#### QUARTERLY EM&A REPORT

The Jockey Club CPS Limited

Central Police Station Conservation and Revitalisation Project: *Thirteenth Quarterly EM&A Report* (1 November 2014 to 31 January 2015)

Issue Date: March 2015

**Environmental Resources Management** 

16/F Berkshire House 25 Westlands Road Quarry Bay, Hong Kong Telephone: (852) 2271 3000 Facsimile: (852) 2723 5660 E-mail: post.hk@erm.com http://www.erm.com The Jockey Club CPS Limited

Central Police Station Conservation and Revitalisation Project: *Thirteenth Quarterly EM&A Report* (1 November 2014 to 31 January 2015)

Issue Date: March 2015

Reference 0095646

| For and on behalf of                    |
|-----------------------------------------|
| ERM-Hong Kong, Limited                  |
|                                         |
| Approved by: Frank Wan                  |
| Warch-4.                                |
| Signed:                                 |
| Position: Partner                       |
| Certified by:                           |
| (Environmental Team Leader – Winnie Ko) |
| Date:24 March 2015                      |

This report has been prepared by ERM-Hong Kong, Limited with all reasonable skill, care and diligence within the terms of the Contract with the client, incorporating our General Terms and Conditions of Business and taking account of the resources devoted to it by agreement with the client.

We disclaim any responsibility to the client and others in respect of any matters outside the scope of the above.

This report is confidential to the client and we accept no responsibility of whatsoever nature to third parties to whom this report, or any part thereof, is made known. Any such party relies on the report at their own risk.



阿特金斯 **ATKINS** 香港九龍尖沙咀海港城 九倉電訊中心十三樓 13/F Wharf T&T Centre Harbour City Tsim Sha Tsui Kowloon Hong Kong

| Your ref. | 0095646_let_Atkins_20150330 Thirteenth Quarterly EM&A Report.do | <b>C</b> Facsimile | (852) 2890 6343        |
|-----------|-----------------------------------------------------------------|--------------------|------------------------|
| Our ref.  | 5121189/17.20/OC080/SO/EK                                       | late block         | le contrato de la como |

30 March 2015 Date:

## **By Email and Post**

ERM-Hong Kong Limited, 16/F Berkshire House, 25 Westlands Road, Quarry Bay, Hong Kong

Attn: Ms Winnie Ko

Dear Winnie,

#### **Central Police Station Conservation and Revitalization Project** Verification of Thirteenth Quarterly EM&A Report

We refer to your letter dated 30 March 2015 regarding the Thirteenth Quarterly EM&A Report. Atkins China Ltd. verifies, in the capacity of Independent Environmental Checker, that the report, in principle, conforms the requirements provided in Section 10.4 of the EM&A Manual.

Yours sincerely, For Atkins China Ltd.

Grofal

Sharifah Or Independent Environmental Checker

HKJC – Mr. Kenneth Lee C.C. Rocco Design Architect – Mr. Charles Kung By Email By Email

Telephone (852) 2972 1000

info.hk@atkinsglobal.com www.atkinsglobal.com

|     | EXECUTIVE SUMMARY                                             | Ι  |
|-----|---------------------------------------------------------------|----|
| 1   | INTRODUCTION                                                  | 1  |
| 1.1 | Purpose of the Report                                         | 1  |
| 1.2 | STRUCTURE OF THE REPORT                                       | 1  |
| 2   | PROJECT INFORMATION                                           | 3  |
| 2.1 | BACKGROUND                                                    | 3  |
| 2.2 | SITE DESCRIPTION                                              | 3  |
| 2.3 | CONSTRUCTION ACTIVITIES                                       | 3  |
| 2.4 | CONSTRUCTION PROGRAMME                                        | 5  |
| 2.5 | <b>PROJECT ORGANISATION AND MANAGEMENT STRUCTURE</b>          | 6  |
| 2.6 | STATUS OF ENVIRONMENTAL APPROVAL DOCUMENTS                    | 6  |
| 3   | ENVIRONMENTAL MONITORING REQUIREMENTS                         | 9  |
| 3.1 | Noise Monitoring                                              | 9  |
| 3.2 | Cultural Heritage                                             | 11 |
| 3.3 | LANDSCAPE AND VISUAL MONITORING                               | 12 |
| 4   | IMPLEMENTATION STATUS ON ENVIRONMENTAL MITIGATION<br>MEASURES | 13 |
| 5   | MONITORING RESULTS                                            | 14 |
| 5.1 | Noise                                                         | 14 |
| 5.2 | LANDSCAPE AND VISUAL MONITORING                               | 14 |
| 5.3 | Cultural Heritage                                             | 15 |
| 5.4 | WASTE MANAGEMENT                                              | 19 |
| 5.5 | <b>EFFECTIVENESS OF MITIGATION MEASURES AND MONITORING</b>    | 19 |
| 6   | ENVIRONMENTAL SITE INSPECTION                                 | 20 |
| 7   | ENVIRONMENTAL NON-CONFORMANCE                                 | 22 |
| 8   | REVIEW OF THE EM&A DATA AND EIA PREDICTIONS                   | 24 |
| 8.1 | NOISE                                                         | 24 |
| 8.2 | WASTE MANAGEMENT                                              | 24 |
| 8.3 | SUMMARY OF REVIEW                                             | 25 |
| 9   | CONCLUSIONS                                                   | 26 |

#### LIST OF TABLES

- Table 2.1
   Summary of Construction Activities undertaken in this Reporting Period
- Table 2.2
   Summary of Environmental Licensing, Notification and Permit Status
- Table 3.1Construction Phase Noise Monitoring Locations
- Table 3.2Noise Monitoring Equipment
- Table 3.3Action and Limit Levels for Construction Noise Monitoring
- Table 3.4Alert, Alarm and Action (AAA) Levels for Vibration Monitoring
- Table 3.5Event and Action Plan for vibration monitoring
- Table 4.1Status of Required Submissions
- Table 5.1Findings of Monthly Tree Inspection in the Reporting Period
- Table 5.2Quantities of Waste Generated from the Project
- Table 8.1Comparison of Construction Noise Standard and Noise Monitoring Results
- Table 8.2Quantity of Actual Amount of C&D Materials, General Wastes and Chemical
  - Wastes Generated and EIA Estimation

# LIST OF ANNEXES

| Annex A  | Locations of Works Areas and the Surroundings                                     |
|----------|-----------------------------------------------------------------------------------|
| Annex A1 | Project Location                                                                  |
| Annex A2 | Declared Monuments within the Project Site                                        |
| Annex A3 | Site Layout Plan marked with Works                                                |
| Annex B  | Project Organization Chart and Contact Detail                                     |
| Annex C  | Locations of Noise Monitoring Stations and Noise Sensitive Receivers              |
| Annex D  | Monitoring Schedule of the Reporting Period                                       |
| Annex E  | Calibration Reports for Calibrators and Sound Level Meters                        |
| Annex F  | Event/Action Plans for Noise                                                      |
| Annex G  | Summary of Implementation Status                                                  |
| Annex H  | Noise Monitoring Results                                                          |
| Annex I  | Construction Programme of the Project                                             |
| Annex J  | Waste Flow Table                                                                  |
| Annex K  | Environmental Complaint, Environmental Summons and Prosecution Log                |
| Annex L  | Records of Vibration Monitoring for Trial Piling and Pipe / Bored Piling<br>Works |
| Annex M  | Records of Vibration Monitoring for Other Construction Works                      |
| Annex N  | A Summary of Current Condition of Character Defining Elements                     |

# **EXECUTIVE SUMMARY**

The construction works of **Central Police Station Conservation and Revitalisation Project** commenced on 24 October 2011. This is the thirteenth quarterly Environmental Monitoring and Audit (EM&A) summary report presenting the EM&A works carried out during the period from 1 November 2014 and 31 January 2015 in accordance with the EM&A Manual.

# Environmental Monitoring and Audit Progress

A summary of the monitoring activities undertaken in this reporting period is listed below:

| • | Construction Noise Monitoring during normal weekdays at |           |
|---|---------------------------------------------------------|-----------|
|   | each monitoring station                                 | 16 times  |
| • | Joint Environmental Site Inspection                     | 3 times   |
| • | Heritage Site Inspection                                | 59 times  |
| • | Landscape & Visual Monitoring                           | 3 times   |
| • | Tree Inspection                                         | 3 times   |
| • | Vibration monitoring for piling works                   | 380 times |
| • | Vibration monitoring for other construction works       | 228 times |
|   |                                                         |           |

## <u>Noise</u>

16 sets of 30-minute construction noise measurements were carried out at each of the monitoring stations (NM2 and NM6) during normal weekdays of the reporting period. No exceedance of the Action or Limit Level of construction noise was recorded during the reporting period.

# Cultural Heritage

# Trial Piling and Piling works

Vibration monitoring carried out for the trial piling and piling works during the reporting period are listed below:

- 76 vibration monitoring measurements for the basement construction at Parade Ground;
- 76 vibration monitoring measurements at Block 8;
- 76 vibration monitoring measurements at Old Bailey Wing (Block 50);
- 76 vibration monitoring measurements at Block 51; and
- 76 vibration monitoring measurements at Block 17.

# Other Construction Works

Vibration monitoring carried out for other construction works during the reporting period are listed below:

- 76 vibration monitoring measurements for the structural addition and alteration works at Block 1;
- 76 vibration monitoring measurements for the structural addition and alteration works at Block 14; and
- 76 vibration monitoring measurements for the structural addition and alteration works at Block 11.

No exceedance of Alert, Alarm and Action Levels of vibration was recorded during the reporting period.

59 heritage site inspections were conducted and the Contractor has generally implemented the necessary protection measures as recommended.

## Landscape & Visual

Landscape and visual monitoring has commenced since October 2011 on a monthly basis. Three monthly tree inspections have been conducted by the arborist during the reporting period. Most recommended actions have been performed by the Contractor as advised in the reporting period.

# Waste Management

Wastes generated from this Project include inert construction and demolition (C&D) materials and non-inert C&D materials. 3,041.52 tonnes of inert C&D materials and 819.22 tonnes of non-inert C&D materials were generated during the reporting period. The non-inert C&D materials and general refuse generated from the Project were disposed of at the SENT Landfill. 21,740 kg of metal and 68 kg of paper/cardboard packaging were produced and sent to recyclers for recycling. No plastics waste was generated during the reporting period. No chemical waste was produced during the reporting period.

# Environmental Site Inspection

Three joint environmental site inspections were carried out by the representatives of the Contractor, the IEC and the ET during the reporting period. The Contractor has generally implemented the mitigation measures as recommended.

# Environmental Exceedance/Non-conformance/Compliant/Summons and Prosecution

No exceedance of the Action or Limit Level of construction noise was recorded at designated monitoring stations during the reporting period.

No exceedance of Alert, Alarm and Action Levels of vibration was recorded during the reporting period.

No enquiry was received during the reporting period.

No non-compliance event was recorded during the reporting period.

No complaint was received during the reporting period.

No summons/prosecution was received in this reporting period.

#### 1 INTRODUCTION

ERM-Hong Kong, Limited (ERM) was appointed by the Jockey Club CPS Limited (the CPS Ltd) as the Environmental Team (ET) to undertake the Environmental Monitoring and Audit (EM&A) programme for the **Central Police Station Conservation and Revitalisation Project** (the Project).

## 1.1 PURPOSE OF THE REPORT

This is the thirteenth quarterly EM&A summary report, which summarises the impact monitoring results and audit findings for the EM&A programme during the reporting period from 1 November 2014 and 31 January 2015.

## **1.2** STRUCTURE OF THE REPORT

The structure of the report is as follows:

# Section 1 : **Introduction** details the scope and structure of the report.

## Section 2: Project Information

summarises background and scope of the Project, site description, project organization and contract details, construction programme, the construction works undertaken and the status of Environmental Permit(s)/License(s) during the reporting period.

# Section 3: Environmental Monitoring Requirements

summarises the monitoring parameters, monitoring programmes, monitoring methodologies, monitoring frequency, monitoring locations, Action and Limit Levels, Event/Action Plans, environmental mitigation measures as recommended in the EIA report, and relevant environmental requirements.

- Section 4 : **Implementation Status on Environmental Mitigation Measures** summarises the implementation of environmental protection measures during the reporting period.
- Section 5: **Monitoring Results** summarises the monitoring and waste management results obtained in the reporting period.

# Section 6 : **Environmental Site Inspection** summarises the audit findings of the monthly site inspections undertaken within the reporting period.

# Section 7: Environmental Non-conformance

summarises any monitoring exceedance, environmental complaints and environmental summons received within the reporting period.

# Section 8: **Review of the EM&A Data and EIA Predictions** compares the monitoring data and waste quantity against predictions in the approved Project EIA report.

Section 9: Conclusions

# 2.1 BACKGROUND

The Chief Executive (CE)'s 2007-2008 Policy Address highlighted revitalisation as the guiding principle of heritage conservation and the Project was among one of the specific proposals put forward by the CE in the same Policy Address. At the meeting of the Executive Council (ExCo) on 15 July 2008, the ExCo advised and the CE ordered that Government should enter into a partnership with the Hong Kong Jockey Club (HKJC) in the form of an agreement (or agreements) to take forward the conservation and revitalisation of the CPS project based on various guiding parameters. The Project is now being undertaken in partnership with the Development Bureau of the HKSAR Government. The HKJC has taken on board the decision at the ExCo meeting and further investigated the design and implementation of the Project. The Project is now implemented by the CPS Limited.

#### 2.2 SITE DESCRIPTION

The location of the Project Site is shown in *Annex A1*. The Site is bounded by Hollywood Road to the north, Arbuthnot Road to the east, Chancery Lane to the south and Old Bailey Street to the west.

The Site comprises three Declared Monuments designated under the *Antiquities and Monuments Ordinance* in 1995. They are:

- Central Police Station;
- Former Central Magistracy; and
- Victoria Prison Compound.

They are collectively named the Central Police Station (CPS). *Annex A2* shows the location of the Declared Monuments within CPS and the buildings within the CPS.

# 2.3 CONSTRUCTION ACTIVITIES

A summary of the major construction activities undertaken in this reporting period is shown in *Table 2.1* and illustrated in *Annex A3*.

#### **Construction Activities Undertaken**

#### November 2014:

- Structural addition and alteration works at Blocks 2, 3, 4, 9, 10, 11, 13 and 17;
- Underpinning at Blocks 4 and 6;
- Excavation at Block 17;
- Roof repair works at Blocks 8, 9, 10, 19 and link bridge between Blocks 3 and 9;
- Demolition works at Blocks 3, 4, 9 and 14;
- New RC structure construction at Blocks 3 and 9;
- Construction of new roof at Block 14;
- Demolition of concrete block at Block 8;
- Conceal conduit construction and E&M installation at Blocks 1, 2, 6 and 7;
- E&M opening at Blocks 1, 6 and 7;
- Underground drainage at Block 2;
- Builders work in basement plant room;
- Timber doors and windows repair works at Blocks 1 and 3;
- Paint stripping and plaster works at Blocks 1, 3, 6, 7, 11, 14 and 15;
- Façade works at Blocks 3, 4, 6, 7, 8, 10 and 14;
- Structural timber floor repair at Blocks 6 and 7;
- New balcony construction at Block 6;
- Balcony repair at Blocks 6, 7 and 8;
- Underpinning at Zone L2;
- Excavation of M3;
- Construction of site wide terminal manhole at Zone M5;
- Arbuthnot Road West works;
- Excavation works for HEC power cable laying at Old Bailey Street east;
- Final reinstatement of traffic island at junction between Arbuthnot Road East and Wyndham Street;
- Core wall construction at Arbuthnot Wing;
- Basement construction at Old Bailey Wing; and
- R22, R24, R54, R174 and R177 upgrading.

#### December 2014:

- Structural repair works at Blocks 11, 12 and 17;
- Underpinning at Blocks 3, 4, 6 and 7;
- Roof repair works at Blocks 4, 8, 19 and link bridge between Blocks 3 and 9;
- Demolition works at Blocks 3 and 9;
- New RC structure construction at Blocks 2, 3, 4, 9, 10, 13 and 14;
- Paint stripping and plaster repair at Blocks 2, 3, 6, 7, 8, 11, 14 and 15;
- E&M installation and Builders work in basement plant room;
- Timber doors and windows repair works at Blocks 2, 3 and 8;
- Transformer delivery and installation in Block 8;
- E&M installation at Blocks 1, 7 and 8;
- Structural timber floor repair at Blocks 3, 6, 7, and 14;
- Façade works at Blocks 2, 3, 4, 8, 9, 10, 11, 12, 14, 15 and 17;
- New balcony construction at Block 6;
- Balcony repair at Blocks 8 and 9;
- Metal works repair at Block 15;
- Underground drainage at Blocks 3 and 7;
- Service trench and draw pit construction at Zone L2;
- Construction of site wide terminal manhole at Zone M5;
- Old Bailey Street works;
- Core wall structure construction at Arbuthnot Wing;
- Basement construction at Old Bailey Wing; and
- R19, R22 and R24 upgrading.

#### January 2015:

- Structural addition and alteration works at Blocks 2, 3, 6, 9, 10, 11, 13, 14 and 17;
- Roof repair works at Blocks 8 and 19;
- Balcony repair at Blocks 8, 9 and 10;
- Paint stripping and plaster repair at Blocks 1, 2, 3, 11, 14 and 15;
- Timber doors and windows repair works at Blocks 2, 3, 4, 9 and 14;
- Structural timber floor repair at Blocks 3, 6 and 14;
- Metal works repair at Blocks 3, 11 and 13;
- Façade works at Blocks 3, 4, 8, 9, 10, 12, 14 and 15;
- Arbuthnot Wing structure construction;
- Old Bailey Wing structure construction;
- E&M opening at Blocks 3, 10, 11, 12 and 14;
- E&M installation at Blocks 1, 7, 8 and basement plant room;
- Underground drainage at Blocks 3, 7 and 14;
- R19, R22 and R24 upgrading;
- Site wide underground services L2, L5 and M5; and
- Road works at Old Bailey Street.

#### 2.4 CONSTRUCTION PROGRAMME

The most updated construction programme for the Project is presented in *Annex I*.

#### 2.5 PROJECT ORGANISATION AND MANAGEMENT STRUCTURE

The Project organization chart, hotline number and contact details are shown in *Annex B*.

#### 2.6 STATUS OF ENVIRONMENTAL APPROVAL DOCUMENTS

A summary of the relevant permits, licences, and/or notifications on environmental protection for this Project since the granting of the EP in April 2011 is presented in *Table 2.2*.

## Table 2.2 Summary of Environmental Licensing, Notification and Permit Status

| Permit/ Licences/<br>Notification                                                                                        | Reference                                | Validity Period                                        | Remarks                                                                                                                                                                                                                                |  |
|--------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Environmental<br>Permit (EP)                                                                                             | EP-408/2011                              | -                                                      | Superseded on 10<br>January 2012                                                                                                                                                                                                       |  |
|                                                                                                                          | EP-408/2011/A                            | -                                                      | Superseded on 22<br>March 2012                                                                                                                                                                                                         |  |
|                                                                                                                          | EP-408/2011/B                            | Throughout the<br>Contract                             | Permit granted on 22 March 2012                                                                                                                                                                                                        |  |
| Notification of<br>Construction Works<br>as required under Air<br>Pollution Control<br>(Construction Dust)<br>Regulation | Ref. No. 332920                          | Throughout the<br>Contract                             | -                                                                                                                                                                                                                                      |  |
| Registration of Waste<br>Producer under Waste<br>Disposal Ordinance                                                      | Waste Producer No.:<br>5213-122-G2347-25 | Throughout the<br>Contract                             | -                                                                                                                                                                                                                                      |  |
| Effluent Discharge<br>License under Water<br>Pollution Control<br>Ordinance                                              | License No.<br>WT00010633-2011           | 21 Oct 2011 – 31<br>Oct 2016                           | -                                                                                                                                                                                                                                      |  |
| Notification of<br>Commencement of<br>Asbestos Abatement<br>Work under Air<br>Pollution Control<br>Ordinance             | -                                        | Throughout the<br>Contract                             | EPD's letter (EPD's<br>ref.: (5) in<br>EPAC/A/4/000/23<br>3 II) dated 2<br>December 2011<br>satisfied that the<br>content of the<br>asbestos abatement<br>plan (Report No.:<br>0210/11/ED/0078A<br>) is in accordance<br>with the APCO |  |
| Approval of Asbestos<br>Abatement Work<br>(Phase 2)                                                                      | -                                        | Earliest<br>commencement<br>date on 26<br>January 2012 | EPD's letter (EPD's<br>ref:() in<br>EPAC/A/4/000/23<br>3) dated 18 January<br>2012.                                                                                                                                                    |  |
| Construction Noise<br>Permit (CNP)                                                                                       | GW-RS0734-12                             | 11 July 2012 at<br>0200 hours to 2<br>August 2012 at   | Expired.                                                                                                                                                                                                                               |  |

| Permit/ Licences/<br>Notification | Reference    | Validity Period                                                         | Remarks  |
|-----------------------------------|--------------|-------------------------------------------------------------------------|----------|
|                                   |              | 0400 hours                                                              |          |
|                                   | GW-RS0839-12 | 13 August 2012 at<br>1900 hours to 31<br>December 2012 at<br>0700 hours | Expired. |
|                                   | GW-RS1162-12 | 1 December 2012<br>at 0000 hours to 28<br>March 2013 at<br>0600 hours   | Expired. |
|                                   | GW-RS0113-13 | 1 February 2013 at<br>0200 hours to 31<br>May 2013 at 0400<br>hours     | Expired. |
|                                   | GW-RS1301-12 | 2 January 2013 at<br>1900 hours to 29<br>June 2013 at 2300<br>hours     | Expired. |
|                                   | GW-R50084-13 | 24 January 2013 at<br>1900 hours to 29<br>June 2013 at 0700<br>hours    | Expired. |
|                                   | GW-RS0638-13 | 16 June 2013 at<br>0700 hours to 15<br>September 2013 at<br>1900 hours  | Expired. |
|                                   | GW-R50901-13 | 14 August 2013 at<br>0000 hours to 31<br>October 2013 at<br>0600 hours  | Expired. |
|                                   | GW-R50714-13 | 29 June 2013 at<br>1900 hours to 28<br>December 2013 at<br>2400 hours   | Expired. |
|                                   | GW-RS0745-13 | 5 July 2013 at 1900<br>hours to 30<br>December 2013 at<br>2300 hours    | Expired. |
|                                   | GW-RS1110-13 | 7 October 2013 at<br>0200 hours to 31<br>December 2013 at<br>0400 hours | Expired. |
|                                   | GW-RS1205-13 | 4 November 2013<br>at 0000 hours to 30<br>January 2014 at<br>2400 hours | Expired. |
|                                   | GW-RS1275-13 | 13 November 2013<br>at 0000 hours to 30<br>April 2014 at 2400<br>hours  | Expired. |
|                                   | GW-RS1461-13 | 29 December 2013<br>at 0000 hours to 28<br>June 2014 at 2400<br>hours.  | Expired. |
|                                   | GW-RS0062-14 | 10 February 2014                                                        | Expired. |

| Permit/ Licences/<br>Notification | Reference    | Validity Period                                                            | Remarks  |
|-----------------------------------|--------------|----------------------------------------------------------------------------|----------|
|                                   |              | at 0000 hours to 31<br>March 2014 at<br>2400 hours.                        |          |
|                                   | GW-RS0271-14 | 1 April 2014 at<br>0100 hours to 30<br>June 2014 at 0600<br>hours          | Expired. |
|                                   | GW-RS0434-14 | 8 May 2014 at<br>0000 hours to 30<br>September 2014 at<br>2400 hours       | Expired. |
|                                   | GW-RS0651-14 | 28 July 2014 at<br>0000 hours to 26<br>September 2014 at<br>2400 hours     | Expired. |
|                                   | GW-RS0658-14 | 29 June 2014 at<br>0000 hours to 28<br>December 2014 at<br>2400 hours      | Expired. |
|                                   | GW-RS0749-14 | 1 August 2014 at<br>0000 hours to 31<br>January 2015 at<br>2400 hours      | Expired. |
|                                   | GW-RS0918-14 | 29 September 2014<br>at 0000 hours to 31<br>December 2014 at<br>2400 hours | Expired. |
|                                   | GW-RS0086-15 | 1 February 2015 at<br>0000 hours to 30<br>June 2015 at 2400<br>hours       | -        |

#### 3.1 NOISE MONITORING

#### 3.1.1 Monitoring Location

The construction noise monitoring locations are given in *Table 3.1* and shown in *Annex C*.

#### Table 3.1Construction Phase Noise Monitoring Locations

| Monitoring Location            | on Proposed Construction Noise Monitoring Station |     |                        |                                                                                                                                                                                                                                                                                                               |
|--------------------------------|---------------------------------------------------|-----|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                | ID in<br>EM&A<br>Manual                           | ID  | Type of<br>Measurement | Remark                                                                                                                                                                                                                                                                                                        |
| Rooftop of Ho Fook<br>Building | N2                                                | NM2 | Façade                 | -                                                                                                                                                                                                                                                                                                             |
| Rooftop of Chancery<br>Mansion |                                                   | NM6 | Façade                 | Accesses to the original proposed<br>monitoring location in the EM&A<br>Manual, Chancery House (N5),<br>were rejected; alternative location<br>of Chancery Mansion (N6), were<br>therefore proposed and approved<br>by the Authorised Person (AP),<br>the Independent Environmental<br>Checker (IEC) and EPD. |

The noise sensitive receivers are also shown in *Annex C*.

#### 3.1.2 Monitoring Parameters, Frequency and Programme

Weekly construction noise monitoring was conducted in accordance with the requirements stipulated in the EM&A Manual. The monitoring programme for this reporting period is shown in *Annex D*.

The construction noise levels were measured in terms of A-weighted equivalent continuous sound pressure level ( $L_{eq}$ ) in decibels dB(A).  $L_{eq (30min)}$  were used as the monitoring parameter for the time period in between 0700 – 1900 hours on normal weekdays. Supplementary information for data auditing, two statistical sound levels  $L_{10}$  and  $L_{90}$ ; the levels exceeded for 10 and 90 percent of the time respectively, were also recorded during the monitoring for reference. The measured noise levels were logged in every 5 minutes throughout the impact monitoring period.

#### 3.1.3 Monitoring Equipment and Methodology

Construction noise measurements were conducted in accordance with the calibration and measurement procedures as stated in *Annex – General Calibration and Measurement Procedures* of *Technical Memorandum on Noise from Construction Work other than Percussive Piling (GW-TM)* issued under the *Noise Control Ordinance (NCO)* (Cap 400).

The sound level meters and calibrator used for the noise measurement, as listed in *Table 3.2*, complies with IEC 651: 1979 and 804:1985 (Type 1) specification. The calibration certificates of the sound level meters are included in *Annex E*.

# Table 3.2Noise Monitoring Equipment

| Monitoring Stations | Monitoring Equipment (Sound Level Meter and Calibrator)      |
|---------------------|--------------------------------------------------------------|
| NM2, NM6            | <u>Calibrator</u><br>Rion NC-73 (S/N 10486660; S/N 10786708) |
|                     | CEL 120 (S/N 3421612)                                        |
|                     | Sound Level Meter                                            |
|                     | Rion NL-52 (S/N 00131627)                                    |
|                     | CEL 633A (S/N 3521757)                                       |

Immediately prior to and following the noise measurements, the accuracy of the measurement equipment was checked using an acoustic calibrator generating a known sound pressure level at a known frequency.

Measurements were accepted as the calibration level from before and after the noise measurement agree to within 1.0 dB.

## 3.1.4 Event / Action Plan

# Table 3.3Action and Limit Levels for Construction Noise Monitoring

| Noise Monitoring<br>Location | Action Level                                                                                     | Limit Level,<br>L <sub>eq(30mins), dB(A)</sub> | Remark                                                     |
|------------------------------|--------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------------------------|
| NM2, NM6                     | When one<br>documented<br>complaint is<br>received from any<br>one of the sensitive<br>receivers | 75 (note)                                      | Applicable during 0700 – 1900<br>hours on normal weekdays. |

Notes:

- a) Acceptable Noise Levels for Area Sensitivity Rating of A/B/C. Limit Level is reduced to 70dB(A) for schools and 65dB(A) during school examination periods.
- b) If works are to be carried out during restricted hours, the conditions stipulated in the CNP issued by the NCA have to be followed.

The Event / Action Plan (EAP) for noise monitoring is presented in Annex F.

#### 3.1.5 *Mitigation Measures*

The mitigation measures in accordance with the EP, EIA and EM&A Manual and their implementation status are presented in *Annex G*.

## 3.2 CULTURAL HERITAGE

# 3.2.1 Vibration Monitoring

In accordance with the EM&A Manual, vibration monitoring is required and the vibration control limits and vibration monitoring proposal are defined by a specialist for AMO's approval.

#### **Baseline** Monitoring

A set of initial readings should be recorded prior to commencement of each stage of demolition works or trial piling works. The baseline vibration monitoring should be conducted for duration of 5 minutes on the measurement day(s) at each vibration monitoring location.

## Vibration Monitoring for Demolition Works

There are five phases/stages of vibration monitoring to be carried out for demolition works, namely Initial Reading Phase, Monitoring Stage 1, Monitoring Stage 2, Monitoring Stage 3 and Monitoring Stage 4. The monitoring location is shown in *Annex L*. The vibration monitoring should be conducted for duration of 5 minutes on the days with demolition works at each vibration monitoring location.

## Vibration Monitoring for Trial Piling and Pipe/Bored Piling Works

Vibration monitoring for trial piling works and pipe/bored piling works is required. The monitoring location is shown in *Annex L*. The vibration monitoring should be conducted for duration of 5 minutes on the days with trial piling works or pipe/bored piling works at each vibration monitoring location.

#### Vibration Monitoring for Other Construction Works

Vibration monitoring for specific construction works other than demolition works, trial piling works and pipe/bored piling works is also required in accordance with Building Department's requirement. The monitoring location is shown in *Annex M*. The number and location of monitoring location will depend on the location of the specific construction works. The vibration monitoring should be conducted for duration of 5 minutes on a daily basis (working day) at each vibration monitoring location.

# Alert, Alarm and Action Levels

The Alert, Alarm and Action (AAA) Levels are to be implemented during the vibration monitoring and shown in *Table 3.4*.

#### Table 3.4Alert, Alarm and Action (AAA) Levels for Vibration Monitoring

| Instrument Type         | Item<br>Monitored      | Alert Level | Alarm Level | Action Level |
|-------------------------|------------------------|-------------|-------------|--------------|
| Vibration<br>Monitoring | Horizontal<br>Movement | 2.0 mm/s    | 2.5 mm/s    | 3.0 mm/s     |

The Event / Action Plan (EAP) for vibration monitoring is shown in Table 3.5.

#### Table 3.5Event and Action Plan for Vibration Monitoring

| Events                     | Action                                      |
|----------------------------|---------------------------------------------|
| Exceedance of Alert Level  | Notify Management Contractor                |
| Exceedance of Alarm Level  | Notify Authorised Person/ Resident Engineer |
| Exceedance of Action Level | Cease Works and submit mitigation           |

#### 3.2.2 *Mitigation Measures*

Cultural heritage mitigation measures in accordance with the EP, EIA and EM&A Manual were implemented by the Contractor and the implementation status is given in *Annex G*.

#### 3.3 LANDSCAPE AND VISUAL MONITORING

In accordance with the EM&A Manual, inspections of affected trees were conducted by an experienced and appropriately trained arborist. All irregularities that deviate from the recommended tree protection measures or could impose deleterious impacts on the protected trees were reported. Besides, implementation of mitigation measures for landscape and visual resources recommended in the EIA Report were also monitored during the site inspection.

#### 3.3.1 *Mitigation Measures*

Landscape and visual mitigation measures in accordance with the EP, EIA and EM&A Manual were implemented by the Contractor and the implementation status is given in *Annex G*.

#### 3.4 Environmental Requirements in Contract Documents

The environmental requirements as specified in the contract documents were reviewed and were covered in the EIA's requirements.

# IMPLEMENTATION STATUS ON ENVIRONMENTAL MITIGATION MEASURES

The Contractor has generally implemented the environmental mitigation measures (including those for archaeology) and requirements as stated in the EIA Report, EM&A Manual, EP and the contract documents. The implementation status during the reporting period is summarised in *Annex G*.

Status of required submissions under the EP during the reporting period is presented in *Table 4.1*.

SubmissionSubmission DateEP ConditionEP Conditions 3.4Conditions 3.4• Thirty-sixth Monthly EM&A Report14 November 2014• Thirty-seventh Monthly EM&A Report15 December 2014• Thirty-eighth Monthly EM&A Report14 January 2015

Table 4.1Status of Required Submissions

4

#### 5.1 NOISE

A total of 16 sets of 30-minute construction noise measurements were carried out at each monitoring station, NM2 and NM6, during normal weekdays of the reporting period. The monitoring results together with graphical presentations are presented in *Annex H*. The local impacts observed near the monitoring stations of NM2 and NM6 were summarised below:

- NM2: construction noise from activities in the Project Site and traffic noise from Old Bailey Street.
- NM6: construction noise from activities in the Project Site and traffic noise from Chancery Lane.

No exceedance of the Action or Limit Level of construction noise was recorded during the reporting period.

#### 5.2 LANDSCAPE AND VISUAL MONITORING

Three monthly tree inspections were conducted by the arborist during the reporting period on 4 November 2014, 4 December 2014 and 5 January 2015 and key findings and recommendations are summarised in *Table 5.1*.

| Tree No.        | Botanical Name         | Overall Health<br>Condition | Arborist's Observation /<br>Recommendations                                                             |  |  |
|-----------------|------------------------|-----------------------------|---------------------------------------------------------------------------------------------------------|--|--|
| 4 November 2014 |                        |                             |                                                                                                         |  |  |
| Tree -5         | Mangifera indica       | Fair                        | • No further action required.                                                                           |  |  |
| Tree -6         | Aleurites moluccana    | Fair                        | • No further action required.                                                                           |  |  |
| Tree-7          | Aleurites moluccana    | Fair                        | • No further action required.                                                                           |  |  |
| Tree-8          | Plumeria rubra         | Fair                        | • No further action required.                                                                           |  |  |
| Tree-9          | Araucaria cunninghamia | Fair                        | • No further action required.                                                                           |  |  |
| Tree-11         | Dracaena marginata     | Fair                        | • No further action required.                                                                           |  |  |
| 4 December      | · 2014                 |                             |                                                                                                         |  |  |
| Tree -5         | Mangifera indica       | Fair                        | • No further action required.                                                                           |  |  |
| Tree -6         | Aleurites moluccana    | Fair                        | • No further action required.                                                                           |  |  |
| Tree-7          | Aleurites moluccana    | Fair                        | • No further action required.                                                                           |  |  |
| Tree-8          | Plumeria rubra         | Fair                        | • No further action required.                                                                           |  |  |
| Tree-9          | Araucaria cunninghamia | Fair                        | • No further action required.                                                                           |  |  |
| Tree-11         | Dracaena marginata     | Fair                        | • No further action required.                                                                           |  |  |
| 5 January 2     | 015                    |                             |                                                                                                         |  |  |
| Tree -5         | Mangifera indica       | Fair                        | <ul> <li>Renovation works were<br/>being carried out near the<br/>tree. Some white paint due</li> </ul> |  |  |

#### Table 5.1 Findings of Monthly Tree Inspections in the Reporting Period

| Tree No. | Botanical Name         | Overall Health<br>Condition | Arborist's Observation /<br>Recommendations                                                                                                                                                           |
|----------|------------------------|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          |                        |                             | to nearby renovation works<br>was observed on some leaves<br>of the tree. The Contractor<br>was reminded that the tree<br>should be well protected<br>from nearby construction<br>works at all times. |
| Tree -6  | Aleurites moluccana    | Fair                        | • No further action required                                                                                                                                                                          |
| Tree-7   | Aleurites moluccana    | Fair                        | • No further action required                                                                                                                                                                          |
| Tree-8   | Plumeria rubra         | Fair                        | • No further action required                                                                                                                                                                          |
| Tree-9   | Araucaria cunninghamia | Fair                        | • No further action required                                                                                                                                                                          |
| Tree-11  | Dracaena marginata     | Poor                        | • Withered leaves were observed on the tree;                                                                                                                                                          |
|          |                        |                             | • To keep close monitoring on the growth of the tree.                                                                                                                                                 |

Follow-up actions needed to be implemented were recommended to the Contractor and the status of the follow-up actions was reviewed during the subsequent monthly site inspections. Recommendations have generally been implemented by the Contractor during the reporting period.

## 5.3 CULTURAL HERITAGE

#### 5.3.1 Vibration Monitoring

#### Trial Piling and Piling works

Vibration monitoring carried out for the trial piling and piling works during the reporting period are listed below:

November 2014:

- 25 vibration monitoring measurements for the basement construction at Parade Ground;
- 25 vibration monitoring measurements at Block 8;
- 25 vibration monitoring measurements for piling works at Old Bailey Wing (Block 50);
- 25 vibration monitoring measurements for piling works at Block 51; and
- 25 vibration monitoring measurements at Block 17.

December 2014:

- 25 vibration monitoring measurements for the basement construction at Parade Ground;
- 25 vibration monitoring measurements at Block 8;

- 25 vibration monitoring measurements at Old Bailey Wing (Block 50);
- 25 vibration monitoring measurements at Block 51; and
- 25 vibration monitoring measurements at Block 17.

January 2015:

- 26 vibration monitoring measurements for the basement construction at Parade Ground;
- 26 vibration monitoring measurements at Block 8;
- 26 vibration monitoring measurements at Old Bailey Wing (Block 50);
- 26 vibration monitoring measurements at Block 51; and
- 26 vibration monitoring measurements at Block 17.

The monitoring results are presented in *Annex L*.

## Other Construction Works

Vibration monitoring carried out for other construction works during the reporting period are listed below:

November 2014:

- 25 vibration monitoring measurements for the structural addition and alteration works at Block 1;
- 25 vibration monitoring measurements for the structural addition and alteration works at Block 14; and
- 25 vibration monitoring measurements for the structural addition and alteration works at Block 11.

December 2014:

- 25 vibration monitoring measurements for the structural addition and alteration works at Block 1;
- 25 vibration monitoring measurements for the structural addition and alteration works at Block 14; and
- 25 vibration monitoring measurements for the structural addition and alteration works at Block 11.

# January 2015:

• 26 vibration monitoring measurements for the structural addition and alteration works at Block 1;

- 26 vibration monitoring measurements for the structural addition and alteration works at Block 14; and
- 26 vibration monitoring measurements for the structural addition and alteration works at Block 11.

The monitoring results are presented in Annex M.

All monitoring results were below the Alert/Alarm/ Action Levels during the reporting period.

# 5.3.2 Heritage Site Audit

Heritage site audits were conducted on 3-7, 10-14, 17-21 and 24-27 November 2014; 1-5, 8-12, 15-20 and 29-31 December 2014; 2, 5-9, 12-16, 19-23 and 26-30 January 2015 by the Heritage Checker during the reporting period. Follow-up actions were undertaken as reported by the Contractor and observed in the subsequent monthly site inspections conducted in the reporting period. Key site audit findings and recommendations are summarised below.

# 3 November 2014

• It was observed that the historic painted sign and facing brickwork had been damaged by concrete pouring down from the first floor window. The Contractor was informed to follow up.

## 6 November 2014

- It was observed that the painted sign to Block 4 south elevation had been sprayed with red paint. The painted sign should be protected and the Contractor was informed to follow up.
- It was observed that the existing infill brickwork to Block 4 windows and doors were not supported after the removal of the window and door frames. The Contractor was informed to follow up.

# 25 November 2014

• Cigarette ends were observed on first floor of Block 2. The Contractor was reminded to remove the cigarette ends and that smoking is not allowed in buildings.

# 3 December 2014

• It was observed that the brick infills to Block 1 light well timber louvre locations were not carried out in accordance with the contract documents. The Contractor was informed to follow up.

# 8 December 2014

• It was observed that some new openings in Block 3 did not have adequate end bearing supporting for lintels. The Contractor was

informed to follow up.

# 10 December 2014

• Debris and cigarette ends were found in Block 9. The Contractor was reminded to remove the cigarette ends and that smoking is not allowed in buildings.

# 16 December 2014

• It was observed that the Block 8 west scaffold was built by fixing into the existing facing brickwork wall, causing damage to the historic fabric. The Contractor was informed to rectify.

# 12 January 2015

• Improvement is required for the window putty application, metal work brackets, bolts, protection and grouting workmanship in general. The Contractor was informed to follow up.

# 21 January 2015

• It was observed that the works package contractor was painting the interior brickwork in Block 1 when instructed not to do so. The Contractor was informed to follow up.

# 23 January 2015

• It was observed that the ceiling was being decorated without rectifying all the repair defects. The Contractor was informed to follow up.

# 27 January 2015

- It was observed that the finish of tiling was very irregular and did not comply with the specifications. The Contractor was informed to follow up.
- It was observed that the sunken slabs to Block 9 first floor were filled with water. The Contractor was reminded to remove the stagnant water.

# 29 January 2015

• It was observed that the surface finish to new handrail of Block 1 did not comply with contract documents. The Contractor was informed to rectify.

# 30 January 2015

• The new base plate fixings to Block 1 Staircase 02 new balustrades were observed to be using a different type of bolt which did not comply with contract document. The Contractor was informed to rectify.

A summary of the current condition of character defining elements, historic buildings and structures is contained in *Annex N*.

#### 5.4 WASTE MANAGEMENT

Wastes generated from this Project include inert construction and demolition (C&D) materials and non-inert C&D materials. Non-inert C&D materials were made up of wastes such as general refuse. With reference to relevant handling records and trip tickets of this Project, the quantities of different types of waste generated in the reporting period are summarised in Table 5.2. The summary of Waste Flow Table prepared by the Contractor is shown in Annex J. The non-inert C&D materials and general refuse generated from the Project were disposed of at the SENT Landfill. 21,740 kg of metal and 68 kg of paper/cardboard packaging were produced and sent to recyclers for recycling. No plastics waste was generated during the reporting period. No chemical waste was produced during the reporting period.

#### Table 5.2 Quantities of Waste Generated from the Project

| Month / Year  | Quantity                |              |          |       |                    |          |        |
|---------------|-------------------------|--------------|----------|-------|--------------------|----------|--------|
|               | C&D                     | C&D          | Chemical |       | Recycled materials |          | 5      |
|               | Materials               | Materials    | Wa       | ste   |                    |          |        |
|               | (inert)                 | (non-inert)  | Liquid   | Solid | Paper/             | Plastics | Metals |
|               | (tonnes) <sup>(a)</sup> | (tonnes) (b) | (L)      | (kg)  | cardboard (kg)     | (kg)     | (kg)   |
| November 2014 | 1,249.55                | 336.57       | 0        | 0     | 0                  | 0        | 6,660  |
| December 2014 | 1,177.63                | 260.33       | 0        | 0     | 68                 | 0        | 12,080 |
| January 2015  | 614.34                  | 222.32       | 0        | 0     | 0                  | 0        | 3,000  |
| Total         | 3,041.52                | 819.22       | 0        | 0     | 68                 | 0        | 21,740 |
| Notoc         |                         | •            |          |       | •                  |          |        |

Notes

(a) Inert C&D materials include bricks, concrete, building debris, rubble and excavated soil.

(b) Non-inert C&D materials include wastes such as general refuse which were disposed of at SENT Landfill and recyclable materials are paper, cardboard, plastics and metals. The figure presented under non-inert C&D materials represents quantities of non-recyclable materials. Recycled materials are reported separately.

#### 5.5

#### **EFFECTIVENESS OF MITIGATION MEASURES AND MONITORING**

The mitigation measures recommended in the EIA report and required by the EP are considered effective in minimising environmental impacts.

The EM&A for the Project was conducted as scheduled during the reporting period. No non-compliance events were observed during site inspections and no exceedances of limit level were recorded during the reporting period. The EM&A programme is considered effective.

Three monthly environmental site inspections were conducted on 17 November 2014, 15 December 2014 and 19 January 2015 during the reporting period. There was no non-compliance recorded during the site inspections. Key site audit findings and recommendations are summarised below. Monthly recommendations and observations were implemented and rectified by the Contractor in the subsequent monthly site inspections.

17 November 2014

• Nil.

15 December 2014

• Chemical waste containers were observed without drip tray near Block 17. The Contractor was reminded to remove the chemical waste containers.

19 January 2015

• Nil.

This page is deliberately left blank

# 7 ENVIRONMENTAL NON-CONFORMANCE

| 7.1.1 | Summary of Monitoring Exceedance                                                                                                                               |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       | No exceedance of the Action or Limit Level of construction noise or Alert,<br>Alarm and Action Level of vibration was recorded during the reporting<br>period. |
| 7.1.2 | Summary of Enquiry                                                                                                                                             |
|       | No enquiry was received during the reporting period.                                                                                                           |
| 7.1.3 | Summary of Environmental Non-Compliance                                                                                                                        |
|       | No non-compliance event was recorded during the reporting period.                                                                                              |
| 7.1.4 | Summary of Environmental Complaint                                                                                                                             |
|       | No complaint was received during the reporting period.                                                                                                         |
|       | The cumulative number of complaints is presented in Annex K.                                                                                                   |
| 7.1.5 | Summary of Environmental Summons and Successful Prosecution                                                                                                    |
|       | No summons was received during the reporting period. The cumulative                                                                                            |

No summons was received during the reporting period. The cumulative summons/prosecution log is shown in *Annex K*.

This page is deliberately left blank

#### 8.1 NOISE

A comparison was made between the monitoring results in this reporting period and the Noise Standard for general construction works during 0700 – 1900 hrs on normal weekdays (*Table 8.1*).

| Table 8.1 C | Comparison of | Construction 1 | Noise Standard | and Noise I | Monitoring Results |
|-------------|---------------|----------------|----------------|-------------|--------------------|
|-------------|---------------|----------------|----------------|-------------|--------------------|

| Reporting<br>Month | Monitoring<br>Stations | Corresponding<br>NSR in EIA | Noise<br>Limit<br>Level          | Predicted<br>Construction<br>Noise Level (With<br>Mitigation) in EIA | Measured<br>Construction<br>Noise Level |  |
|--------------------|------------------------|-----------------------------|----------------------------------|----------------------------------------------------------------------|-----------------------------------------|--|
|                    |                        |                             | L <sub>eq, 30 min</sub><br>dB(A) | L <sub>eq, 30 min</sub> dB(A)                                        | L <sub>eq, 30 min</sub> dB(A)           |  |
| Nov 2014           | NM2                    | N2                          | 75                               | 67 - 72                                                              | 63.8 - 70.1                             |  |
|                    | NM6                    | N6                          | 75                               | 73 - 75                                                              | 64.3 - 69.7                             |  |
| Dec 2014           | NM2                    | N2                          | 75                               | 67 - 72                                                              | 66.1 – 71.9                             |  |
|                    | NM6                    | N6                          | 75                               | 73 - 75                                                              | 67.1 - 70.6                             |  |
| Jan 2015           | NM2                    | N2                          | 75                               | 67 - 72                                                              | 64.8 - 71.1                             |  |
|                    | NM6                    | N6                          | 75                               | 73 - 75                                                              | 66.9 – 73.7                             |  |

The monitoring results recorded since the commencement of the construction works have been below the Limit Level and comparable to the predicted construction noise level in the approved EIA. Recommended mitigation measures in *Section 5.9.1* of EIA will continue to be implemented throughout the construction stage.

#### 8.2 WASTE MANAGEMENT

The estimated amount of waste generated in the approved EIA and the accumulated quantities of waste generated up to this reporting period are presented in *Table 8.2*. The accumulated amount of inert and non-inert C&D materials is higher than the estimated amount in EIA. The major chemical waste generated on site was primarily asbestos which was not estimated in the approved EIA and hence no data is available for comparison. Recommended mitigation measures in *Section 8.5.1* of the EIA will continue to be implemented throughout the construction stage.

# Table 8.2Quantity of Actual Amount of C&D Materials, General Wastes and Chemical<br/>Wastes Generated and EIA Estimation

| Type of Material                               | Estimated Amount of<br>Waste in EIA | Accumulated Actual Amount of<br>Waste Recorded <sup>(a) (b)</sup> |
|------------------------------------------------|-------------------------------------|-------------------------------------------------------------------|
| Amount of C&D Materials<br>(Inert) Arising     | 16,440 m <sup>3</sup>               | 30,069.0 m <sup>3</sup>                                           |
| Amount of C&D Materials<br>(Non-inert) Arising | 890 m <sup>3</sup>                  | 6,527.6 m <sup>3</sup>                                            |
| General Refuse                                 | 130 kg per day                      | _ (c)                                                             |
| Chemical Waste                                 | Less than 100L per month            | - 57 L (liquid)                                                   |
|                                                |                                     | - 395 kg (solid)                                                  |
|                                                |                                     | - 7,000 kg of asbestos generated                                  |

#### Notes:

(a) The accumulated actual amount of C&D Materials and chemical waste were recorded since the commencement of construction works.

(b) The volume of waste materials are provided by the Contractor based on the updated waste record in January 2015.

(c) The amount of general refuse generated was not recorded.

## 8.3 SUMMARY OF REVIEW

The EIA predictions and the monitoring results since the commencement of construction works have been reviewed. The EIA concluded that the Project would not cause adverse impacts to the environment and the monitoring results have also indicated the same so far. Mitigation measures (including those for archaeology) recommended in the EP, EIA and EM&A Manual were implemented by the Contractor as far as practicable and were considered effective. The recommended mitigation measures will continue to be implemented throughout the construction phase of the Project.

The effectiveness of the monitoring programme has been exhibited therefore change to the programme is not considered to be necessary.

#### 9 CONCLUSIONS

This thirteenth Quarterly EM&A Report presents the EM&A works undertaken during the reporting period from 1 November 2014 to 31 January 2015 in accordance with EM&A Manual and the requirements under EP-408/2011/B.

No exceedance of the Action or Limit Level of construction noise was recorded at designated monitoring stations during the reporting period.

Tree inspections were conducted in this reporting period. Most of the necessary landscape and visual mitigation measures recommended in the EIA Report were implemented by the Contractor.

No exceedance of Alert, Alarm and Action Levels of vibration was recorded during the reporting period.

No enquiry was received during the reporting period.

No non-compliance event for heritage and environmental site inspections was recorded during the reporting period.


No complaint was received during the reporting period.

No summons/prosecution was received during the reporting period.

The monitoring programme was considered effective in reflecting the environmental conditions at the designated representative sensitive receivers. The monitoring results also indicate that the Project have not caused adverse impacts on the environment with implementation of appropriate mitigation measures. Change to the monitoring programme is not considered to be necessary. The ET will keep track on the EM&A programme to ensure compliance of environmental requirements and the proper implementation of all necessary mitigation measures in the coming periods. Annex A


Location of Works Areas and the Surroundings Annex A1

# Project Location

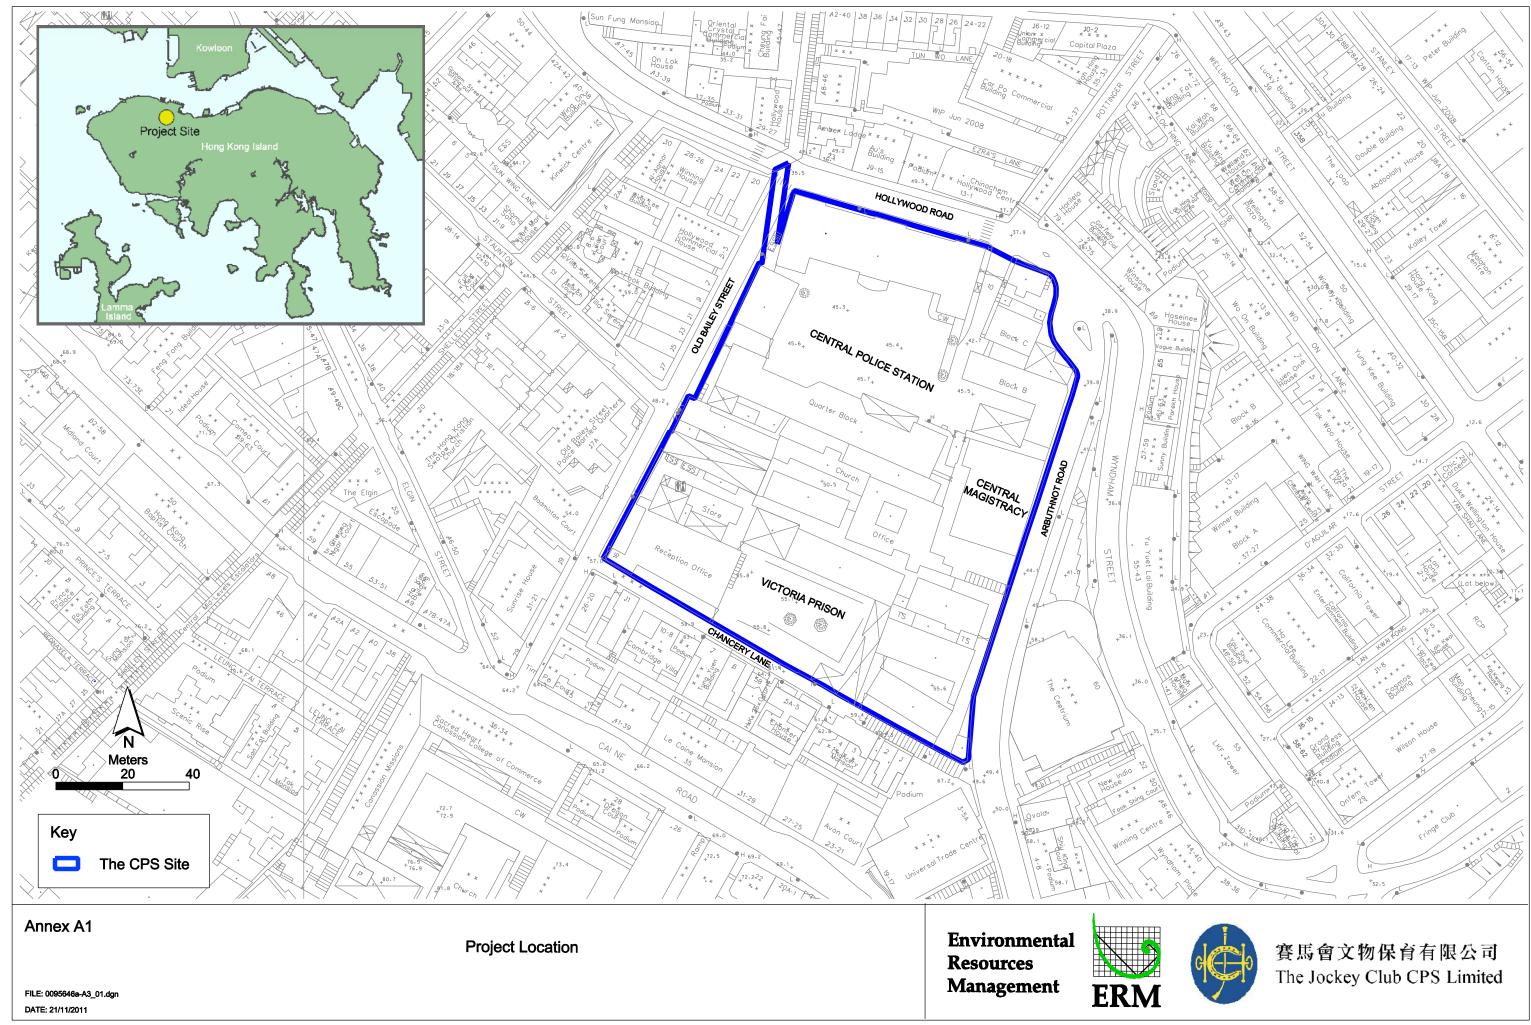

Annex A2

Declared Monuments within the Project Site

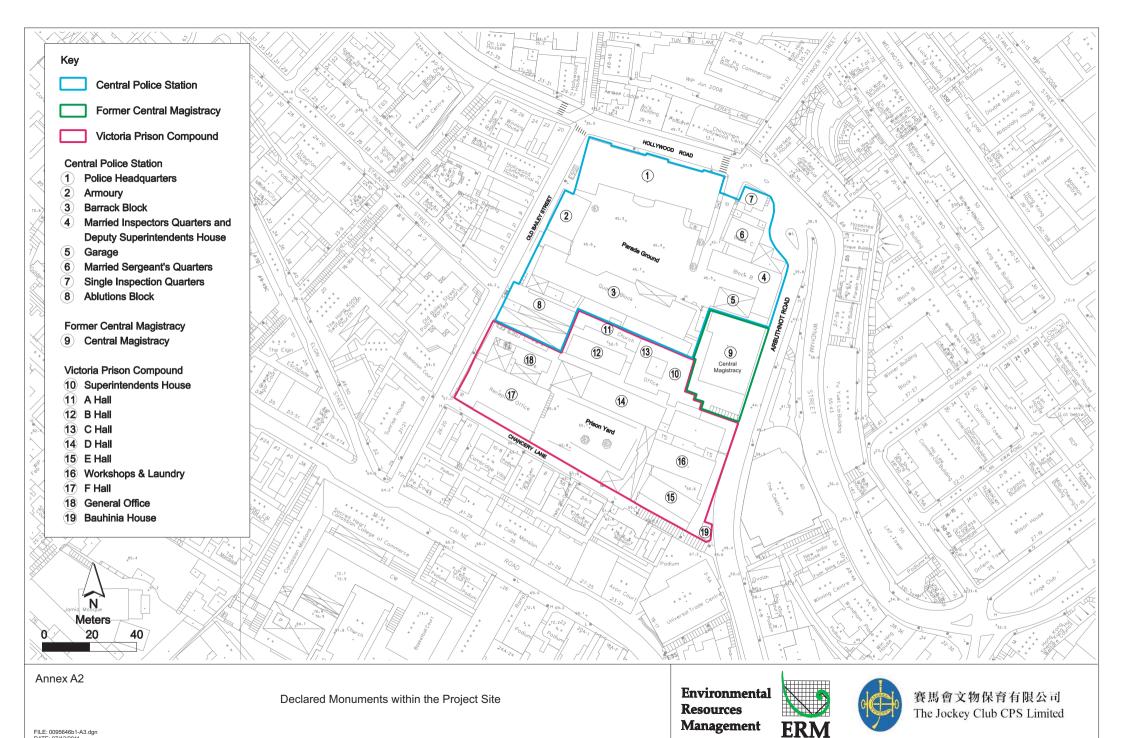

FILE: 0095646b1-A3.dgn DATE: 07/12/2011

Annex A3


Site Layout Plan marked with Works





- 1. E&M Installation / Opening / Conduit
- 2. Excavation
- 3. Internal Building Works
- 4. Permanent Steel Works Erection
- 5. Upgrading
- 6. Roof Replacement Works / New Roof
- 7. Basement Construction
- 8. Structure A&A Works
- 9. Repair Works to Timber Window, Door, Structure, Floor and Metal Elements
- 10. Demolition Works
- 11. Facade Works / Link Bridage Repair
- 12. New Structure Construction
- 13. Balcony Repair
- 14. Paint Stripping and Plastering Works
- 15. Core Wall Construction
- 16. Utilities Diversion and Carriageway
- 17. PBR
- 18. Removal of Needle Beams
- 19. U/G Drainage
- 20. Service trench construction
- 21. Demolition of concrete block
- 22. New Balcony Construction

| Client        |                      | 文物保育有限<br>tey Club CPS I |             |             |
|---------------|----------------------|--------------------------|-------------|-------------|
| Contractor    |                      |                          |             |             |
| Drawing Title | Gar                  | nmo                      | 'n          |             |
|               |                      |                          |             |             |
| SHEL          | AYOUT PL             | .AN                      |             |             |
|               |                      |                          |             |             |
| Drawn         | Scale                | N.T.S.                   |             |             |
| Designed      | Status<br>Marked for | Enquiry & Cor            | nplaint log |             |
| Checked       | (CPS/E&C             |                          | ,           | Ц           |
| Approved      | Drawing No.          |                          |             | .AST_UPDATE |
| CAD Ref       |                      | _                        |             | 2           |
|               |                      |                          |             | AST.        |

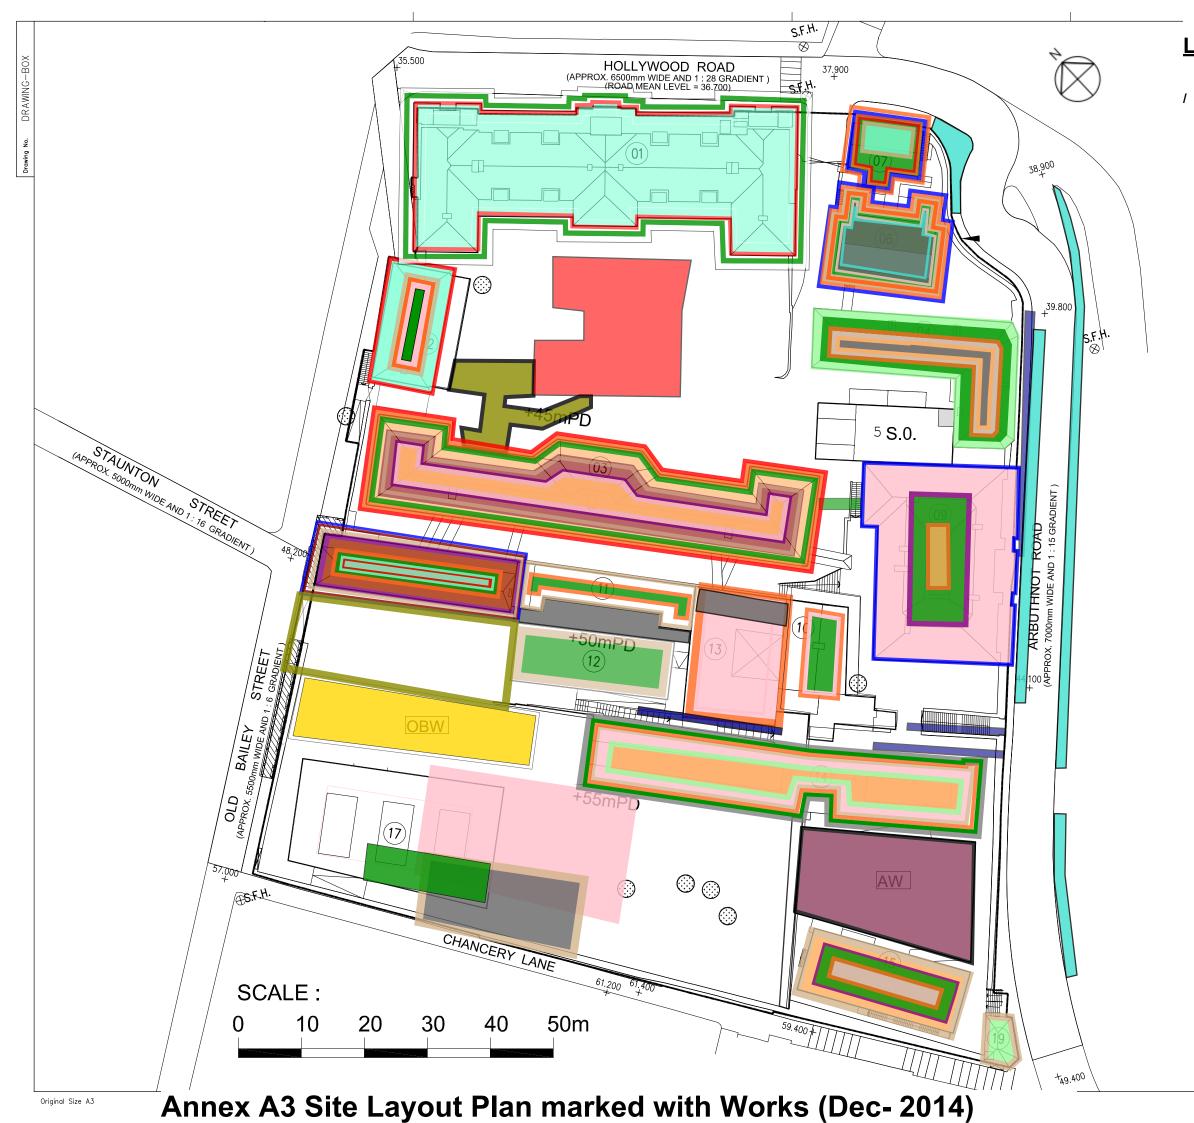



- 1. E&M Installation / Opening / Conduit Transformer delivery and installation
- 2. Excavation
- 3. Internal Building Works
- 4. Permanent Steel Works Erection
- 5. Upgrading
- 6. Roof Replacement Works / New Roof / Repair
- 7. Basement Construction
- 8. Structure A&A Works
- 9. Repair Works to Timber Window, Door, Structure, Floor and Metal Elements
- **10. Demolition Works**
- 11. Facade Works / Link Bridage Repair
- **12. New Structure Construction**
- 13. Balcony Repair
- 14. Paint Stripping and Plastering Works
- 15. Core Wall Construction
- 16. Utilities Diversion and Carriageway
- 17. PBR
- 18. Removal of Needle Beams
- 19. U/G Drainage
- 20. Service trench construction
- 21. Demolition of concrete block
- 22. New Balcony Construction

23. Construction of terminal Manhole



賽馬會文物保育有限公司 The Jockey Club CPS Limited

Contractor



Drawing Title

## SITE LAYOUT PLAN

| Drawn    | Scale N.T.S            |               |
|----------|------------------------|---------------|
| Designed | Marked for Enguiry & ( | Complaint log |
| Checked  | (CPS/E&C/09)           |               |
| Approved | Drawing No.            |               |
| CAD Ref  |                        | _             |

LAST\_UPDATE





- 1. E&M Installation / Opening / Conduit Transformer delivery and installation
- 2. Excavation
- 3. Internal Building Works
- 4. Permanent Steel Works Erection
- 5. Upgrading
- 6. Roof Replacement Works / New Roof / Repair
- '. Basement Construction
- 8. Structure A&A Works
- 9. Repair Works to Timber Window, Door, Structure, Floor and Metal Elements
- **10. Demolition Works**
- 11. Facade Works / Link Bridage Repair
- **12. New Structure Construction**
- 13. Balcony Repair
- 14. Paint Stripping and Plastering Works
- 15. Core Wall Construction
- 16. Utilities Diversion and Carriageway
- 17. PBR
- 18. Removal of Needle Beams
- 19. U/G Drainage
- 20. Service trench construction
- 21. Demolition of concrete block
- 22. New Balcony Construction

23. Construction of terminal Manhole



賽馬會文物保育有限公司 The Jockey Club CPS Limited

Contractor



Drawing Title


### SITE LAYOUT PLAN

| Drawn    | Scale N.T.S.                                |    |
|----------|---------------------------------------------|----|
| Designed | Status<br>Marked for Enguiry & Complaint lo | oq |
| Checked  | (CPS/E&C/09)                                | 0  |
| Approved | Drawing No.                                 |    |
| CAD Ref  |                                             |    |
|          |                                             |    |

LAST\_UPDATE


Annex B

Project Organization Chart and Contact Detail

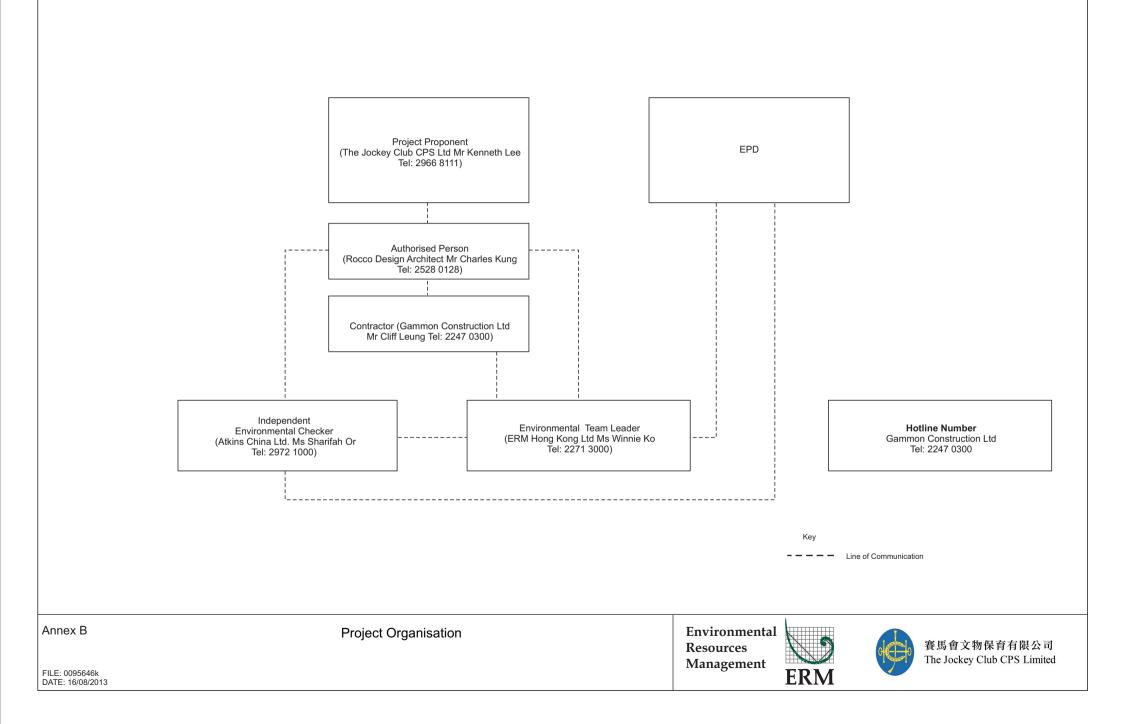

Annex C

Locations of Noise Monitoring Stations and Noise Sensitive Receivers

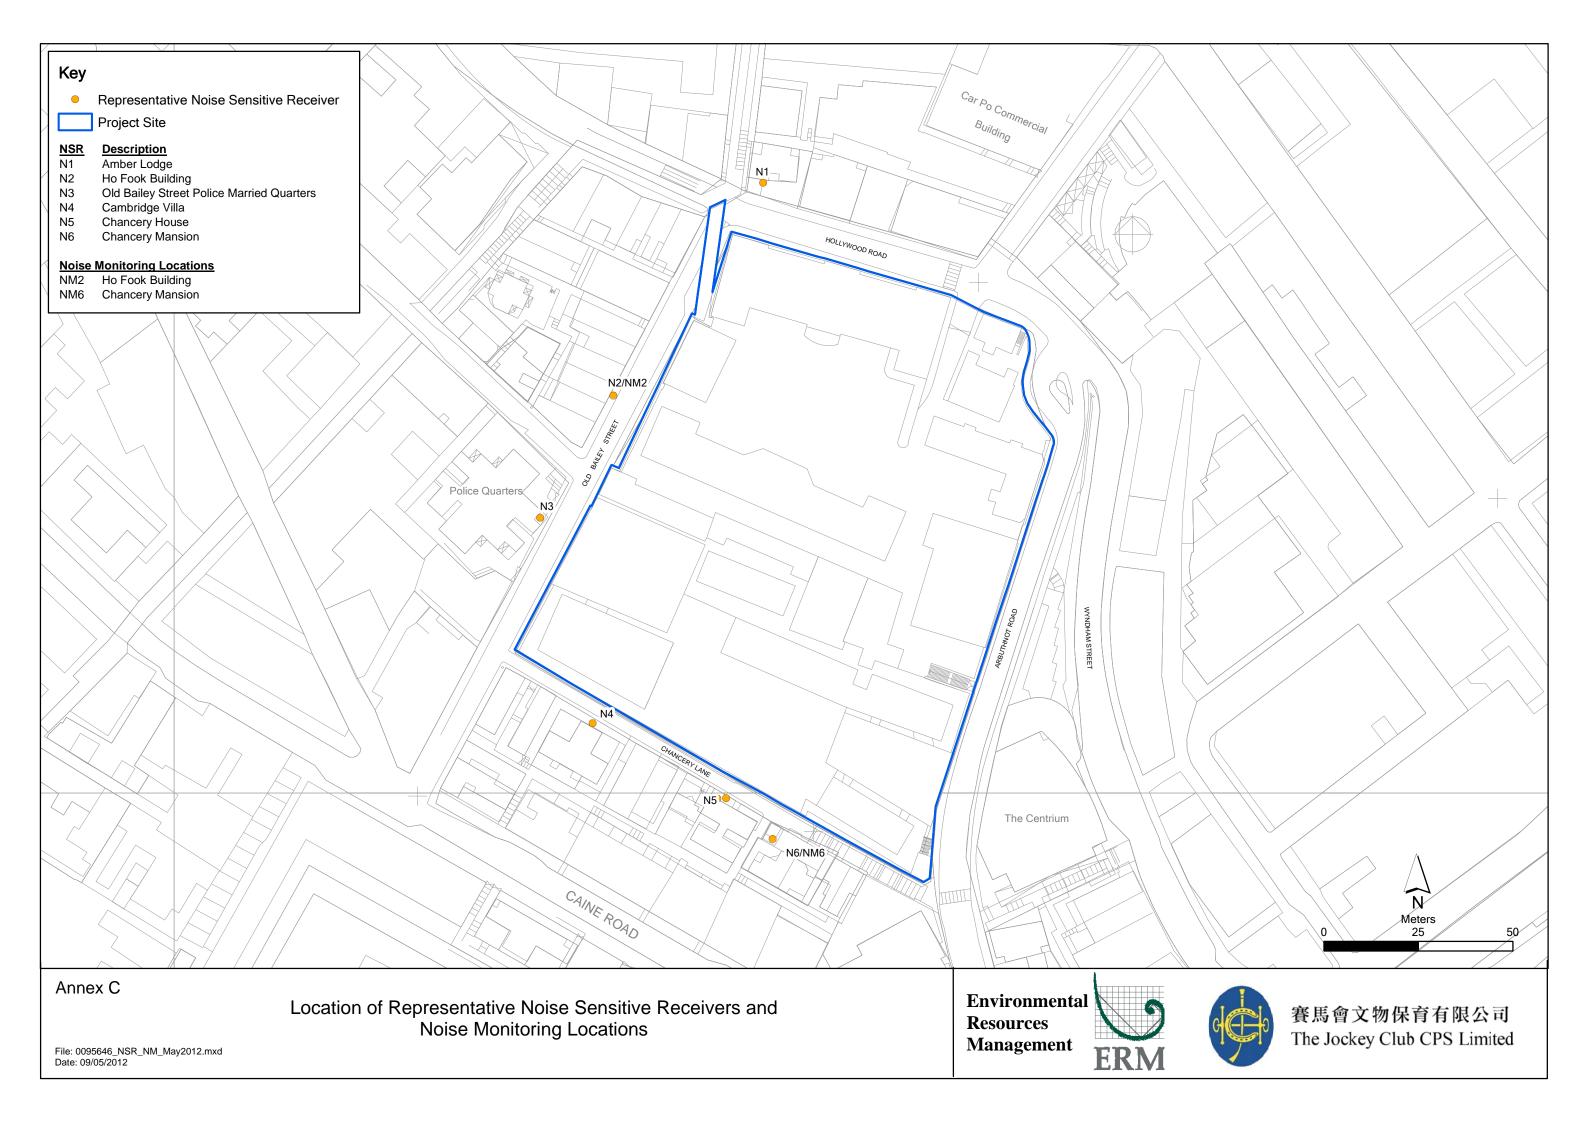

Annex D

Monitoring Schedule of the Reporting Period

### Central Police Station Compound Conservation and Revitalisation (Ho Fook Building - NM2 & Chancery Mansion - NM6) Monitoring Schedule for Reporting Month - November 2014

| Sunday | Monday                           | Tuesday                          | Wednesday                        | Thursday                         | Friday | Saturday                         |
|--------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|--------|----------------------------------|
|        |                                  |                                  |                                  |                                  |        | 01-Nov                           |
|        |                                  |                                  |                                  |                                  |        |                                  |
|        |                                  |                                  |                                  |                                  |        |                                  |
|        |                                  |                                  |                                  |                                  |        |                                  |
|        |                                  |                                  |                                  |                                  |        |                                  |
| 02-Nov | 03-Nov                           | 04-Nov                           | 05-Nov                           | 06-Nov                           | 07-Nov | 08-Nov                           |
|        |                                  |                                  |                                  | Noise Monitoring<br>at NM2 & NM6 |        |                                  |
| 09-Nov | 10-Nov                           | 11-Nov                           | 12-Nov                           | 13-Nov                           | 14-Nov | 15-Nov                           |
|        |                                  |                                  |                                  | 10.101                           |        |                                  |
|        |                                  |                                  | Noise Monitoring<br>at NM2 & NM6 |                                  |        |                                  |
| 16-Nov | 17-Nov                           | 18-Nov                           | 19-Nov                           | 20-Nov                           | 21-Nov | 22-Nov                           |
|        |                                  | Noise Monitoring<br>at NM2 & NM6 |                                  |                                  |        |                                  |
| 23-Nov | 24-Nov                           | 25-Nov                           | 26-Nov                           | 27-Nov                           | 28-Nov | 29-Nov                           |
|        | Noise Monitoring<br>at NM2 & NM6 |                                  |                                  |                                  |        | Noise Monitoring<br>at NM2 & NM6 |
| 30-Nov |                                  |                                  |                                  |                                  |        |                                  |
|        |                                  |                                  |                                  |                                  |        |                                  |
|        |                                  |                                  |                                  |                                  |        |                                  |

### Central Police Station Compound Conservation and Revitalisation (Ho Fook Building - NM2 & Chancery Mansion - NM6) Monitoring Schedule for Reporting Month - December 2014

| Sunday | Monday                           | Tuesday | Wednesday                        | Thursday                         | Friday                           | Saturday                         |
|--------|----------------------------------|---------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
|        | 01-Dec                           | 02-Dec  | 03-Dec                           | 04-Dec                           | 05-Dec                           | 06-Dec                           |
|        |                                  |         |                                  |                                  | Noise Monitoring<br>at NM2 & NM6 |                                  |
| 07-Dec | 08-Dec                           | 09-Dec  | 10-Dec                           | 11-Dec                           | 12-Dec                           | 13-Dec                           |
|        |                                  |         |                                  | Noise Monitoring<br>at NM2 & NM6 |                                  |                                  |
| 14-Dec | 15-Dec                           | 16-Dec  | 17-Dec                           | 18-Dec                           | 19-Dec                           | 20-Dec                           |
|        |                                  |         | Noise Monitoring<br>at NM2 & NM6 |                                  |                                  |                                  |
| 21-Dec | 22-Dec                           | 23-Dec  | 24-Dec                           | 25-Dec                           | 26-Dec                           | 27-Dec                           |
|        | Noise Monitoring<br>at NM2 & NM6 |         |                                  | Public Holiday                   | Public Holiday                   | Noise Monitoring<br>at NM2 & NM6 |
| 28-Dec | 29-Dec                           | 30-Dec  | 31-Dec                           |                                  |                                  |                                  |
|        |                                  |         |                                  |                                  |                                  |                                  |

### Central Police Station Compound Conservation and Revitalisation (Ho Fook Building - NM2 & Chancery Mansion - NM6) Monitoring Schedule for Reporting Month - January 2015

| Sunday | Monday                           | Tuesday                          | Wednesday                        | Thursday                         | Friday                           | Saturday                         |
|--------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
|        |                                  |                                  |                                  | 01-Jan                           | 02-Jan                           | 03-Jan                           |
|        |                                  |                                  |                                  |                                  | Noise Monitoring<br>at NM2 & NM6 |                                  |
| 04-Jan | 05-Jan                           | 06-Jan                           | 07-Jan                           | 08-Jan                           | 09-Jan                           | 10-Jan                           |
|        |                                  |                                  |                                  | Noise Monitoring<br>at NM2 & NM6 |                                  |                                  |
| 11-Jan | 12-Jan                           | 13-Jan                           | 14-Jan                           | 15-Jan                           | 16-Jan                           | 17-Jan                           |
|        |                                  |                                  | Noise Monitoring<br>at NM2 & NM6 |                                  |                                  |                                  |
| 18-Jan | 19-Jan                           | 20-Jan                           | 21-Jan                           | 22-Jan                           | 23-Jan                           | 24-Jan                           |
|        |                                  | Noise Monitoring<br>at NM2 & NM6 |                                  |                                  |                                  |                                  |
| 25-Jan | 26-Jan                           | 27-Jan                           | 28-Jan                           | 29-Jan                           | 30-Jan                           | 31-Jan                           |
|        | Noise Monitoring<br>at NM2 & NM6 |                                  |                                  |                                  |                                  | Noise Monitoring<br>at NM2 & NM6 |

Annex E

Calibration Reports for Calibrators and Sound Level Meters



Certificate No. : C137683 證書編號

| ITEM TESTED / 送檢只  | 頁目 | (Job No. / 序引編號:IC13-3109)                        |
|--------------------|----|---------------------------------------------------|
| Description / 儀器名稱 | :  | Sound Level Calibrator                            |
| Manufacturer / 製造商 | :  | Rion                                              |
| Model No. / 型號     | :  | NC-73                                             |
| Serial No. / 編號    | :  | 10486660                                          |
| Supplied By / 委託者  | :  | Envirotech Services Co.                           |
|                    |    | Shop 6, G/F., Casio Mansion, 209 Shaukeiwan Road, |
|                    |    | Hong Kong                                         |
|                    |    |                                                   |

### TEST CONDITIONS / 測試條件

Temperature / 溫度 : Line Voltage / 電壓 :

 $(23 \pm 2)^{\circ}C$ 

Relative Humidity / 相對濕度 :  $(55 \pm 20)\%$ 

#### TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期 3 December 2013 :

### TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only. All results are within manufacturer's specification. The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA
- Agilent Technologies, USA

| Tested By<br>測試    | K C Lee  |                       |   |                 |
|--------------------|----------|-----------------------|---|-----------------|
| Certified By<br>核證 | : K M Wu | Date of Issue<br>簽發日期 | : | 4 December 2013 |

te test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior

1 證書所載校正用之測試器材均可溯源至國際標準。 局部複印本證書需先獲本實驗所書面批准。

n Creation Engineering Limited - Calibration & Testing Laboratory

龍創工程有限公司 - 校正及檢測實驗所

) 香港新界屯門興安里一號青山灣機樓四樓

[1] 電話: 2927 2606 Fax/傳真: 2744 8986



Certificate No. : C137683 證書編號

- 1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours before the commencement of the test.
- 2. The results presented are the mean of 3 measurements at each calibration point.
- 3. Test equipment :

Equipment ID CL130 CL281 TST150A <u>Description</u> Universal Counter Multifunction Acoustic Calibrator Measuring Amplifier <u>Certificate No.</u> C133632 DC130171 C120886

- 4. Test procedure : MA100N.
- 5. Results :

#### 5.1 Sound Level Accuracy

| UUT           | Measured Value | Mfr's Spec. | Uncertainty of Measured Value |
|---------------|----------------|-------------|-------------------------------|
| Nominal Value | (dB)           | (dB)        | (dB)                          |
| 94 dB, 1 kHz  | 93.8           | ± 0.5       | ± 0.2                         |

#### 5.2 Frequency Accuracy

| UUT Nominal Value | Measured Value | Mfr's       | Uncertainty of Measured Value |
|-------------------|----------------|-------------|-------------------------------|
| (kHz)             | (kHz)          | Spec.       | (Hz)                          |
| 1                 | 0.991          | 1 kHz ± 2 % | ± 1                           |

Remark : The uncertainties are for a confidence probability of not less than 95 %.

Note :

T: 電話: 2927 2606 Fax/傳真: 2744 8986

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior v itten approval of this laboratory.

<sup>4.</sup> 證書所載校正用之測試器材均可溯源至國際標準。 局部複印本證書需先獲本實驗所書面批准。



2

輝創工程有限公司

Sun Creation Engineering Limited

Calibration and Testing Laboratory

# Certificate of Calibration 校正證書

Certificate No.: C144214 證書編號

| Manufacturer / 製造商 : Ri<br>Model No. / 型號 : No<br>Serial No. / 編號 : 10<br>Supplied By / 委託者 : En<br>Sh                                                                                                                                                                                                          | und Level Calibrator                                                                                                      |                         | f Receipt / 收件日期:    | : 9 July 2014 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|-------------------------|----------------------|---------------|
| TEST CONDITIONS / 測試條<br>Temperature / 溫度 : (23 ± 2<br>Line Voltage / 電壓 :                                                                                                                                                                                                                                      |                                                                                                                           | Relative Hum            | idity / 相對濕度 :       | (55 ± 20)%    |
| TEST SPECIFICATIONS / 測<br>Calibration check                                                                                                                                                                                                                                                                    | 試規範                                                                                                                       |                         |                      |               |
| DATE OF TEST / 測試日期                                                                                                                                                                                                                                                                                             | : 15 July 2014                                                                                                            |                         |                      |               |
| TEST RESULTS / 測試結果<br>The results apply to the particula<br>All results are within manufactur<br>The results are detailed in the sul<br>The test equipment used for calib<br>- The Government of The Hong<br>- Rohde & Schwarz Laboratory,<br>- Fluke Everett Service Center, I<br>- Agilent Technologies, USA | er's specification.<br>osequent page(s).<br>oration are traceable to National<br>Kong Special Administrative R<br>Germany |                         | libration Laboratory |               |
| Tested By :<br>測試<br>Certified By :<br>核證                                                                                                                                                                                                                                                                       | m & Chan<br>H C Chan<br>Engineer<br>K K Wong<br>Engineer                                                                  | Date of Issue :<br>簽發日期 | 16 July 2            | 2014          |

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。



Sun Creation Engineering Limited

Calibration and Testing Laboratory

# Certificate of Calibration 校正證書

Certificate No. : C144214 證書編號

- 1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours before the commencement of the test.
- 2. The results presented are the mean of 3 measurements at each calibration point.
- 3. Test equipment :

Equipment ID CL130 CL281 TST150A

Description Universal Counter Multifunction Acoustic Calibrator Measuring Amplifier <u>Certificate No.</u> C143868 DC130171 C141558

- 4. Test procedure : MA100N.
- 5. Results :
- 5.1 Sound Level Accuracy

| UUT           | Measured Value | Mfr's Spec. | Uncertainty of Measured Value |
|---------------|----------------|-------------|-------------------------------|
| Nominal Value | (dB)           | (dB)        | (dB)                          |
| 94 dB, 1 kHz  | 93.9           | ± 0.5       | ± 0.2                         |

5.2 Frequency Accuracy

| UUT Nominal Value | Measured Value | Mfr's                    | Uncertainty of Measured Value |
|-------------------|----------------|--------------------------|-------------------------------|
| (kHz)             | (kHz)          | Spec.                    | (Hz)                          |
| 1                 | 0.990          | $1 \text{ kHz} \pm 2 \%$ | ± 1                           |

Remark : The uncertainties are for a confidence probability of not less than 95 %.

Note :

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。



5

輝創工程有限公司

Sun Creation Engineering Limited

Calibration and Testing Laboratory

# Certificate of Calibration 校正證書

Certificate No.: C147473 證書編號

|   | ITEM TESTED / 送檢項目<br>Description / 儀器名稱 :<br>Manufacturer / 製造商 :<br>Model No. / 型號 :<br>Serial No. / 編號 :<br>Supplied By / 委託者 : | <ul> <li>( Job No. / 序引編號: IC14-3079 )</li> <li>Acoustic Calibrator</li> <li>Casella</li> <li>CEL-120/1</li> <li>3421612</li> <li>Envirotech Services Co.</li> <li>Shop 6, G/F., Casio Mansion, 209 Shar</li> <li>Hong Kong</li> </ul> | Date of Receipt / 收件日期:5 De | cember 2014 |
|---|------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-------------|
| - | TEST CONDITIONS / 測語<br>Temperature / 溫度 : (2<br>Line Voltage / 電壓 :                                                               | $(3 \pm 2)^{\circ}C$                                                                                                                                                                                                                   | Relative Humidity / 相對濕度 :  | (55 ± 20)%  |
| - | TEST SPECIFICATIONS<br>Calibration check                                                                                           | / 測試規範                                                                                                                                                                                                                                 |                             |             |

DATE OF TEST / 測試日期 : 14 December 2014

#### TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only. All results are within manufacturer's specification. The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory

- Agilent Technologies / Keysight Technologies
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA

| Tested By<br>測試    | :( | K O Lee<br>Project Engineer |                       |   |                  |
|--------------------|----|-----------------------------|-----------------------|---|------------------|
| Certified By<br>核證 | :  | K K Wong<br>Engineer        | Date of Issue<br>簽發日期 | : | 17 December 2014 |

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。



Sun Creation Engineering Limited

Calibration and Testing Laboratory

# Certificate of Calibration 校正證書

Certificate No. : C147473 證書編號

- 1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours before the commencement of the test.
- 2. The results presented are the mean of 3 measurements at each calibration point.
- 3. Test equipment :

| Equipment ID | Description                       | Certificate No. |
|--------------|-----------------------------------|-----------------|
| CL130        | Universal Counter                 | C143868         |
| CL281        | Multifunction Acoustic Calibrator | DC130171        |
| TST150A      | Measuring Amplifier               | C141558         |

- 4. Test procedure : MA100N.
- 5. Results :
- 5.1 Sound Level Accuracy

| UUT<br>Nominal Value | Measured Value<br>(dB) | Mfr's Spec.<br>(dB) | Uncertainty of Measured Value (dB) |
|----------------------|------------------------|---------------------|------------------------------------|
| 94 dB, 1 kHz         | 94.0                   | ± 0.25              | ± 0.2                              |
| 114 dB, 1 kHz        | 114.1                  |                     |                                    |

### 5.2 Frequency Accuracy

| UUT Nominal Value | Measured Value | Mfr's                            | Uncertainty of Measured Value |
|-------------------|----------------|----------------------------------|-------------------------------|
| (kHz)             | (kHz)          | Spec.                            | (Hz)                          |
| .1                | 1.000 0        | $1 \text{ kHz} \pm 5 \text{ Hz}$ | $\pm 0.1$                     |

Remark : The uncertainties are for a confidence probability of not less than 95 %.

#### Note :

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。



Certificate No. : C141622 證書編號

| ITEM TESTED / 送檢項  | 頁目 | (Job No./序引編號:IC14-0645)                  | Date of Receipt / 收件日期: 11 March 2014 |
|--------------------|----|-------------------------------------------|---------------------------------------|
| Description / 儀器名稱 | :  | Sound Level Meter                         |                                       |
| Manufacturer / 製造商 | :  | Rion                                      |                                       |
| Model No. / 型號     | :  | NL-52                                     |                                       |
| Serial No. / 編號    | :  | 00131627                                  |                                       |
| Supplied By / 委託者  | :  | Envirotech Services Co.                   |                                       |
|                    |    | Shop 6, G/F., Casio Mansion, 209 Shaukeiv | wan Road,                             |
|                    |    | Hong Kong                                 |                                       |
|                    |    |                                           |                                       |
|                    |    |                                           |                                       |

### TEST CONDITIONS / 測試條件

Temperature / 溫度 : (23 ± 2)°C Line Voltage / 電壓 : --- Relative Humidity / 相對濕度 : (55 ± 20)%

#### TEST SPECIFICATIONS / 測試規範

Calibration check

DATE OF TEST / 測試日期 : 17 March 2014

#### TEST RESULTS / 測試結果

The results apply to the particular unit-under-test only. All results are within manufacturer's specification. The results are detailed in the subsequent page(s).

The test equipment used for calibration are traceable to National Standards via :

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory
- Agilent Technologies, USA
- Fluke Everett Service Center, USA
- Rohde & Schwarz Laboratory, Germany

| Tested By<br>測試    | :<br>KCLee<br>Project Engineer |                       |   |               |
|--------------------|--------------------------------|-----------------------|---|---------------|
| Certified By<br>核證 | : KM Wu<br>Engineer            | Date of Issue<br>簽發日期 | : | 20 March 2014 |

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。



Certificate No. : C141622 證書編號

- 1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours, and switched on to warm up for over 10 minutes before the commencement of the test.
- 2. Self-calibration was performed before the test.
- 3. The results presented are the mean of 3 measurements at each calibration point.
- 4. Test equipment :

| Equipment ID | Description                         | Certificate No. |
|--------------|-------------------------------------|-----------------|
| CL280        | 40 MHz Arbitrary Waveform Generator | C140016         |
| CL281        | Multifunction Acoustic Calibrator   | DC130171        |

- 5. Test procedure : MA101N.
- 6. Results :
- 6.1 Sound Pressure Level
- 6.1.1 Reference Sound Pressure Level

|          | UUT Setting    |           |           |       |       | UUT     | IEC 61672     |
|----------|----------------|-----------|-----------|-------|-------|---------|---------------|
| Range    | Function       | Frequency | Time      | Level | Freq. | Reading | Class 1 Spec. |
| (dB)     |                | Weighting | Weighting | (dB)  | (kHz) | (dB)    | (dB)          |
| 30 - 130 | L <sub>A</sub> | А         | Fast      | 94.00 | 1     | 94.1    | ± 1.1         |

#### 6.1.2 Linearity

|          | UU             | Γ Setting | Applie    | d Value | UUT   |             |
|----------|----------------|-----------|-----------|---------|-------|-------------|
| Range    | Function       | Frequency | Time      | Level   | Freq. | Reading     |
| (dB)     |                | Weighting | Weighting | (dB)    | (kHz) | (dB)        |
| 30 - 130 | L <sub>A</sub> | А         | Fast      | 94.00   | 1     | 94.1 (Ref.) |
|          |                |           |           | 104.00  |       | 104.1       |
|          |                |           |           | 114.00  |       | 114.1       |

IEC 61672 Class 1 Spec. :  $\pm$  0.6 dB per 10 dB step and  $\pm$  1.1 dB for overall different.

#### 6.2 Time Weighting

|      | UUT Setting |                |           |           |       | Applied Value |         | IEC 61672     |
|------|-------------|----------------|-----------|-----------|-------|---------------|---------|---------------|
| Ra   | inge        | Function       | Frequency | Time      | Level | Freq.         | Reading | Class 1 Spec. |
| (0   | dB)         |                | Weighting | Weighting | (dB)  | (kHz)         | (dB)    | (dB)          |
| 30 - | - 130       | L <sub>A</sub> | А         | Fast      | 94.00 | 1             | 94.1    | Ref.          |
|      |             |                |           | Slow      |       |               | 94.1    | ± 0.3         |

- 渾創工程有限公司 校正及檢測實驗所
- 。 香港新界屯門興安里一號青山灣機樓四樓

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate s all not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。 局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited - Calibration & Testing Laboratory

o 4/F. Tsing Shan Wan Exchange Building, 1 Hing On L me, Tuen Mun, New Territories, Hong Kong



Certificate No. : C141622 證書編號

6.3 Frequency Weighting

### 6.3.1 A-Weighting

|               | Setting  |                        | Appl              | ied Value     | UUT      | IEC 61672       |                       |
|---------------|----------|------------------------|-------------------|---------------|----------|-----------------|-----------------------|
| Range<br>(dB) | Function | Frequency<br>Weighting | Time<br>Weighting | Level<br>(dB) | Freq.    | Reading<br>(dB) | Class 1 Spec.<br>(dB) |
| 30 - 130      | LA       | A                      | Fast              | 94.00         | 63 Hz    | 67.8            | $-26.2 \pm 1.5$       |
|               |          |                        |                   |               | 125 Hz   | 77.8            | $-16.1 \pm 1.5$       |
|               |          |                        |                   |               | 250 Hz   | 85.4            | $-8.6 \pm 1.4$        |
|               |          |                        |                   |               | 500 Hz   | 90.8            | $-3.2 \pm 1.4$        |
|               |          |                        |                   |               | 1 kHz    | 94.1            | Ref.                  |
|               |          |                        |                   |               | 2 kHz    | 95.3            | $+1.2 \pm 1.6$        |
|               |          |                        |                   |               | 4 kHz    | 95.1            | $+1.0 \pm 1.6$        |
|               |          |                        |                   |               | 8 kHz    | 93.0            | -1.1 (+2.1 ; -3.1)    |
|               |          |                        |                   |               | 12.5 kHz | 89.6            | -4.3 (+3.0 ; -6.0)    |

#### 6.3.2 C-Weighting

|          |                | Setting   |           | Applied Value |          | UUT     | IEC 61672          |
|----------|----------------|-----------|-----------|---------------|----------|---------|--------------------|
| Range    | Function       | Frequency | Time      | Level         | Freq.    | Reading | Class 1 Spec.      |
| (dB)     |                | Weighting | Weighting | (dB)          |          | (dB)    | (dB)               |
| 30 - 130 | L <sub>A</sub> | С         | Fast      | 94.00         | 63 Hz    | 93.2    | $-0.8 \pm 1.5$     |
|          |                |           |           |               | 125 Hz   | 93.8    | $-0.2 \pm 1.5$     |
|          |                |           |           |               | 250 Hz   | 94.0    | $0.0 \pm 1.4$      |
|          |                |           |           |               | 500 Hz   | 94.1    | $0.0 \pm 1.4$      |
|          |                |           |           |               | 1 kHz    | 94.1    | Ref.               |
|          |                |           |           |               | 2 kHz    | 93.9    | $-0.2 \pm 1.6$     |
|          |                |           |           |               | 4 kHz    | 93.3    | $-0.8 \pm 1.6$     |
|          |                |           |           |               | 8 kHz    | 91.1    | -3.0 (+2.1;-3.1)   |
|          |                |           |           |               | 12.5 kHz | 87.7    | -6.2 (+3.0 ; -6.0) |

Remarks : - UUT Microphone Model No. : UC-59 & S/N : 04663

- Mfr's Spec. : IEC 61672 Class 1

| 1 ]<br>2 ]<br>8 ] | 50 Hz - 500 Hz : ±<br>kHz : ±<br>kHz - 4 kHz : ±<br>kHz : ±<br>2.5 kHz : ±<br>kHz : ± |  |
|-------------------|---------------------------------------------------------------------------------------|--|
|-------------------|---------------------------------------------------------------------------------------|--|

- The uncertainties are for a confidence probability of not less than 95 %.

Note :

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。



Sun Creation Engineering Limited

Calibration and Testing Laboratory

# Certificate of Calibration 校正證書

Certificate No. : C147474 證書編號

| ITEM TESTED / 送檢項目<br>Description / 儀器名稱 :<br>Manufacturer / 製造商 :<br>Model No. / 型號 :<br>Serial No. / 編號 :<br>Supplied By / 委託者 : | (Job No. / 序引編號: IC14-3079)<br>Sound Level Meter<br>Casella<br>CEL-633A<br>3521757<br>Envirotech Services Co.<br>Shop 6, G/F., Casio Mansion, 209 Shaw<br>Hong Kong | Date of Receipt / 收件日期: 5 December 2014<br>ukeiwan Road, |
|------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| TEST CONDITIONS / 測記<br>Temperature / 溫度 : (23<br>Line Voltage / 電壓 :                                                              |                                                                                                                                                                     | Relative Humidity / 相對濕度 : (55 ± 20)%                    |
| TEST SPECIFICATIONS                                                                                                                | / 測試規範                                                                                                                                                              |                                                          |
| DATE OF TEST / 測試日期                                                                                                                | 月 : 14 December 2014                                                                                                                                                |                                                          |
|                                                                                                                                    | cular unit-under-test only.<br>cturer's specification.                                                                                                              |                                                          |

- The Government of The Hong Kong Special Administrative Region Standard & Calibration Laboratory

- Agilent Technologies / Keysight Technologies
- Rohde & Schwarz Laboratory, Germany
- Fluke Everett Service Center, USA

| Tested By<br>測試    | :<br>K C Lee<br>Project Engineer   |                         |                  |
|--------------------|------------------------------------|-------------------------|------------------|
| Certified By<br>核證 | : <u>k</u><br>K K Wong<br>Engineer | Date of Issue :<br>簽發日期 | 17 December 2014 |

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。



Sun Creation Engineering Limited

Calibration and Testing Laboratory

# Certificate of Calibration 校正證書

Certificate No. : C147474 證書編號

- 1. The unit-under-test (UUT) was allowed to stabilize in the laboratory for over 12 hours, and switched on to yarm up for over 10 minutes before the commencement of the test.
- 2. Self-calibration using the Casella Acoustic Calibrator CEL-120/1, S/N : 3421612 was performed before the test.
- 3. The results presented are the mean of 3 measurement at each calibration point.
- 4. Test equipment :

| Equipment ID | Description                         | Certificate No. |
|--------------|-------------------------------------|-----------------|
| CL280        | 40 MHz Arbitrary Waveform Generator | C140016         |
| CL281        | Multifunction Acoustic Calibrator   | DC130171        |

- 5. Test procedure : MA101N.
- 6. Results :
- 6.1 Sound Pressure Level
- 6.1.1 Reference Sound Pressure Level

| UUT Setting       |                        | Applied Value |                | UUT             | IEC 61672 Class 1 |
|-------------------|------------------------|---------------|----------------|-----------------|-------------------|
| Time<br>Weighting | Frequency<br>Weighting | Level<br>(dB) | Freq.<br>(kHz) | Reading<br>(dB) | Spec.<br>(dB)     |
| L <sub>F</sub>    | A                      | 114.00        | 1              | 113.9           | ± 1.1             |

### 6.1.2 Linearity

| UUT Setting       |                        | Applie        | UUT            |                 |
|-------------------|------------------------|---------------|----------------|-----------------|
| Time<br>Weighting | Frequency<br>Weighting | Level<br>(dB) | Freq.<br>(kHz) | Reading<br>(dB) |
| L <sub>F</sub>    | A                      | 114.00        | 1              | 113.9 (Ref.)    |
|                   |                        | 104.00        |                | 103.9           |
|                   |                        | 94.00         |                | 93.9            |

IEC 61672 Class 1 Spec. :  $\pm$  0.6 dB per 10 dB step and  $\pm$  1.1 dB for overall different.

### 6.2 Time Weighting

| UUT Setting       |                        | Applied Value |                | UUT             | IEC 61672 Class 1 |
|-------------------|------------------------|---------------|----------------|-----------------|-------------------|
| Time<br>Weighting | Frequency<br>Weighting | Level<br>(dB) | Freq.<br>(kHz) | Reading<br>(dB) | Spec.<br>(dB)     |
| L <sub>F</sub>    | A                      | 114.00        | 1              | 113.9           | Ref.              |
| Ls                |                        |               |                | 113.9           | ± 0.3             |
| L                 |                        |               |                | 113.9           |                   |

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Sun Creation Engineering Limited – Calibration & Testing Laboratory c/o 4/F, Tsing Shan Wan Exchange Building, 1 Hing On Lane, Tuen Mun, New Territories, Hong Kong 輝創工程有限公司 – 校正及檢測實驗所 c/o 香港新界屯門興安里一號青山灣機樓四樓 Tel.電話: 2927 2606 Fax/傳真: 2744 8986 E-mail/電郵: callab@suncreation.com Website/網址: www.suncreation.com



Sun Creation Engineering Limited

Calibration and Testing Laboratory

# Certificate of Calibration 校正證書

Certificate No. : C147474 證書編號

### 6.3 Frequency Weighting

6.3.1 'A-Weighting

| UUT               | Setting                | App           | lied Value | UUT             | IEC 61672 Class 1 |
|-------------------|------------------------|---------------|------------|-----------------|-------------------|
| Time<br>Weighting | Frequency<br>Weighting | Level<br>(dB) | Freq.      | Reading<br>(dB) | Spec.<br>(dB)     |
| L <sub>F</sub>    | A                      | 94.00         | 63 Hz      | 87.6            | $-26.2 \pm 1.5$   |
| · ·               |                        |               | 125 Hz     | 97.7            | $-16.1 \pm 1.5$   |
|                   |                        |               | 250 Hz     | 105.2           | $-8.6 \pm 1.4$    |
|                   |                        |               | 500 Hz     | 110.6           | $-3.2 \pm 1.4$    |
|                   |                        |               | 1 kHz      | 113.9           | Ref.              |
|                   |                        |               | 2 kHz      | 115.1           | $+1.2 \pm 1.6$    |
|                   |                        |               | 4 kHz      | 114.7           | $+1.0 \pm 1.6$    |
|                   |                        |               | 8 kHz      | 112.4           | -1.1(+2.1;-3.1)   |
|                   |                        |               | 12.5 kHz   | 108.3           | -4.3(+3.0;-6.0)   |

### 6.3.2 C-Weighting

| UUT               | UUT Setting            |               | Applied Value |                 | IEC 61672 Class 1  |
|-------------------|------------------------|---------------|---------------|-----------------|--------------------|
| Time<br>Weighting | Frequency<br>Weighting | Level<br>(dB) | Freq.         | Reading<br>(dB) | Spec.<br>(dB)      |
| L <sub>F</sub>    | C                      | 94.00         | 63 Hz         | 113.0           | $-0.8 \pm 1.5$     |
|                   |                        |               | 125 Hz        | 113.7           | $-0.2 \pm 1.0$     |
|                   |                        |               | 250 Hz        | 113.8           | $0.0 \pm 1.0$      |
|                   |                        |               | 500 Hz        | 113.9           | $0.0 \pm 1.0$      |
|                   |                        |               | 1 kHz         | 113.9           | Ref.               |
|                   |                        |               | 2 kHz         | 113.7           | $-0.2 \pm 1.0$     |
|                   |                        |               | 4 kHz         | 112.9           | $-0.8 \pm 1.0$     |
|                   |                        |               | 8 kHz         | 110.5           | -3.0 (+1.5 ; -3.0) |
|                   |                        |               | 12.5 kHz      | 106.4           | -6.2 (+3.0 ; -6.0) |

Remarks : - UUT Microphone Model No. : CEL-251 & S/N : 1950

- Mfr's Spec. : IEC 61672 Class 1

| Uncertainties of Applied Value : | 1 kHz<br>2 kHz - 4 kHz<br>8 kHz<br>12.5 kHz | : $\pm 0.45 \text{ dB}$<br>: $\pm 0.40 \text{ dB}$<br>: $\pm 0.30 \text{ dB}$<br>: $\pm 0.45 \text{ dB}$<br>: $\pm 0.55 \text{ dB}$<br>: $\pm 0.80 \text{ dB}$ |
|----------------------------------|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                  | : 1 kHz<br>: 1 kHz                          | $\pm 0.10 \text{ dB} (\text{Ref. 114 dB})$<br>$\pm 0.10 \text{ dB} (\text{Ref. 114 dB})$                                                                       |

- The uncertainties are for a confidence probability of not less than 95 %.

Note :

The values given in this Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environment changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Sun Creation Engineering Limited shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to the Nation Standards as specified in this certificate. This certificate shall not be reproduced except in full, without the prior written approval of this laboratory.

本證書所載校正用之測試器材均可溯源至國際標準。局部複印本證書需先獲本實驗所書面批准。

Annex F

# Event/Action Plans for Noise

# Annex F Event and Action Plan for Noise

| Event        | Action                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                            |                                                                                                                                                                                                                                                                          |                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                        |                                                                                                                                                                                                                                                                                                                                                        |
|--------------|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|              | Environmental Team (ET)                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Independent Environmental<br>Checker (IEC) |                                                                                                                                                                                                                                                                          | Authorised Person (AP)                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                    | Contractor                                                             |                                                                                                                                                                                                                                                                                                                                                        |
| Action Level | 1.<br>2.<br>3.<br>4.<br>5.                   | Notify IEC and Contractor;<br>Carry out investigation;<br>Report the results of<br>investigation to the IEC, AP and<br>Contractor;<br>Discuss with the Contractor and<br>formulate remedial measures;<br>Increase monitoring frequency to<br>check mitigation effectiveness.                                                                                                                                                                                                                                | <ol> <li>2.</li> <li>3.</li> </ol>         | Review the analysed results<br>submitted by the ET;<br>Review the proposed remedial<br>measures by the Contractor and<br>advise the AP accordingly;<br>Supervise the implementation of<br>remedial measures.                                                             | <ol> <li>1.</li> <li>2.</li> <li>3.</li> <li>4.</li> </ol>             | Confirm receipt of notification<br>of failure in writing;<br>Notify Contractor;<br>Require Contractor to proposed<br>remedial measures for the<br>analysed noise problem;<br>Ensure remedial measures are<br>properly implemented.                                                                                                                                                                                 | 1.<br>2.                                                               | Submit noise mitigation proposals<br>to IEC;<br>Implement noise mitigation<br>proposals.                                                                                                                                                                                                                                                               |
| Limit Level  | 1.<br>2.<br>3.<br>4.<br>5.<br>6.<br>7.<br>8. | Identify source;<br>Inform IEC and AP;<br>Repeat measurements to confirm<br>findings;<br>Increase monitoring frequency;<br>Carry out analysis of<br>Contractor's working procedures<br>to determine possible mitigation<br>to be implemented;<br>Inform IEC, AP and EPD the<br>causes and actions taken for the<br>exceedances;<br>Assess effectiveness of<br>Contractor's remedial actions<br>and keep IEC, EPD and AP<br>informed of the results;<br>If exceedance stops, cease<br>additional monitoring. |                                            | Discuss amongst AP, ET, and<br>Contractor on the potential<br>remedial actions;<br>Review Contractors remedial<br>actions whenever necessary to<br>assure their effectiveness and<br>advise the AP accordingly;<br>Supervise the implementation of<br>remedial measures. | <ol> <li>1.</li> <li>2.</li> <li>3.</li> <li>4.</li> <li>5.</li> </ol> | Confirm receipt of notification<br>of failure in writing;<br>Notify Contractor;<br>Require Contractor to propose<br>remedial measures for the<br>analysed noise problem;<br>Ensure remedial measures<br>properly implemented;<br>If exceedance continues,<br>consider what portion of the<br>work is responsible and instruct<br>the Contractor to stop that<br>portion of work until the<br>exceedance is abated. | <ol> <li>1.</li> <li>2.</li> <li>3.</li> <li>4.</li> <li>5.</li> </ol> | Take immediate action to avoid<br>further exceedance;<br>Submit proposals for remedial<br>actions to IEC within 3 working<br>days of notification;<br>Implement the agreed proposals;<br>Resubmit proposals if problem<br>still not under control;<br>Stop the relevant portion of works<br>as determined by the AP until the<br>exceedance is abated. |

Annex G

Summary of Implementation Status

| Annex G | Implementation Schedule | for Environmental Protection Measures ( | (1 November to 30 November 2014) |
|---------|-------------------------|-----------------------------------------|----------------------------------|
|---------|-------------------------|-----------------------------------------|----------------------------------|

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Location                                                                                                                                                              | When to<br>Implement the<br>Measure           | Status                                |
|-------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|---------------------------------------|
| Cultur      | al Heritag   | ge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                       |                                               |                                       |
| S3.9.1      | S3.2.6       | Subject to the outcome of the archaeological investigation, if<br>archaeological deposits are identified to be impacted by the proposed<br>development, appropriate mitigation measures will be recommended<br>and agreed with AMO.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | In accordance with the<br>recommendations in the<br>Archaeological Action<br>Plan (AAP) issued on 21<br>Dec 11 and approved<br>on 30 Dec 11 by AMO                    | During detailed<br>design and<br>construction | No field work in the reporting month. |
| 53.9.2      | S3.3.1       | <u>Vibration Monitoring</u><br>A baseline condition survey and baseline vibration impact will be<br>conducted by a specialist for the approval of AMO and Buildings<br>Department prior to commencement of the construction works to define<br>the vibration control limits and recommend a vibration monitoring<br>proposal for the concerned historic buildings and structures in and<br>outside CPS for AMO's prior approval before commencement of the<br>construction works.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Historic buildings and<br>structures in CPS, the<br>granite walls at Old<br>Bailey Street and the<br>proposed Grade 3<br>historic building (No. 20<br>Hollywood Road) | During detailed<br>design and<br>construction | 7                                     |
| 53.9.2      | S3.3.3       | <u>Compliance of the Approved Measures and Auditing</u><br>Staff training by an experience building conservation expert or relevant<br>competent person(s) in the environmental team of the project should be<br>provided to the on-site staffs, contractors, sub-contractors and workers<br>of the project before commencement of works to ensure their full<br>understanding of the approved protection schedule, restoration<br>proposal and work methodologies related to cultural heritage, and<br>their respective responsibilities in the implementation of the<br>environmental protection measures.<br>Regular site audit for cultural heritage should be carried out in the<br>construction phase by an experience building conservation expert in the<br>environmental team ("the Heritage Checker") to investigate the site<br>practice of the contractors and workers and their compliance of the<br>approved work methodologies with respect of conservation works,<br>mitigations for cultural heritage and any related works. A detailed | Whole site                                                                                                                                                            | Prior to and during<br>construction           |                                       |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Location   | When to<br>Implement the<br>Measure                                  | Status                                                        |
|-------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------------------------------------------------------------------|---------------------------------------------------------------|
|             |              | proposal of the regular audit such as methodology (e.g. performance<br>and monitoring indicators, control tools, frequency of the audit, etc.)<br>and the conservation professionals to be engaged should be agreed with<br>AMO prior to work commencement.<br>The Heritage Checker shall also attend the regular site meetings with<br>AMO and report the compliance and effectiveness of the mitigation<br>measures for cultural heritage.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |            |                                                                      |                                                               |
| S3.9.3      | S3.3.4       | <u>Archival Recording</u><br>An archival recording should be conducted to provide a detailed<br>reference for the update of the Conservation Management Plan and<br>inventory of historical features of the monuments, the preparation of as-<br>built drawings showing the condition of the historic buildings and<br>structures after the completion of the construction works. These<br>archival records will be a reference source for future maintenance of the<br>character defining elements, conservation of the monuments,<br>interpretation and conservation education of the Site. The archival<br>recording shall include but not limit to the video and photographic<br>recording on the detailed process of the repair trials for different kinds<br>of historical features, conservation works of character defining elements<br>and historic fabrics of the monuments, and a written records of any new<br>changes to the detailed design made in the construction phase illustrate<br>with photos and drawings. A full set of the archives records<br>(including both hard and soft copies) should be submitted to the AMO<br>for approval after the work completion for record purpose. Any new<br>findings related to the conservation of built heritage in the Site<br>identified during the detailed design stage and construction phases<br>shall be properly recorded in details for notification to the AMO and<br>update of the Conservation Management Plan. | Whole Site | During detailed<br>design,<br>construction and<br>prior to operation | N/A – Archival recording will be conducted at later<br>stage. |
| S3.7.3      | -            | <u>General Construction Methods</u><br>Prior to the commencement of the modification/refurbishment works at<br>an existing building or structure (e.g. masonry walls near the Old Bailey<br>Wing), a site survey will be carried out by the design team, and all<br>building dimensions and levels of the building/structure shown will be                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Whole site | During<br>construction                                               | $\checkmark$                                                  |

| EIA<br>Ref.       | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Location   | When to<br>Implement the<br>Measure                                                | Status                                                                                    |
|-------------------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| 53.7.1<br>& 3.7.2 | -            | checked and confirmed by the contractor. Non-percussive piling<br>methods will be adopted for the construction of the foundation for the<br>new buildings. Protective and precaution measures to the existing<br>buildings and structure adjacent to the work area (including the<br>proposed Grade 3 historic building (No. 20 Hollywood road) and the<br>granite boundary walls between the Ablutions Block of the police<br>station (building no. 08) and the General Office of the prison area<br>(building no. 18) which is adjacent to the new construction of the Old<br>Bailey Wing and for an old granite walls at Old Bailey Street within 15m<br>from the new construction) shall be provided to avoid damage to the<br>existing features and to safeguard the structural integrity during the<br>course of construction. Small scale handheld pneumatic tools with<br>minimal vibration impact to the existing buildings / structures are<br>selected so as to have a better logistic and handling at the existing<br>buildings and structures, which usually have only narrow working<br>areas. In cases of the local demolition of structural elements,<br>demountable platforms will be erected to temporarily support the<br>affected area and divert the loading from above to avoid instability and<br>create excessive cracking and settlement of the building/structure.<br>Implementation and update of the Conservation Management Plan<br>(CMP). Any new findings related to the conservation of the built<br>heritage in the site identified during the detailed design and<br>construction, a cartographic and photographic recording on the<br>restored historic buildings, historic features and the site shall be<br>conducted and the following records shall be included into the CMP as<br>appendices for updating and record purpose:<br>• one set of measured drawings and photographic records showing<br>the as-built condition of historic buildings and structures; and<br>• an updated inventory list of the historic features together with the<br>cross referenced location plans and photo records.<br>One set of updated CMP shall be submitted to the AMO for approval<br>before | Whole site | During detailed<br>design,<br>construction, post-<br>construction and<br>operation | √ - CMP was implemented during the reporting<br>month. There were no updates for the CMP. |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Location   | When to<br>Implement the<br>Measure | Status                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Landsca     | ipe & Visi   | ıal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |                                     | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| S4.7.27     | -            | <u>In-situ Tree Protection - Cordon Zone (CZ)</u><br>Cordon off each tree along its drip line (below the crown) with a chain-<br>link fencing of 2.5 m height with padlocked gate, allowing limited<br>access to area only to authorized persons. The base of the perimeter<br>fence will be sealed up to 30 cm height to ensure that no construction<br>drainage water will enter. If grouting is to be conducted less than 5 m<br>from the edge of the CZ, a waterproof membrane will be installed<br>below the ground to a depth of 1.5 m on the outer edge of the CZ to<br>prevent the subsurface lateral movement of contaminated construction<br>wastewater from intruding the soil inside the CZ.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Whole site | During<br>construction              | <ul> <li>√ - Part of the cordon zone of Tree-5 has been used<br/>as a worker storage room. The Contractor was<br/>recommended to pay utmost attention to potential<br/>land pollution at the worker storage room at all<br/>times.</li> <li>Scaffolding has been set up close to Tree-5 within<br/>the cordon zone. The Contractor was reminded to<br/>perform proper measures to protect Tree-5 during<br/>the carrying out of works within the cordon zone.</li> </ul> |
| S4.7.2      | -            | <u>In-situ Tree Protection - Advanced &amp; Phased Root Pruning</u><br>All edges of the CZ that will be affected by excavation will undergo root<br>pruning by a trained arborist or horticulturist, in advance of the earth<br>work. The entire affected length of the CZ, plus 3 m additional length<br>at both ends, shall be designated as the root pruning segment (RPS).<br>The require trench will be opened manually in the RPS, be 1.5 m deep<br>and 1 m wide, and closed on the same day after pruning with a good<br>soil mix. All roots with a diameter >20 mm encountered in the course<br>of trench opening shall be cut flushed with the inner wall of the trench.<br>If the RPS exceeds one-quarter of the CZ circumference, the root<br>pruning should be conducted in two stages. Each phase will tackle half<br>of the RPS length. After the first phase, the tree will be allowed to<br>recuperate for not less than four months before the second phase root<br>pruning is conducted. The RPS shall be protected by sheet piles along<br>the outer edge. The rig that installs the piles and the associated<br>operations shall not intrude into the CZ or injure the protected tree. | Whole site | During<br>construction              | N/A – no root pruning has been conducted yet                                                                                                                                                                                                                                                                                                                                                                                                                             |
| S4.7.2      | -            | <u>In-situ Tree Protection - Foliage cleansing system</u><br>A sprinkler cleansing system will be installed either in the crown of the<br>tree or at a suitable location on an adjacent building to provide the                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Whole site | During<br>construction              | $\checkmark$                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Location                                                                        | When to<br>Implement the<br>Measure           | Status                                                                |
|-------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|-----------------------------------------------|-----------------------------------------------------------------------|
|             |              | means to wash the foliage of the accumulated dust when necessary,                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                 |                                               |                                                                       |
|             |              | particularly in the dry season.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 |                                               |                                                                       |
| S4.7.2      | S4           | In-situ Tree Protection - Monthly inspection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Whole site                                                                      | During<br>construction                        | $\checkmark$                                                          |
|             |              | Monthly inspection of affected trees by an experienced and<br>appropriately trained arborist or horticulturist using Form 1 – Tree<br>Group Inspection Form and Form 2 – Tree Risk Assessment Form<br>developed by Development Bureau<br>( <i>http://www.trees.gov.hk/en/doc/TRAGuideline_July2010version_combine.pdf</i> )<br>or a form designed by a tree expert and approved by Tree Management<br>Office. All irregularities that deviate from the recommended tree<br>protection measures, or could impose deleterious impacts on the<br>protected trees, must be reported to the authorized person or the tree<br>expert within two days.                                                                                                                                                                                                                                                                                                  |                                                                                 |                                               |                                                                       |
| S4.7.2      | -            | <u>Light Control</u><br>Control of night-time lighting shall be implemented to minimise impact<br>to adjacent VSRs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Whole site                                                                      | During<br>construction and<br>operation       | $\checkmark$                                                          |
| S4.7.2      | S4           | <u>Compensatory Tree Planting</u><br>A new planting site has been identified for compensatory tree planting<br>in the Parade Ground. The planting is to compensate for felling of T10.<br>The existing tree site will be enlarged to become a wide tree strip to<br>accommodate at least six trees. The entire strip of land that<br>accommodates T1 to T4 should be revamped to improve the soil<br>condition for future tree growth.<br>The new tree strip should be 4 m wide and covered by porous unit<br>pavers to permit the entry of rain and irrigation water and air exchange<br>between the soil and the atmosphere. The unit pavers should be<br>supported by small columns to create a vault-like structure so as to<br>avoid compaction of the underlying soil due to pedestrian trampling.<br>The unit pavers will be movable to provide access to the soil<br>underneath so that fertilizers and conditioners could be added on a | At identified<br>compensatory tree<br>planting location at the<br>Parade Ground | During detailed<br>design and<br>construction | N/A – Compensatory Tree Planting will be<br>conducted at later stage. |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Location            | When to<br>Implement the<br>Measure           | Status                                                               |
|-------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----------------------------------------------|----------------------------------------------------------------------|
|             |              | regular basis. The air conditioner unit currently located near the proposed planting site should also be removed. This new tree planting site should also be provided with proper irrigation.                                                                                                                                                                                                                                                                                                                                                                                |                     |                                               |                                                                      |
|             |              | Pursuant to the "Environment, Transport and Works Bureau Technical Circular (Works) No. 3/2006 Tree Preservation", the compensation ratio should preferably be 1:1 according to trunk girth. T10 has a DBH of 20 cm ( <i>Table 4.3</i> ), and it is proposed that six trees of heavy standard size be planted, each with a DBH of around 10 cm and root balls of not less than 0.75 m diameter and 0.75 m depth,. Since the aggregate DBH of the new trees would be 60 cm, the rate of compensation is equivalent to three times the DBH of T10, far beyond the requirements |                     |                                               |                                                                      |
|             |              | The six replacement trees should be planted in the new tree strip in two<br>staggered rows, maximising distance between each tree to avoid mutual<br>interference in the future. It is recommended that the species selected<br>should have a small final dimension of less than 10 m height given the<br>proximity to built structures such as the retaining wall and buildings.<br>Two each of the outstanding and related flowering tree species<br>connected to local natural history are suggested::                                                                    |                     |                                               |                                                                      |
|             |              | <ul> <li>Bauhinia 'Blakeana' a native evergreen species with deep mauve<br/>flowers and an exceptionally long flowering period from late<br/>autumn to early spring.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                              |                     |                                               |                                                                      |
|             |              | <ul> <li>Bauhinia purpure, a native evergreen with lighter purple flowers from<br/>late autumn to early winter.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |                                               |                                                                      |
|             |              | <ul> <li>Bauhinia variegata, an exotic deciduous species, with pale pinkish<br/>flowers in spring to early summer often when the tree has little or no<br/>leaves.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                |                     |                                               |                                                                      |
| S4.7.2      | S4           | <u>Vertical Greening</u><br>Within the limitations of the conservation of the CPS character,                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Inner Southern Wall | During detailed<br>design and<br>construction | N/A – No vertical greening was conducted during the reporting month. |
|             |              | greening of vertical structures should be provided where possible.<br>As such it is recommended that the inner southern wall of the Site be<br>planted as a green wall. The plantings should be inserted in between<br>each of the large protruding piers and an offset be made from both the                                                                                                                                                                                                                                                                                |                     |                                               |                                                                      |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Location   | When to<br>Implement the<br>Measure           | Status                                                           |
|-------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------------------------------------|------------------------------------------------------------------|
|             |              | top and bottom edge so that old and new are equally visible. An<br>independent frame should be strategically positioned in order to ensure<br>minimal disturbance to the original wall, and provide the main<br>structural support and planting surface for the green wall. The frame<br>on to which the new green will be planted should contain its own<br>irrigation system so that moisture for the plants will remain mainly on<br>the planting surface and not the exiting wall behind. The planting<br>chosen should be appropriate to the Hong Kong climate, requiring<br>relatively little maintenance to sustain the quality of both plants and<br>wall. |            |                                               |                                                                  |
| S4.7.2      | -            | <i>New Custom Paving</i><br>New, Patterned, High Quality, Concrete Custom Pavers should replace<br>most of the existing paving in the open spaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Whole site | During detailed<br>design and<br>construction | N/A – No custom paving was conducted during the reporting month. |
| S4.7.2      | S4           | <u>In-situ Tree Protection - Quarterly inspection</u><br>Quarterly Inspection of affected and newly planted trees by an<br>experienced and appropriately trained arborist or horticulturist using<br>Form 1 – Tree Group Inspection Form and Form 2 – Tree Risk<br>Assessment Form developed by Development Bureau<br>(http://www.trees.gov.hk/en/doc/TRAGuideline_July2010version_combine.pdf)<br>or a form designed by a tree expert and approved by Tree Management<br>Office for a period of 12 months after construction.                                                                                                                                     | Whole site | During post<br>construction and<br>operation  | N/A – The quarterly inspection will be conducted at later stage. |
| Noise       |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |            | L                                             |                                                                  |
| <i>S5.9</i> | -            | <ul> <li>The following site practices should be followed during the construction of the Project:</li> <li>Only well-maintained plant will be operated on-site and plant will be serviced regularly during the construction phase;</li> <li>Silencers or mufflers on construction equipment will be utilised and will be properly maintained during the construction phase;</li> <li>Mobile plant, if any, will be sited as far away from NSRs as possible;</li> </ul>                                                                                                                                                                                              | Whole Site | During<br>construction                        |                                                                  |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Location   | When to<br>Implement the<br>Measure | Status       |
|-------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------|--------------|
|             |              | <ul> <li>Machines and plant (such as trucks) that may be in intermittent use will be shut down between work periods or will be throttled down to a minimum;</li> <li>Plant known to emit noise strongly in one direction will, wherever possible, be orientated so that the noise is directed away from the nearby NSRs; and</li> <li>Material stockpiles and other structures will be effectively utilised, wherever practicable, in screening noise from on-site construction activities.</li> </ul>                                                               |            |                                     |              |
| <i>S5.9</i> | -            | Noise insulating sheet would be adopted for certain PME (eg drill rig, excavator for demolition of existing structures, etc). The noise insulating sheet should be deployed such that there would be no opening or gaps on the joints.                                                                                                                                                                                                                                                                                                                               | Whole Site | During<br>construction              | $\checkmark$ |
| <i>S5.9</i> | -            | Use temporary noise barriers to mitigate the noise impact arising from the construction works, particularly for low-rise NSRs. Movable noise barriers of 3 m in height with skid footing should be used and located within a few metres of stationary plant and mobile plant such that the line of sight to the NSR is blocked by the barriers. The length of the barrier should be at least five times greater than its height. The noise barrier material should have a superficial surface density of at least 7 kg m <sup>-2</sup> and have no openings or gaps. | Whole Site | During<br>construction              | √            |
| <i>S5.9</i> | -            | Use quiet PME as far as practicable to mitigate the construction noise impact.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Whole Site | During construction                 | $\checkmark$ |
| <i>S5.9</i> | -            | Scheduling of construction activities with identified grouping of PMEs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Whole Site | During<br>construction              | $\checkmark$ |
| S5.11       | S5           | Weekly noise monitoring will be undertaken at the representative NSRs N2 Ho Fook Building and N5 Chancery House. Monthly site audits will be conducted to ensure that the recommended mitigation measures are properly implemented during the construction stage.                                                                                                                                                                                                                                                                                                    | Whole Site | During<br>construction              | $\checkmark$ |
| Air Qu      | ality        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |            |                                     |              |
| S6.8.1      | -            | Dust control measures stipulated in the <i>Air Pollution Control</i> ( <i>Construction Dust</i> ) <i>Regulation</i> will be implemented during the construction phase to control the potential fugitive dust emissions.                                                                                                                                                                                                                                                                                                                                              | Whole Site | During<br>construction              | √<br>        |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                         | Location                    | When to<br>Implement the<br>Measure | Status       |
|-------------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-------------------------------------|--------------|
| S6.8.1      | -            | In particular:<br>Temporary stockpiles of dusty materials will be either covered entirely<br>by impervious sheets; placed in an area sheltered on the top and three<br>sides; or sprayed with water to maintain the entire surface wet at all the<br>time.                              | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | Impervious sheet will be provided for skip hoist for material transport.                                                                                                                                                                                                                | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | Vehicle washing facilities will be provided at the designated vehicle exit points.                                                                                                                                                                                                      | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | Every vehicle will be washed to remove any dusty materials from its chassis and wheels immediately before leaving the worksite.                                                                                                                                                         | Whole Site                  | During construction                 | $\checkmark$ |
| S6.8.1      | -            | Road sections between vehicle-wash areas and vehicular entrances will be paved.                                                                                                                                                                                                         | Whole Site                  | During construction                 | $\checkmark$ |
| S6.8.1      | -            | The load carried by the trucks will be covered entirely to ensure no dust emission from the vehicles.                                                                                                                                                                                   | Whole Site                  | During construction                 | $\checkmark$ |
| S6.8.1      | -            | Hoarding of not less than 2.4m high from ground level will be provided<br>along the Project Site boundary adjoining a road where the new<br>buildings (Old Bailey Wing and Arbuthnot Wing) will be constructed.                                                                         | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | Stockpiles of more than 20 bags of cement, dry pulverised fuel ash and dusty construction materials will be covered entirely by impervious sheeting sheltered on top and 3-sides.                                                                                                       | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | An effective dust screen will be provided to enclose scaffolding, if<br>required, from the ground floor level of building for construction of<br>superstructure of the new buildings.                                                                                                   | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | Impervious dust screen or sheeting will be implemented for demolition<br>of structures and renovation of outer surfaces of structures that abuts or<br>fronts open area accessible to the public to no less than 1m higher than<br>the highest level of the structure being demolished. | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | The area at which demolition work takes place will be sprayed with<br>water or dust suppression chemical immediately prior to, during and<br>immediately after the demolition activity.                                                                                                 | Area for Demolition<br>Work | During<br>construction              | √            |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Location   | When to<br>Implement the<br>Measure | Status              |
|-------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------|---------------------|
| S6.8.1      | -            | ULSD will be used for all construction plant on-site.                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Whole Site | During construction                 | $\checkmark$        |
| S6.8.1      | -            | The engine of the construction equipment or trucks during idling will be switched off.                                                                                                                                                                                                                                                                                                                                                                                                                                   | Whole Site | During<br>construction              | $\checkmark$        |
| S6.8.1      | -            | Site practices such as regular maintenance and checking of construction<br>equipment deployed on-site will be conducted to avoid any black<br>smoke emissions and to minimise gaseous emissions.                                                                                                                                                                                                                                                                                                                         | Whole Site | During<br>construction              | N/A – Not observed. |
| S6.10       | S3.2         | Monthly environmental site audits to ensure that appropriate dust<br>control measures are properly implemented and good construction site<br>practices are adopted throughout the construction period.                                                                                                                                                                                                                                                                                                                   | Whole Site | During<br>construction              | $\checkmark$        |
| Water (     | Quality      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |            | 1                                   |                     |
| S7.6        | -            | Channels, earth bunds or sand bag barriers will be provided on site to direct stormwater to silt removal facilities. The design of silt removal facilities will make reference to the guidelines in <i>Appendix A1</i> of <i>ProPECC PN 1/94</i> . All drainage facilities and erosion and sediment control structures will be inspected on a regular basis and maintained to confirm proper and efficient operation at all times and particularly during rainstorms. Deposited silt and grit will be removed regularly. | Whole Site | During<br>construction              | $\checkmark$        |
| S7.6        | -            | All drainage facilities and erosion and sediment control structures will<br>be regularly inspected and maintained to ensure proper and efficient<br>operation at all times and particularly following rainstorms.<br>Deposited silt and grit will be removed regularly and disposed of.                                                                                                                                                                                                                                  | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | Measures will be taken to reduce the ingress of stormwater into<br>excavation areas. If the excavation of the concrete foundation is to be<br>carried out in wet season, they will be dug and backfilled in short<br>sections wherever practicable. Water pumped out from trenches or<br>foundation excavations will be discharged into stormwater drains via<br>silt removal facilities.                                                                                                                                | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | Open stockpiles of excavated and demolition materials will be covered<br>with tarpaulin or similar fabric during rainstorms. Measures will be<br>taken to prevent the washing away of residues, chemicals or debris into<br>any drainage system.                                                                                                                                                                                                                                                                         | Whole Site | During<br>construction              | $\checkmark$        |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                | Location   | When to<br>Implement the<br>Measure | Status              |
|-------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------|---------------------|
| S7.6        | -            | Manholes (including newly constructed ones) will always be<br>adequately covered and temporarily sealed so as to prevent silt,<br>construction materials or debris being washed into the drainage system.                                                                                                                                                                                                                      | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | Precautions will be taken when a rainstorm is imminent or forecasted, and actions to be taken during or after rainstorms are summarised in Appendix A2 of <i>ProPECC PN 1/94</i> . Particular attention will be paid to the control of silty surface runoff during storm events.                                                                                                                                               | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | All temporary and permanent drainage pipes and culverts provided to<br>facilitate runoff discharge will be adequately designed for the controlled<br>release of stormwater flows. All sediment traps will be regularly<br>cleaned and maintained. The temporary diverted drainage will be<br>reinstated to the original condition when the construction work has<br>finished or the temporary diversion is no longer required. | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | Vehicle and plant servicing areas, vehicle washing bays and lubrication<br>bays will, as far as possible, be located within roofed areas. The<br>drainage in these covered areas will be connected to foul sewers via a<br>petrol interceptor.                                                                                                                                                                                 | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | Oil leakage or spillage will be contained and cleaned up immediately.<br>Waste oil will be collected and stored for recycling or disposal.                                                                                                                                                                                                                                                                                     | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | Waste streams classifiable as chemical wastes will be properly stored, collected and treated.                                                                                                                                                                                                                                                                                                                                  | Whole Site | During construction                 | $\checkmark$        |
| S7.6        | -            | All fuel tanks and chemical storage areas will be provided with locks<br>and be sited on paved areas.                                                                                                                                                                                                                                                                                                                          | Whole Site | During construction                 | $\checkmark$        |
| S7.6        | -            | The storage areas will be surrounded by bunds with a capacity equal to 110% of the storage capacity of the largest tank to prevent spilled oil, fuel and chemicals from reaching the receiving waters.                                                                                                                                                                                                                         | Whole Site | During construction                 | $\checkmark$        |
| S7.6        | -            | The Contractors will prepare guidelines and procedures for immediate clean-up actions following any spillages of oil, fuel or chemicals.                                                                                                                                                                                                                                                                                       | Whole Site | During<br>construction              | $\checkmark$        |

| EIA<br>Ref. | EM&A<br>Ref.                | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                              | Location   | When to<br>Implement the<br>Measure | Status              |
|-------------|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------|---------------------|
| S7.6        | -                           | Surface runoff from bunded areas will pass through oil/grease traps prior to discharge to the stormwater system                                                                                                                                                                                                                                                                                                                                                              | Whole Site | During construction                 | N/A – Not observed. |
| S7.6        | -                           | The stormwater discharge from the site will be monitored as part of the routine monitoring under the WPCO licence, if applicable.                                                                                                                                                                                                                                                                                                                                            | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -                           | The existing toilet facilities of the CPS will be available to the construction workforce. The sewage will be discharged to the public sewer.                                                                                                                                                                                                                                                                                                                                | Whole Site | During<br>construction              | $\checkmark$        |
| S7.8        | S5.2                        | Monthly site audits of the works areas will be carried out during the construction phase to monitor the environmental performance of the Project and to enable prompt actions to rectify any malpractice which may give rise to water pollution problem.                                                                                                                                                                                                                     | Whole Site | During<br>construction              | N                   |
| Waste I     | Manageme                    | nt                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 1          |                                     |                     |
| S8.5        | S6.3.1<br>&<br>Table<br>6.1 | <u>General</u><br>The Contractor shall apply for and obtain all the necessary waste<br>disposal permits or licences are obtained prior to the commencement of<br>the construction works.                                                                                                                                                                                                                                                                                     | Whole Site | During<br>construction              | $\checkmark$        |
| S8.5        | -                           | <u>Management of Waste Disposal</u><br>The construction contractor will open a billing account with the EPD.<br>Every construction waste or public fill load to be transferred to the<br>Government waste disposal facilities such as public fill reception<br>facilities, sorting facilities, landfills will require a valid "chit" which<br>contains the information of the account holder to facilitate waste<br>transaction recording and billing to the waste producer. | Whole Site | During<br>construction              | √                   |
| S8.5        | S6.2                        | A trip-ticket system will also be established to monitor the disposal of construction waste at landfill and to control fly-tipping. The trip-ticket system will be included as one of the contractual requirements and implemented by the contractor.                                                                                                                                                                                                                        | Whole Site | During<br>construction              | $\checkmark$        |

| EIA<br>Ref. | EM&A<br>Ref.         | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Location   | When to<br>Implement the<br>Measure     | Status       |
|-------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------------------------------|--------------|
| S8.5        | S6 &<br>Table<br>6.1 | A recording system for the amount of wastes generated/recycled and disposed of will be established during the construction phase.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Whole Site | During construction                     | $\checkmark$ |
| S8.5        | S6.3                 | <u>Reduction of Construction Waste Generation</u><br>C&D material will be segregated on-site into public fill and construction<br>waste and stored in different containers or skips to facilitate reuse of the<br>public fill and proper disposal of the construction waste. Specific areas<br>of the work site will be designated for such segregation and storage if<br>immediate use is not practicable.                                                                                                                                                                                                                                                                     | Whole Site | During<br>construction                  | $\checkmark$ |
| S8.5        | S6                   | <u>Chemical Waste</u><br>The contractor will register as a chemical waste producer with the EPD.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Whole Site | During<br>construction and<br>operation | $\checkmark$ |
| S8.5        | S6                   | <ul> <li>Containers used for storage of chemical waste shall:</li> <li>Be suitable for the substance they are holding, resistant to corrosion, maintained in a good condition, and securely closed;</li> <li>Have a capacity of less than 450 L unless the specifications have been approved by the EPD; and</li> <li>Display a label in English and Chinese in accordance with instructions prescribed in <i>Schedule 2</i> of the <i>Regulations</i>.</li> </ul>                                                                                                                                                                                                              | Whole Site | During<br>construction and<br>operation | $\checkmark$ |
| S8.5        | S6                   | <ul> <li>Storage areas for chemical waste shall:</li> <li>Be clearly labelled and used solely for the storage of chemical waste;</li> <li>Be enclosed on at least 3 sides;</li> <li>Have an impermeable floor and bunding, of capacity to accommodate 110% of the volume of the largest container or 20% by volume of the chemical waste stored in that area, whichever is the greatest;</li> <li>Have adequate ventilation;</li> <li>Be covered to prevent rainfall entering (water collected within the bund must be tested and disposed of as chemical waste, if necessary); and</li> <li>Be arranged so that incompatible materials are appropriately separated.</li> </ul> | Whole Site | During<br>construction and<br>operation | √            |

| EIA<br>Ref. | EM&A<br>Ref.         | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                  | Location                                          | When to<br>Implement the<br>Measure     | Status       |
|-------------|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|-----------------------------------------|--------------|
| S8.5        | S6                   | A licensed contractor shall be employed to collect chemical waste for delivery to a licensed treatment facility.                                                                                                                                                                                                                                 | Chemical Waste<br>Treatment<br>Centre at Tsing Yi | During<br>construction and<br>operation | $\checkmark$ |
| S8.5        | S6 &<br>Table<br>6.1 | <u>General Refuse</u><br>General refuse will be stored in enclosed bins separately from<br>construction and chemical wastes. The general refuse will be<br>delivered to the transfer station, separately from construction and<br>chemical wastes, on a daily basis to reduce odour, pest and litter<br>impacts.                                 | Whole site                                        | During<br>construction                  | $\checkmark$ |
| S8.5        | S6                   | Recycling bins will be provided at strategic locations to facilitate<br>recovery of aluminium can and waste paper from the Site. Materials<br>recovered will be sold for recycling.                                                                                                                                                              | Whole site                                        | During<br>construction and<br>operation | $\checkmark$ |
| S8.5        | S6                   | <u>Staff Training</u><br>At the commencement of the construction works, training will be<br>provided to workers on the concepts of site cleanliness and on<br>appropriate waste management procedures, including waste reduction,<br>reuse and recycling.                                                                                        | Whole site                                        | Commencement of construction            | $\checkmark$ |
| S8.7        | S6.1 & 6.3           | Monthly audits of the waste management practices will be carried out<br>during the construction phases to determine if wastes are being<br>managed in accordance with the recommended good site practices.<br>The audits will examine all aspects of waste management including<br>waste generation, storage, recycling, transport and disposal. | Whole site                                        | During<br>construction                  | √            |

Remark:

 $\sqrt{}$  Compliance of Mitigation Measures

<> Compliance of Mitigation but need improvement

x Non-compliance of Mitigation Measures

▲ Non-compliance of Mitigation Measures but rectified by Gammon Construction Ltd

Δ Deficiency of Mitigation Measures but rectified by Gammon Construction Ltd

N/A Not Applicable in Reporting Period

| Annex G | Implementation Schedule for Environmental Protection Measures (1 December to 31 December 2014) |  |
|---------|------------------------------------------------------------------------------------------------|--|
|---------|------------------------------------------------------------------------------------------------|--|

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Location                                                                                                                                                              | When to<br>Implement the<br>Measure           | Status                                |
|-------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|---------------------------------------|
| Culture     | al Heritag   | ge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                       |                                               |                                       |
| S3.9.1      | S3.2.6       | Subject to the outcome of the archaeological investigation, if<br>archaeological deposits are identified to be impacted by the proposed<br>development, appropriate mitigation measures will be recommended<br>and agreed with AMO.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | In accordance with the<br>recommendations in the<br>Archaeological Action<br>Plan (AAP) issued on 21<br>Dec 11 and approved<br>on 30 Dec 11 by AMO                    | During detailed<br>design and<br>construction | No field work in the reporting month. |
| S3.9.2      | S3.3.1       | <u>Vibration Monitoring</u><br>A baseline condition survey and baseline vibration impact will be<br>conducted by a specialist for the approval of AMO and Buildings<br>Department prior to commencement of the construction works to define<br>the vibration control limits and recommend a vibration monitoring<br>proposal for the concerned historic buildings and structures in and<br>outside CPS for AMO's prior approval before commencement of the<br>construction works.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Historic buildings and<br>structures in CPS, the<br>granite walls at Old<br>Bailey Street and the<br>proposed Grade 3<br>historic building (No. 20<br>Hollywood Road) | During detailed<br>design and<br>construction | 1                                     |
| \$3.9.2     | S3.3.3       | <u>Compliance of the Approved Measures and Auditing</u><br>Staff training by an experience building conservation expert or relevant<br>competent person(s) in the environmental team of the project should be<br>provided to the on-site staffs, contractors, sub-contractors and workers<br>of the project before commencement of works to ensure their full<br>understanding of the approved protection schedule, restoration<br>proposal and work methodologies related to cultural heritage, and<br>their respective responsibilities in the implementation of the<br>environmental protection measures.<br>Regular site audit for cultural heritage should be carried out in the<br>construction phase by an experience building conservation expert in the<br>environmental team ("the Heritage Checker") to investigate the site<br>practice of the contractors and workers and their compliance of the<br>approved work methodologies with respect of conservation works,<br>mitigations for cultural heritage and any related works. A detailed | Whole site                                                                                                                                                            | Prior to and during<br>construction           |                                       |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Location   | When to<br>Implement the<br>Measure                                  | Status                                                        |
|-------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------------------------------------------------------------------|---------------------------------------------------------------|
|             |              | proposal of the regular audit such as methodology (e.g. performance<br>and monitoring indicators, control tools, frequency of the audit, etc.)<br>and the conservation professionals to be engaged should be agreed with<br>AMO prior to work commencement.<br>The Heritage Checker shall also attend the regular site meetings with<br>AMO and report the compliance and effectiveness of the mitigation<br>measures for cultural heritage.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |            |                                                                      |                                                               |
| 53.9.3      | S3.3.4       | <u>Archival Recording</u><br>An archival recording should be conducted to provide a detailed<br>reference for the update of the Conservation Management Plan and<br>inventory of historical features of the monuments, the preparation of as-<br>built drawings showing the condition of the historic buildings and<br>structures after the completion of the construction works. These<br>archival records will be a reference source for future maintenance of the<br>character defining elements, conservation of the monuments,<br>interpretation and conservation education of the Site. The archival<br>recording shall include but not limit to the video and photographic<br>recording on the detailed process of the repair trials for different kinds<br>of historical features, conservation works of character defining elements<br>and historic fabrics of the monuments, and a written records of any new<br>changes to the detailed design made in the construction phase illustrate<br>with photos and drawings. A full set of the archives records<br>(including both hard and soft copies) should be submitted to the AMO<br>for approval after the work completion for record purpose. Any new<br>findings related to the conservation of built heritage in the Site<br>identified during the detailed design stage and construction phases<br>shall be properly recorded in details for notification to the AMO and<br>update of the Conservation Management Plan. | Whole Site | During detailed<br>design,<br>construction and<br>prior to operation | N/A – Archival recording will be conducted at later<br>stage. |
| S3.7.3      | -            | <u>General Construction Methods</u><br>Prior to the commencement of the modification/refurbishment works at<br>an existing building or structure (e.g. masonry walls near the Old Bailey<br>Wing), a site survey will be carried out by the design team, and all<br>building dimensions and levels of the building/structure shown will be                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Whole site | During<br>construction                                               | <>                                                            |

THE JOCKEY CLUB CPS LIMITED

| EIA EM&A<br>Ref. Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Location   | When to<br>Implement the<br>Measure                                                | Status                                                                                 |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| S3.7.1 -<br>& 3.7.2   | <ul> <li>checked and confirmed by the contractor. Non-percussive piling methods will be adopted for the construction of the foundation for the new buildings. Protective and precaution measures to the existing buildings and structure adjacent to the work area (including the proposed Grade 3 historic building (No. 20 Hollywood road) and the granite boundary walls between the Ablutions Block of the police station (building no. 08) and the General Office of the prison area (building no. 18) which is adjacent to the new construction of the Old Bailey Wing and for an old granite walls at Old Bailey Street within 15m from the new construction) shall be provided to avoid damage to the existing features and to safeguard the structural integrity during the course of construction. Small scale handheld pneumatic tools with minimal vibration impact to the existing buildings / structures are selected so as to have a better logistic and handling at the existing buildings and structures, which usually have only narrow working areas. In cases of the local demolition of structural elements, demountable platforms will be erected to temporarily support the affected area and divert the loading from above to avoid instability and create excessive cracking and settlement of the building/structure.</li> <li>Implementation and update of the Conservation Management Plan (CMP). Any new findings related to the conservation of the built heritage in the site identified during the detailed design and construction, a cartographic and photographic recording on the restored historic buildings, historic features and the site shall be conducted and the following records shall be included into the CMP as appendices for updating and record purpose:</li> <li>one set of measured drawings and photographic records showing the as-built condition of historic buildings and structures; and</li> <li>an updated inventory list of the historic features together with the cross referenced location plans and photo records.</li> </ul> | Whole site | During detailed<br>design,<br>construction, post-<br>construction and<br>operation | √ - CMP was implemented during the reporting month. There were no updates for the CMP. |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Location   | When to<br>Implement the<br>Measure | Status                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Landsca     | ipe & Visi   | ıal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |                                     | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| S4.7.27     | -            | <u>In-situ Tree Protection - Cordon Zone (CZ)</u><br>Cordon off each tree along its drip line (below the crown) with a chain-<br>link fencing of 2.5 m height with padlocked gate, allowing limited<br>access to area only to authorized persons. The base of the perimeter<br>fence will be sealed up to 30 cm height to ensure that no construction<br>drainage water will enter. If grouting is to be conducted less than 5 m<br>from the edge of the CZ, a waterproof membrane will be installed<br>below the ground to a depth of 1.5 m on the outer edge of the CZ to<br>prevent the subsurface lateral movement of contaminated construction<br>wastewater from intruding the soil inside the CZ.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Whole site | During<br>construction              | <ul> <li>√ - Part of the cordon zone of Tree-5 has been used<br/>as a worker storage room. The Contractor was<br/>recommended to pay utmost attention to potential<br/>land pollution at the worker storage room at all<br/>times.</li> <li>Scaffolding has been set up close to Tree-5 within<br/>the cordon zone. The Contractor was reminded to<br/>perform proper measures to protect Tree-5 during<br/>the carrying out of works within the cordon zone.</li> </ul> |
| S4.7.2      | -            | <u>In-situ Tree Protection - Advanced &amp; Phased Root Pruning</u><br>All edges of the CZ that will be affected by excavation will undergo root<br>pruning by a trained arborist or horticulturist, in advance of the earth<br>work. The entire affected length of the CZ, plus 3 m additional length<br>at both ends, shall be designated as the root pruning segment (RPS).<br>The require trench will be opened manually in the RPS, be 1.5 m deep<br>and 1 m wide, and closed on the same day after pruning with a good<br>soil mix. All roots with a diameter >20 mm encountered in the course<br>of trench opening shall be cut flushed with the inner wall of the trench.<br>If the RPS exceeds one-quarter of the CZ circumference, the root<br>pruning should be conducted in two stages. Each phase will tackle half<br>of the RPS length. After the first phase, the tree will be allowed to<br>recuperate for not less than four months before the second phase root<br>pruning is conducted. The RPS shall be protected by sheet piles along<br>the outer edge. The rig that installs the piles and the associated<br>operations shall not intrude into the CZ or injure the protected tree. | Whole site | During<br>construction              | N/A – no root pruning has been conducted yet                                                                                                                                                                                                                                                                                                                                                                                                                             |
| S4.7.2      | -            | <u>In-situ Tree Protection - Foliage cleansing system</u><br>A sprinkler cleansing system will be installed either in the crown of the<br>tree or at a suitable location on an adjacent building to provide the                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Whole site | During<br>construction              | $\checkmark$                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Location                                                                        | When to<br>Implement the<br>Measure           | Status                                                                |
|-------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|-----------------------------------------------|-----------------------------------------------------------------------|
|             |              | means to wash the foliage of the accumulated dust when necessary,                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                 |                                               |                                                                       |
|             |              | particularly in the dry season.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 |                                               |                                                                       |
| S4.7.2      | S4           | In-situ Tree Protection - Monthly inspection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Whole site                                                                      | During<br>construction                        | $\checkmark$                                                          |
|             |              | Monthly inspection of affected trees by an experienced and<br>appropriately trained arborist or horticulturist using Form 1 – Tree<br>Group Inspection Form and Form 2 – Tree Risk Assessment Form<br>developed by Development Bureau<br>( <i>http://www.trees.gov.hk/en/doc/TRAGuideline_July2010version_combine.pdf</i> )<br>or a form designed by a tree expert and approved by Tree Management<br>Office. All irregularities that deviate from the recommended tree<br>protection measures, or could impose deleterious impacts on the<br>protected trees, must be reported to the authorized person or the tree<br>expert within two days.                                                                                                                                                                                                                                                                                                  |                                                                                 |                                               |                                                                       |
| S4.7.2      | -            | <u>Light Control</u><br>Control of night-time lighting shall be implemented to minimise impact<br>to adjacent VSRs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Whole site                                                                      | During<br>construction and<br>operation       | $\checkmark$                                                          |
| S4.7.2      | S4           | <u>Compensatory Tree Planting</u><br>A new planting site has been identified for compensatory tree planting<br>in the Parade Ground. The planting is to compensate for felling of T10.<br>The existing tree site will be enlarged to become a wide tree strip to<br>accommodate at least six trees. The entire strip of land that<br>accommodates T1 to T4 should be revamped to improve the soil<br>condition for future tree growth.<br>The new tree strip should be 4 m wide and covered by porous unit<br>pavers to permit the entry of rain and irrigation water and air exchange<br>between the soil and the atmosphere. The unit pavers should be<br>supported by small columns to create a vault-like structure so as to<br>avoid compaction of the underlying soil due to pedestrian trampling.<br>The unit pavers will be movable to provide access to the soil<br>underneath so that fertilizers and conditioners could be added on a | At identified<br>compensatory tree<br>planting location at the<br>Parade Ground | During detailed<br>design and<br>construction | N/A – Compensatory Tree Planting will be<br>conducted at later stage. |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Location            | When to<br>Implement the<br>Measure           | Status                                                               |
|-------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----------------------------------------------|----------------------------------------------------------------------|
|             |              | regular basis. The air conditioner unit currently located near the proposed planting site should also be removed. This new tree planting site should also be provided with proper irrigation.                                                                                                                                                                                                                                                                                                                                                                                |                     |                                               |                                                                      |
|             |              | Pursuant to the "Environment, Transport and Works Bureau Technical Circular (Works) No. 3/2006 Tree Preservation", the compensation ratio should preferably be 1:1 according to trunk girth. T10 has a DBH of 20 cm ( <i>Table 4.3</i> ), and it is proposed that six trees of heavy standard size be planted, each with a DBH of around 10 cm and root balls of not less than 0.75 m diameter and 0.75 m depth,. Since the aggregate DBH of the new trees would be 60 cm, the rate of compensation is equivalent to three times the DBH of T10, far beyond the requirements |                     |                                               |                                                                      |
|             |              | The six replacement trees should be planted in the new tree strip in two staggered rows, maximising distance between each tree to avoid mutual interference in the future. It is recommended that the species selected should have a small final dimension of less than 10 m height given the proximity to built structures such as the retaining wall and buildings. Two each of the outstanding and related flowering tree species connected to local natural history are suggested::                                                                                      |                     |                                               |                                                                      |
|             |              | <ul> <li>Bauhinia 'Blakeana' a native evergreen species with deep mauve<br/>flowers and an exceptionally long flowering period from late<br/>autumn to early spring.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                              |                     |                                               |                                                                      |
|             |              | <ul> <li>Bauhinia purpure, a native evergreen with lighter purple flowers from<br/>late autumn to early winter.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |                                               |                                                                      |
|             |              | <ul> <li>Bauhinia variegata, an exotic deciduous species, with pale pinkish<br/>flowers in spring to early summer often when the tree has little or no<br/>leaves.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                |                     |                                               |                                                                      |
| S4.7.2      | S4           | <u>Vertical Greening</u><br>Within the limitations of the conservation of the CPS character,                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Inner Southern Wall | During detailed<br>design and<br>construction | N/A – No vertical greening was conducted during the reporting month. |
|             |              | greening of vertical structures should be provided where possible.<br>As such it is recommended that the inner southern wall of the Site be<br>planted as a green wall. The plantings should be inserted in between<br>each of the large protruding piers and an offset be made from both the                                                                                                                                                                                                                                                                                |                     |                                               |                                                                      |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Location   | When to<br>Implement the<br>Measure           | Status                                                           |
|-------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------------------------------------|------------------------------------------------------------------|
|             |              | top and bottom edge so that old and new are equally visible. An<br>independent frame should be strategically positioned in order to ensure<br>minimal disturbance to the original wall, and provide the main<br>structural support and planting surface for the green wall. The frame<br>on to which the new green will be planted should contain its own<br>irrigation system so that moisture for the plants will remain mainly on<br>the planting surface and not the exiting wall behind. The planting<br>chosen should be appropriate to the Hong Kong climate, requiring<br>relatively little maintenance to sustain the quality of both plants and<br>wall. |            |                                               |                                                                  |
| S4.7.2      | -            | <u>New Custom Paving</u><br>New, Patterned, High Quality, Concrete Custom Pavers should replace<br>most of the existing paving in the open spaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Whole site | During detailed<br>design and<br>construction | N/A – No custom paving was conducted during the reporting month. |
| S4.7.2      | S4           | <u>In-situ Tree Protection - Quarterly inspection</u><br>Quarterly Inspection of affected and newly planted trees by an<br>experienced and appropriately trained arborist or horticulturist using<br>Form 1 – Tree Group Inspection Form and Form 2 – Tree Risk<br>Assessment Form developed by Development Bureau<br>(http://www.trees.gov.hk/en/doc/TRAGuideline_July2010version_combine.pdf)<br>or a form designed by a tree expert and approved by Tree Management<br>Office for a period of 12 months after construction.                                                                                                                                     | Whole site | During post<br>construction and<br>operation  | N/A – The quarterly inspection will be conducted at later stage. |
| Noise       |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | •          |                                               |                                                                  |
| <i>S5.9</i> | -            | <ul> <li>The following site practices should be followed during the construction of the Project:</li> <li>Only well-maintained plant will be operated on-site and plant will be serviced regularly during the construction phase;</li> <li>Silencers or mufflers on construction equipment will be utilised and will be properly maintained during the construction phase;</li> <li>Mobile plant, if any, will be sited as far away from NSRs as possible;</li> </ul>                                                                                                                                                                                              | Whole Site | During<br>construction                        | $\checkmark$                                                     |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Location   | When to<br>Implement the<br>Measure | Status |
|-------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------|--------|
|             |              | <ul> <li>Machines and plant (such as trucks) that may be in intermittent use will be shut down between work periods or will be throttled down to a minimum;</li> <li>Plant known to emit noise strongly in one direction will, wherever possible, be orientated so that the noise is directed away from the nearby NSRs; and</li> <li>Material stockpiles and other structures will be effectively utilised, wherever practicable, in screening noise from on-site construction activities.</li> </ul>                                                               |            |                                     |        |
| \$5.9       | -            | Noise insulating sheet would be adopted for certain PME (eg drill rig, excavator for demolition of existing structures, etc). The noise insulating sheet should be deployed such that there would be no opening or gaps on the joints.                                                                                                                                                                                                                                                                                                                               | Whole Site | During √<br>construction            | ,      |
| <i>S5.9</i> | -            | Use temporary noise barriers to mitigate the noise impact arising from the construction works, particularly for low-rise NSRs. Movable noise barriers of 3 m in height with skid footing should be used and located within a few metres of stationary plant and mobile plant such that the line of sight to the NSR is blocked by the barriers. The length of the barrier should be at least five times greater than its height. The noise barrier material should have a superficial surface density of at least 7 kg m <sup>-2</sup> and have no openings or gaps. | Whole Site | During √<br>construction            |        |
| <i>S5.9</i> | -            | Use quiet PME as far as practicable to mitigate the construction noise impact.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Whole Site | During √<br>construction            |        |
| <i>S5.9</i> | -            | Scheduling of construction activities with identified grouping of PMEs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Whole Site | During √<br>construction            | ,      |
| S5.11       | S5           | Weekly noise monitoring will be undertaken at the representative NSRs N2 Ho Fook Building and N5 Chancery House. Monthly site audits will be conducted to ensure that the recommended mitigation measures are properly implemented during the construction stage.                                                                                                                                                                                                                                                                                                    | Whole Site | During √<br>construction            |        |
| Air Qu      | ality        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |            |                                     |        |
| S6.8.1      | -            | Dust control measures stipulated in the <i>Air Pollution Control</i><br>( <i>Construction Dust</i> ) <i>Regulation</i> will be implemented during the<br>construction phase to control the potential fugitive dust emissions.                                                                                                                                                                                                                                                                                                                                        | Whole Site | During √<br>construction            |        |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                         | Location                    | When to<br>Implement the<br>Measure | Status       |
|-------------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-------------------------------------|--------------|
| S6.8.1      | -            | In particular:<br>Temporary stockpiles of dusty materials will be either covered entirely<br>by impervious sheets; placed in an area sheltered on the top and three<br>sides; or sprayed with water to maintain the entire surface wet at all the<br>time.                              | Whole Site                  | During<br>construction              | √            |
| S6.8.1      | -            | Impervious sheet will be provided for skip hoist for material transport.                                                                                                                                                                                                                | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | Vehicle washing facilities will be provided at the designated vehicle exit points.                                                                                                                                                                                                      | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | Every vehicle will be washed to remove any dusty materials from its chassis and wheels immediately before leaving the worksite.                                                                                                                                                         | Whole Site                  | During construction                 | $\checkmark$ |
| S6.8.1      | -            | Road sections between vehicle-wash areas and vehicular entrances will be paved.                                                                                                                                                                                                         | Whole Site                  | During construction                 | $\checkmark$ |
| S6.8.1      | -            | The load carried by the trucks will be covered entirely to ensure no dust emission from the vehicles.                                                                                                                                                                                   | Whole Site                  | During construction                 | $\checkmark$ |
| S6.8.1      | -            | Hoarding of not less than 2.4m high from ground level will be provided<br>along the Project Site boundary adjoining a road where the new<br>buildings (Old Bailey Wing and Arbuthnot Wing) will be constructed.                                                                         | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | Stockpiles of more than 20 bags of cement, dry pulverised fuel ash and dusty construction materials will be covered entirely by impervious sheeting sheltered on top and 3-sides.                                                                                                       | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | An effective dust screen will be provided to enclose scaffolding, if<br>required, from the ground floor level of building for construction of<br>superstructure of the new buildings.                                                                                                   | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | Impervious dust screen or sheeting will be implemented for demolition<br>of structures and renovation of outer surfaces of structures that abuts or<br>fronts open area accessible to the public to no less than 1m higher than<br>the highest level of the structure being demolished. | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | The area at which demolition work takes place will be sprayed with<br>water or dust suppression chemical immediately prior to, during and<br>immediately after the demolition activity.                                                                                                 | Area for Demolition<br>Work | During<br>construction              | √            |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Location   | When to<br>Implement the<br>Measure | Status              |
|-------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------|---------------------|
| S6.8.1      | -            | ULSD will be used for all construction plant on-site.                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Whole Site | During construction                 | $\checkmark$        |
| S6.8.1      | -            | The engine of the construction equipment or trucks during idling will be switched off.                                                                                                                                                                                                                                                                                                                                                                                                                                   | Whole Site | During<br>construction              | $\checkmark$        |
| S6.8.1      | -            | Site practices such as regular maintenance and checking of construction<br>equipment deployed on-site will be conducted to avoid any black<br>smoke emissions and to minimise gaseous emissions.                                                                                                                                                                                                                                                                                                                         | Whole Site | During<br>construction              | N/A – Not observed. |
| S6.10       | S3.2         | Monthly environmental site audits to ensure that appropriate dust<br>control measures are properly implemented and good construction site<br>practices are adopted throughout the construction period.                                                                                                                                                                                                                                                                                                                   | Whole Site | During<br>construction              | $\checkmark$        |
| Water (     | Quality      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |            | 1                                   |                     |
| S7.6        | -            | Channels, earth bunds or sand bag barriers will be provided on site to direct stormwater to silt removal facilities. The design of silt removal facilities will make reference to the guidelines in <i>Appendix A1</i> of <i>ProPECC PN 1/94</i> . All drainage facilities and erosion and sediment control structures will be inspected on a regular basis and maintained to confirm proper and efficient operation at all times and particularly during rainstorms. Deposited silt and grit will be removed regularly. | Whole Site | During<br>construction              | $\checkmark$        |
| S7.6        | -            | All drainage facilities and erosion and sediment control structures will<br>be regularly inspected and maintained to ensure proper and efficient<br>operation at all times and particularly following rainstorms.<br>Deposited silt and grit will be removed regularly and disposed of.                                                                                                                                                                                                                                  | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | Measures will be taken to reduce the ingress of stormwater into<br>excavation areas. If the excavation of the concrete foundation is to be<br>carried out in wet season, they will be dug and backfilled in short<br>sections wherever practicable. Water pumped out from trenches or<br>foundation excavations will be discharged into stormwater drains via<br>silt removal facilities.                                                                                                                                | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | Open stockpiles of excavated and demolition materials will be covered<br>with tarpaulin or similar fabric during rainstorms. Measures will be<br>taken to prevent the washing away of residues, chemicals or debris into<br>any drainage system.                                                                                                                                                                                                                                                                         | Whole Site | During<br>construction              | $\checkmark$        |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                | Location   | When to<br>Implement the<br>Measure | Status              |
|-------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------|---------------------|
| S7.6        | -            | Manholes (including newly constructed ones) will always be<br>adequately covered and temporarily sealed so as to prevent silt,<br>construction materials or debris being washed into the drainage system.                                                                                                                                                                                                                      | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | Precautions will be taken when a rainstorm is imminent or forecasted, and actions to be taken during or after rainstorms are summarised in Appendix A2 of <i>ProPECC PN 1/94</i> . Particular attention will be paid to the control of silty surface runoff during storm events.                                                                                                                                               | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | All temporary and permanent drainage pipes and culverts provided to<br>facilitate runoff discharge will be adequately designed for the controlled<br>release of stormwater flows. All sediment traps will be regularly<br>cleaned and maintained. The temporary diverted drainage will be<br>reinstated to the original condition when the construction work has<br>finished or the temporary diversion is no longer required. | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | Vehicle and plant servicing areas, vehicle washing bays and lubrication<br>bays will, as far as possible, be located within roofed areas. The<br>drainage in these covered areas will be connected to foul sewers via a<br>petrol interceptor.                                                                                                                                                                                 | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | Oil leakage or spillage will be contained and cleaned up immediately.<br>Waste oil will be collected and stored for recycling or disposal.                                                                                                                                                                                                                                                                                     | Whole Site | During construction                 | N/A – Not observed. |
| S7.6        | -            | Waste streams classifiable as chemical wastes will be properly stored, collected and treated.                                                                                                                                                                                                                                                                                                                                  | Whole Site | During construction                 | $\checkmark$        |
| S7.6        | -            | All fuel tanks and chemical storage areas will be provided with locks and be sited on paved areas.                                                                                                                                                                                                                                                                                                                             | Whole Site | During construction                 | $\checkmark$        |
| S7.6        | -            | The storage areas will be surrounded by bunds with a capacity equal to 110% of the storage capacity of the largest tank to prevent spilled oil, fuel and chemicals from reaching the receiving waters.                                                                                                                                                                                                                         | Whole Site | During<br>construction              | 1                   |
| S7.6        | -            | The Contractors will prepare guidelines and procedures for immediate clean-up actions following any spillages of oil, fuel or chemicals.                                                                                                                                                                                                                                                                                       | Whole Site | During<br>construction              | $\checkmark$        |

| EIA<br>Ref. | EM&A<br>Ref.                | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                              | Location   | When to<br>Implement the<br>Measure | Status              |
|-------------|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------|---------------------|
| S7.6        | -                           | Surface runoff from bunded areas will pass through oil/grease traps prior to discharge to the stormwater system                                                                                                                                                                                                                                                                                                                                                              | Whole Site | During construction                 | N/A – Not observed. |
| S7.6        | -                           | The stormwater discharge from the site will be monitored as part of the routine monitoring under the WPCO licence, if applicable.                                                                                                                                                                                                                                                                                                                                            | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -                           | The existing toilet facilities of the CPS will be available to the construction workforce. The sewage will be discharged to the public sewer.                                                                                                                                                                                                                                                                                                                                | Whole Site | During<br>construction              | $\checkmark$        |
| S7.8        | S5.2                        | Monthly site audits of the works areas will be carried out during the construction phase to monitor the environmental performance of the Project and to enable prompt actions to rectify any malpractice which may give rise to water pollution problem.                                                                                                                                                                                                                     | Whole Site | During<br>construction              | N                   |
| Waste I     | Manageme                    | nt                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 1          |                                     |                     |
| S8.5        | S6.3.1<br>&<br>Table<br>6.1 | <u>General</u><br>The Contractor shall apply for and obtain all the necessary waste<br>disposal permits or licences are obtained prior to the commencement of<br>the construction works.                                                                                                                                                                                                                                                                                     | Whole Site | During<br>construction              | $\checkmark$        |
| S8.5        | -                           | <u>Management of Waste Disposal</u><br>The construction contractor will open a billing account with the EPD.<br>Every construction waste or public fill load to be transferred to the<br>Government waste disposal facilities such as public fill reception<br>facilities, sorting facilities, landfills will require a valid "chit" which<br>contains the information of the account holder to facilitate waste<br>transaction recording and billing to the waste producer. | Whole Site | During<br>construction              | √                   |
| S8.5        | S6.2                        | A trip-ticket system will also be established to monitor the disposal of construction waste at landfill and to control fly-tipping. The trip-ticket system will be included as one of the contractual requirements and implemented by the contractor.                                                                                                                                                                                                                        | Whole Site | During<br>construction              | $\checkmark$        |

| EIA<br>Ref. | EM&A<br>Ref.         | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Location   | When to<br>Implement the<br>Measure     | Status       |
|-------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------------------------------|--------------|
| S8.5        | S6 &<br>Table<br>6.1 | A recording system for the amount of wastes generated/recycled and disposed of will be established during the construction phase.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Whole Site | During<br>construction                  | $\checkmark$ |
| S8.5        | S6.3                 | <u>Reduction of Construction Waste Generation</u><br>C&D material will be segregated on-site into public fill and construction<br>waste and stored in different containers or skips to facilitate reuse of the<br>public fill and proper disposal of the construction waste. Specific areas<br>of the work site will be designated for such segregation and storage if<br>immediate use is not practicable.                                                                                                                                                                                                                                                                     | Whole Site | During<br>construction                  | $\checkmark$ |
| S8.5        | S6                   | <u>Chemical Waste</u><br>The contractor will register as a chemical waste producer with the EPD.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Whole Site | During<br>construction and<br>operation | $\checkmark$ |
| S8.5        | S6                   | <ul> <li>Containers used for storage of chemical waste shall:</li> <li>Be suitable for the substance they are holding, resistant to corrosion, maintained in a good condition, and securely closed;</li> <li>Have a capacity of less than 450 L unless the specifications have been approved by the EPD; and</li> <li>Display a label in English and Chinese in accordance with instructions prescribed in <i>Schedule 2</i> of the <i>Regulations</i>.</li> </ul>                                                                                                                                                                                                              | Whole Site | During<br>construction and<br>operation | $\checkmark$ |
| S8.5        | S6                   | <ul> <li>Storage areas for chemical waste shall:</li> <li>Be clearly labelled and used solely for the storage of chemical waste;</li> <li>Be enclosed on at least 3 sides;</li> <li>Have an impermeable floor and bunding, of capacity to accommodate 110% of the volume of the largest container or 20% by volume of the chemical waste stored in that area, whichever is the greatest;</li> <li>Have adequate ventilation;</li> <li>Be covered to prevent rainfall entering (water collected within the bund must be tested and disposed of as chemical waste, if necessary); and</li> <li>Be arranged so that incompatible materials are appropriately separated.</li> </ul> | Whole Site | During<br>construction and<br>operation | √            |

| EIA<br>Ref. | EM&A<br>Ref.         | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                  | Location                                          | When to<br>Implement the<br>Measure     | Status       |
|-------------|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|-----------------------------------------|--------------|
| S8.5        | S6                   | A licensed contractor shall be employed to collect chemical waste for delivery to a licensed treatment facility.                                                                                                                                                                                                                                 | Chemical Waste<br>Treatment<br>Centre at Tsing Yi | During<br>construction and<br>operation | $\checkmark$ |
| S8.5        | S6 &<br>Table<br>6.1 | <u>General Refuse</u><br>General refuse will be stored in enclosed bins separately from<br>construction and chemical wastes. The general refuse will be<br>delivered to the transfer station, separately from construction and<br>chemical wastes, on a daily basis to reduce odour, pest and litter<br>impacts.                                 | Whole site                                        | During<br>construction                  | $\checkmark$ |
| S8.5        | S6                   | Recycling bins will be provided at strategic locations to facilitate<br>recovery of aluminium can and waste paper from the Site. Materials<br>recovered will be sold for recycling.                                                                                                                                                              | Whole site                                        | During<br>construction and<br>operation | $\checkmark$ |
| S8.5        | S6                   | <u>Staff Training</u><br>At the commencement of the construction works, training will be<br>provided to workers on the concepts of site cleanliness and on<br>appropriate waste management procedures, including waste reduction,<br>reuse and recycling.                                                                                        | Whole site                                        | Commencement of construction            | $\checkmark$ |
| S8.7        | S6.1 & 6.3           | Monthly audits of the waste management practices will be carried out<br>during the construction phases to determine if wastes are being<br>managed in accordance with the recommended good site practices.<br>The audits will examine all aspects of waste management including<br>waste generation, storage, recycling, transport and disposal. | Whole site                                        | During<br>construction                  | √            |

Remark:

 $\sqrt{}$  Compliance of Mitigation Measures

<> Compliance of Mitigation but need improvement

x Non-compliance of Mitigation Measures

▲ Non-compliance of Mitigation Measures but rectified by Gammon Construction Ltd

Δ Deficiency of Mitigation Measures but rectified by Gammon Construction Ltd

N/A Not Applicable in Reporting Period

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Location                                                                                                                                                              | When to<br>Implement the<br>Measure           | Status                                |
|-------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|---------------------------------------|
| Cultur      | al Heritag   | ge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                       |                                               |                                       |
| S3.9.1      | S3.2.6       | Subject to the outcome of the archaeological investigation, if<br>archaeological deposits are identified to be impacted by the proposed<br>development, appropriate mitigation measures will be recommended<br>and agreed with AMO.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | In accordance with the<br>recommendations in the<br>Archaeological Action<br>Plan (AAP) issued on 21<br>Dec 11 and approved<br>on 30 Dec 11 by AMO                    | During detailed<br>design and<br>construction | No field work in the reporting month. |
| S3.9.2      | S3.3.1       | <u>Vibration Monitoring</u><br>A baseline condition survey and baseline vibration impact will be<br>conducted by a specialist for the approval of AMO and Buildings<br>Department prior to commencement of the construction works to define<br>the vibration control limits and recommend a vibration monitoring<br>proposal for the concerned historic buildings and structures in and<br>outside CPS for AMO's prior approval before commencement of the<br>construction works.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Historic buildings and<br>structures in CPS, the<br>granite walls at Old<br>Bailey Street and the<br>proposed Grade 3<br>historic building (No. 20<br>Hollywood Road) | During detailed<br>design and<br>construction | 7                                     |
| \$3.9.2     | S3.3.3       | <u>Compliance of the Approved Measures and Auditing</u><br>Staff training by an experience building conservation expert or relevant<br>competent person(s) in the environmental team of the project should be<br>provided to the on-site staffs, contractors, sub-contractors and workers<br>of the project before commencement of works to ensure their full<br>understanding of the approved protection schedule, restoration<br>proposal and work methodologies related to cultural heritage, and<br>their respective responsibilities in the implementation of the<br>environmental protection measures.<br>Regular site audit for cultural heritage should be carried out in the<br>construction phase by an experience building conservation expert in the<br>environmental team ("the Heritage Checker") to investigate the site<br>practice of the contractors and workers and their compliance of the<br>approved work methodologies with respect of conservation works,<br>mitigations for cultural heritage and any related works. A detailed | Whole site                                                                                                                                                            | Prior to and during<br>construction           |                                       |

## Annex G Implementation Schedule for Environmental Protection Measures (1 January to 31 January 2015)

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Location   | When to<br>Implement the<br>Measure                                  | Status                                                        |
|-------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------------------------------------------------------------------|---------------------------------------------------------------|
|             |              | proposal of the regular audit such as methodology (e.g. performance<br>and monitoring indicators, control tools, frequency of the audit, etc.)<br>and the conservation professionals to be engaged should be agreed with<br>AMO prior to work commencement.<br>The Heritage Checker shall also attend the regular site meetings with<br>AMO and report the compliance and effectiveness of the mitigation<br>measures for cultural heritage.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |            |                                                                      |                                                               |
| 53.9.3      | S3.3.4       | <u>Archival Recording</u><br>An archival recording should be conducted to provide a detailed<br>reference for the update of the Conservation Management Plan and<br>inventory of historical features of the monuments, the preparation of as-<br>built drawings showing the condition of the historic buildings and<br>structures after the completion of the construction works. These<br>archival records will be a reference source for future maintenance of the<br>character defining elements, conservation of the monuments,<br>interpretation and conservation education of the Site. The archival<br>recording shall include but not limit to the video and photographic<br>recording on the detailed process of the repair trials for different kinds<br>of historical features, conservation works of character defining elements<br>and historic fabrics of the monuments, and a written records of any new<br>changes to the detailed design made in the construction phase illustrate<br>with photos and drawings. A full set of the archives records<br>(including both hard and soft copies) should be submitted to the AMO<br>for approval after the work completion for record purpose. Any new<br>findings related to the conservation of built heritage in the Site<br>identified during the detailed design stage and construction phases<br>shall be properly recorded in details for notification to the AMO and<br>update of the Conservation Management Plan. | Whole Site | During detailed<br>design,<br>construction and<br>prior to operation | N/A – Archival recording will be conducted at later<br>stage. |
| S3.7.3      | -            | <u>General Construction Methods</u><br>Prior to the commencement of the modification/refurbishment works at<br>an existing building or structure (e.g. masonry walls near the Old Bailey<br>Wing), a site survey will be carried out by the design team, and all<br>building dimensions and levels of the building/structure shown will be                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Whole site | During<br>construction                                               | <>                                                            |

G3-2

|                     | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Location   | When to<br>Implement the<br>Measure                                                | Status                                                                                |
|---------------------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| S3.7.1 -<br>& 3.7.2 |              | checked and confirmed by the contractor. Non-percussive piling<br>methods will be adopted for the construction of the foundation for the<br>new buildings. Protective and precaution measures to the existing<br>buildings and structure adjacent to the work area (including the<br>proposed Grade 3 historic building (No. 20 Hollywood road) and the<br>granite boundary walls between the Ablutions Block of the police<br>station (building no. 08) and the General Office of the prison area<br>(building no. 18) which is adjacent to the new construction of the Old<br>Bailey Wing and for an old granite walls at Old Bailey Street within 15m<br>from the new construction) shall be provided to avoid damage to the<br>existing features and to safeguard the structural integrity during the<br>course of construction. Small scale handheld pneumatic tools with<br>minimal vibration impact to the existing buildings / structures are<br>selected so as to have a better logistic and handling at the existing<br>buildings and structures, which usually have only narrow working<br>areas. In cases of the local demolition of structural elements,<br>demountable platforms will be erected to temporarily support the<br>affected area and divert the loading from above to avoid instability and<br>create excessive cracking and settlement of the building/structure.<br>Implementation and update of the Conservation Management Plan<br>(CMP). Any new findings related to the conservation of the built<br>heritage in the site identified during the detailed design and<br>construction, a cartographic and photographic recording on the<br>restored historic buildings, historic features and the site shall be<br>conducted and the following records shall be included into the CMP as<br>appendices for updating and record purpose:<br>• one set of measured drawings and photographic records showing<br>the as-built condition of historic buildings and structures; and<br>• an updated inventory list of the historic features together with the<br>cross referenced location plans and photo records.<br>One set of updated CMP shall be submitted to the AMO for approval<br>before | Whole site | During detailed<br>design,<br>construction, post-<br>construction and<br>operation | √- CMP was implemented during the reporting month. There were no updates for the CMP. |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Location   | When to<br>Implement the<br>Measure | Status                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Landsca     | ipe & Visi   | ıal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |            |                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| S4.7.27     | -            | <u>In-situ Tree Protection - Cordon Zone (CZ)</u><br>Cordon off each tree along its drip line (below the crown) with a chain-<br>link fencing of 2.5 m height with padlocked gate, allowing limited<br>access to area only to authorized persons. The base of the perimeter<br>fence will be sealed up to 30 cm height to ensure that no construction<br>drainage water will enter. If grouting is to be conducted less than 5 m<br>from the edge of the CZ, a waterproof membrane will be installed<br>below the ground to a depth of 1.5 m on the outer edge of the CZ to<br>prevent the subsurface lateral movement of contaminated construction<br>wastewater from intruding the soil inside the CZ.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Whole site | During<br>construction              | <ul> <li>√ - Part of the cordon zone of Tree-5 has been used<br/>as a worker storage room. The Contractor was<br/>recommended to pay utmost attention to potential<br/>land pollution at the worker storage room at all<br/>times.</li> <li>Scaffolding has been set up close to Tree-5 within<br/>the cordon zone. The Contractor was reminded to<br/>perform proper measures to protect Tree-5 during<br/>the carrying out of works within the cordon zone.</li> </ul> |
| S4.7.2      | -            | In-situ Tree Protection - Advanced & Phased Root Pruning<br>All edges of the CZ that will be affected by excavation will undergo root<br>pruning by a trained arborist or horticulturist, in advance of the earth<br>work. The entire affected length of the CZ, plus 3 m additional length<br>at both ends, shall be designated as the root pruning segment (RPS).<br>The require trench will be opened manually in the RPS, be 1.5 m deep<br>and 1 m wide, and closed on the same day after pruning with a good<br>soil mix. All roots with a diameter >20 mm encountered in the course<br>of trench opening shall be cut flushed with the inner wall of the trench.<br>If the RPS exceeds one-quarter of the CZ circumference, the root<br>pruning should be conducted in two stages. Each phase will tackle half<br>of the RPS length. After the first phase, the tree will be allowed to<br>recuperate for not less than four months before the second phase root<br>pruning is conducted. The RPS shall be protected by sheet piles along<br>the outer edge. The rig that installs the piles and the associated<br>operations shall not intrude into the CZ or injure the protected tree. | Whole site | During<br>construction              | N/A – no root pruning has been conducted yet                                                                                                                                                                                                                                                                                                                                                                                                                             |
| S4.7.2      | -            | <u>In-situ Tree Protection - Foliage cleansing system</u><br>A sprinkler cleansing system will be installed either in the crown of the<br>tree or at a suitable location on an adjacent building to provide the                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Whole site | During<br>construction              | $\checkmark$                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Location                                                                        | When to<br>Implement the<br>Measure           | Status                                                                |
|-------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|-----------------------------------------------|-----------------------------------------------------------------------|
|             |              | means to wash the foliage of the accumulated dust when necessary,                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                 |                                               |                                                                       |
|             |              | particularly in the dry season.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                 |                                               |                                                                       |
| S4.7.2      | S4           | In-situ Tree Protection - Monthly inspection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Whole site                                                                      | During<br>construction                        | $\checkmark$                                                          |
|             |              | Monthly inspection of affected trees by an experienced and<br>appropriately trained arborist or horticulturist using Form 1 – Tree<br>Group Inspection Form and Form 2 – Tree Risk Assessment Form<br>developed by Development Bureau<br>( <i>http://www.trees.gov.hk/en/doc/TRAGuideline_July2010version_combine.pdf</i> )<br>or a form designed by a tree expert and approved by Tree Management<br>Office. All irregularities that deviate from the recommended tree<br>protection measures, or could impose deleterious impacts on the<br>protected trees, must be reported to the authorized person or the tree<br>expert within two days.                                                                                                                                                                                                                                                                                                  |                                                                                 |                                               |                                                                       |
| S4.7.2      | -            | <u>Light Control</u><br>Control of night-time lighting shall be implemented to minimise impact<br>to adjacent VSRs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Whole site                                                                      | During<br>construction and<br>operation       | $\checkmark$                                                          |
| S4.7.2      | S4           | <u>Compensatory Tree Planting</u><br>A new planting site has been identified for compensatory tree planting<br>in the Parade Ground. The planting is to compensate for felling of T10.<br>The existing tree site will be enlarged to become a wide tree strip to<br>accommodate at least six trees. The entire strip of land that<br>accommodates T1 to T4 should be revamped to improve the soil<br>condition for future tree growth.<br>The new tree strip should be 4 m wide and covered by porous unit<br>pavers to permit the entry of rain and irrigation water and air exchange<br>between the soil and the atmosphere. The unit pavers should be<br>supported by small columns to create a vault-like structure so as to<br>avoid compaction of the underlying soil due to pedestrian trampling.<br>The unit pavers will be movable to provide access to the soil<br>underneath so that fertilizers and conditioners could be added on a | At identified<br>compensatory tree<br>planting location at the<br>Parade Ground | During detailed<br>design and<br>construction | N/A – Compensatory Tree Planting will be<br>conducted at later stage. |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Location            | When to<br>Implement the<br>Measure           | Status                                                               |
|-------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----------------------------------------------|----------------------------------------------------------------------|
|             |              | regular basis. The air conditioner unit currently located near the proposed planting site should also be removed. This new tree planting site should also be provided with proper irrigation.                                                                                                                                                                                                                                                                                                                                                                                |                     |                                               |                                                                      |
|             |              | Pursuant to the "Environment, Transport and Works Bureau Technical Circular (Works) No. 3/2006 Tree Preservation", the compensation ratio should preferably be 1:1 according to trunk girth. T10 has a DBH of 20 cm ( <i>Table 4.3</i> ), and it is proposed that six trees of heavy standard size be planted, each with a DBH of around 10 cm and root balls of not less than 0.75 m diameter and 0.75 m depth,. Since the aggregate DBH of the new trees would be 60 cm, the rate of compensation is equivalent to three times the DBH of T10, far beyond the requirements |                     |                                               |                                                                      |
|             |              | The six replacement trees should be planted in the new tree strip in two staggered rows, maximising distance between each tree to avoid mutual interference in the future. It is recommended that the species selected should have a small final dimension of less than 10 m height given the proximity to built structures such as the retaining wall and buildings. Two each of the outstanding and related flowering tree species connected to local natural history are suggested::                                                                                      |                     |                                               |                                                                      |
|             |              | <ul> <li>Bauhinia 'Blakeana' a native evergreen species with deep mauve<br/>flowers and an exceptionally long flowering period from late<br/>autumn to early spring.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                              |                     |                                               |                                                                      |
|             |              | <ul> <li>Bauhinia purpure, a native evergreen with lighter purple flowers from<br/>late autumn to early winter.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |                                               |                                                                      |
|             |              | <ul> <li>Bauhinia variegata, an exotic deciduous species, with pale pinkish<br/>flowers in spring to early summer often when the tree has little or no<br/>leaves.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                |                     |                                               |                                                                      |
| S4.7.2      | S4           | <u>Vertical Greening</u><br>Within the limitations of the conservation of the CPS character,                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Inner Southern Wall | During detailed<br>design and<br>construction | N/A – No vertical greening was conducted during the reporting month. |
|             |              | greening of vertical structures should be provided where possible.<br>As such it is recommended that the inner southern wall of the Site be<br>planted as a green wall. The plantings should be inserted in between<br>each of the large protruding piers and an offset be made from both the                                                                                                                                                                                                                                                                                |                     |                                               |                                                                      |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Location   | When to<br>Implement the<br>Measure           | Status                                                           |
|-------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------------------------------------|------------------------------------------------------------------|
|             |              | top and bottom edge so that old and new are equally visible. An<br>independent frame should be strategically positioned in order to ensure<br>minimal disturbance to the original wall, and provide the main<br>structural support and planting surface for the green wall. The frame<br>on to which the new green will be planted should contain its own<br>irrigation system so that moisture for the plants will remain mainly on<br>the planting surface and not the exiting wall behind. The planting<br>chosen should be appropriate to the Hong Kong climate, requiring<br>relatively little maintenance to sustain the quality of both plants and<br>wall. |            |                                               |                                                                  |
| S4.7.2      | -            | <u>New Custom Paving</u><br>New, Patterned, High Quality, Concrete Custom Pavers should replace<br>most of the existing paving in the open spaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Whole site | During detailed<br>design and<br>construction | N/A – No custom paving was conducted during the reporting month. |
| S4.7.2      | S4           | <u>In-situ Tree Protection - Quarterly inspection</u><br>Quarterly Inspection of affected and newly planted trees by an<br>experienced and appropriately trained arborist or horticulturist using<br>Form 1 – Tree Group Inspection Form and Form 2 – Tree Risk<br>Assessment Form developed by Development Bureau<br>(http://www.trees.gov.hk/en/doc/TRAGuideline_July2010version_combine.pdf)<br>or a form designed by a tree expert and approved by Tree Management<br>Office for a period of 12 months after construction.                                                                                                                                     | Whole site | During post<br>construction and<br>operation  | N/A – The quarterly inspection will be conducted at later stage. |
| Noise       |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | •          |                                               |                                                                  |
| <i>S5.9</i> | -            | <ul> <li>The following site practices should be followed during the construction of the Project:</li> <li>Only well-maintained plant will be operated on-site and plant will be serviced regularly during the construction phase;</li> <li>Silencers or mufflers on construction equipment will be utilised and will be properly maintained during the construction phase;</li> <li>Mobile plant, if any, will be sited as far away from NSRs as possible;</li> </ul>                                                                                                                                                                                              | Whole Site | During<br>construction                        | $\checkmark$                                                     |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Location   | When to<br>Implement the<br>Measure | Status |
|-------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------|--------|
|             |              | <ul> <li>Machines and plant (such as trucks) that may be in intermittent use will be shut down between work periods or will be throttled down to a minimum;</li> <li>Plant known to emit noise strongly in one direction will, wherever possible, be orientated so that the noise is directed away from the nearby NSRs; and</li> <li>Material stockpiles and other structures will be effectively utilised, wherever practicable, in screening noise from on-site construction activities.</li> </ul>                                                               |            |                                     |        |
| \$5.9       | -            | Noise insulating sheet would be adopted for certain PME (eg drill rig, excavator for demolition of existing structures, etc). The noise insulating sheet should be deployed such that there would be no opening or gaps on the joints.                                                                                                                                                                                                                                                                                                                               | Whole Site | During √<br>construction            | ,      |
| <i>S5.9</i> | -            | Use temporary noise barriers to mitigate the noise impact arising from the construction works, particularly for low-rise NSRs. Movable noise barriers of 3 m in height with skid footing should be used and located within a few metres of stationary plant and mobile plant such that the line of sight to the NSR is blocked by the barriers. The length of the barrier should be at least five times greater than its height. The noise barrier material should have a superficial surface density of at least 7 kg m <sup>-2</sup> and have no openings or gaps. | Whole Site | During √<br>construction            |        |
| <i>S5.9</i> | -            | Use quiet PME as far as practicable to mitigate the construction noise impact.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Whole Site | During √<br>construction            |        |
| <i>S5.9</i> | -            | Scheduling of construction activities with identified grouping of PMEs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Whole Site | During √<br>construction            | ,      |
| S5.11       | S5           | Weekly noise monitoring will be undertaken at the representative NSRs N2 Ho Fook Building and N5 Chancery House. Monthly site audits will be conducted to ensure that the recommended mitigation measures are properly implemented during the construction stage.                                                                                                                                                                                                                                                                                                    | Whole Site | During √<br>construction            |        |
| Air Qu      | ality        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |            |                                     |        |
| S6.8.1      | -            | Dust control measures stipulated in the <i>Air Pollution Control</i><br>( <i>Construction Dust</i> ) <i>Regulation</i> will be implemented during the<br>construction phase to control the potential fugitive dust emissions.                                                                                                                                                                                                                                                                                                                                        | Whole Site | During √<br>construction            |        |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                         | Location                    | When to<br>Implement the<br>Measure | Status       |
|-------------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-------------------------------------|--------------|
| S6.8.1      | -            | In particular:<br>Temporary stockpiles of dusty materials will be either covered entirely<br>by impervious sheets; placed in an area sheltered on the top and three<br>sides; or sprayed with water to maintain the entire surface wet at all the<br>time.                              | Whole Site                  | During<br>construction              | √            |
| S6.8.1      | -            | Impervious sheet will be provided for skip hoist for material transport.                                                                                                                                                                                                                | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | Vehicle washing facilities will be provided at the designated vehicle exit points.                                                                                                                                                                                                      | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | Every vehicle will be washed to remove any dusty materials from its chassis and wheels immediately before leaving the worksite.                                                                                                                                                         | Whole Site                  | During construction                 | $\checkmark$ |
| S6.8.1      | -            | Road sections between vehicle-wash areas and vehicular entrances will be paved.                                                                                                                                                                                                         | Whole Site                  | During construction                 | $\checkmark$ |
| S6.8.1      | -            | The load carried by the trucks will be covered entirely to ensure no dust emission from the vehicles.                                                                                                                                                                                   | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | Hoarding of not less than 2.4m high from ground level will be provided<br>along the Project Site boundary adjoining a road where the new<br>buildings (Old Bailey Wing and Arbuthnot Wing) will be constructed.                                                                         | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | Stockpiles of more than 20 bags of cement, dry pulverised fuel ash and dusty construction materials will be covered entirely by impervious sheeting sheltered on top and 3-sides.                                                                                                       | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | An effective dust screen will be provided to enclose scaffolding, if<br>required, from the ground floor level of building for construction of<br>superstructure of the new buildings.                                                                                                   | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | Impervious dust screen or sheeting will be implemented for demolition<br>of structures and renovation of outer surfaces of structures that abuts or<br>fronts open area accessible to the public to no less than 1m higher than<br>the highest level of the structure being demolished. | Whole Site                  | During<br>construction              | $\checkmark$ |
| S6.8.1      | -            | The area at which demolition work takes place will be sprayed with<br>water or dust suppression chemical immediately prior to, during and<br>immediately after the demolition activity.                                                                                                 | Area for Demolition<br>Work | During<br>construction              | √            |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Location   | When to<br>Implement the<br>Measure | Status              |
|-------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------|---------------------|
| S6.8.1      | -            | ULSD will be used for all construction plant on-site.                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Whole Site | During construction                 | $\checkmark$        |
| S6.8.1      | -            | The engine of the construction equipment or trucks during idling will be switched off.                                                                                                                                                                                                                                                                                                                                                                                                                                   | Whole Site | During<br>construction              | $\checkmark$        |
| S6.8.1      | -            | Site practices such as regular maintenance and checking of construction<br>equipment deployed on-site will be conducted to avoid any black<br>smoke emissions and to minimise gaseous emissions.                                                                                                                                                                                                                                                                                                                         | Whole Site | During<br>construction              | N/A – Not observed. |
| S6.10       | S3.2         | Monthly environmental site audits to ensure that appropriate dust<br>control measures are properly implemented and good construction site<br>practices are adopted throughout the construction period.                                                                                                                                                                                                                                                                                                                   | Whole Site | During<br>construction              | $\checkmark$        |
| Water (     | Quality      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |            | 1                                   |                     |
| S7.6        | -            | Channels, earth bunds or sand bag barriers will be provided on site to direct stormwater to silt removal facilities. The design of silt removal facilities will make reference to the guidelines in <i>Appendix A1</i> of <i>ProPECC PN 1/94</i> . All drainage facilities and erosion and sediment control structures will be inspected on a regular basis and maintained to confirm proper and efficient operation at all times and particularly during rainstorms. Deposited silt and grit will be removed regularly. | Whole Site | During<br>construction              | $\checkmark$        |
| S7.6        | -            | All drainage facilities and erosion and sediment control structures will<br>be regularly inspected and maintained to ensure proper and efficient<br>operation at all times and particularly following rainstorms.<br>Deposited silt and grit will be removed regularly and disposed of.                                                                                                                                                                                                                                  | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | Measures will be taken to reduce the ingress of stormwater into<br>excavation areas. If the excavation of the concrete foundation is to be<br>carried out in wet season, they will be dug and backfilled in short<br>sections wherever practicable. Water pumped out from trenches or<br>foundation excavations will be discharged into stormwater drains via<br>silt removal facilities.                                                                                                                                | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | Open stockpiles of excavated and demolition materials will be covered<br>with tarpaulin or similar fabric during rainstorms. Measures will be<br>taken to prevent the washing away of residues, chemicals or debris into<br>any drainage system.                                                                                                                                                                                                                                                                         | Whole Site | During<br>construction              | $\checkmark$        |

| EIA<br>Ref. | EM&A<br>Ref. | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                | Location   | When to<br>Implement the<br>Measure | Status              |
|-------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------|---------------------|
| S7.6        | -            | Manholes (including newly constructed ones) will always be<br>adequately covered and temporarily sealed so as to prevent silt,<br>construction materials or debris being washed into the drainage system.                                                                                                                                                                                                                      | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | Precautions will be taken when a rainstorm is imminent or forecasted, and actions to be taken during or after rainstorms are summarised in Appendix A2 of <i>ProPECC PN 1/94</i> . Particular attention will be paid to the control of silty surface runoff during storm events.                                                                                                                                               | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | All temporary and permanent drainage pipes and culverts provided to<br>facilitate runoff discharge will be adequately designed for the controlled<br>release of stormwater flows. All sediment traps will be regularly<br>cleaned and maintained. The temporary diverted drainage will be<br>reinstated to the original condition when the construction work has<br>finished or the temporary diversion is no longer required. | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | Vehicle and plant servicing areas, vehicle washing bays and lubrication<br>bays will, as far as possible, be located within roofed areas. The<br>drainage in these covered areas will be connected to foul sewers via a<br>petrol interceptor.                                                                                                                                                                                 | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -            | Oil leakage or spillage will be contained and cleaned up immediately.<br>Waste oil will be collected and stored for recycling or disposal.                                                                                                                                                                                                                                                                                     | Whole Site | During construction                 | N/A – Not observed. |
| S7.6        | -            | Waste streams classifiable as chemical wastes will be properly stored, collected and treated.                                                                                                                                                                                                                                                                                                                                  | Whole Site | During construction                 | $\checkmark$        |
| S7.6        | -            | All fuel tanks and chemical storage areas will be provided with locks and be sited on paved areas.                                                                                                                                                                                                                                                                                                                             | Whole Site | During construction                 | $\checkmark$        |
| S7.6        | -            | The storage areas will be surrounded by bunds with a capacity equal to 110% of the storage capacity of the largest tank to prevent spilled oil, fuel and chemicals from reaching the receiving waters.                                                                                                                                                                                                                         | Whole Site | During construction                 | $\checkmark$        |
| S7.6        | -            | The Contractors will prepare guidelines and procedures for immediate clean-up actions following any spillages of oil, fuel or chemicals.                                                                                                                                                                                                                                                                                       | Whole Site | During<br>construction              | <b>√</b>            |

| EIA<br>Ref. | EM&A<br>Ref.                | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                              | Location   | When to<br>Implement the<br>Measure | Status              |
|-------------|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-------------------------------------|---------------------|
| S7.6        | -                           | Surface runoff from bunded areas will pass through oil/grease traps prior to discharge to the stormwater system                                                                                                                                                                                                                                                                                                                                                              | Whole Site | During construction                 | N/A – Not observed. |
| S7.6        | -                           | The stormwater discharge from the site will be monitored as part of the routine monitoring under the WPCO licence, if applicable.                                                                                                                                                                                                                                                                                                                                            | Whole Site | During<br>construction              | N/A – Not observed. |
| S7.6        | -                           | The existing toilet facilities of the CPS will be available to the construction workforce. The sewage will be discharged to the public sewer.                                                                                                                                                                                                                                                                                                                                | Whole Site | During<br>construction              | $\checkmark$        |
| S7.8        | S5.2                        | Monthly site audits of the works areas will be carried out during the construction phase to monitor the environmental performance of the Project and to enable prompt actions to rectify any malpractice which may give rise to water pollution problem.                                                                                                                                                                                                                     | Whole Site | During<br>construction              | N                   |
| Waste I     | Manageme                    | nt                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 1          |                                     |                     |
| S8.5        | S6.3.1<br>&<br>Table<br>6.1 | <u>General</u><br>The Contractor shall apply for and obtain all the necessary waste<br>disposal permits or licences are obtained prior to the commencement of<br>the construction works.                                                                                                                                                                                                                                                                                     | Whole Site | During<br>construction              | $\checkmark$        |
| S8.5        | -                           | <u>Management of Waste Disposal</u><br>The construction contractor will open a billing account with the EPD.<br>Every construction waste or public fill load to be transferred to the<br>Government waste disposal facilities such as public fill reception<br>facilities, sorting facilities, landfills will require a valid "chit" which<br>contains the information of the account holder to facilitate waste<br>transaction recording and billing to the waste producer. | Whole Site | During<br>construction              | √                   |
| S8.5        | S6.2                        | A trip-ticket system will also be established to monitor the disposal of construction waste at landfill and to control fly-tipping. The trip-ticket system will be included as one of the contractual requirements and implemented by the contractor.                                                                                                                                                                                                                        | Whole Site | During<br>construction              | $\checkmark$        |

| EIA<br>Ref. | EM&A<br>Ref.         | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Location   | When to<br>Implement the<br>Measure     | Status       |
|-------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------------------------------|--------------|
| S8.5        | S6 &<br>Table<br>6.1 | A recording system for the amount of wastes generated/recycled and disposed of will be established during the construction phase.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Whole Site | During<br>construction                  | $\checkmark$ |
| S8.5        | S6.3                 | <u>Reduction of Construction Waste Generation</u><br>C&D material will be segregated on-site into public fill and construction<br>waste and stored in different containers or skips to facilitate reuse of the<br>public fill and proper disposal of the construction waste. Specific areas<br>of the work site will be designated for such segregation and storage if<br>immediate use is not practicable.                                                                                                                                                                                                                                                                     | Whole Site | During<br>construction                  | $\checkmark$ |
| S8.5        | S6                   | <u>Chemical Waste</u><br>The contractor will register as a chemical waste producer with the EPD.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Whole Site | During<br>construction and<br>operation | $\checkmark$ |
| S8.5        | S6                   | <ul> <li>Containers used for storage of chemical waste shall:</li> <li>Be suitable for the substance they are holding, resistant to corrosion, maintained in a good condition, and securely closed;</li> <li>Have a capacity of less than 450 L unless the specifications have been approved by the EPD; and</li> <li>Display a label in English and Chinese in accordance with instructions prescribed in <i>Schedule 2</i> of the <i>Regulations</i>.</li> </ul>                                                                                                                                                                                                              | Whole Site | During<br>construction and<br>operation | $\checkmark$ |
| S8.5        | S6                   | <ul> <li>Storage areas for chemical waste shall:</li> <li>Be clearly labelled and used solely for the storage of chemical waste;</li> <li>Be enclosed on at least 3 sides;</li> <li>Have an impermeable floor and bunding, of capacity to accommodate 110% of the volume of the largest container or 20% by volume of the chemical waste stored in that area, whichever is the greatest;</li> <li>Have adequate ventilation;</li> <li>Be covered to prevent rainfall entering (water collected within the bund must be tested and disposed of as chemical waste, if necessary); and</li> <li>Be arranged so that incompatible materials are appropriately separated.</li> </ul> | Whole Site | During<br>construction and<br>operation | V            |

| EIA<br>Ref. | EM&A<br>Ref.         | Recommended Mitigation Measures                                                                                                                                                                                                                                                                                                                  | Location                                          | When to<br>Implement the<br>Measure     | Status       |
|-------------|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|-----------------------------------------|--------------|
| S8.5        | S6                   | A licensed contractor shall be employed to collect chemical waste for delivery to a licensed treatment facility.                                                                                                                                                                                                                                 | Chemical Waste<br>Treatment<br>Centre at Tsing Yi | During<br>construction and<br>operation | $\checkmark$ |
| S8.5        | S6 &<br>Table<br>6.1 | <u>General Refuse</u><br>General refuse will be stored in enclosed bins separately from<br>construction and chemical wastes. The general refuse will be<br>delivered to the transfer station, separately from construction and<br>chemical wastes, on a daily basis to reduce odour, pest and litter<br>impacts.                                 | Whole site                                        | During<br>construction                  | $\checkmark$ |
| S8.5        | S6                   | Recycling bins will be provided at strategic locations to facilitate<br>recovery of aluminium can and waste paper from the Site. Materials<br>recovered will be sold for recycling.                                                                                                                                                              | Whole site                                        | During<br>construction and<br>operation | $\checkmark$ |
| S8.5        | S6                   | <u>Staff Training</u><br>At the commencement of the construction works, training will be<br>provided to workers on the concepts of site cleanliness and on<br>appropriate waste management procedures, including waste reduction,<br>reuse and recycling.                                                                                        | Whole site                                        | Commencement of construction            | $\checkmark$ |
| S8.7        | S6.1 & 6.3           | Monthly audits of the waste management practices will be carried out<br>during the construction phases to determine if wastes are being<br>managed in accordance with the recommended good site practices.<br>The audits will examine all aspects of waste management including<br>waste generation, storage, recycling, transport and disposal. | Whole site                                        | During<br>construction                  | √            |

Remark:

 $\sqrt{}$  Compliance of Mitigation Measures

<> Compliance of Mitigation but need improvement

x Non-compliance of Mitigation Measures

▲ Non-compliance of Mitigation Measures but rectified by Gammon Construction Ltd

Δ Deficiency of Mitigation Measures but rectified by Gammon Construction Ltd

N/A Not Applicable in Reporting Period

Annex H

Noise Monitoring Results

## Annex H Noise Monitoring Results

## **Daytime Noise Monitoring Results**

## NM6 Chancery Mansion

| Date      | Start Time | End Time | Weather | Noise | level (dB(A) | ), 30 min | Major Construction Noise<br>Source(s) Observed                              | Other Noise<br>Source(s) | Remarks | Wind Speed<br>(m/s) | Noise Meter<br>Model / ID       | Calibrator<br>Model / ID         |
|-----------|------------|----------|---------|-------|--------------|-----------|-----------------------------------------------------------------------------|--------------------------|---------|---------------------|---------------------------------|----------------------------------|
|           |            |          |         | Leq   | L10          | L90       |                                                                             | Observed                 |         | (                   |                                 |                                  |
| 06-Nov-14 | 15:22      | 15:52    | Fine    | 69.7  | 71.6         | 66.3      | Interior fitting, lifting,<br>handheld breaker (within<br>the project site) | Traffic Noise            | -       | 0.2                 | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10486660) |
| 12-Nov-14 | 10:16      | 10:46    | Cloudy  | 68.0  | 69.4         | 65.7      | Interior fitting, lifting (within the project site)                         | Traffic Noise            | -       | 0.5                 | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10486660) |
| 18-Nov-14 | 11:00      | 11:30    | Sunny   | 64.3  | 66.1         | 61.6      | Interior fitting, lifting (within the project site)                         | Traffic Noise            | -       | 0.2                 | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10486660) |
| 24-Nov-14 | 10:56      | 11:26    | Sunny   | 68.3  | 69.5         | 65.4      | Interior fitting, lifting (within the project site)                         | Traffic Noise            | -       | 0.3                 | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10486660) |
| 29-Nov-14 | 10:50      | 11:20    | Fine    | 67.6  | 68.8         | 65.1      | Interior fitting, lifting (within the project site)                         | Traffic Noise            | -       | 0.3                 | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10486660) |
|           |            |          | Min.    | 64.3  |              |           |                                                                             |                          |         |                     |                                 |                                  |
|           |            |          | Max.    | 69.7  |              |           |                                                                             |                          |         |                     |                                 |                                  |

#### NM2 Ho Fook Building

|           |            |          |         | Noise | level (dB(A)) | ), 30 min | Major Construction Noise                            | Other Noise           |         | Wind Speed | Noise Meter                     | Calibrator                       |
|-----------|------------|----------|---------|-------|---------------|-----------|-----------------------------------------------------|-----------------------|---------|------------|---------------------------------|----------------------------------|
| Date      | Start Time | End Time | Weather | Leq   | L10           | L90       | Source(s) Observed                                  | Source(s)<br>Observed | Remarks | (m/s)      | Model / ID                      | Model / ID                       |
| 06-Nov-14 | 13:27      | 13:57    | Fine    | 68.2  | 70.4          | 65.7      | Interior fitting, lifting (within the project site) | Traffic noise         | -       | 0.2        | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10486660) |
| 12-Nov-14 | 8:58       | 9:28     | Cloudy  | 70.1  | 71.6          | 66.9      | Interior fitting, lifting (within the project site) | Traffic Noise         | -       | 0.5        | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10486660) |
| 18-Nov-14 | 8:57       | 9:27     | Sunny   | 63.8  | 66.4          | 61.4      | Interior fitting, lifting (within the project site) | Traffic Noise         | -       | 0.3        | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10486660) |
| 24-Nov-14 | 9:00       | 9:30     | Sunny   | 68.1  | 69.8          | 65.4      | Interior fitting, lifting (within the project site) | Traffic Noise         | -       | 0.2        | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10486660) |
| 29-Nov-14 | 8:53       | 9:23     | Fine    | 69.6  | 71.3          | 66.8      | Interior fitting, lifting (within the project site) | Traffic Noise         | -       | 0.3        | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10486660) |
|           |            |          | Min.    | 63.8  |               |           |                                                     |                       |         |            |                                 |                                  |
|           |            |          | Max.    | 70.1  |               |           |                                                     |                       |         |            |                                 |                                  |

## Annex H Noise Monitoring Results

## Daytime Noise Monitoring Results

## NM6 Chancery Mansion

| Date      | Start Time | End Time | Weather | Noise | level (dB(A) | ), 30 min | Major Construction Noise<br>Source(s) Observed      | Other Noise<br>Source(s) | Remarks | Wind Speed<br>(m/s) | Noise Meter<br>Model / ID       | Calibrator<br>Model / ID         |
|-----------|------------|----------|---------|-------|--------------|-----------|-----------------------------------------------------|--------------------------|---------|---------------------|---------------------------------|----------------------------------|
|           |            |          |         | Leq   | L10          | L90       |                                                     | Observed                 |         |                     |                                 |                                  |
| 05-Dec-14 | 10:34      | 11:04    | Cloudy  | 69.9  | 72.7         | 66.7      | Interior fitting, lifting (within the project site) | Traffic Noise            | -       | 0.9                 | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10786708) |
| 11-Dec-14 | 10:35      | 11:05    | Fine    | 68.0  | 69.7         | 65.7      | Interior fitting, lifting (within the project site) | Traffic Noise            | -       | 0.3                 | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10786708) |
| 17-Dec-14 | 11:00      | 11:30    | Sunny   | 70.6  | 72.9         | 67.2      | Interior fitting, lifting (within the project site) | Traffic Noise            | -       | 0.8                 | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10786708) |
| 22-Dec-14 | 11:00      | 11:30    | Sunny   | 67.9  | 69.4         | 64.8      | Interior fitting, lifting (within the project site) | Traffic Noise            | -       | 1.2                 | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10786708) |
| 27-Dec-14 | 10:30      | 11:00    | Cloudy  | 67.1  | 68.7         | 64.6      | Interior fitting, lifting (within the project site) | Traffic Noise            | -       | 0.3                 | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10786708) |
|           |            |          | Min.    | 67.1  |              | •         |                                                     |                          |         |                     |                                 |                                  |
|           |            |          | Max.    | 70.6  |              |           |                                                     |                          |         |                     |                                 |                                  |

#### NM2 Ho Fook Building

|           |            |          |         | Noise | level (dB(A) | ), 30 min | Major Construction Noise                            | Other Noise           |         | Wind Speed | Noise Meter                     | Calibrator                       |
|-----------|------------|----------|---------|-------|--------------|-----------|-----------------------------------------------------|-----------------------|---------|------------|---------------------------------|----------------------------------|
| Date      | Start Time | End Time | Weather | Leq   | L10          | L90       | Source(s) Observed                                  | Source(s)<br>Observed | Remarks | (m/s)      | Model / ID                      | Model / ID                       |
| 05-Dec-14 | 8:37       | 9:07     | Cloudy  | 66.1  | 67.6         | 63.7      | Interior fitting, lifting (within the project site) | Traffic noise         | -       | 0.9        | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10786708) |
| 11-Dec-14 | 8:37       | 9:07     | Fine    | 71.9  | 74.2         | 69.0      | Interior fitting, lifting (within the project site) | Traffic Noise         | -       | 0.3        | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10786708) |
| 17-Dec-14 | 9:00       | 9:30     | Sunny   | 68.1  | 70.4         | 65.5      | Interior fitting, lifting (within the project site) | Traffic Noise         | -       | 0.5        | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10786708) |
| 22-Dec-14 | 9:00       | 9:30     | Sunny   | 69.6  | 71.0         | 66.6      | Interior fitting, lifting (within the project site) | Traffic Noise         | -       | 1.0        | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10786708) |
| 27-Dec-14 | 8:27       | 8:57     | Cloudy  | 69.2  | 71.3         | 65.3      | Interior fitting, lifting (within the project site) | Traffic Noise         | -       | 0.5        | RION- NL52<br>(S/N<br>00131627) | RION - NC73<br>(S/N<br>10786708) |
|           |            |          | Min.    | 66.1  |              |           |                                                     |                       |         |            |                                 | 1                                |
|           |            |          | Max.    | 71.9  |              |           |                                                     |                       |         |            |                                 |                                  |

## Annex H Noise Monitoring Results


## Daytime Noise Monitoring Results


#### NM6 Chancery Mansion

| Date      | Start Time | End Time | Weather | Noise | level (dB(A) | ), 30 min | Major Construction Noise<br>Source(s) Observed      | Other Noise<br>Source(s) | Remarks | Wind Speed<br>(m/s) | Noise Meter<br>Model / ID | Calibrator<br>Model / ID |
|-----------|------------|----------|---------|-------|--------------|-----------|-----------------------------------------------------|--------------------------|---------|---------------------|---------------------------|--------------------------|
|           |            |          |         | Leq   | L10          | L90       |                                                     | Observed                 |         | (                   |                           |                          |
| 02-Jan-15 | 10:45      | 11:15    | Sunny   | 67.0  | 68.6         | 63.5      | Interior fitting, lifting (within the project site) | Traffic Noise            | -       | 0.2                 | CEL-633A (S/N<br>3521757) | CEL-120 (S/N<br>3421612) |
| 08-Jan-15 | 10:45      | 11:15    | Sunny   | 67.6  | 69.7         | 63.8      | Interior fitting, lifting (within the project site) | Traffic Noise            | -       | 0.3                 | CEL-633A (S/N<br>3521757) | CEL-120 (S/N<br>3421612) |
| 14-Jan-15 | 15:30      | 16:00    | Sunny   | 66.9  | 68.4         | 64.6      | Interior fitting, lifting (within the project site) | Traffic Noise            | -       | 0.3                 | CEL-633A (S/N<br>3521757) | CEL-120 (S/N<br>3421612) |
| 20-Jan-15 | 15:30      | 16:00    | Sunny   | 67.5  | 69.1         | 64.6      | Interior fitting, lifting (within the project site) | Traffic Noise            | -       | 0.3                 | CEL-633A (S/N<br>3521757) | CEL-120 (S/N<br>3421612) |
| 26-Jan-15 | 10:30      | 11:00    | Sunny   | 73.7  | 75.9         | 70.5      | Interior fitting, lifting (within the project site) | Traffic Noise            | -       | 0.2                 | CEL-633A (S/N<br>3521757) | CEL-120 (S/N<br>3421612) |
| 31-Jan-15 | 11:00      | 11:30    | Cloudy  | 73.5  | 75.8         | 69.4      | Interior fitting, lifting (within the project site) | Traffic Noise            | -       | 0.5                 | CEL-633A (S/N<br>3521757) | CEL-120 (S/N<br>3421612) |
|           |            |          | Min.    | 66.9  |              |           | · ·                                                 |                          |         |                     | ·                         |                          |
|           |            |          | Max.    | 73.7  |              |           |                                                     |                          |         |                     |                           |                          |

#### NM2 Ho Fook Building

|           |            |          |         | Noise | level (dB(A) | ), 30 min | Major Construction Noise                            | Other Noise           |         | Wind Speed | Noise Meter               | Calibrator               |
|-----------|------------|----------|---------|-------|--------------|-----------|-----------------------------------------------------|-----------------------|---------|------------|---------------------------|--------------------------|
| Date      | Start Time | End Time | Weather | Leq   | L10          | L90       | Source(s) Observed                                  | Source(s)<br>Observed | Remarks | (m/s)      | Model / ID                | Model / ID               |
| 02-Jan-15 | 8:47       | 9:17     | Sunny   | 69.6  | 72.6         | 65.2      | Interior fitting, lifting (within the project site) | Traffic noise         | -       | 0.3        | CEL-633A (S/N<br>3521757) | CEL-120 (S/N<br>3421612) |
| 08-Jan-15 | 8:43       | 9:13     | Sunny   | 70.3  | 73.2         | 65.5      | Interior fitting, lifting (within the project site) | Traffic Noise         | -       | 0.3        | CEL-633A (S/N<br>3521757) | CEL-120 (S/N<br>3421612) |
| 14-Jan-15 | 13:30      | 14:00    | Sunny   | 71.1  | 72.7         | 68.3      | Interior fitting, lifting (within the project site) | Traffic Noise         | -       | 0.3        | CEL-633A (S/N<br>3521757) | CEL-120 (S/N<br>3421612) |
| 20-Jan-15 | 13:28      | 13:58    | Sunny   | 64.8  | 66.6         | 62.5      | Interior fitting, lifting (within the project site) | Traffic Noise         | -       | 0.3        | CEL-633A (S/N<br>3521757) | CEL-120 (S/N<br>3421612) |
| 26-Jan-15 | 8:30       | 9:00     | Sunny   | 71.1  | 75.0         | 67.2      | Interior fitting, lifting (within the project site) | Traffic Noise         | -       | 0.2        | CEL-633A (S/N<br>3521757) | CEL-120 (S/N<br>3421612) |
| 31-Jan-15 | 9:02       | 9:32     | Cloudy  | 70.5  | 72.7         | 67.1      | Interior fitting, lifting (within the project site) | Traffic Noise         | -       | 0.5        | CEL-633A (S/N<br>3521757) | CEL-120 (S/N<br>3421612) |
|           |            |          | Min.    | 64.8  |              |           |                                                     |                       |         |            |                           |                          |
|           |            |          | Max.    | 71.1  |              |           |                                                     |                       |         |            |                           |                          |

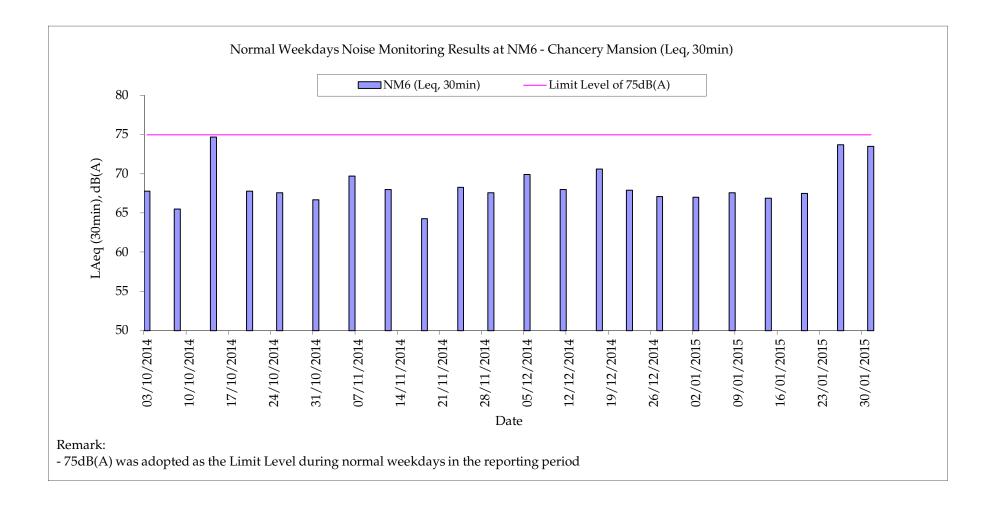

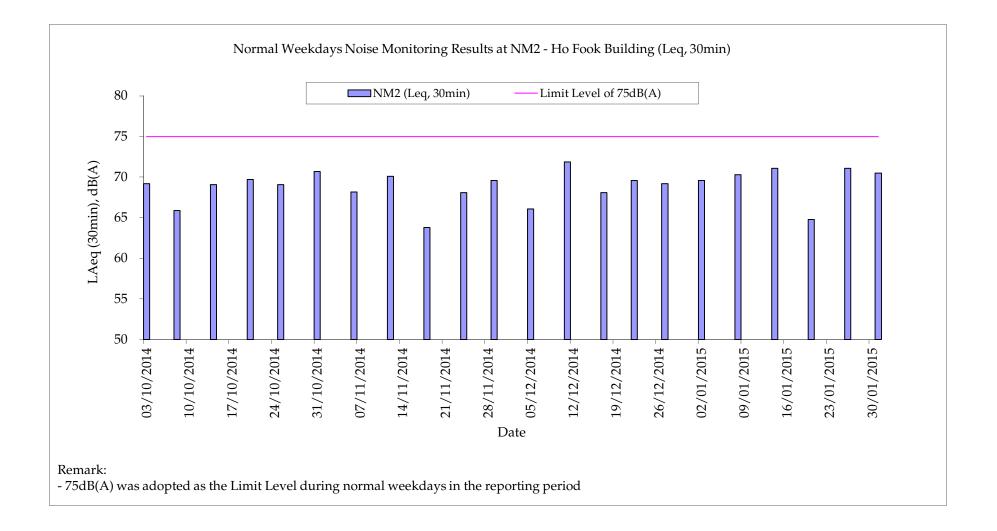


Annex I

Construction Programme of the Project

| Activity<br>ID                                     | Activity<br>Description                            | Dur<br>(Cal Days) | Start<br>Date | Finish<br>Date                                 | Rev 6A<br>Start | Rev 6A<br>Finish                               |                  |                | 2012  |                    |                          |              |         | 013       |     |           |                    |                   | 014            |
|----------------------------------------------------|----------------------------------------------------|-------------------|---------------|------------------------------------------------|-----------------|------------------------------------------------|------------------|----------------|-------|--------------------|--------------------------|--------------|---------|-----------|-----|-----------|--------------------|-------------------|----------------|
| EXISTING B                                         | JILDING                                            |                   |               |                                                |                 |                                                | MA               | MJ             | JA    | SON                | D J                      | FM           | A M J   |           | SON | DJI       | <mark>= м /</mark> | A <mark>MJ</mark> | JAS            |
| Block 1                                            |                                                    | 1                 | 1             |                                                |                 |                                                |                  |                |       |                    |                          |              |         |           |     |           |                    |                   |                |
| 010005-18                                          | BLOCK 1 - POLICE HEADQUARTERS MAJOR WORKS          | 932*              | 03OCT12A      | 22APR15                                        | 03OCT12A        | 14MAR15                                        |                  |                |       |                    |                          |              |         |           |     |           |                    |                   |                |
| 010005-22                                          | BLOCK 1 - SERV. CORRIDOR&WORKS AFTER CATWALK       | 271*              | 18AUG14A      | 15MAY15                                        | 18AUG14A        | 16APR15                                        |                  |                |       |                    |                          |              | OCK 1 - | SERV. CO  |     | i i       | i                  | i i               |                |
| 010005-30                                          | BLK 1-O/S WORK AFTER SITE OFFICE VACATED+SIGNAGE   | 204*              | 02JUL15       | 21JAN16                                        | 02JUL15         | 15FEB16                                        |                  |                |       |                    |                          |              |         |           |     | BLK       | 1-0/5              |                   | AFTER SIT      |
| 010005-35                                          | Ment Plant Room                                    | 968*              | 04OCT12A      | 29MAY15                                        | 040CT12A        | 21MAY15                                        |                  |                |       |                    |                          |              |         |           |     |           | 1                  |                   |                |
| Block 2                                            |                                                    | 500               | 0400112A      | 23101A113                                      | 0400112A        | ZIMATI5                                        |                  |                |       |                    |                          |              |         |           |     |           |                    |                   |                |
| 020005-05                                          | BLOCK 2 - ARMOURY & STORE                          | 838*              | 03MAY13A      | 18AUG15                                        | 03MAY13A        | 14JUL15                                        |                  |                |       |                    |                          |              |         |           |     |           |                    |                   |                |
| Block 3                                            |                                                    |                   |               |                                                |                 |                                                |                  |                |       |                    |                          |              |         |           |     |           |                    |                   |                |
| 030005-05                                          | BLOCK 3 - BARRACK BLOCK                            | 1,066*            | 21MAR13A      | 19FEB16                                        | 21MAR13A        | 13JAN16                                        |                  | I I .          | BLOCK | 3 - BARR           |                          |              |         |           |     |           |                    |                   |                |
| 030005-20                                          | BLOCK 3 - REMAINING FACADE REPAIR WORK             | 136*              | 16JUL15       | 28NOV15                                        | 22JUN15         | 21DEC15                                        |                  |                |       |                    |                          |              |         |           |     |           |                    | BLOC              | CK 3¦- REM     |
| Block 4                                            |                                                    |                   | 10110101      | 0005045                                        |                 |                                                |                  |                |       | BLOCK 4            |                          |              | BLOCK   | Δ & B     | 1   |           | 1                  |                   |                |
| 040005-05                                          | BLOCK 4 - DORMITORY BLOCK A & B                    | 869*              | 12AUG13A      | 28DEC15                                        | 12AUG13A        | 06JAN16                                        |                  |                |       |                    |                          |              | BLOCK   |           |     |           |                    |                   |                |
| 040005-30                                          | BLOCK 4 - T & C<br>BLOCK 4 - STATUTORY INSPECTIONS | 32*               | 18DEC15       | 18JAN16                                        | 21DEC15         | 20JAN16                                        |                  |                |       |                    |                          |              |         |           |     |           |                    |                   |                |
| 040005-40<br>Block 5                               | BLOCK 4 - STATUTORY INSPECTIONS                    | 55*               | 30DEC15       | 22FEB16                                        | 30DEC15         | 22FEB16                                        |                  |                |       |                    |                          |              |         |           |     |           |                    |                   |                |
| 050002                                             | Block 5 (Demolition Only)                          | 159*              | 16JUN14A      | 21NOV14A                                       | 16JUN14A        | 26NOV14                                        |                  |                |       |                    |                          |              |         |           |     |           |                    | · · ·             |                |
| Block 6                                            |                                                    |                   |               | I                                              |                 |                                                |                  |                |       |                    |                          | 1 1          |         |           |     |           |                    |                   |                |
| 060005-05                                          | BLOCK 6 - DORMITORY BLOCK C                        | 915*              | 18FEB13A      | 21AUG15                                        | 18FEB13A        | 05AUG15                                        |                  |                |       |                    |                          |              |         |           |     |           |                    |                   |                |
| Block 7                                            |                                                    |                   |               |                                                |                 |                                                |                  | i i            |       |                    |                          |              |         |           |     |           |                    |                   |                |
| 070005-05                                          | BLOCK 7 - DORMITORY BLOCK D                        | 852*              | 19MAR13A      | 18JUL15                                        | 19MAR13A        | 30JUL15                                        |                  | <br>   <br>    |       | <br>   <br>        | <br>                     |              |         |           |     |           |                    |                   |                |
| Block 8<br>080010-05                               | BLOCK 8 - ABLUTIONS BLOCK                          | 1,205*            | 23APR12A      | 10AUG15                                        | 23APR12A        | 27JUL15                                        |                  |                |       |                    |                          |              |         |           |     |           | 1                  |                   |                |
| 080010-03                                          | BLOCK 8 - REMAINING FACADE REPAIR WORK             | 71*               | 090CT15       | 18DEC15                                        | 080CT15         | 17DEC15                                        | -                |                |       |                    | !                        |              |         |           |     |           |                    |                   | BLOC           |
| Block 9                                            |                                                    | ,,,               | 0000110       | IODEOTO                                        | 0000110         | II DE010                                       |                  |                |       |                    |                          |              |         |           |     |           |                    |                   |                |
| 090005-05                                          | BLOCK 9 - CENTRAL MAGISTRACY                       | 877*              | 17JUN13A      | 10NOV15                                        | 17JUN13A        | 270CT15                                        |                  |                | BL    | рск 9 - се         | NTRA                     | L MAGI       | STRACY  |           |     |           |                    |                   |                |
| Block 10                                           |                                                    |                   |               | 1                                              |                 | <u>.</u>                                       |                  |                |       |                    |                          |              |         |           |     |           |                    |                   |                |
| 100010-05                                          | BLOCK 10 - SUPERINTENDENT HOUSE                    | 1,050*            | 11JAN13A      | 26NOV15                                        | 11JAN13A        | 280CT15                                        |                  |                | 1     |                    |                          |              |         |           |     |           |                    |                   |                |
| Block 11                                           |                                                    | aaat              | (0)(0)((0)    | 00 11 11 15                                    |                 | 07.11.11.65                                    |                  | i i            |       |                    |                          |              |         |           |     |           |                    |                   |                |
| 110010-05                                          |                                                    | 986*              | 10NOV12A      | 23JUL15                                        | 10NOV12A        | 27JUL15                                        | $\left  \right $ | i i            |       |                    | i                        |              |         |           |     |           | 1                  | BLOCK             | (<br>11 ↓ A ḤA |
| 110010-30<br>Block 12                              | BLOCK 11 - A HALL REMAIN FACADE REPAIR WORK        | 128*              | 19AUG15       | 24DEC15                                        | 16JUL15         | 24DEC15                                        |                  |                |       |                    | <br>                     |              |         |           |     |           |                    |                   |                |
| 120010-05                                          | BLOCK 12 - B HALL                                  | 1,023*            | 10NOV12A      | 29AUG15                                        | 10NOV12A        | 07AUG15                                        | •                | I I            |       |                    |                          | 1 1          |         |           |     |           |                    |                   |                |
| Block 13                                           |                                                    |                   |               |                                                |                 |                                                |                  |                |       |                    | 1                        |              |         |           |     |           |                    |                   |                |
| 130010-05                                          | BLOCK 13 - C HALL                                  | 1,056*            | 18JAN13A      | 09DEC15                                        | 18JAN13A        | 24NOV15                                        |                  |                |       |                    |                          |              |         |           |     |           |                    |                   |                |
| 130010-35                                          | BLOCK 13 - C HALL REMAIN FACADE REPAIR WORK        | 79*               | 06AUG15       | 23OCT15                                        | 04JUL15         | 21NOV15                                        |                  |                |       |                    |                          |              |         |           |     |           | E                  | LOCK 1            | 13 - C HAL     |
| Block 14                                           |                                                    |                   |               |                                                |                 |                                                |                  |                |       |                    | !                        |              |         |           |     |           | !                  |                   |                |
| 140010-03                                          | BLOCK 14 EAST WING D HALL                          | 1,112*            | 22OCT12A      | 07NOV15                                        | 220CT12A        | 20OCT15                                        |                  |                | WEOT  |                    |                          | 1 1          |         |           |     |           |                    |                   |                |
| 140035-03                                          | BLOCK 14 - WEST WING D HALL                        | 1,052*            | 08JAN13A      | 25NOV15                                        | 08JAN13A        | 16OCT15                                        | BLU              | ur 14          |       | WING D H           |                          |              |         |           |     |           |                    |                   | +++            |
| Block 15<br>150010-05                              | BLOCK 15 - E HALL                                  | 829*              | 10JUN13A      | 16SEP15                                        | 10JUN13A        | 29AUG15                                        |                  |                |       |                    |                          |              |         |           |     |           |                    |                   |                |
| Block 17                                           |                                                    | 020               | 10001110/1    | TOOLI TO                                       | 10001110/1      | 20/10/010                                      |                  | <u>   </u><br> | 1     | 1 I<br>I I         | 1                        | 1 I<br>1 I   |         |           |     |           | -                  |                   |                |
| 170010-02                                          | BLOCK 17 - F HALL                                  | 1,199*            | 02MAY12A      | 13AUG15                                        | 02MAY12A        | 12AUG15                                        |                  |                |       |                    |                          |              |         |           |     |           |                    |                   |                |
| Block 19                                           |                                                    |                   |               |                                                |                 |                                                |                  |                |       | <br>               | 1                        |              |         |           | 1   | 1   1<br> |                    |                   |                |
| 190005-05                                          | BLOCK 19 - BAUHINIA HOUSE                          | 775*              | 01AUG13A      | 14SEP15                                        | 01AUG13A        | 02SEP15                                        |                  |                |       |                    |                          |              |         |           |     |           |                    |                   |                |
|                                                    | ECTION & HANDOVER                                  |                   |               |                                                |                 |                                                |                  |                |       |                    |                          |              |         |           |     |           |                    |                   |                |
| S400                                               |                                                    | 294*              | 08APR15       | 26JAN16                                        | 17FEB15         | 13JAN16                                        |                  |                |       |                    |                          |              |         |           |     | 1   1     |                    |                   | BIOCK 1 T      |
| S410                                               |                                                    | 50*               | 12NOV15       | 31DEC15                                        | 09NOV15         | 24DEC15                                        |                  | i i<br>I I     |       |                    |                          |              |         |           |     |           |                    |                   |                |
| S415<br>Start Date                                 | - FINAL HANDOVER INSPECTION                        | 120*              | 05JAN16       | 03MAY16                                        | 29DEC15         | 26APR16                                        |                  |                |       |                    |                          |              | Cho     | et 1 of 2 |     |           |                    |                   |                |
| Start Date<br>Finish Date<br>Data Date<br>Run Date | 07JUL10<br>04MAY16<br>27NOV14<br>28NOV14 17:34     |                   | Rev           | 'ly Bar <sup>4L0</sup><br>v6A Bar<br>gress Bar |                 | CE<br>CONSEI<br>CONSTR<br>ARY PROGI<br>(WITH P |                  | ON AI          | ND RE | MME (R<br>DRIC & N | ATION<br>lev 6/<br>IEW B | A)<br>BUILDI |         |           | 5   |           | 5É                 | n                 | nm             |

(WITH PROGRESS AS OF 27 NOV 2014)

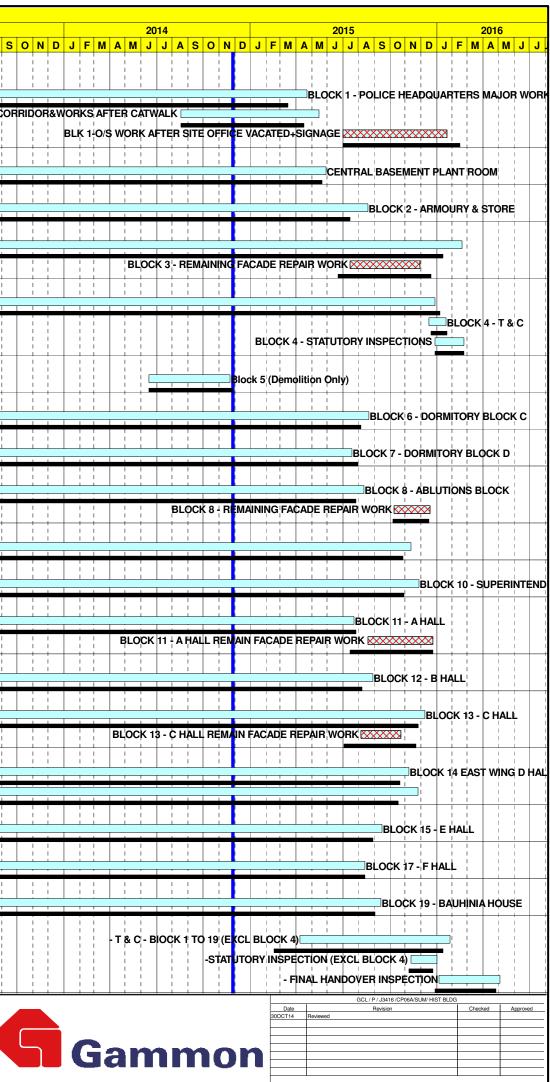

| Activity   | Activity                              | Dur        | Start    | Finish  | Rev 6A   | Rev 6A  |                                                                                                                                                                                                                                     |            |
|------------|---------------------------------------|------------|----------|---------|----------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| ID         | Description                           | (Cal Days) | Date     | Date    | Start    | Finish  | 2012 2013 2014 2015                                                                                                                                                                                                                 | 2016       |
|            |                                       |            |          |         |          |         | M A M J J A S O N D J F M A M J J A S O N D J F M A M J J A S O N D J F M A M J J A S O N D J F M A M J J A S O N D J F M                                                                                                           | M A M J J  |
| NEW BUILD  | INGS                                  |            |          |         |          |         |                                                                                                                                                                                                                                     |            |
| OBW        |                                       |            |          |         |          |         |                                                                                                                                                                                                                                     |            |
| OBW-0010   | OLD BAILEY WING                       | 1,374*     | 30MAR12A | 02JAN16 | 30MAR12A | 24DEC15 |                                                                                                                                                                                                                                     | AILEY WING |
| AW         |                                       |            |          |         |          |         |                                                                                                                                                                                                                                     |            |
| AW-0010    | ARBUTHNOT WING                        | 1,291*     | 08MAY12A | 19NOV15 | 08MAY12A | 07NOV15 |                                                                                                                                                                                                                                     | r wing     |
| INSPECTION | & HANDOVER                            |            |          |         |          |         |                                                                                                                                                                                                                                     |            |
| OBW-0015   | - APPLY FOR WATER SUPPLY & CONNECTION | 66*        | 10OCT15  | 14DEC15 | 10OCT15  | 26NOV15 |                                                                                                                                                                                                                                     |            |
| OBW-0020   | - STATUTORY INSPECTION (NEW BLDGS)    | 50*        | 12NOV15  | 31DEC15 | 09NOV15  | 24DEC15 | - STATUTORY INSPECTION (NEW BLDGS)                                                                                                                                                                                                  |            |
| OBW-0025   | - OP ACHIEVED                         | 0          |          | 31DEC15 |          | 24DEC15 | оррания и правили и п<br>Правили и правили и пр | CHIEVED    |
| OBW-0030   | - HANDOVER INPSECTION (NEW BLDGS)     | 120*       | 05JAN16  | 03MAY16 | 29DEC15  | 26APR16 |                                                                                                                                                                                                                                     |            |
| OBW-0035   | - PRACTICAL COMPLETION                | 0          |          | 03MAY16 |          | 26APR16 |                                                                                                                                                                                                                                     |            |
| SIGNAGE    | 1                                     |            | 1        | 1       | 1        | 1       |                                                                                                                                                                                                                                     |            |
| SIGNAGE    |                                       |            |          |         |          |         |                                                                                                                                                                                                                                     |            |
| SN-0010    | -SIGNAGE                              | 92*        | 10OCT15  | 09JAN16 | 02OCT15  | 31DEC15 |                                                                                                                                                                                                                                     | <b>IGE</b> |

| Start Dat |                          | Early Bar    | 4L02 Sheet 2 of 2                             |       |
|-----------|--------------------------|--------------|-----------------------------------------------|-------|
| Finish Da | ate 04MAY16              |              | CENTRAL POLICE STATION                        |       |
| Data Dat  | e 27NOV14                | Rev6A Bar    |                                               |       |
| Run Date  | e 28NOV14 17:34          | Progress Bar | CONSERVATION AND REVITALIZATION               |       |
|           |                          |              | CONSTRUCTION PROGRAMME (Rev 6A)               |       |
|           |                          |              | SUMMARY PROGRAMME OF HISTORIC & NEW BUILDINGS | Gammo |
|           |                          |              | (WITH PROGRESS AS OF 27 NOV 2014)             |       |
|           | ?Primavera Systems, Inc. |              | (WITH PROGRESS AS OF 27 NOV 2014)             | 1     |

|         | GCL / P / J3416 /CP06A/SUM/ HIST BLDG |         |          |
|---------|---------------------------------------|---------|----------|
| Date    | Revision                              | Checked | Approved |
| 30OCT14 | Reviewed                              |         |          |
|         |                                       |         |          |
|         |                                       |         |          |
|         |                                       |         |          |
|         |                                       |         |          |
|         |                                       |         |          |
|         |                                       |         |          |
|         |                                       |         |          |
|         |                                       |         |          |
|         |                                       |         |          |

Annex J

Waste Flow Table

| Annex . | J – | Waste | Flow | Table |
|---------|-----|-------|------|-------|
|---------|-----|-------|------|-------|

| Month / Year | Quantity                        |                   |                   |                         |                      |                                         |              |            |                      |               |             |  |
|--------------|---------------------------------|-------------------|-------------------|-------------------------|----------------------|-----------------------------------------|--------------|------------|----------------------|---------------|-------------|--|
|              | C&D Materials                   | Number of Trucks  | Volume of C&D     | C&D Materials           | Number of Trucks for | Volume of C&D                           | Chemical     | Chemical   | Recycled materials   |               |             |  |
|              | (inert) (tonnes) <sup>(a)</sup> | for C&D Materials | Materials (inert) |                         | C&D Materials        | Materials (non-                         | Waste (Solid | Waste      |                      |               |             |  |
|              |                                 | Disposal (inert)  | $(m^3)^{(c)}$     | (tonnes) <sup>(b)</sup> | Disposal (non-inert) | inert) (m <sup>3</sup> ) <sup>(c)</sup> | /kg)         | (Liquid/L) | Paper/cardboard (kg) | Plastics (kg) | Metals (kg) |  |
| January-14   | 3813.53                         | 400               | 1950.00           | 97.87                   | 36                   | 175.50                                  | 0            | 0          | 0                    | 0             | 14110       |  |
| February-14  | 3378.16                         | 316               | 1540.50           | 37.84                   | 14                   | 68.25                                   | 0            | 0          | 0                    | 0             | 9800        |  |
| March-14     | 5256.15                         | 516               | 2515.50           | 89.39                   | 31                   | 151.13                                  | 0            | 0          | 6000                 | 0             | 19030       |  |
| April-14     | 3006                            | 299               | 1457.63           | 114.31                  | 33                   | 160.88                                  | 45           | 0          | 0                    | 0             | 6950        |  |
| May-14       | 3195.53                         | 310               | 1511.25           | 119.54                  | 37                   | 180.38                                  | 0            | 0          | 0                    | 0             | 7000        |  |
| June-14      | 2176.81                         | 205               | 999.38            | 148.8                   | 45                   | 219.38                                  | 0            | 0          | 242                  | 0             | 8830        |  |
| July-14      | 1009.96                         | 111               | 541.13            | 147.36                  | 49                   | 238.88                                  | 0            | 0          | 0                    | 0             | 6680        |  |
| August-14    | 379.23                          | 53                | 258.38            | 211.86                  | 47                   | 229.13                                  | 0            | 0          | 0                    | 0             | 13690       |  |
| September-14 | 1216.97                         | 123               | 599.63            | 264.83                  | 56                   | 273.00                                  | 0            | 0          | 0                    | 0             | 9720        |  |
| October-14   | 1162.34                         | 124               | 604.50            | 294.33                  | 65                   | 316.88                                  | 0            | 0          | 0                    | 0             | 57080       |  |
| November-14  | 1249.55                         | 141               | 687.38            | 336.57                  | 75                   | 365.63                                  | 0            | 0          | 0                    | 0             | 6660        |  |
| December-14  | 1177.63                         | 129               | 628.88            | 260.33                  | 69                   | 336.38                                  | 0            | 0          | 68                   | 0             | 12080       |  |
| January-15   | 614.34                          | 69                | 336.38            | 222.32                  | 58                   | 282.75                                  | 0            | 0          | 0                    | 0             | 3000        |  |
| Total        | 55448.55                        | 6168              | 30069             | 4972.23                 | 1339                 | 6527.63                                 | 7395         | 57         | 8713                 | 6             | 586769      |  |

Notes:

(a) Inert C&D materials (public fill) include bricks, concrete, building debris, rubble and excavated soil.

(b) Non-inert C&D materials include steel, paper / cardboard packaging waste, plastics and other wastes such as general refuse. Steel materials generated from the Project are grouped into construction wastes as the materials were not disposed of with other inert C&D materials and were recycled. The non-inert C&D materials other than steel, plastics and paper / cardboard packaging were disposed of at SENT Landfill.

(c) If necessary, use the conversion factor: 3/4 load of dumping truck being equivalent to  $6.5 \text{ m}^3$  by volume.

Annex K

Environmental Complaint, Environmental Summons and Prosecution Log

| Reporting Month | Number of Complaints in Reporting Month | Number of Summons/Prosecutions in Reporting Month |
|-----------------|-----------------------------------------|---------------------------------------------------|
| November 2011   | 0                                       | 0                                                 |
| December 2011   | 0                                       | 0                                                 |
| January 2012    | 0                                       | 0                                                 |
| February 2012   | 0                                       | 0                                                 |
| March 2012      | 4                                       | 0                                                 |
| April 2012      | 0                                       | 0                                                 |
| May 2012        | 0                                       | 0                                                 |
| June 2012       | 2                                       | 0                                                 |
| July 2012       | 1                                       | 0                                                 |
| August 2012     | 0                                       | 0                                                 |
| September 2012  | 0                                       | 0                                                 |
| October 2012    | 0                                       | 0                                                 |
| November 2012   | 2                                       | 0                                                 |
| December 2012   | 0                                       | 0                                                 |
| January 2013    | 0                                       | 0                                                 |
| February 2013   | 1                                       | 0                                                 |
| March 2013      | 1                                       | 0                                                 |
| April 2013      | 0                                       | 0                                                 |

Annex K Cumulative Complaint and Summons/Prosecutions Log

ENVIRONMENTAL RESOURCES MANAGEMENT

| Reporting Month | Number of Complaints in Reporting Month | Number of Summons/Prosecutions in Reporting Month |
|-----------------|-----------------------------------------|---------------------------------------------------|
| May 2013        | 0                                       | 0                                                 |
| June 2013       | 0                                       | 0                                                 |
| July 2013       | 0                                       | 0                                                 |
| August 2013     | 0                                       | 0                                                 |
| September 2013  | 0                                       | 0                                                 |
| October 2013    | 0                                       | 0                                                 |
| November 2013   | 0                                       | 0                                                 |
| December 2013   | 0                                       | 0                                                 |
| January 2014    | 2                                       | 0                                                 |
| February 2014   | 1                                       | 0                                                 |
| March 2014      | 1                                       | 0                                                 |
| April 2014      | 1                                       | 0                                                 |
| May 2014        | 0                                       | 0                                                 |
| June 2014       | 0                                       | 0                                                 |
| July 2014       | 2                                       | 0                                                 |
| August 2014     | 3                                       | 0                                                 |
| September 2014  | 2                                       | 0                                                 |
| October 2014    | 1                                       | 0                                                 |
| November 2014   | 0                                       | 0                                                 |

| <b>Reporting Month</b> | Number of Complaints in Reporting Month | Number of Summons/Prosecutions in Reporting Month |
|------------------------|-----------------------------------------|---------------------------------------------------|
| December 2014          | 0                                       | 0                                                 |
| January 2015           | 0                                       | 0                                                 |
| <b>Overall Total</b>   | 24                                      | 0                                                 |

#### ENVIRONMENTAL RESOURCES MANAGEMENT

Annex L

Records of Vibration Monitoring for Trial Piling and Piling Works





## Vibration Monitoring Record (November)

|           |       | Pa    | rade Grou | nd    |       |
|-----------|-------|-------|-----------|-------|-------|
| Point     | VM1-1 | VM1-2 | VM2-1     | VM3-1 | VM3-2 |
| Date      | mm/s  | mm/s  | mm/s      | mm/s  | mm/s  |
| 01-Nov-14 | 0.154 | 0.128 | 0.156     | 0.148 | 0.182 |
| 02-Nov-14 |       |       | Holiday   |       |       |
| 03-Nov-14 | 0.263 | 0.106 | 0.298     | 0.154 | 0.131 |
| 04-Nov-14 | 0.346 | 0.158 | 0.179     | 0.193 | 0.125 |
| 05-Nov-14 | 0.191 | 0.131 | 0.206     | 0.167 | 0.102 |
| 06-Nov-14 | 0.168 | 0.108 | 0.174     | 0.348 | 0.179 |
| 07-Nov-14 | 0.106 | 0.185 | 0.156     | 0.187 | 0.123 |
| 08-Nov-14 | 0.398 | 0.134 | 0.189     | 0.204 | 0.156 |
| 09-Nov-14 |       |       | Sunday    |       |       |
| 10-Nov-14 | 0.098 | 0.102 | 0.314     | 0.195 | 0.142 |
| 11-Nov-14 | 0.156 | 0.147 | 0.114     | 0.286 | 0.189 |
| 12-Nov-14 | 0.192 | 0.120 | 0.111     | 0.168 | 0.175 |
| 13-Nov-14 | 0.146 | 0.127 | 0.177     | 0.178 | 0.166 |
| 14-Nov-14 | 0.114 | 0.122 | 0.156     | 0.169 | 0.147 |
| 15-Nov-14 | 0.196 | 0.159 | 0.114     | 0.196 | 0.162 |
| 16-Nov-14 |       |       | Sunday    |       |       |
| 17-Nov-14 | 0.165 | 0.113 | 0.159     | 0.209 | 0.151 |
| 18-Nov-14 | 0.192 | 0.102 | 0.143     | 0.122 | 0.149 |
| 19-Nov-14 | 0.101 | 0.114 | 0.138     | 0.173 | 0.138 |
| 20-Nov-14 | 0.191 | 0.152 | 0.173     | 0.129 | 0.130 |
| 21-Nov-14 | 0.088 | 0.078 | 0.145     | 0.099 | 0.109 |
| 22-Nov-14 | 0.195 | 0.102 | 0.165     | 0.198 | 0.126 |
| 23-Nov-14 |       | •     | Sunday    |       |       |
| 24-Nov-14 | 0.126 | 0.114 | 0.183     | 0.145 | 0.192 |
| 25-Nov-14 | 0.491 | 0.101 | 0.151     | 0.189 | 0.125 |
| 26-Nov-14 | 0.119 | 0.132 | 0.112     | 0.156 | 0.132 |
| 27-Nov-14 | 0.156 | 0.105 | 0.168     | 0.192 | 0.122 |
| 28-Nov-14 | 0.178 | 0.136 | 0.122     | 0.142 | 0.117 |
| 29-Nov-14 | 0.162 | 0.103 | 0.195     | 0.241 | 0.165 |
| 30-Nov-14 |       |       | Sunday    |       |       |




# Vibration Monitoring Record (December)

|           |       | Pa    | rade Grou | nd    |       |
|-----------|-------|-------|-----------|-------|-------|
| Point     | VM1-1 | VM1-2 | VM2-1     | VM3-1 | VM3-2 |
| Date      | mm/s  | mm/s  | mm/s      | mm/s  | mm/s  |
| 01-Dec-14 | 0.165 | 0.132 | 0.198     | 0.351 | 0.196 |
| 02-Dec-14 | 0.189 | 0.103 | 0.151     | 0.258 | 0.161 |
| 03-Dec-14 | 0.165 | 0.128 | 0.196     | 0.143 | 0.185 |
| 04-Dec-14 | 0.113 | 0.123 | 0.165     | 0.198 | 0.118 |
| 05-Dec-14 | 0.198 | 0.114 | 0.127     | 0.231 | 0.105 |
| 06-Dec-14 | 0.117 | 0.165 | 0.125     | 0.173 | 0.151 |
| 07-Dec-14 |       |       | Sunday    |       |       |
| 08-Dec-14 | 0.135 | 0.156 | 0.114     | 0.198 | 0.113 |
| 09-Dec-14 | 0.168 | 0.132 | 0.166     | 0.143 | 0.120 |
| 10-Dec-14 | 0.176 | 0.104 | 0.137     | 0.122 | 0.161 |
| 11-Dec-14 | 0.143 | 0.111 | 0.195     | 0.173 | 0.124 |
| 12-Dec-14 | 0.147 | 0.102 | 0.165     | 0.165 | 0.114 |
| 13-Dec-14 | 0.113 | 0.097 | 0.130     | 0.148 | 0.109 |
| 14-Dec-14 |       |       | Sunday    |       |       |
| 15-Dec-14 | 0.198 | 0.112 | 0.175     | 0.169 | 0.124 |
| 16-Dec-14 | 0.136 | 0.105 | 0.113     | 0.152 | 0.108 |
| 17-Dec-14 | 0.155 | 0.114 | 0.136     | 0.159 | 0.112 |
| 18-Dec-14 | 0.119 | 0.103 | 0.154     | 0.135 | 0.114 |
| 19-Dec-14 | 0.125 | 0.117 | 0.140     | 0.144 | 0.132 |
| 20-Dec-14 | 0.110 | 0.163 | 0.189     | 0.183 | 0.112 |
| 21-Dec-14 |       |       | Sunday    |       |       |
| 22-Dec-14 | 0.143 | 0.182 | 0.122     | 0.149 | 0.112 |
| 23-Dec-14 | 0.114 | 0.162 | 0.103     | 0.138 | 0.108 |
| 24-Dec-14 | 0.102 | 0.122 | 0.122     | 0.129 | 0.170 |
| 25-Dec-14 |       |       | Holiday   |       |       |
| 26-Dec-14 |       |       | Holiday   |       |       |
| 27-Dec-14 | 0.114 | 0.136 | 0.135     | 0.132 | 0.102 |
| 28-Dec-14 |       |       | Sunday    |       |       |
| 29-Dec-14 | 0.132 | 0.145 | 0.159     | 0.119 | 0.105 |
| 30-Dec-14 | 0.125 | 0.114 | 0.132     | 0.192 | 0.119 |
| 31-Dec-14 | 0.113 | 0.106 | 0.145     | 0.153 | 0.110 |



## Vibration Monitoring Record (Jan 15)

|           |       | Pa    | arade Grou    | nd    |       |
|-----------|-------|-------|---------------|-------|-------|
| Point     | VM1-1 | VM1-2 | VM2-1         | VM3-1 | VM3-2 |
| Date      | mm/s  | mm/s  | mm/s          | mm/s  | mm/s  |
| 01-Jan-15 |       | ]     | Public Holida | y     | -     |
| 02-Jan-15 | 0.106 | 0.109 | 0.133         | 0.147 | 0.115 |
| 03-Jan-15 | 0.114 | 0.165 | 0.144         | 0.125 | 0.152 |
| 04-Jan-15 |       |       | Sunday        |       |       |
| 05-Jan-15 | 0.153 | 0.114 | 0.135         | 0.158 | 0.120 |
| 06-Jan-15 | 0.114 | 0.104 | 0.139         | 0.112 | 0.182 |
| 07-Jan-15 | 0.161 | 0.115 | 0.122         | 0.169 | 0.122 |
| 08-Jan-15 | 0.144 | 0.120 | 0.117         | 0.127 | 0.130 |
| 09-Jan-15 | 0.121 | 0.135 | 0.107         | 0.110 | 0.142 |
| 10-Jan-15 | 0.111 | 0.127 | 0.118         | 0.162 | 0.152 |
| 11-Jan-15 |       |       | Sunday        |       |       |
| 12-Jan-15 | 0.114 | 0.156 | 0.138         | 0.114 | 0.136 |
| 13-Jan-15 | 0.168 | 0.115 | 0.122         | 0.183 | 0.120 |
| 14-Jan-15 | 0.121 | 0.120 | 0.106         | 0.142 | 0.128 |
| 15-Jan-15 | 0.116 | 0.103 | 0.110         | 0.171 | 0.114 |
| 16-Jan-15 | 0.150 | 0.107 | 0.112         | 0.193 | 0.100 |
| 17-Jan-15 | 0.113 | 0.108 | 0.140         | 0.141 | 0.128 |
| 18-Jan-15 |       |       | Sunday        |       |       |
| 19-Jan-15 | 0.148 | 0.101 | 0.192         | 0.156 | 0.114 |
| 20-Jan-15 | 0.131 | 0.105 | 0.115         | 0.172 | 0.120 |
| 21-Jan-15 | 0.117 | 0.100 | 0.114         | 0.156 | 0.119 |
| 22-Jan-15 | 0.163 | 0.114 | 0.132         | 0.128 | 0.101 |
| 23-Jan-15 | 0.101 | 0.112 | 0.108         | 0.114 | 0.122 |
| 24-Jan-15 | 0.161 | 0.108 | 0.121         | 0.169 | 0.135 |
| 25-Jan-15 |       | •     | Sunday        | •     |       |
| 26-Jan-15 | 0.145 | 0.103 | 0.132         | 0.183 | 0.118 |
| 27-Jan-15 | 0.121 | 0.107 | 0.108         | 0.150 | 0.121 |
| 28-Jan-15 | 0.136 | 0.219 | 0.188         | 0.194 | 0.103 |
| 29-Jan-15 | 0.136 | 0.105 | 0.113         | 0.152 | 0.108 |
| 30-Jan-15 | 0.149 | 0.109 | 0.098         | 0.167 | 0.125 |
| 31-Jan-15 | 0.159 | 0.103 | 0.151         | 0.158 | 0.161 |

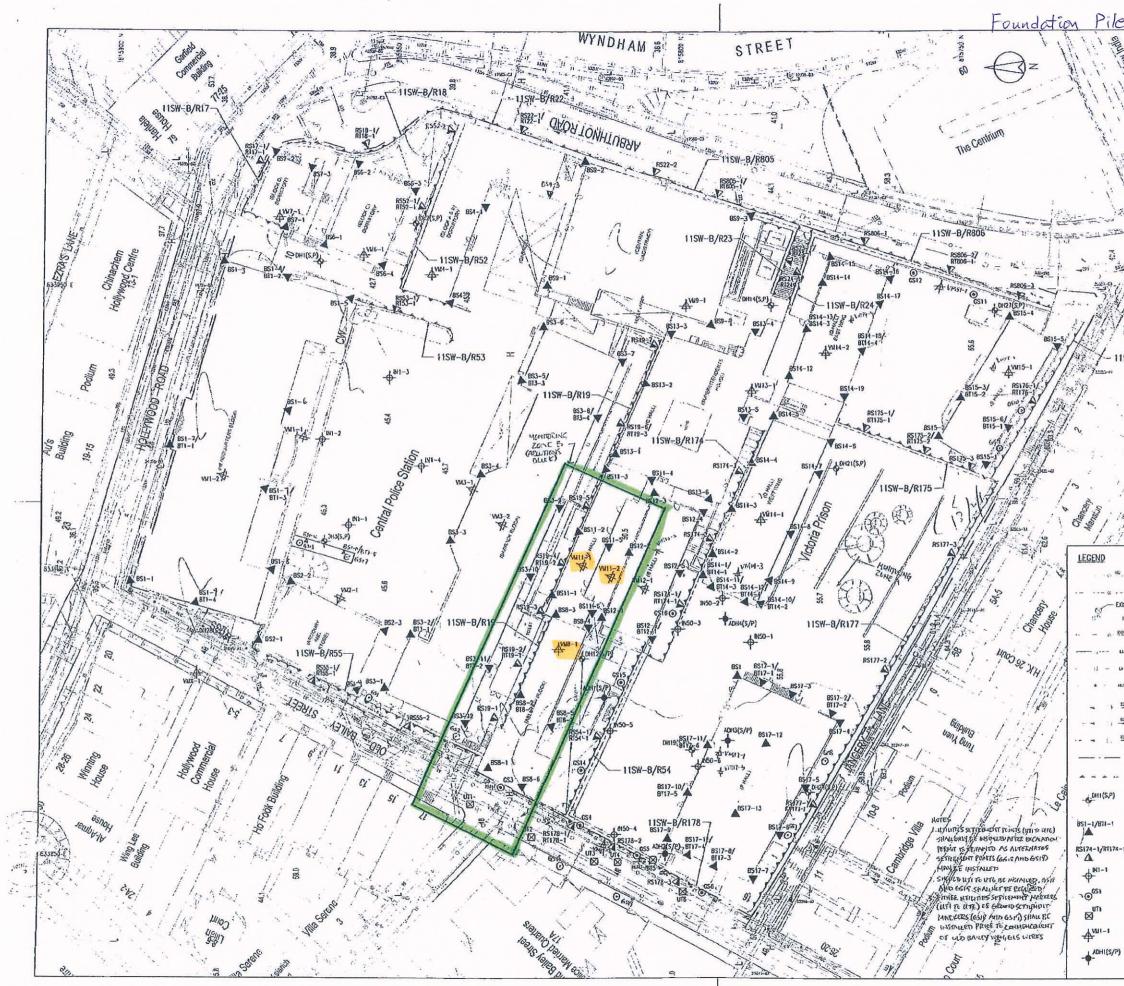


Block & at Pile Works SO Rel IN SHEDKAS - ED SJEARSSION 12/11 29985 Shiu King Court 000 Plan Approved 9500 tis NG Kin-shing Chill Structural Engineer for BUILDING AUTHORITY 20 FEB 2012 2.54 Key Plan 常引四 - 115W-B/R176 BD SUBMISSION Drawing Status 製图狀況 - This many and co mains been at \$c o of sky of conducts 本文社及代史書的語言が知られて知知られたら。 EWAY KIN X 4월2021 IV 10 ISB 6 8 II 12 3 6 97 11 13 16 Ho gan of the drawing and the design conserved here a Ery to expression of whom the prior action conserved relevant consultants 조합 [[[10] (FD]) 218 월(일도, 平강산성관군) 49 5 % 위험 ([11] Do mi lake seaso asoch oreoty in Which TEELFERRI. Cod and only alderertoors on Site EXISTING FRESH WATER WAIN Rest Rest groups a convertion with the specific and a mixer where it among RESERVICE RELIGIONS - FREE RESERVICE RELIGIONS of any EXISTING SALT WATER WAN - EXISTING STREET LIGHTING NO. 33488-A1 normany builters Breachtricel, edigerents DUSTING STREET LIGHTING CABL len III RUAZORATIRAN Ibe Jacker Clab CIS Lielted EXISTING GAS MAIN DUSTING HY ELECTRICITY CABLE EXISTING LY ELECTROITY CABLE HERZOG GDE MEURON EDISTING TELECOMMUNICATION DUCT trefthy anima HUTCHISON GLOBAL COMMUNICATION LAMITED) EXISTING STORMWATUR DRAIN Vanders Arrindert \$ 25 ROCCO 许尔 14 EXISTING FOUR SEWER PROPOSED FOLK SEWER E & M Engine Suvaural Engineer / RSE R. JRP STE DOUNDARD ARUP DUSTING RETAINING WALL Project INEL CENTRAL POLICE STATION CONSERVATION AND REVITALISATION PROJECT FXCSTING ORIHINGEF WITH STANDFIPE/PEZOWETER Drawing Takes MONITORING LAYOUT PLAN PROPOSED BURLOWC SETTLEMENT POINTS/TR\_TWETER PROPOSED RETAINING WALL SETTLEMENT PORTS/TILTMETER Scale LER Draven S.E. PROPOSED INCLINOUETER TO BE FAINT IN TECTED FILE WALL OL IPIPE FILE WALL KCLd 1:3000A1 00-0AP209674-G-001 PROPOSED GROUND SETTLEMENT PORITS PROPOSED LITELY MONTORING PODITS PROPOSED VERATION MONITORING POINTS PROPOSED ADDITIONAL DEALHOLE Cost fire : 00-04/209571-G-001.049

|                                                         |                |                |                |                            | (Block 8 F  | oundation)     |              |  |  |
|---------------------------------------------------------|----------------|----------------|----------------|----------------------------|-------------|----------------|--------------|--|--|
| WW 恆誠颈                                                  | <b>赴筑</b> 了;   | 程有限公           | ्रत            | Monitoring Check Pts.      |             | Trigger Levels |              |  |  |
|                                                         |                |                |                |                            | Alert level | Alarm level    | Action level |  |  |
| Win Win Way Co                                          | nstructio      | n Company      | Ltd.           | Vibrating Monitoring       |             | 2.5mm/s        | 3mm/s        |  |  |
|                                                         |                |                |                | #Vibration at largest span | S ()mm/s    | 6.0mm/s        | 7.5mm/s      |  |  |
|                                                         |                |                |                | highest Structural level   | 1           |                |              |  |  |
|                                                         |                |                | V              | ration Record              |             |                |              |  |  |
| Project Title: Central Po                               | lice Station ( | Conservation & | Revitalization | Project No: WP201          | 1-Nov-2014  | to             | 30-Nov-20    |  |  |
| POINT                                                   | VM8-1          | VM11-1#        | VM11-2         |                            |             |                |              |  |  |
| DATE PD/(m)                                             | mm/s           | mm/s           | mm/s           |                            |             |                |              |  |  |
| 19-Jun-2012 (Initial)                                   | 0.56           | 0.13           | 0.19           |                            |             |                |              |  |  |
|                                                         |                |                |                |                            |             |                |              |  |  |
| 1-Nov-2014                                              | 0.20           | 0.18           | 0.10           |                            |             |                |              |  |  |
| 2-Nov-2014                                              |                |                |                | Sunday                     |             |                |              |  |  |
| 3-Nov-2014                                              | 0.37           | 0.16           | 0.11           |                            |             |                |              |  |  |
| 4-Nov-2014                                              | 0.32           | 0.19           | 0.13           |                            |             |                |              |  |  |
| 5-Nov-2014                                              | 0.14           | 0.19           | 0.15           |                            |             |                |              |  |  |
| 6-Nov-2014                                              | 0.17           | 0.17           | 0.11           |                            |             |                |              |  |  |
| 7-Nov-2014                                              | 0.17           | 0.18           | 0.13           |                            |             |                |              |  |  |
| 8-Nov-2014                                              | 0.19           | 0.17           | 0.12           |                            |             |                |              |  |  |
| 9-Nov-2014                                              |                |                |                | Sunday                     |             |                |              |  |  |
| 10-Nov-2014                                             | 0.22           | 0.14           | 0.14           |                            |             |                |              |  |  |
| 11-Nov-2014                                             | 0.19           | 0.20           | 0.17           |                            |             |                |              |  |  |
| 12-Nov-2014                                             | 0.13           | 0.19           | 0.19           |                            |             |                |              |  |  |
| 13-Nov-2014                                             | 0.14           | 0.16           | 0.17           |                            |             |                |              |  |  |
| 14-Nov-2014                                             | 0.17           | 0.13           | 0.17           |                            |             |                |              |  |  |
| 15-Nov-2014                                             | 0.17           | 0.20           | 0.19           |                            |             |                |              |  |  |
| 16-Nov-2014                                             |                |                |                | Sunday                     |             | _              |              |  |  |
| 17-Nov-2014                                             | 0.20           | 0.15           | 0.16           |                            |             |                |              |  |  |
| 18-Nov-2014                                             | 0.13           | 0.17           | 0.11           |                            |             |                |              |  |  |
| 19-Nov-2014                                             | 0.12           | 0.14           | 0.13           |                            |             |                |              |  |  |
| 20-Nov-2014                                             | 0.19           | 0.16           | 0.13           |                            |             |                |              |  |  |
| 21-Nov-2014                                             | 0.18           | 0.13           | 0.16           |                            |             |                |              |  |  |
| 22-Nov-2014                                             | 0.17           | 0.17           | 0.11           |                            |             |                |              |  |  |
| 23-Nov-2014                                             |                | · · · · ·      |                | Sunday                     |             |                |              |  |  |
| 24-Nov-2014                                             | 0.14           | 0.20           | 0.15           |                            |             |                |              |  |  |
| 25-Nov-2014                                             | 0.12           | 0.17           | 0.13           |                            |             |                |              |  |  |
| 26-Nov-2014                                             | 0.17           | 0.11           | 0.16           |                            |             |                |              |  |  |
| 27-Nov-2014                                             | 0.14           | 0.20           | 0.11           |                            |             |                |              |  |  |
| 28-Nov-2014                                             |                | 0.15           | 0.10           |                            |             |                |              |  |  |
| 29-Nov-2014                                             |                |                |                |                            |             |                |              |  |  |
| 28-Nov-2014           29-Nov-2014           30-Nov-2014 | 0.16 0.20      | 0.15<br>0.13   | 0.10<br>0.21   | Sunday                     |             |                |              |  |  |

|                            |                                      |                |                |                |            |               |                                   | ( Block 8 Fo                                 | undation)   |              |  |
|----------------------------|--------------------------------------|----------------|----------------|----------------|------------|---------------|-----------------------------------|----------------------------------------------|-------------|--------------|--|
| <b>WW</b> 1                | ह≣दीय                                | 事效工1           | 过方阻力           | ৲ল             |            | Monitorin     | g Check Pts.                      | Trigger Levels                               |             |              |  |
| AAAA                       | <b>归</b> , <b> , , , , , , , , ,</b> | 主关上1           | 主有1122         | 7. HÌ          |            |               | E enter i tai                     | Alert level                                  | Alarm level | Action level |  |
| Win Win W                  | ay Co                                | nstructior     | n Company      | Ltd.           |            |               | Monitoring                        | 2mm/s                                        | 2.5mm/s     | 3mm/s        |  |
|                            |                                      |                |                |                |            |               | largest span of<br>ructural level | 5.0mm/s                                      | 6.0mm/s     | 7.5mm/s      |  |
|                            |                                      |                |                | V.             | ibration R | ecord         |                                   | · · · · · · · · · · · · · · · · · · ·        |             |              |  |
|                            |                                      |                |                | v              | IUIAUUII N |               |                                   |                                              |             |              |  |
| Project Title: Co          | entral Po                            | lice Station C | Conservation & | Revitalization |            | Project No: V | VP201                             | 1-Dec-2014                                   | to          | 31-Dec-2014  |  |
| POINT                      |                                      | VM8-1          | VM11-1#        | VM11-2         |            |               |                                   |                                              |             |              |  |
| DATE                       | PD/(m)                               | mm/s           | mm/s           | mm/s           |            |               |                                   |                                              |             |              |  |
| 19-Jun-2012 (In            |                                      | 0.560          | 0.130          | 0.190          |            |               |                                   |                                              |             |              |  |
|                            |                                      |                |                |                |            |               |                                   |                                              |             |              |  |
| 1-Dec-2014                 |                                      | 0.322          | 0.147          | 0.132          |            |               |                                   |                                              |             |              |  |
| 2-Dec-2014                 |                                      | 0.156          | 0.132          | 0.111          |            |               |                                   |                                              |             |              |  |
| 3-Dec-2014                 |                                      | 0.212          | 0.113          | 0.103          |            |               |                                   |                                              |             |              |  |
| 4-Dec-2014                 |                                      | 0.165          | 0.180          | 0.123          |            |               |                                   |                                              |             |              |  |
| 5-Dec-2014                 |                                      | 0.148          | 0.122          | 0.168          |            |               |                                   |                                              |             |              |  |
| 6-Dec-2014                 |                                      | 0.216          | 0.193          | 0.147          |            |               |                                   |                                              |             |              |  |
| 7-Dec-2014                 |                                      |                | 1              |                | 1          | Sunday        |                                   |                                              |             |              |  |
| 8-Dec-2014                 |                                      | 0.331          | 0.152          | 0.106          |            |               |                                   |                                              |             |              |  |
| 9-Dec-2014                 |                                      | 0.182          | 0.115          | 0.103          |            |               |                                   |                                              |             |              |  |
| 10-Dec-2014                |                                      | 0.192          | 0.114          | 0.132          |            |               |                                   |                                              |             |              |  |
| 11-Dec-2014                |                                      | 0.152          | 0.216          | 0.138          |            |               |                                   |                                              |             |              |  |
| 12-Dec-2014                |                                      | 0.131          | 0.130          | 0.105          |            |               |                                   |                                              |             |              |  |
| 13-Dec-2014                |                                      | 0.168          | 0.166          | 0.115          |            |               |                                   |                                              |             |              |  |
| 14-Dec-2014                |                                      |                |                |                |            | Sunday        |                                   |                                              |             |              |  |
| 15-Dec-2014                |                                      | 0.151          | 0.136          | 0.104          |            |               |                                   |                                              |             |              |  |
| 16-Dec-2014                |                                      | 0.182          | 0.136          | 0.112          |            |               |                                   |                                              |             |              |  |
| 17-Dec-2014<br>18-Dec-2014 |                                      | 0.135          | 0.114          | 0.165          |            |               |                                   |                                              |             |              |  |
| 18-Dec-2014<br>19-Dec-2014 |                                      | 0.166          | 0.114          | 0.133          |            | <u> </u>      |                                   |                                              |             |              |  |
| 20-Dec-2014                | ├                                    | 0.165          | 0.121          | 0.127          |            | 1             |                                   |                                              |             |              |  |
| 20-Dec-2014<br>21-Dec-2014 |                                      | 0.117          | 0.196          | 0.154          | 1          | Sunday        | 1                                 | <u>                                     </u> |             |              |  |
| 21-Dec-2014<br>22-Dec-2014 |                                      | 0 149          | 0.111          | 0.165          |            | Junuay        |                                   |                                              |             |              |  |
| 23-Dec-2014                |                                      | 0.168          | 0.111 0.116    | 0.165 0.162    |            | 1             |                                   |                                              |             |              |  |
| 23-Dec-2014<br>24-Dec-2014 |                                      | 0.196          | 0.116          | 0.162          |            | +             | +                                 |                                              |             |              |  |
| 25-Dec-2014                |                                      | 0.124          | 0.120          | 0.115          | I          | Holiday       | 1                                 |                                              |             |              |  |
| 26-Dec-2014                |                                      |                |                |                |            | Holiday       |                                   |                                              |             |              |  |
| 27-Dec-2014                | l I                                  | 0.135          | 0.146          | 0.108          |            |               |                                   |                                              |             |              |  |
| 28-Dec-2014                |                                      | 0.100          | 0.170          | 0.100          | 1          | Sunday        | 1                                 | 1                                            |             |              |  |
| 29-Dec-2014                |                                      | 0.159          | 0.118          | 0.103          |            | _ unduj       |                                   |                                              |             |              |  |
| 30-Dec-2014                |                                      | 0.135          | 0.115          | 0.103          |            | 1             |                                   |                                              |             |              |  |
| 31-Dec-2014                |                                      | 0.121          | 0.103          | 0.121          |            | 1             |                                   |                                              |             |              |  |

|                            |           |                |                |                |             |                      |                                     | (Block 8 Fo                                  | oundation)     |              |  |  |
|----------------------------|-----------|----------------|----------------|----------------|-------------|----------------------|-------------------------------------|----------------------------------------------|----------------|--------------|--|--|
| <b>WW</b> 12               | ह∋∄य      | 事物 丁1          | 阳方阳方           | ৲া             |             | Monitorin            | g Check Pts.                        |                                              | Trigger Levels |              |  |  |
| AAAA                       | 且或效       | 主采1            | 至有1122         | て口]            |             | Wiemterin            | g cheek r ts.                       | Alert level                                  | Alarm level    | Action level |  |  |
| Win Win W                  | ay Co     | nstruction     | ı Company      | Ltd.           |             | Vibrating Monitoring |                                     | 2mm/s                                        | 2.5mm/s        | 3mm/s        |  |  |
|                            | •         |                |                |                |             |                      | t largest span of<br>ructural level | 5.0mm/s                                      | 6.0mm/s        | 7.5mm/s      |  |  |
|                            |           |                |                |                |             |                      |                                     | II                                           |                |              |  |  |
|                            |           |                |                | Ι              | vibration R | lecord               |                                     |                                              |                |              |  |  |
| Project Title: Ce          | entral Po | lice Station C | Conservation & | Revitalization |             | Project No: W        | WP201                               | 1-Jan-2015                                   | to             | 31-Jan-2015  |  |  |
| POINT                      |           | VM8-1          | VM11-1#        | VM11-2         |             |                      |                                     |                                              |                |              |  |  |
| DATE                       | PD/(m)    | mm/s           | mm/s           | mm/s           |             |                      |                                     |                                              |                |              |  |  |
| 19-Jun-2012 (In            |           | 0.56           | 0.13           | 0.19           |             |                      |                                     |                                              |                |              |  |  |
|                            |           |                |                |                |             |                      |                                     |                                              |                |              |  |  |
| 1-Jan-2015                 |           |                |                |                | Pu          | blic Holiday         |                                     |                                              |                |              |  |  |
| 2-Jan-2015                 |           | 0.13           | 0.13           | 0.11           |             |                      |                                     |                                              |                |              |  |  |
| 3-Jan-2015                 |           | 0.16           | 0.14           | 0.12           |             |                      |                                     |                                              |                |              |  |  |
| 4-Jan-2015                 |           |                |                |                | •           | Sunday               |                                     |                                              |                |              |  |  |
| 5-Jan-2015                 |           | 0.14           | 0.11           | 0.10           |             |                      |                                     |                                              |                |              |  |  |
| 6-Jan-2015                 |           | 0.12           | 0.15           | 0.17           |             |                      |                                     |                                              |                |              |  |  |
| 7-Jan-2015                 |           | 0.20           | 0.12           | 0.19           |             |                      |                                     |                                              |                |              |  |  |
| 8-Jan-2015                 |           | 0.14           | 0.16           | 0.15           |             |                      |                                     |                                              |                |              |  |  |
| 9-Jan-2015                 |           | 0.11           | 0.12           | 0.12           |             |                      |                                     |                                              |                |              |  |  |
| 10-Jan-2015                |           | 0.13           | 0.15           | 0.13           |             |                      |                                     |                                              |                |              |  |  |
| 11-Jan-2015                |           |                | Г              |                | T           | Sunday               |                                     |                                              |                |              |  |  |
| 12-Jan-2015                |           | 0.12           | 0.14           | 0.14           |             |                      |                                     |                                              |                |              |  |  |
| 13-Jan-2015                |           | 0.16           | 0.11           | 0.16           |             |                      |                                     |                                              |                |              |  |  |
| 14-Jan-2015                |           | 0.13           | 0.13           | 0.17           |             |                      |                                     |                                              |                |              |  |  |
| 15-Jan-2015                |           | 0.11           | 0.18           | 0.13           |             |                      |                                     |                                              |                |              |  |  |
| 16-Jan-2015                |           | 0.13           | 0.11           | 0.13           |             |                      |                                     |                                              |                |              |  |  |
| 17-Jan-2015<br>18-Jan-2015 |           | 0.11           | 0.13           | 0.12           |             | Sunday               |                                     |                                              |                |              |  |  |
| 18-Jan-2015<br>19-Jan-2015 | <u> </u>  | 0.10           | 0.14           | 0.11           | 1           | Sunday               |                                     |                                              |                |              |  |  |
| 20-Jan-2015                |           | 0.10           | 0.14           | 0.11           |             |                      |                                     |                                              |                |              |  |  |
| 20-Jan-2015<br>21-Jan-2015 |           | 0.11           | 0.13           | 0.16           |             |                      |                                     |                                              |                |              |  |  |
| 21-Jan-2015<br>22-Jan-2015 |           | 0.14           | 0.11           | 0.12           | }           | +                    |                                     |                                              |                |              |  |  |
| 22-Jan-2015<br>23-Jan-2015 |           | 0.11           | 0.11 0.13      | 0.12           | +           | +                    |                                     |                                              |                |              |  |  |
| 23-Jan-2015                |           | 0.11           |                |                |             |                      |                                     |                                              |                |              |  |  |
| 24-Jan-2015                |           | 0.14           | 0.11           | 0.11           | <u> </u>    | Sunday               | 1                                   | <u>                                     </u> |                |              |  |  |
| 26-Jan-2015                | I         | 0.10           | 0.18           | 0.13           |             | Sunday               |                                     |                                              |                |              |  |  |
| 20-Jan-2015<br>27-Jan-2015 |           | 0.10           | 0.18           | 0.13           |             |                      |                                     |                                              |                |              |  |  |
| 28-Jan-2015                |           | 0.11           | 0.13           | 0.10           |             |                      |                                     |                                              |                |              |  |  |
| 29-Jan-2015                |           | 0.17           | 0.17           | 0.12           |             |                      |                                     |                                              |                |              |  |  |
| 30-Jan-2015                |           | 0.13           | 0.14           | 0.10           |             |                      |                                     |                                              |                |              |  |  |
| 31-Jan-2015                |           | 0.14           | 0.16           | 0.13           |             | 1                    |                                     |                                              |                |              |  |  |

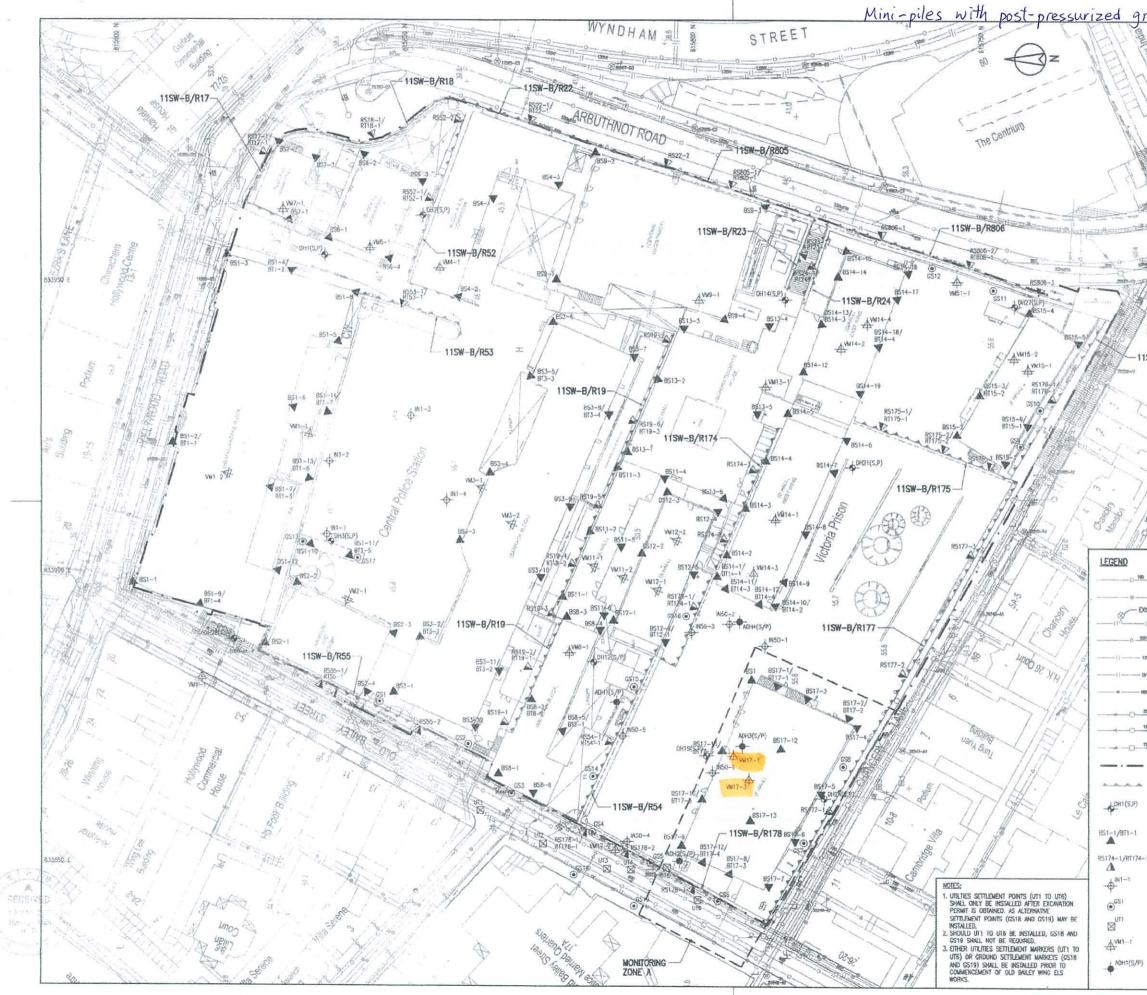

Mini-piles with post-pressurized grout in CDG and steel shear H-piles at Block 1, D SUBMISSION RD SUGMISSION B BD SUSMISSION Shou King Calif 10-1 Plas Approved NG Kun-shing Chief Structural Engineer for BCILLINNG ALTCHORITO 1 9 MAR 2012 lay Plan 索引導 11SW-B/R176 BD SUBMISSION wing Blatux 對顯狀況 ゼロlisist Lonsilion。 主義法以外の内容現象体的指面明白1 remains optionants. 未加有機範疇合同實動阿爾。卡德皮解此機械 出版或如約 的mit Like meansaments 的导致转动器系上重要的 Check and while a4 dimensions on sa 所有尺寸必須加工地領導者參加單核. EXISTING FRESH WATER MAD and an other related scoreigh 素羅是心思與現俗說何喜及其它介張講師一座認識。 EXISTING SALT WATER MAIN STREET LIGHTING NO. 33488-A1 EXISTING TRUES & BORNAN DUSTING STREET LIGHTING CABLE Chent @ 1 EXISTING GAS MAIN 唐馬會文物從直有關公司 Jovan Carl US Listin XUSTING HV ELECTRICITY CASEE EXISTING LY ELECTRICITY CABLE HERZOG&DEMEURON EXISTING TELECOMMUNICATION DUCT (HUTCHISON G OBAL COMMUNICATIONS LIMITED) EXISTING STORMWATER DRAIN ROCCO 许纳严 EXISTING FOUL SEWER PROPOSED FOLL SEWER 三古鮮王的 R. JRP STIE BOUNDAR ARUP EXISTING RETAINING WALL Project 251 CENTRAL POLICE STATION CONSERVATION AND REVITALISATION PROJECT EXISTING DRILLHOLE WITH STANDPIPE/PIEZOMETER Drawing Title EA MONITORING LAYOUT PLAN PROPOSED BUILDING SETTLEMENT POINTS/TRUTMETER PROPOSED RETAINING WALL SETTLEMENT POINTS/TRUTMETER Chann 90 PROPOSED INCLINOMETER TO BE BUILT IN BORIED PILE WALL OR PIPE PILE WALL 1:300041 K.C.Lei 00-0AP209674-G-001 B PROPOSED GROUND SETTLEMENT POINTS PROPOSED UTILITY MONITORING POINTS PROPOSED VERATION MONITORING POINTS PROPOSED ADDITIONAL DRILLHOLE Cat Sis : 00-434P209674-G-601.dwg

|                           |                 |                   |             |                                                            |              | ( Block 17 Fou | undation Works | ; )          |
|---------------------------|-----------------|-------------------|-------------|------------------------------------------------------------|--------------|----------------|----------------|--------------|
|                           |                 |                   |             |                                                            | (1 1 D)      |                | Trigger Levels |              |
| WW 恆調                     | <b>北</b> 建筑 ]   | 和右限公              | 、司          | Monitoring                                                 | g Check Pts. | Alert level    | Alarm level    | Action level |
|                           | が生木 -           | 一生日代工             | ν μ)        |                                                            | Monitoring   | 2mm/s          | 2.5mm/s        | 3mm/s        |
| Win Win Way               | Constructi      | ion Company       | Ltd.        | # Vibration at largest span of<br>highest Structural level |              | 5.0mm/s        | 6.0mm/s        | 7.5mm/s      |
|                           |                 |                   | Vibration F | Record                                                     |              |                |                |              |
| Project Title: Central Po | lice Station Co | onservation & Rev | italization | Project No: Y                                              | WP201        | 1-Nov-2014     | to             | 30-Nov-2014  |
| POINT                     | VM17-1          | VM17-3 #          |             |                                                            |              |                |                |              |
| DATE PD/(m)               | mm/s            | mm/s              |             |                                                            |              |                |                |              |
| 19-Jun-2012 (Initial)     | 0.13            | 0.37              |             |                                                            |              |                |                |              |
| Surveying Date            |                 |                   |             |                                                            |              |                |                |              |
| 1-Nov-2014                | 0.09            | 0.10              |             |                                                            |              |                |                |              |
| 2-Nov-2014                |                 | r                 | ſ           | Sunday                                                     | T            | 1 1            |                | 1            |
| 3-Nov-2014                | 0.12            | 0.10              |             |                                                            |              |                |                |              |
| 4-Nov-2014                | 0.10            | 0.08              |             |                                                            |              |                |                |              |
| 5-Nov-2014                | 0.10            | 0.10              |             |                                                            |              |                |                |              |
| 6-Nov-2014                | 0.11            | 0.09              |             |                                                            |              |                |                |              |
| 7-Nov-2014                | 0.09            | 0.07              |             |                                                            |              |                |                |              |
| 8-Nov-2014<br>9-Nov-2014  | 0.12            | 0.10              |             | Sunday                                                     |              |                |                |              |
| 10-Nov-2014               | 0.10            | 0.10              |             | Sunday                                                     |              |                |                |              |
| 11-Nov-2014               | 0.10            | 0.09              |             |                                                            |              |                |                |              |
| 12-Nov-2014               | 0.12            | 0.09              |             |                                                            |              |                |                |              |
| 13-Nov-2014               | 0.11            | 0.07              |             |                                                            |              |                |                |              |
| 14-Nov-2014               | 0.14            | 0.07              |             |                                                            |              |                |                |              |
| 15-Nov-2014               | 0.11            | 0.10              |             |                                                            |              |                |                |              |
| 16-Nov-2014               |                 | + · · · +         | ł           | Sunday                                                     | ł            | • •            |                |              |
| 17-Nov-2014               | 0.10            | 0.09              |             |                                                            |              |                |                |              |
| 18-Nov-2014               | 0.11            | 0.12              |             |                                                            |              |                |                |              |
| 19-Nov-2014               | 0.10            | 0.11              |             |                                                            |              |                |                |              |
| 20-Nov-2014               | 0.17            | 0.16              |             |                                                            |              |                |                |              |
| 21-Nov-2014               | 0.15            | 0.13              |             |                                                            |              |                |                |              |
| 22-Nov-2014               | 0.12            | 0.11              |             |                                                            |              |                |                |              |
| 23-Nov-2014               |                 |                   | Γ           | Sunday                                                     |              | •              |                | 1            |
| 24-Nov-2014               | 0.16            | 0.16              |             |                                                            |              |                |                |              |
| 25-Nov-2014               | 0.10            | 0.10              |             |                                                            |              |                |                |              |
| 26-Nov-2014               | 0.10            | 0.12              |             |                                                            |              |                |                |              |
| 27-Nov-2014               | 0.14            | 0.13              |             |                                                            |              |                |                |              |
| 28-Nov-2014               | 0.14            | 0.17              |             |                                                            |              |                |                |              |
| 29-Nov-2014               | 0.15            | 0.11              |             |                                                            | Ļ            |                |                | ļ            |
| 30-Nov-2014               |                 |                   |             | Sunday                                                     |              |                |                |              |

|                   |             |                |                 |                |            |                |                 | ( Block 17 Fou | undation Works | ; )          |  |  |
|-------------------|-------------|----------------|-----------------|----------------|------------|----------------|-----------------|----------------|----------------|--------------|--|--|
|                   |             |                |                 |                |            |                | ~               |                | Trigger Levels |              |  |  |
|                   | 板雪          | 7中统工           | 程有限             | 八司             |            | Monitorin      | g Check Pts.    | Alert level    | Alarm level    | Action level |  |  |
| AA AA             | 互副          | 使关系            | 一任何收            | 公司             |            | Vibration      | Monitoring      | 2mm/s          | 2.5mm/s        | 3mm/s        |  |  |
| Win Win           | Way (       | Constructi     | on Compai       | nv L.td.       |            | # Vibration at | largest span of | 5.0mm/s        | 6.0mm/s        | 7.5mm/s      |  |  |
|                   |             |                | on compa        | 1) <b>L</b> un |            | highest Str    | uctural level   | 5.01111/5      | 0.01111/3      | 7.51111/5    |  |  |
|                   |             |                |                 | •              | ··· · -    |                |                 |                |                |              |  |  |
|                   |             |                |                 | V              | ibration F | lecord         |                 |                |                |              |  |  |
| Project Title: Ce | entral Poli | ice Station Co | onservation & F | Revitalization |            | Project No: '  | WP201           | 1-Dec-2014     | to             | 31-Dec-2014  |  |  |
|                   |             |                |                 |                |            |                |                 |                |                |              |  |  |
| POINT             |             | VM17-1         | VM17-2          | VM17-3 #       |            |                |                 |                |                |              |  |  |
| DATE              | PD/(m)      | mm/s           | mm/s            | mm/s           |            |                |                 |                |                |              |  |  |
| 19-Jun-2012 (In   | nitial)     | 0.130          | 0.370           | 0.370          |            | 1              |                 |                |                |              |  |  |
| Surveying Date    |             |                |                 |                |            |                |                 |                |                |              |  |  |
| 1-Dec-2014        |             | 0.111          | 0.102           | 0.105          |            |                |                 |                |                |              |  |  |
| 2-Dec-2014        |             | 0.103          | 0.093           | 0.101          |            |                |                 |                |                |              |  |  |
| 3-Dec-2014        |             | 0.141          | 0.105           | 0.082          |            |                |                 |                |                |              |  |  |
| 4-Dec-2014        |             | 0.132          | 0.097           | 0.116          |            |                |                 |                |                |              |  |  |
| 5-Dec-2014        |             | 0.113          | 0.143           | 0.097          |            |                |                 |                |                |              |  |  |
| 6-Dec-2014        |             | 0.106          | 0.098           | 0.087          |            |                |                 |                |                |              |  |  |
| 7-Dec-2014        |             |                | •               |                | •          | Sunday         |                 |                |                |              |  |  |
| 8-Dec-2014        |             | 0.103          | 0.085           | 0.110          |            |                |                 |                |                |              |  |  |
| 9-Dec-2014        |             | 0.103          | 0.108           | 0.095          |            |                |                 |                |                |              |  |  |
| 10-Dec-2014       |             | 0.117          | 0.102           | 0.095          |            |                |                 |                |                |              |  |  |
| 11-Dec-2014       |             | 0.106          | 0.157           | 0.107          |            |                |                 |                |                |              |  |  |
| 12-Dec-2014       |             | 0.155          | 0.134           | 0.115          |            |                |                 |                |                |              |  |  |
| 13-Dec-2014       |             | 0.125          | 0.116           | 0.107          |            |                |                 |                |                |              |  |  |
| 14-Dec-2014       |             |                | 1               | r              | •          | Sunday         | T               |                |                |              |  |  |
| 15-Dec-2014       |             | 0.138          | 0.114           | 0.182          |            |                |                 |                |                |              |  |  |
| 16-Dec-2014       |             | 0.153          | 0.141           | 0.120          |            |                |                 |                |                |              |  |  |
| 17-Dec-2014       |             | 0.114          | 0.129           | 0.109          |            |                | -               |                |                |              |  |  |
| 18-Dec-2014       |             | 0.113          | 0.142           | 0.185          |            |                |                 |                |                |              |  |  |
| 19-Dec-2014       |             | 0.201          | 0.157           | 0.158          |            |                |                 |                |                |              |  |  |
| 20-Dec-2014       |             | 0.126          | 0.114           | 0.102          |            |                |                 |                |                |              |  |  |
| 21-Dec-2014       |             |                | 1               | r              | •          | Sunday         | T               |                |                |              |  |  |
| 22-Dec-2014       |             | 0.120          | 0.114           | 0.103          |            |                |                 |                |                |              |  |  |
| 23-Dec-2014       |             | 0.106          | 0.141           | 0.112          |            |                |                 |                |                |              |  |  |
| 24-Dec-2014       |             | 0.099          | 0.141           | 0.133          |            | ļ              |                 |                |                |              |  |  |
| 25-Dec-2014       |             |                |                 |                |            | Holiday        |                 |                |                |              |  |  |
| 26-Dec-2014       | ļ,          |                | I               | Γ              | 1          | Holiday        | 1               | ,        •     |                | I            |  |  |
| 27-Dec-2014       |             | 0.103          | 0.126           | 0.110          |            |                | <u> </u>        |                |                |              |  |  |
| 28-Dec-2014       | ļ           |                | 1               |                |            | Sunday         | 1               | ,              |                |              |  |  |
| 29-Dec-2014       |             | 0.123          | 0.108           | 0.101          |            |                |                 |                |                |              |  |  |
| 30-Dec-2014       |             | 0.111          | 0.152           | 0.105          |            | ļ              | ļ               |                |                |              |  |  |
| 31-Dec-2014       |             | 0.150          | 0.103           | 0.120          |            |                |                 |                |                |              |  |  |

|                   |            |                |                 |                |                       |                 | ( Block 17 Fou | Indation Works | ; )          |  |  |  |
|-------------------|------------|----------------|-----------------|----------------|-----------------------|-----------------|----------------|----------------|--------------|--|--|--|
|                   |            |                |                 |                |                       | <i>a</i> . 1 b. | Trigger Levels |                |              |  |  |  |
|                   | 板電台        | は中領す           | _程有限            | 八司             | Monitoring Check Pts. |                 | Alert level    | Alarm level    | Action level |  |  |  |
| AA AA             | 互副         | 使年末上           | 一任何收            | 公司             | Vibration Monitoring  |                 | 2mm/s          | 2.5mm/s        | 3mm/s        |  |  |  |
| Win Win           | Way (      | Constructi     | on Compar       | nv L.td.       | # Vibration at        | largest span of | 5.0mm/s        | 6.0mm/s        | 7.5mm/s      |  |  |  |
|                   | , i u y v  | Jonisti ucti   | on compa        | ly Ltd.        | highest Str           | ructural level  | 5.01111/8      | 0.0mm/s        | 7.5000/5     |  |  |  |
|                   |            |                |                 | T 711 . 1 T    |                       |                 |                |                |              |  |  |  |
|                   |            |                |                 | Vibration R    | lecord                |                 |                |                |              |  |  |  |
| Project Title: Ce | entral Pol | ice Station Co | onservation & F | Revitalization | Project No:           | WP201           | 1-Jan-2015     | to             | 31-Jan-2015  |  |  |  |
|                   |            |                |                 |                |                       |                 |                |                |              |  |  |  |
| POINT             |            | VM17-1         | VM17-3 #        |                |                       |                 |                |                |              |  |  |  |
| DATE              | PD/(m)     | mm/s           | mm/s            |                |                       |                 |                |                |              |  |  |  |
| 19-Jun-2012 (Ir   |            | 0.13           | 0.37            |                |                       |                 |                |                |              |  |  |  |
| Surveying Date    |            |                |                 |                |                       |                 |                |                |              |  |  |  |
| 1-Jan-2015        |            |                |                 | P              | ublic Holiday         |                 |                |                |              |  |  |  |
| 2-Jan-2015        |            | 0.10           | 0.09            |                |                       |                 |                |                |              |  |  |  |
| 3-Jan-2015        |            | 0.12           | 0.10            |                |                       |                 |                |                |              |  |  |  |
| 4-Jan-2015        |            |                |                 |                | Sunday                |                 |                |                |              |  |  |  |
| 5-Jan-2015        |            | 0.10           | 0.10            |                |                       |                 |                |                |              |  |  |  |
| 6-Jan-2015        |            | 0.12           | 0.09            |                |                       |                 |                |                |              |  |  |  |
| 7-Jan-2015        |            | 0.11           | 0.11            |                |                       |                 |                |                |              |  |  |  |
| 8-Jan-2015        |            | 0.15           | 0.15            |                |                       |                 |                |                |              |  |  |  |
| 9-Jan-2015        |            | 0.16           | 0.12            |                |                       |                 |                |                |              |  |  |  |
| 10-Jan-2015       |            | 0.17           | 0.11            |                |                       |                 |                |                |              |  |  |  |
| 11-Jan-2015       |            |                |                 |                | Sunday                |                 |                |                |              |  |  |  |
| 12-Jan-2015       |            | 0.13           | 0.10            |                |                       |                 |                |                |              |  |  |  |
| 13-Jan-2015       |            | 0.16           | 0.17            |                |                       |                 |                |                |              |  |  |  |
| 14-Jan-2015       |            | 0.12           | 0.12            |                |                       |                 |                |                |              |  |  |  |
| 15-Jan-2015       |            | 0.11           | 0.12            |                |                       |                 |                |                |              |  |  |  |
| 16-Jan-2015       |            | 0.14           | 0.11            |                |                       |                 |                |                |              |  |  |  |
| 17-Jan-2015       |            | 0.11           | 0.14            |                |                       |                 |                |                |              |  |  |  |
| 18-Jan-2015       |            |                |                 |                | Sunday                |                 |                |                |              |  |  |  |
| 19-Jan-2015       |            | 0.11           | 0.11            |                |                       |                 |                |                |              |  |  |  |
| 20-Jan-2015       |            | 0.14           | 0.10            |                |                       |                 |                |                |              |  |  |  |
| 21-Jan-2015       |            | 0.10           | 0.11            |                |                       |                 |                |                |              |  |  |  |
| 22-Jan-2015       |            | 0.11           | 0.10            |                |                       |                 |                |                |              |  |  |  |
| 23-Jan-2015       |            | 0.14           | 0.11            |                |                       |                 |                |                |              |  |  |  |
| 24-Jan-2015       |            | 0.10           | 0.09            |                |                       |                 |                |                |              |  |  |  |
| 25-Jan-2015       |            |                |                 |                | Sunday                |                 |                |                |              |  |  |  |
| 26-Jan-2015       |            | 0.11           | 0.09            |                |                       |                 |                |                |              |  |  |  |
| 27-Jan-2015       |            | 0.13           | 0.09            |                |                       |                 |                |                |              |  |  |  |
| 28-Jan-2015       |            | 0.13           | 0.07            |                |                       |                 |                |                |              |  |  |  |
| 29-Jan-2015       |            | 0.14           | 0.18            |                |                       |                 |                |                |              |  |  |  |
| 30-Jan-2015       |            | 0.15           | 0.15            |                |                       |                 |                |                |              |  |  |  |
| 31-Jan-2015       |            | 0.14           | 0.07            |                |                       |                 |                |                |              |  |  |  |




| Gia    | /Pipe Pile Walls                                                    | 3/3053/11 (BLK 17&56) (HW)(S)                                                                                                                             |
|--------|---------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| UI MIC | House House                                                         | F.S.D. Ref. No. 消防虚检索编张                                                                                                                                   |
|        | CHO/                                                                | Revision/Submission 佳改哉/ 提出<br>No. 编辑 Description 说明 Date日期 Approved 審定                                                                                   |
| 7//    |                                                                     | - BD SUBMISSION 12/11 JS                                                                                                                                  |
| 21     | 1000                                                                |                                                                                                                                                           |
| 15     | Shiu King<br>Court                                                  |                                                                                                                                                           |
|        | L-TL I - F                                                          |                                                                                                                                                           |
|        | Ovidio                                                              |                                                                                                                                                           |
| th     | 2 68                                                                |                                                                                                                                                           |
| 1      | The second second                                                   |                                                                                                                                                           |
| 1.2    | 100 100 10                                                          |                                                                                                                                                           |
|        | 100 000 100 100 000 000                                             |                                                                                                                                                           |
| 40.4   | of the former                                                       | Plan Approved                                                                                                                                             |
| -01    | Et and the second second                                            | X                                                                                                                                                         |
| il.    | 354                                                                 | Chief Structural Engineer                                                                                                                                 |
|        | 1                                                                   | for BUILDING AUTHORITY<br>2 0 FEB 2012                                                                                                                    |
| 1 52   | the last                                                            |                                                                                                                                                           |
| -115   | W-B/R176                                                            | Key Plan 索引圖                                                                                                                                              |
| -41    |                                                                     | Store A                                                                                                                                                   |
|        | E Astronomical Contractions                                         |                                                                                                                                                           |
| T      | Podi                                                                | · · · · · · · · · · · · · · · · · · ·                                                                                                                     |
|        |                                                                     | 0 0 0 0                                                                                                                                                   |
|        | ANT A                                                               | 40.00                                                                                                                                                     |
|        | Miter X                                                             |                                                                                                                                                           |
| 11     | AN ANTINA                                                           | BD SUBMISSION                                                                                                                                             |
|        | W III                                                               | Drawing Status 製圖狀況 - This drawing and the contents herein are the copyright                                                                              |
| 1 /3)  | KWAN KIN KEI<br>CEng FISmete MICH ESCH<br>MEDISTERED STRUCTAL ENGER | of relevant consultants.<br>本關紙及其內省的版標層有調驗問公司所有。<br>- No part of the drawing and the design contained herein                                              |
| 11     | MEGISTERED STUCCTORAL ENDERING                                      | may be reproduced without the prior written consent of<br>relevant concultance.<br>未经有關請問公司書面同意。不得複製此圖紙內任何                                                |
|        |                                                                     | 內容或設計。<br>- Do not take measurements directly from this drawing<br>初勿直接從圓紅上量度尺寸。                                                                          |
| O- 100 | EXISTING FRESH WATER MAIN                                           | <ul> <li>Check and verify all dimensions or site.</li> <li>所有尺寸必須在工地規堪検許及審核。</li> <li>Read this drawing in conjunction with the specifications</li> </ul> |
| ©      | and the cash in the man                                             | and all other related drawings.<br>此圈話必须與我格說明書及其它有關圈試一併閱讀。<br>- Notify the relevant consultants immediately of any                                        |
| EXIST  | ING STREET LIGHTING NO. 33488-A1<br>EXISTING STREET LIGHTING CABLE  | discrepancy found herein.<br>如發現內容有任何謬誤之處,應立刻通知有讚解問公司。                                                                                                    |
| A 150  | EXISTING GAS MAIN                                                   |                                                                                                                                                           |
| 1330   | EXISTING HV ELECTRICITY CABLE                                       | 赛馬會文物保有有限公司<br>The Jockey Club CPS Limited                                                                                                                |
| LV     | EXISTING LV ELECTRICITY CABLE                                       |                                                                                                                                                           |
| HZ -   | EXISTING TELECOMMUNICATION DUCT<br>(HUTCHISON GLOBAL COMMUNICATIONS | Conservation Architect                                                                                                                                    |
| 22     | LIMITED)<br>EXISTING STORNWATER DRAIN                               |                                                                                                                                                           |
| 150    | EXISTING FOUL SEWER                                                 | Executive Architect / AP                                                                                                                                  |
| 12     | PROPOSED FOUL SEWER                                                 | 记书和<br>Structural Engineer / RSE E & M Engineer                                                                                                           |
|        | SITE BOUNDARY                                                       | ARUP                                                                                                                                                      |
|        | EXISTING RETAINING WALL                                             | Project 项目<br>CENTRAL POLICE STATION                                                                                                                      |
| ,P)    | EXISTING DRILLHOLE WITH<br>STANDPIPE/PIEZOMETER                     | CONSERVATION AND REVITALISATION<br>PROJECT                                                                                                                |
| -1     | PROPOSED BUILDING SETTLEMENT<br>POINTS/TILITMETER                   | Drawing Title III名<br>MONITORING LAYOUT PLAN                                                                                                              |
| 174-1  | PROPOSED RETAINING WALL SETLEMENT<br>POINTS/TILITMETER              |                                                                                                                                                           |
|        | PROPOSED INCLINOMETER TO BE BALLT IN                                | Scale LE 191 Drawn Still Checked 4281<br>1:300041 K.C.Loi AL                                                                                              |
|        | BORED PILE OR FIPE PILE WALL<br>PROPOSED GROUND SETTLEMENT POINTS   | Drawing No. 国弦 Revision 你说能<br>00-0AP209674-G-001 -                                                                                                       |
|        | PROPOSED UTILITY WONITORING POINTS                                  |                                                                                                                                                           |
| ĵ.     | PROPOSED VIBRATION MONITORING POINTS                                |                                                                                                                                                           |
| (S/P)  |                                                                     |                                                                                                                                                           |
| 1.01.1 | PROPOSED ADDITIONAL DRILLHOLE                                       |                                                                                                                                                           |

|                            | 恆誠建築                  | 工程方阳           | 八司              |           | <b></b>       | ( _ 5.0         | d Pile Walls / Pipe                                                           |         |                       |  |
|----------------------------|-----------------------|----------------|-----------------|-----------|---------------|-----------------|-------------------------------------------------------------------------------|---------|-----------------------|--|
| <b>A A A A A A A A A A</b> | 也誠建架                  | 上任有限           | 公司              |           | Monitoring    | Check Pts.      | Trigger Levels           Alert level         Alarm level         Action level |         |                       |  |
| Win Win                    | Way Construc          | tion Compa     | ny Ltd.         |           | Vibration     | Monitoring      | 2mm/s                                                                         | 2.5mm/s | Action level<br>3mm/s |  |
|                            | •                     |                |                 |           |               | largest span of |                                                                               |         |                       |  |
|                            |                       |                |                 |           |               | uctural level   | 5.0mm/s                                                                       | 6.0mm/s | 7.5mm/s               |  |
|                            |                       |                |                 | Vibration | Record        |                 |                                                                               |         |                       |  |
| Project Title: Co          | entral Police Station | Conservation a | & Revitalizatio | on        | Project No: W | P201            | 1-Nov-2014                                                                    | to      | 30-Nov-2014           |  |
| POINT                      | <b>VM</b> 8-1         | VM11-1#        | VM11-2          | VM12-1#   | VM12-2        | VM14-3          | VM17-1                                                                        | VM17-2  | VM17-3 #              |  |
| DATE P                     | D/(m) mm/s            | mm/s           | mm/s            | mm/s      | mm/s          | mm/s            | mm/s                                                                          | mm/s    | mm/s                  |  |
| 19-Jun-2012 (Ini           |                       | 0.13           | 0.19            | 0.22      | 0.13          | 0.21            | 0.13                                                                          | 0.13    | 0.37                  |  |
| Surveying Date             |                       |                |                 |           |               |                 |                                                                               |         |                       |  |
| 1-Nov-2014                 | 0.20                  | 0.18           | 0.10            | 0.20      | 0.16          | 0.17            | 0.09                                                                          | 0.10    | 0.10                  |  |
| 2-Nov-2014                 |                       |                |                 |           | Sunday        |                 |                                                                               |         |                       |  |
| 3-Nov-2014                 | 0.37                  | 0.16           | 0.11            | 0.32      | 0.15          | 0.56            | 0.12                                                                          | 0.07    | 0.10                  |  |
| 4-Nov-2014                 | 0.32                  | 0.19           | 0.13            | 0.16      | 0.14          | 0.18            | 0.10                                                                          | 0.10    | 0.08                  |  |
| 5-Nov-2014                 | 0.14                  | 0.19           | 0.15            | 0.20      | 0.16          | 0.25            | 0.10                                                                          | 0.11    | 0.10                  |  |
| 6-Nov-2014                 | 0.17                  | 0.17           | 0.11            | 0.18      | 0.15          | 0.22            | 0.11                                                                          | 0.12    | 0.09                  |  |
| 7-Nov-2014                 | 0.17                  | 0.18           | 0.13            | 0.21      | 0.14          | 0.31            | 0.09                                                                          | 0.10    | 0.07                  |  |
| 8-Nov-2014                 | 0.19                  | 0.17           | 0.12            | 0.19      | 0.16          | 0.17            | 0.12                                                                          | 0.10    | 0.10                  |  |
| 9-Nov-2014                 | 1                     | 1              |                 | 1         | Sunday        |                 | , ,                                                                           |         | -                     |  |
| 10-Nov-2014                | 0.22                  | 0.14           | 0.14            | 0.13      | 0.15          | 0.14            | 0.10                                                                          | 0.08    | 0.10                  |  |
| 11-Nov-2014                | 0.19                  | 0.20           | 0.17            | 0.19      | 0.20          | 0.19            | 0.12                                                                          | 0.10    | 0.09                  |  |
| 12-Nov-2014                | 0.13                  | 0.19           | 0.19            | 0.32      | 0.13          | 0.16            | 0.11                                                                          | 0.12    | 0.09                  |  |
| 13-Nov-2014                | 0.14                  | 0.16           | 0.17            | 0.25      | 0.12          | 0.16            | 0.14                                                                          | 0.12    | 0.07                  |  |
| 14-Nov-2014                | 0.17                  | 0.13           | 0.17            | 0.20      | 0.12          | 0.18            | 0.14                                                                          | 0.12    | 0.07                  |  |
| 15-Nov-2014                | 0.17                  | 0.20           | 0.19            | 0.13      | 0.17          | 0.19            | 0.11                                                                          | 0.12    | 0.10                  |  |
| 16-Nov-2014                |                       | 0.15           | 0.1.5           | 0.10      | Sunday        | 0.10            | 0.40                                                                          | 0.10    | 0.00                  |  |
| 17-Nov-2014                | 0.20                  | 0.15           | 0.16            | 0.18      | 0.13          | 0.18            | 0.10                                                                          | 0.10    | 0.09                  |  |
| 18-Nov-2014                | 0.13                  | 0.17           | 0.11            | 0.14      | 0.12          | 0.15            | 0.11                                                                          | 0.09    | 0.12                  |  |
| 19-Nov-2014<br>20-Nov-2014 | 0.12                  | 0.14           | 0.13            | 0.20      | 0.11          | 0.20            | 0.10                                                                          | 0.09    | 0.11                  |  |
| 20-Nov-2014<br>21-Nov-2014 | 0.19                  | 0.16           | 0.13            | 0.16      | 0.10          | 0.18            | 0.17                                                                          | 0.11    | 0.16                  |  |
| 21-Nov-2014<br>22-Nov-2014 | 0.18                  | 0.13           | 0.16            |           | 0.12 0.12     |                 | 0.15                                                                          | 0.14    | 0.13                  |  |
| 22-Nov-2014<br>23-Nov-2014 | 0.17                  | 0.17           | 0.11            | 0.19      | Sunday        | 0.18            | 0.12                                                                          | 0.12    | 0.11                  |  |
| 23-Nov-2014<br>24-Nov-2014 | 0.14                  | 0.20           | 0.15            | 0.15      | 0.18          | 0.20            | 0.16                                                                          | 0.11    | 0.16                  |  |
| 25-Nov-2014                | 0.12                  | 0.20           | 0.13            | 0.13      | 0.18          | 0.20            | 0.10                                                                          | 0.11    | 0.16                  |  |
| 26-Nov-2014                | 0.12                  | 0.17           | 0.13            | 0.18      | 0.12          | 0.15            | 0.10                                                                          | 0.13    | 0.10                  |  |
| 27-Nov-2014                | 0.14                  | 0.20           | 0.10            | 0.19      | 0.15          | 0.15            | 0.14                                                                          | 0.10    | 0.12                  |  |
| 28-Nov-2014                | 0.14                  | 0.15           | 0.10            | 0.19      | 0.10          | 0.10            | 0.14                                                                          | 0.10    | 0.13                  |  |
| 29-Nov-2014                | 0.10                  | 0.13           | 0.19            | 0.17      | 0.10          | 0.17            | 0.17                                                                          | 0.17    | 0.17                  |  |
| 30-Nov-2014                |                       |                | /               | !         | Sunday        | ł               | <u>۱</u>                                                                      |         | 4                     |  |

| 14/14          |           |                |                |                 |           |                       | ( Bored         | d Pile Walls / Pipe                   | Pile Walls at F | Block 50 )   |
|----------------|-----------|----------------|----------------|-----------------|-----------|-----------------------|-----------------|---------------------------------------|-----------------|--------------|
| WV             | / 個言      | 成建築            | L程有限           | 公司              |           | Manitaria             |                 |                                       |                 |              |
|                |           |                |                |                 |           | Monitoring Check Pts. |                 | Alert level                           | Alarm level     | Action level |
| Win W          | in Way    | Construct      | tion Compa     | ny Ltd.         |           | Vibration             | Monitoring      | 2mm/s                                 | 2.5mm/s         | 3mm/s        |
|                |           |                |                |                 |           |                       | largest span of | 5.0mm/s                               | 6.0mm/s         | 7.5mm/s      |
|                |           |                |                |                 |           | nignest Str           | ructural level  |                                       |                 |              |
|                |           |                |                |                 | Vibration | Record                |                 |                                       |                 |              |
| Project Title: | Central F | Police Station | Conservation d | & Revitalizatio | n         | Project No: W         | /P201           | 1-Dec-2014                            | to              | 31-Dec-2014  |
| POINT          |           | VM8-1          | VM11-1#        | VM11-2          | VM12-1#   | VM12-2                | VM14-3          | VM17-1                                | VM17-2          | VM17-3 #     |
| DATE           | PD/(m)    | mm/s           | mm/s           | mm/s            | mm/s      | mm/s                  | mm/s            | mm/s                                  | mm/s            | mm/s         |
| 19-Jun-2012    | (Initial) | 0.560          | 0.130          | 0.190           | 0.220     | 0.130                 | 0.210           | 0.130                                 | 0.130           | 0.370        |
| Surveying Date | :         |                |                |                 |           | 1                     |                 |                                       |                 | T            |
| 1-Dec-2014     |           | 0.322          | 0.147          | 0.132           | 0.198     | 0.121                 | 0.132           | 0.111                                 | 0.102           | 0.105        |
| 2-Dec-2014     |           | 0.156          | 0.132          | 0.111           | 0.198     | 0.132                 | 0.182           | 0.103                                 | 0.093           | 0.101        |
| 3-Dec-2014     |           | 0.212          | 0.113          | 0.103           | 0.151     | 0.120                 | 0.192           | 0.141                                 | 0.105           | 0.082        |
| 4-Dec-2014     |           | 0.165          | 0.180          | 0.123           | 0.164     | 0.154                 | 0.147           | 0.132                                 | 0.097           | 0.116        |
| 5-Dec-2014     |           | 0.148          | 0.122          | 0.168           | 0.121     | 0.198                 | 0.136           | 0.113                                 | 0.143           | 0.097        |
| 6-Dec-2014     |           | 0.216          | 0.193          | 0.147           | 0.122     | 0.103                 | 0.146           | 0.106                                 | 0.098           | 0.087        |
| 7-Dec-2014     |           |                |                |                 |           | Sunday                | 1               |                                       |                 | 4            |
| 8-Dec-2014     |           | 0.331          | 0.152          | 0.106           | 0.135     | 0.133                 | 0.126           | 0.103                                 | 0.085           | 0.110        |
| 9-Dec-2014     |           | 0.182          | 0.115          | 0.103           | 0.172     | 0.114                 | 0.134           | 0.103                                 | 0.108           | 0.095        |
| 10-Dec-2014    |           | 0.192          | 0.114          | 0.132           | 0.152     | 0.103                 | 0.151           | 0.117                                 | 0.102           | 0.095        |
| 11-Dec-2014    |           | 0.152          | 0.216          | 0.138           | 0.115     | 0.108                 | 0.125           | 0.106                                 | 0.157           | 0.107        |
| 12-Dec-2014    |           | 0.131          | 0.130          | 0.105           | 0.168     | 0.111                 | 0.118           | 0.155                                 | 0.134           | 0.115        |
| 13-Dec-2014    |           | 0.168          | 0.166          | 0.115           | 0.172     | 0.132                 | 0.182           | 0.125                                 | 0.116           | 0.107        |
| 14-Dec-2014    |           |                |                |                 |           | Sunday                |                 |                                       |                 | -            |
| 15-Dec-2014    |           | 0.151          | 0.136          | 0.104           | 0.120     | 0.183                 | 0.114           | 0.138                                 | 0.114           | 0.182        |
| 16-Dec-2014    |           | 0.182          | 0.136          | 0.112           | 0.103     | 0.154                 | 0.119           | 0.153                                 | 0.141           | 0.120        |
| 17-Dec-2014    |           | 0.135          | 0.114          | 0.165           | 0.112     | 0.130                 | 0.162           | 0.114                                 | 0.129           | 0.109        |
| 18-Dec-2014    |           | 0.166          | 0.114          | 0.133           | 0.182     | 0.145                 | 0.149           | 0.113                                 | 0.142           | 0.185        |
| 19-Dec-2014    |           | 0.165          | 0.121          | 0.127           | 0.162     | 0.149                 | 0.119           | 0.201                                 | 0.157           | 0.158        |
| 20-Dec-2014    |           | 0.117          | 0.196          | 0.154           | 0.152     | 0.114                 | 0.192           | 0.126                                 | 0.114           | 0.102        |
| 21-Dec-2014    |           |                |                |                 |           | Sunday                |                 |                                       |                 |              |
| 22-Dec-2014    |           | 0.168          | 0.111          | 0.165           | 0.132     | 0.103                 | 0.171           | 0.120                                 | 0.114           | 0.103        |
| 23-Dec-2014    |           | 0.196          | 0.116          | 0.162           | 0.106     | 0.153                 | 0.126           | 0.106                                 | 0.141           | 0.112        |
| 24-Dec-2014    |           | 0.124          | 0.126          | 0.113           | 0.102     | 0.149                 | 0.131           | 0.099                                 | 0.141           | 0.133        |
| 25-Dec-2014    |           |                |                |                 |           | Holiday               |                 | · · · · · · · · · · · · · · · · · · · |                 |              |
| 26-Dec-2014    |           |                |                |                 |           | Holiday               |                 |                                       |                 |              |
| 27-Dec-2014    |           | 0.135          | 0.146          | 0.108           | 0.171     | 0.155                 | 0.116           | 0.103                                 | 0.126           | 0.110        |
| 28-Dec-2014    |           |                |                |                 |           | Sunday                |                 | · · · · · · · · · · · · · · · · · · · |                 |              |
| 29-Dec-2014    |           | 0.159          | 0.118          | 0.103           | 0.136     | 0.158                 | 0.116           | 0.123                                 | 0.108           | 0.101        |
| 30-Dec-2014    |           | 0.121          | 0.165          | 0.121           | 0.103     | 0.165                 | 0.152           | 0.111                                 | 0.152           | 0.105        |
| 31-Dec-2014    |           | 0.192          | 0.123          | 0.125           | 0.136     | 0.114                 | 0.123           | 0.150                                 | 0.103           | 0.120        |

| 14/14/              |          |              |                |                 |           |               | (Bored                           | d Pile Walls / Pipe | e Pile Walls at E | Block 50)    |
|---------------------|----------|--------------|----------------|-----------------|-----------|---------------|----------------------------------|---------------------|-------------------|--------------|
| VV VV               | 恆誠       | 建築           | L程有限           | 公司              |           | Monitorin     | chaol: Dto                       |                     | Trigger Levels    |              |
|                     |          |              |                |                 |           | WOIIItOTIII   | g Check Pts.                     | Alert level         | Alarm level       | Action level |
| Win Win V           | Nay C    | Construct    | tion Compa     | ny Ltd.         |           | Vibration     | Monitoring                       | 2mm/s               | 2.5mm/s           | 3mm/s        |
|                     |          |              |                |                 |           |               | largest span of<br>uctural level | 5.0mm/s             | 6.0mm/s           | 7.5mm/s      |
|                     |          |              |                |                 | Vibration | Record        |                                  |                     |                   |              |
| Project Title: Cen  | tral Pol | lice Station | Conservation & | & Revitalizatio |           | Project No: W | /P201                            | 1-Jan-2015          | to                | 31-Jan-2015  |
|                     |          |              |                |                 |           |               |                                  |                     |                   |              |
| POINT               |          | VM8-1        | VM11-1#        | VM11-2          | VM12-1#   | VM12-2        | VM14-3                           | VM17-1              | VM17-2            | VM17-3 #     |
| DATE PD/            | /(m)     | mm/s         | mm/s           | mm/s            | mm/s      | mm/s          | mm/s                             | mm/s                | mm/s              | mm/s         |
| 19-Jun-2012 (Initia | ıl)      | 0.56         | 0.13           | 0.19            | 0.22      | 0.13          | 0.21                             | 0.13                | 0.13              | 0.37         |
| Surveying Date      |          |              |                |                 |           |               |                                  |                     |                   |              |
| 1-Jan-2015          |          |              |                |                 | Pi        | ublic Holiday |                                  |                     |                   |              |
| 2-Jan-2015          |          | 0.13         | 0.13           | 0.11            | 0.10      | 0.13          | 0.15                             | 0.10                | 0.11              | 0.09         |
| 3-Jan-2015          |          | 0.16         | 0.14           | 0.12            | 0.12      | 0.17          | 0.17                             | 0.12                | 0.10              | 0.10         |
| 4-Jan-2015          |          |              |                |                 |           | Sunday        | •                                |                     |                   |              |
| 5-Jan-2015          |          | 0.14         | 0.11           | 0.10            | 0.12      | 0.12          | 0.13                             | 0.10                | 0.12              | 0.10         |
| 6-Jan-2015          |          | 0.12         | 0.15           | 0.17            | 0.11      | 0.12          | 0.11                             | 0.12                | 0.10              | 0.09         |
| 7-Jan-2015          |          | 0.20         | 0.12           | 0.19            | 0.10      | 0.17          | 0.13                             | 0.11                | 0.11              | 0.11         |
| 8-Jan-2015          |          | 0.14         | 0.16           | 0.15            | 0.10      | 0.14          | 0.11                             | 0.15                | 0.13              | 0.15         |
| 9-Jan-2015          |          | 0.11         | 0.12           | 0.12            | 0.14      | 0.13          | 0.13                             | 0.16                | 0.16              | 0.12         |
| 10-Jan-2015         |          | 0.13         | 0.15           | 0.13            | 0.12      | 0.18          | 0.14                             | 0.17                | 0.15              | 0.11         |
| 11-Jan-2015         |          |              |                |                 |           | Sunday        |                                  |                     |                   |              |
| 12-Jan-2015         |          | 0.12         | 0.14           | 0.14            | 0.10      | 0.16          | 0.13                             | 0.13                | 0.12              | 0.10         |
| 13-Jan-2015         |          | 0.16         | 0.11           | 0.16            | 0.11      | 0.14          | 0.14                             | 0.16                | 0.12              | 0.17         |
| 14-Jan-2015         |          | 0.13         | 0.13           | 0.17            | 0.10      | 0.11          | 0.12                             | 0.12                | 0.11              | 0.12         |
| 15-Jan-2015         |          | 0.11         | 0.18           | 0.13            | 0.11      | 0.13          | 0.15                             | 0.11                | 0.13              | 0.12         |
| 16-Jan-2015         |          | 0.13         | 0.11           | 0.13            | 0.10      | 0.10          | 0.15                             | 0.14                | 0.11              | 0.11         |
| 17-Jan-2015         |          | 0.11         | 0.13           | 0.12            | 0.09      | 0.11          | 0.18                             | 0.11                | 0.11              | 0.14         |
| 18-Jan-2015         |          |              |                |                 |           | Sunday        |                                  |                     |                   |              |
| 19-Jan-2015         |          | 0.10         | 0.14           | 0.11            | 0.11      | 0.10          | 0.17                             | 0.11                | 0.11              | 0.11         |
| 20-Jan-2015         |          | 0.11         | 0.13           | 0.16            | 0.10      | 0.11          | 0.20                             | 0.14                | 0.11              | 0.10         |
| 21-Jan-2015         |          | 0.14         | 0.11           | 0.12            | 0.11      | 0.12          | 0.12                             | 0.10                | 0.11              | 0.11         |
| 22-Jan-2015         |          | 0.11         | 0.11           | 0.12            | 0.10      | 0.15          | 0.16                             | 0.11                | 0.14              | 0.10         |
| 23-Jan-2015         |          | 0.11         | 0.13           | 0.10            | 0.11      | 0.14          | 0.14                             | 0.14                | 0.10              | 0.11         |
| 24-Jan-2015         |          | 0.14         | 0.11           | 0.11            | 0.11      | 0.16          | 0.12                             | 0.10                | 0.11              | 0.09         |
| 25-Jan-2015         |          |              |                |                 |           | Sunday        |                                  |                     |                   |              |
| 26-Jan-2015         |          | 0.10         | 0.18           | 0.13            | 0.11      | 0.12          | 0.14                             | 0.11                | 0.10              | 0.09         |
| 27-Jan-2015         |          | 0.11         | 0.15           | 0.10            | 0.11      | 0.11          | 0.12                             | 0.13                | 0.10              | 0.09         |
| 28-Jan-2015         |          | 0.17         | 0.17           | 0.12            | 0.11      | 0.18          | 0.20                             | 0.13                | 0.12              | 0.07         |
| 29-Jan-2015         |          | 0.15         | 0.14           | 0.10            | 0.12      | 0.18          | 0.11                             | 0.14                | 0.11              | 0.18         |
| 30-Jan-2015         |          | 0.14         | 0.16           | 0.15            | 0.10      | 0.14          | 0.11                             | 0.15                | 0.13              | 0.15         |
| 31-Jan-2015         |          | 0.11         | 0.16           | 0.17            | 0.15      | 0.12          | 0.16                             | 0.14                | 0.12              | 0.07         |

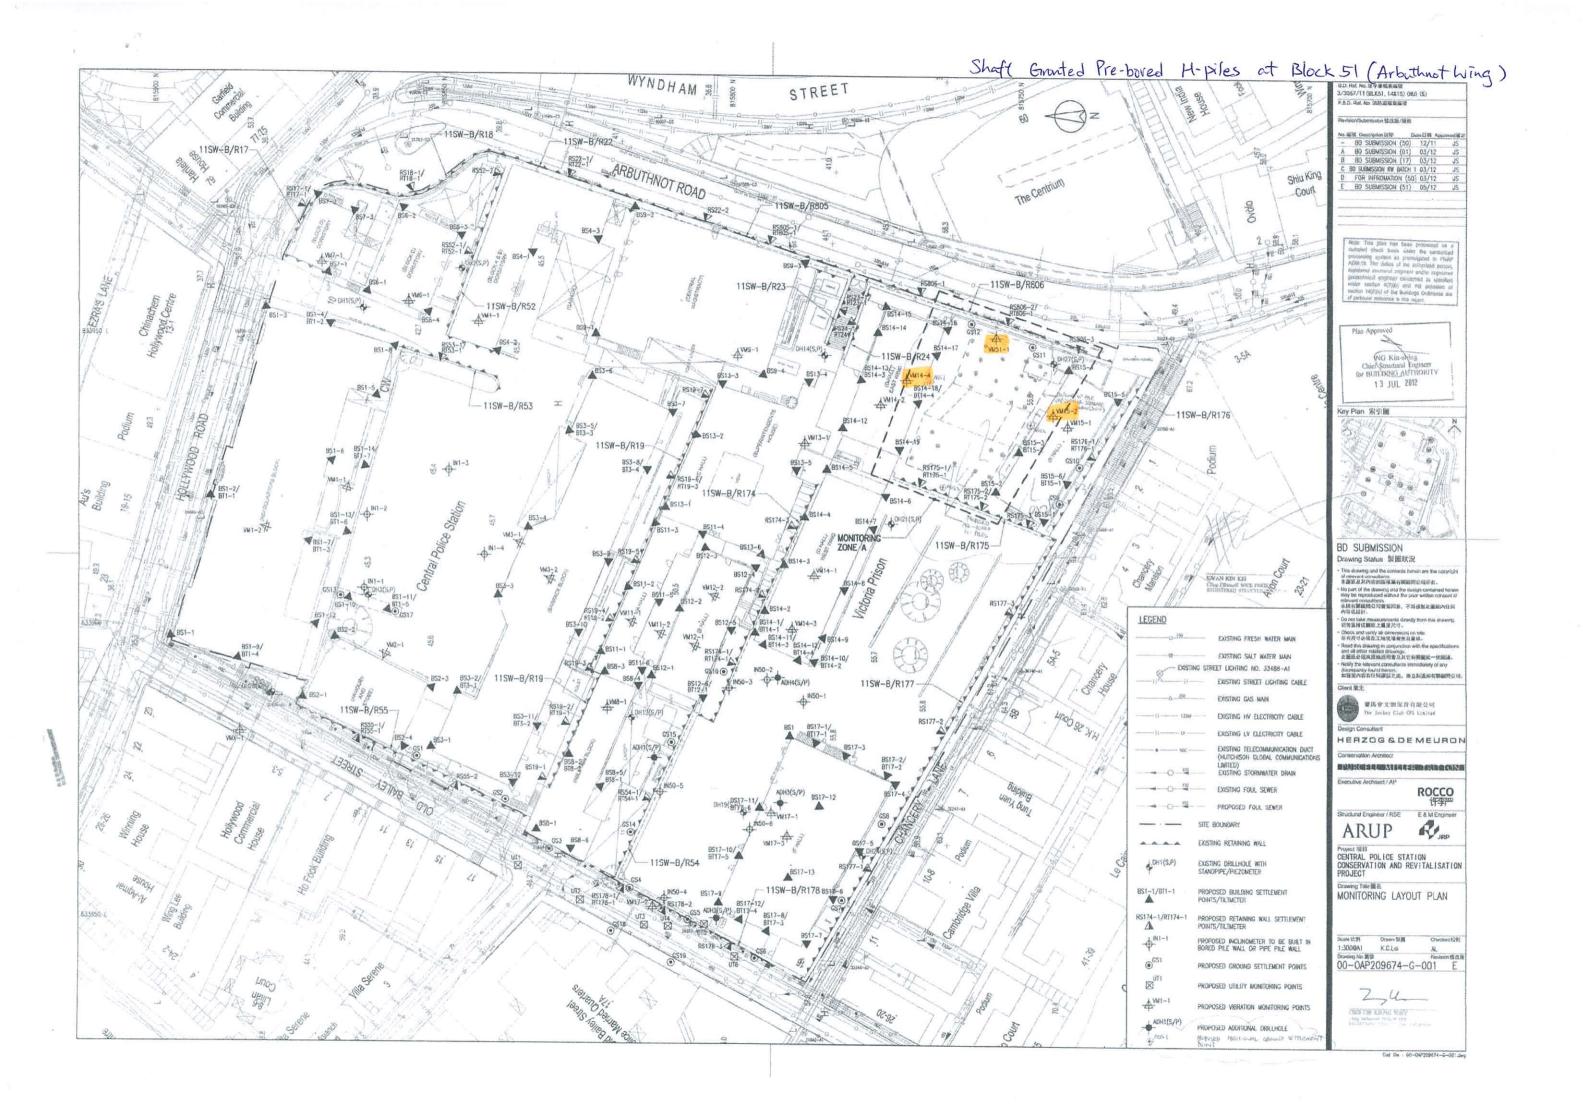

|                            |                      |              |                   |           |            | ( Sh         | aft Grouted Pre-bor | ed H-piles at E | Block 51)    |  |
|----------------------------|----------------------|--------------|-------------------|-----------|------------|--------------|---------------------|-----------------|--------------|--|
|                            | ት7 <del>ቱ</del> ለታ ተ |              | र ज्ञ             | Г         |            |              | Trigger Levels      |                 |              |  |
| WW 恆調                      | 戏建梁上                 | . 住 何 限 2    | ンロ                |           | Monitoring | g Check Pts. | Alert level         | Alarm level     | Action level |  |
|                            |                      |              |                   |           | Vibrating  | Monitoring   | 2mm/s               | 2.5mm/s         | 3mm/s        |  |
| Win Win Way                | Constructio          | on Company   | <sup>7</sup> Ltd. | -         |            |              |                     |                 |              |  |
|                            |                      |              | Vil               | bration R | lecord     |              |                     |                 |              |  |
| Project Title: Centra      | l Police Statior     | Conservation | & Revitalization  | Project   | No: WP201  |              | 1-Nov-2014          | to              | 30-Nov-2014  |  |
| POINT                      | VM14-4               | VM15-2       | VM51-1            |           |            |              |                     |                 |              |  |
| DATE PD/(m)                | mm/s                 | mm/s         | mm/s              |           |            |              |                     |                 |              |  |
| 03-Dec-2012 (Initial)      | 0.14                 | 0.21         | 0.3               |           |            |              |                     |                 |              |  |
| 1-Nov-2014                 | 0.31                 | 0.18         | 0.16              |           |            |              |                     |                 |              |  |
| 2-Nov-2014                 |                      | 1            | · · · ·           |           | Sunday     | 1            |                     |                 | 1            |  |
| 3-Nov-2014                 | 0.15                 | 0.11         | 0.13              |           |            |              |                     |                 |              |  |
| 4-Nov-2014                 | 0.17                 | 0.14         | 0.20              |           |            |              |                     |                 |              |  |
| 5-Nov-2014                 | 0.30                 | 0.16         | 0.16              |           |            |              |                     |                 |              |  |
| 6-Nov-2014                 | 0.25                 | 0.12         | 0.18              |           |            |              |                     |                 |              |  |
| 7-Nov-2014                 | 0.20                 | 0.11         | 0.16              |           |            |              |                     |                 |              |  |
| 8-Nov-2014                 | 0.16                 | 0.18         | 0.33              |           |            |              |                     |                 |              |  |
| 9-Nov-2014                 | 1                    | [            | <u>г т т</u>      |           | Sunday     | 1            |                     |                 | 1            |  |
| 10-Nov-2014                | 0.20                 | 0.13         | 0.19              |           |            |              |                     |                 |              |  |
| 11-Nov-2014                | 0.16                 | 0.14         | 0.17              |           |            |              |                     |                 |              |  |
| 12-Nov-2014                | 0.14                 | 0.21         | 0.19              |           |            |              |                     |                 |              |  |
| 13-Nov-2014                | 0.13                 | 0.20         | 0.17              |           |            |              |                     |                 |              |  |
| 14-Nov-2014                | 0.14                 | 0.19         | 0.14              |           |            |              |                     |                 |              |  |
| 15-Nov-2014                | 0.19                 | 0.15         | 0.20              |           | 0 1        |              |                     |                 |              |  |
| 16-Nov-2014                |                      |              |                   |           | Sunday     |              |                     |                 |              |  |
| 17-Nov-2014<br>18-Nov-2014 | 0.17                 | 0.16         | 0.17              |           |            |              |                     |                 |              |  |
| 18-Nov-2014<br>19-Nov-2014 | 0.20                 | 0.15         | 0.15              |           |            |              |                     |                 |              |  |
|                            | 0.17                 | 0.19         | 0.17              |           |            |              |                     |                 |              |  |
| 20-Nov-2014<br>21-Nov-2014 | 0.20                 | 0.13         | 0.18              |           |            |              |                     |                 |              |  |
| 21-Nov-2014<br>22-Nov-2014 | 0.19                 | 0.16         | 0.20              |           |            |              |                     |                 |              |  |
| 22-Nov-2014<br>23-Nov-2014 | 0.20                 | 0.15         | 0.15              |           | Sunday     | I            |                     |                 | 1            |  |
| 23-Nov-2014<br>24-Nov-2014 | 0.24                 | 0.19         | 0.16              |           | Sunuay     |              |                     |                 |              |  |
| 24-Nov-2014<br>25-Nov-2014 | 0.24 0.15            | 0.18 0.21    | 0.16 0.17         |           |            |              |                     |                 |              |  |
| 26-Nov-2014                | 0.15                 | 0.21         | 0.17              |           |            |              |                     |                 |              |  |
| 20-Nov-2014<br>27-Nov-2014 | 0.13                 | 0.15         |                   |           |            |              |                     |                 |              |  |
| 27-Nov-2014<br>28-Nov-2014 | 0.13                 | 0.19         | 0.11 0.17         |           |            |              |                     |                 |              |  |
| 29-Nov-2014                | 0.16                 | 0.14         | 0.17              |           |            |              |                     |                 |              |  |
| 30-Nov-2014                | 0.15                 | 0.14         | 0.15              |           | Sunday     | ļ            | _ <b> </b>          |                 | ļ            |  |

|                          |                |                |                  |           |            | ( Sh        | aft Grouted Pre-bo | ed H-piles at E | Block 51)   |  |
|--------------------------|----------------|----------------|------------------|-----------|------------|-------------|--------------------|-----------------|-------------|--|
| WW 恆誠                    | 建筑工            | 积右阻/           | 入司               |           | Monitoring | Check Pts   | Trigger Levels     |                 |             |  |
| 四戚                       | / 注 宋 上        | 1至行122         | イロ               |           |            | Alert level | Alarm level        | Action level    |             |  |
| Win Win Way C            | onstructio     | n Company      | 7 I td           |           | Vibrating  | Monitoring  | 2mm/s              | 2.5mm/s         | 3mm/s       |  |
| vvшi vvшi vvay С         | onstructio     | n Company      |                  |           |            |             |                    |                 |             |  |
|                          |                |                | Vi               | bration 1 | Record     |             |                    |                 |             |  |
| Project Title: Central I | Police Station | Conservation a | & Revitalization | Project   | No: WP201  |             | 1-Dec-2014         | to              | 31-Dec-2014 |  |
| POINT                    | VM14-4         | VM15-2         | VM51-1           |           |            |             |                    |                 |             |  |
| DATE PD/(m)              | mm/s           | mm/s           | mm/s             |           |            |             |                    |                 |             |  |
| 03-Dec-2012 (Initial)    | 0.140          | 0.210          | 0.300            |           |            |             |                    |                 |             |  |
| 1-Dec-2014               | 0.161          | 0.133          | 0.125            |           |            |             |                    |                 |             |  |
| 2-Dec-2014               | 0.139          | 0.121          | 0.165            |           |            |             |                    |                 |             |  |
| 3-Dec-2014               | 0.116          | 0.166          | 0.147            |           |            |             |                    |                 |             |  |
| 4-Dec-2014               | 0.131          | 0.15           | 0.311            |           |            |             |                    |                 |             |  |
| 5-Dec-2014               | 0.157          | 0.204          | 0.135            |           |            |             |                    |                 |             |  |
| 6-Dec-2014               | 0.112          | 0.135          | 0.172            |           |            |             |                    |                 |             |  |
| 7-Dec-2014               |                | r              |                  |           | Sunday     |             | 1                  |                 | T           |  |
| 8-Dec-2014               | 0.137          | 0.103          | 0.149            |           |            |             |                    |                 |             |  |
| 9-Dec-2014               | 0.119          | 0.138          | 0.125            |           |            |             |                    |                 |             |  |
| 10-Dec-2014              | 0.125          | 0.162          | 0.173            |           |            |             |                    |                 |             |  |
| 11-Dec-2014              | 0.125          | 0.153          | 0.114            |           |            |             |                    |                 |             |  |
| 12-Dec-2014              | 0.167          | 0.155          | 0.132            |           |            |             |                    |                 |             |  |
| 13-Dec-2014              | 0.115          | 0.193          | 0.121            |           |            |             |                    |                 |             |  |
| 14-Dec-2014              |                | 1              | r                |           | Sunday     | [           |                    |                 | T           |  |
| 15-Dec-2014              | 0.141          | 0.15           | 0.143            |           |            |             |                    |                 |             |  |
| 16-Dec-2014              | 0.125          | 0.114          | 0.129            |           |            |             |                    |                 |             |  |
| 17-Dec-2014              | 0.121          | 0.134          | 0.111            |           |            |             |                    |                 |             |  |
| 18-Dec-2014              | 0.155          | 0.193          | 0.166            |           |            |             |                    |                 |             |  |
| 19-Dec-2014              | 0.139          | 0.174          | 0.129            |           |            |             |                    |                 |             |  |
| 20-Dec-2014              | 0.113          | 0.127          | 0.182            |           |            |             |                    |                 |             |  |
| 21-Dec-2014              |                | 1              | r                |           | Sunday     | [           |                    |                 | T           |  |
| 22-Dec-2014              | 0.147          | 0.163          | 0.175            |           |            |             |                    |                 |             |  |
| 23-Dec-2014              | 0.123          | 0.128          | 0.124            |           |            |             |                    |                 |             |  |
| 24-Dec-2014              | 0.162          | 0.138          | 0.134            |           | L          |             |                    |                 |             |  |
| 25-Dec-2014              |                |                |                  |           | Holiday    |             |                    |                 |             |  |
| 26-Dec-2014              |                |                |                  |           | Holiday    |             |                    |                 | 1           |  |
| 27-Dec-2014              | 0.116          | 0.165          | 0.162            |           |            |             |                    |                 |             |  |
| 28-Dec-2014              |                |                | r                |           | Sunday     |             | 1                  |                 |             |  |
| 29-Dec-2014              | 0.131          | 0.12           | 0.114            |           |            |             |                    |                 |             |  |
| 30-Dec-2014              | 0.165          | 0.112          | 0.166            |           |            |             |                    |                 |             |  |
| 31-Dec-2014              | 0.12           | 0.135          | 0.117            |           |            |             |                    |                 |             |  |

|                            |                     |              |                  |         |                       | ( Sha      | aft Grouted Pre-bo | red H-piles at B | llock 51)    |  |
|----------------------------|---------------------|--------------|------------------|---------|-----------------------|------------|--------------------|------------------|--------------|--|
| IWW 恆                      | 誠建築工                | 积有限少         | いていた             |         | Monitoring Check Pts. |            | Trigger Levels     |                  |              |  |
|                            | ,吸生木上               | 但日代1         | イロー              |         |                       |            | Alert level        | Alarm level      | Action level |  |
| Win Win Wa                 | y Constructio       | on Company   | v L.t.d          |         | Vibrating             | Monitoring | 2mm/s              | 2.5mm/s          | 3mm/s        |  |
|                            | y construction      | n company    |                  | bration | Record                |            |                    |                  |              |  |
| Project Title: Cen         | tral Police Station | Conservation | & Revitalization | Project | No: WP201             |            | 1-Jan-2015         | to               | 31-Jan-2015  |  |
| POINT                      | VM14-4              | VM15-2       | VM51-1           |         |                       |            |                    |                  |              |  |
| DATE PD/                   | (m) mm/s            | mm/s         | mm/s             |         |                       |            |                    |                  |              |  |
| 03-Dec-2012 (Initia        | l) 0.14             | 0.21         | 0.3              |         |                       |            |                    |                  |              |  |
| 1-Jan-2015                 |                     |              |                  | Pi      | ublic Holiday         |            |                    |                  |              |  |
| 2-Jan-2015                 | 0.15                | 0.11         | 0.12             |         |                       |            |                    |                  |              |  |
| 3-Jan-2015                 | 0.12                | 0.17         | 0.15             |         |                       |            |                    |                  |              |  |
| 4-Jan-2015                 | T                   |              |                  |         | Sunday                |            |                    |                  | 1            |  |
| 5-Jan-2015                 | 0.13                | 0.19         | 0.17             |         |                       |            |                    |                  |              |  |
| 6-Jan-2015                 | 0.17                | 0.14         | 0.14             |         |                       |            |                    |                  |              |  |
| 7-Jan-2015                 | 0.11                | 0.17         | 0.15             |         |                       |            |                    |                  |              |  |
| 8-Jan-2015                 | 0.16                | 0.16         | 0.15             |         |                       |            |                    |                  |              |  |
| 9-Jan-2015                 | 0.12                | 0.14         | 0.13             |         |                       |            |                    |                  |              |  |
| 10-Jan-2015                | 0.15                | 0.14         | 0.12             |         |                       |            |                    |                  |              |  |
| 11-Jan-2015                |                     | 1            | 1 1              |         | Sunday                | 1          |                    |                  |              |  |
| 12-Jan-2015                | 0.13                | 0.13         | 0.12             |         |                       |            |                    |                  |              |  |
| 13-Jan-2015                | 0.11                | 0.16         | 0.14             |         |                       |            |                    |                  |              |  |
| 14-Jan-2015                | 0.12                | 0.13         | 0.17             |         |                       |            |                    |                  |              |  |
| 15-Jan-2015                | 0.18                | 0.17         | 0.13             |         |                       |            |                    |                  |              |  |
| 16-Jan-2015                | 0.16                | 0.12         | 0.11             |         |                       |            |                    |                  |              |  |
| 17-Jan-2015                | 0.15                | 0.12         | 0.14             |         | Sundari               | Į          |                    |                  | Į            |  |
| 18-Jan-2015<br>19-Jan-2015 | 0.12                | 0.14         | 0.14             |         | Sunday                |            |                    |                  |              |  |
| 19-Jan-2015<br>20-Jan-2015 | 0.13                | 0.14         | 0.14             |         |                       | <u> </u>   |                    |                  |              |  |
| 20-Jan-2015<br>21-Jan-2015 | 0.13                | 0.17         | 0.16             |         |                       | 1          |                    |                  |              |  |
| 21-Jan-2015<br>22-Jan-2015 | 0.15                | 0.12         | 0.11             |         |                       | 1          |                    |                  |              |  |
| 22-Jan-2015                | 0.12                | 0.13         | 0.15             |         |                       |            | +                  |                  |              |  |
| 23-Jan-2015                | 0.13                | 0.13         | 0.14             |         |                       |            | +                  |                  |              |  |
| 25-Jan-2015                | 0.15                | 0.17         | 0.10             |         | Sunday                | 1          | 1                  |                  | 1            |  |
| 26-Jan-2015                | 0.14                | 0.13         | 0.15             |         | Sunday                |            |                    |                  |              |  |
| 27-Jan-2015                | 0.14                | 0.12         | 0.12             |         | 1                     | 1          |                    |                  |              |  |
| 28-Jan-2015                | 0.11                | 0.12         | 0.12             |         |                       | 1          |                    |                  |              |  |
| 29-Jan-2015                | 0.13                | 0.13         | 0.12             |         | 1                     | 1          |                    |                  |              |  |
| 30-Jan-2015                | 0.12                | 0.11         | 0.19             |         | 1                     | 1          |                    |                  |              |  |
| 31-Jan-2015                | 0.11                | 0.11         | 0.15             |         |                       |            |                    |                  |              |  |

Annex M


Records of Vibration Monitoring for Other Construction Works



| 14/14          | /       | - D - E. E.E.  |                | ·              |           |                                                            | ( Block 14 Str | uctural A&A    | )            |
|----------------|---------|----------------|----------------|----------------|-----------|------------------------------------------------------------|----------------|----------------|--------------|
|                | / 小肉    | 誠建築            | 工程有降           | <b>艮公</b> 司    |           |                                                            |                | Trigger Levels |              |
|                |         |                |                |                |           | Monitoring Check Pts.                                      | Alert level    | Alarm level    | Action level |
| Win Wi         | n Way   | v Construe     | ction Comp     | oany Ltd.      |           | Vibration Monitoring                                       | 2mm/s          | 2.5mm/s        | 3mm/s        |
|                |         |                |                |                |           | # Vibration at largest span of<br>highest Structural level | 5.0mm/s        | 6.0mm/s        | 7.5mm/s      |
|                |         |                |                |                |           |                                                            |                |                |              |
|                |         |                |                |                | Vibration | Record                                                     |                |                |              |
| Project Title: | Central | Police Station | n Conservation | & Revitalizati | on Proje  | ect No: WP201                                              | 1-Nov-2014     | to             | 30-Nov-2014  |
| POINT          |         | VM14-1#        | VM14-2 #       | VM14-3         | VM14-4    |                                                            |                |                |              |
| DATE           | PD/(m)  | mm/s           | mm/s           | mm/s           | mm/s      |                                                            |                |                |              |
| 19-Nov-12 (In  |         | 0.103          | 0.112          | 0.147          | 0.136     |                                                            |                |                |              |
| 1-Nov-2014     |         | 0.14           | 0.14           | 0.17           | 0.31      |                                                            |                |                |              |
| 2-Nov-2014     |         |                |                |                |           | Sunday                                                     | I              |                | 1            |
| 3-Nov-2014     |         | 0.20           | 0.13           | 0.56           | 0.15      |                                                            |                |                |              |
| 4-Nov-2014     |         | 0.17           | 0.11           | 0.18           | 0.17      |                                                            |                |                |              |
| 5-Nov-2014     |         | 0.10           | 0.18           | 0.25           | 0.30      |                                                            |                |                |              |
| 6-Nov-2014     |         | 0.13           | 0.15           | 0.22           | 0.25      |                                                            |                |                |              |
| 7-Nov-2014     |         | 0.16           | 0.14           | 0.31           | 0.20      |                                                            |                |                |              |
| 8-Nov-2014     |         | 0.13           | 0.19           | 0.17           | 0.16      |                                                            |                |                |              |
| 9-Nov-2014     | I       |                |                |                |           | Sunday                                                     | 1              |                | •            |
| 10-Nov-2014    |         | 0.19           | 0.13           | 0.14           | 0.20      |                                                            |                |                |              |
| 11-Nov-2014    |         | 0.16           | 0.15           | 0.16           | 0.19      |                                                            |                |                |              |
| 12-Nov-2014    |         | 0.15           | 0.12           | 0.16           | 0.14      |                                                            |                |                |              |
| 13-Nov-2014    |         | 0.14           | 0.19           | 0.16           | 0.13      |                                                            |                |                |              |
| 14-Nov-2014    |         | 0.14           | 0.20           | 0.18           | 0.14      |                                                            |                |                |              |
| 15-Nov-2014    |         | 0.17           | 0.16           | 0.19           | 0.19      |                                                            |                |                |              |
| 16-Nov-2014    | •       |                |                |                |           | Sunday                                                     | • •            |                | *            |
| 17-Nov-2014    |         | 0.19           | 0.12           | 0.18           | 0.17      |                                                            |                |                |              |
| 18-Nov-2014    |         | 0.12           | 0.13           | 0.15           | 0.20      |                                                            |                |                |              |
| 19-Nov-2014    |         | 0.12           | 0.11           | 0.20           | 0.21      |                                                            |                |                |              |
| 20-Nov-2014    |         | 0.11           | 0.14           | 0.18           | 0.20      |                                                            |                |                |              |
| 21-Nov-2014    |         | 0.10           | 0.19           | 0.16           | 0.19      |                                                            |                |                |              |
| 22-Nov-2014    |         | 0.12           | 0.18           | 0.18           | 0.20      |                                                            |                |                |              |
| 23-Nov-2014    | ľ       |                |                |                |           | Sunday                                                     |                |                |              |
| 24-Nov-2014    |         | 0.12           | 0.13           | 0.20           | 0.24      |                                                            |                |                |              |
| 25-Nov-2014    |         | 0.20           | 0.12           | 0.13           | 0.15      |                                                            |                |                |              |
| 26-Nov-2014    |         | 0.13           | 0.16           | 0.15           | 0.15      |                                                            |                |                |              |
| 27-Nov-2014    |         | 0.12           | 0.19           | 0.16           | 0.13      |                                                            |                |                |              |
| 28-Nov-2014    |         | 0.14           | 0.18           | 0.17           | 0.16      |                                                            |                |                |              |
| 29-Nov-2014    |         | 0.17           | 0.12           | 0.17           | 0.13      |                                                            |                |                |              |
| 30-Nov-2014    |         |                |                |                |           | Sunday                                                     |                |                |              |

| 14/14/                     |                  |                  |                |                |                                | ( Block 14 Str | uctural A&A    | )            |  |  |  |
|----------------------------|------------------|------------------|----------------|----------------|--------------------------------|----------------|----------------|--------------|--|--|--|
| WW 12                      | 「誠建築             | 工程有降             | 艮公司            |                |                                | ,              | Trigger Levels |              |  |  |  |
|                            |                  |                  |                |                | Monitoring Check Pts.          | Alert level    | Alarm level    | Action level |  |  |  |
| Win Win W                  | ay Constru       | ction Comp       | any Ltd.       |                | Vibration Monitoring           | 2mm/s          | 2.5mm/s        | 3mm/s        |  |  |  |
|                            |                  |                  |                |                | # Vibration at largest span of | 5.0mm/a        | 6.0mm/a        | 7.5mm/s      |  |  |  |
|                            |                  |                  |                |                | highest Structural level       | 5.0mm/s        | 6.0mm/s        | 7.5mm/s      |  |  |  |
|                            |                  |                  |                | <b>T</b> 7'1 / |                                |                |                |              |  |  |  |
|                            |                  |                  |                | Vibration      | Record                         |                |                |              |  |  |  |
| Project Title: Centr       | al Police Statio | n Conservation   | & Revitalizati | on Proie       | ect No: WP201                  | 1-Dec-2014     | to             | 31-Dec-2014  |  |  |  |
|                            | ur ronee Sturio  | il consel valion | e ne mulleur   | on 110je       |                                | 1 200 2011     | 10             |              |  |  |  |
| POINT                      | VM14-1#          | VM14-2 #         | VM14-3         | VM14-4         |                                |                |                |              |  |  |  |
| DATE PD/(m                 | i) mm/s          | mm/s             | mm/s           | mm/s           |                                |                |                |              |  |  |  |
| 19-Nov-12 (Initial)        | 0.103            | 0.112            | 0.147          | 0.136          |                                |                |                | T            |  |  |  |
| 1-Dec-2014                 | 0.154            | 0.115            | 0.132          | 0.161          |                                |                |                |              |  |  |  |
| 2-Dec-2014                 | 0.198            | 0.151            | 0.182          | 0.139          |                                |                |                |              |  |  |  |
| 3-Dec-2014                 | 0.113            | 0.104            | 0.192          | 0.116          |                                |                |                |              |  |  |  |
| 4-Dec-2014                 | 0.103            | 0.112            | 0.147          | 0.131          |                                |                |                |              |  |  |  |
| 5-Dec-2014                 | 0.107            | 0.114            | 0.136          | 0.157          |                                |                |                |              |  |  |  |
| 6-Dec-2014                 | 0.130            | 0.153            | 0.146          | 0.112          |                                |                |                |              |  |  |  |
| 7-Dec-2014                 |                  |                  |                |                | Sunday                         |                |                | -            |  |  |  |
| 8-Dec-2014                 | 0.107            | 0.133            | 0.126          | 0.137          |                                |                |                |              |  |  |  |
| 9-Dec-2014                 | 0.129            | 0.105            | 0.134          | 0.119          |                                |                |                |              |  |  |  |
| 10-Dec-2014                | 0.107            | 0.135            | 0.151          | 0.125          |                                |                |                |              |  |  |  |
| 11-Dec-2014                | 0.104            | 0.122            | 0.125          | 0.125          |                                |                |                |              |  |  |  |
| 12-Dec-2014                | 0.132            | 0.112            | 0.118          | 0.167          |                                |                |                |              |  |  |  |
| 13-Dec-2014                | 0.113            | 0.104            | 0.182          | 0.115          |                                |                |                |              |  |  |  |
| 14-Dec-2014                | 0.102            | 0.152            | 0.114          | 0.141          | Sunday                         |                |                |              |  |  |  |
| 15-Dec-2014<br>16-Dec-2014 | 0.103            | 0.153 0.123      | 0.114 0.119    | 0.141 0.125    |                                |                |                |              |  |  |  |
| 10-Dec-2014<br>17-Dec-2014 | 0.114            | 0.123            | 0.119          | 0.125          |                                |                |                | -            |  |  |  |
| 17-Dec-2014<br>18-Dec-2014 | 0.122            | 0.152            | 0.149          | 0.133          |                                |                |                |              |  |  |  |
| 19-Dec-2014                | 0.147            | 0.122            | 0.119          | 0.139          |                                | 1              |                | 1            |  |  |  |
| 20-Dec-2014                | 0.103            | 0.149            | 0.192          | 0.113          |                                | 1              |                | 1            |  |  |  |
| 21-Dec-2014                |                  |                  |                |                | Sunday                         | 1              |                | <b>I</b>     |  |  |  |
| 22-Dec-2014                | 0.123            | 0.125            | 0.171          | 0.147          |                                |                |                |              |  |  |  |
| 23-Dec-2014                | 0.102            | 0.112            | 0.126          | 0.123          |                                |                |                |              |  |  |  |
| 24-Dec-2014                | 0.119            | 0.127            | 0.131          | 0.162          |                                | 1 1            |                | T            |  |  |  |
| 25-Dec-2014                | •                | •                |                |                | Holiday                        | · ·            |                | •            |  |  |  |
| 26-Dec-2014                |                  |                  |                |                | Holiday                        |                |                |              |  |  |  |
| 27-Dec-2014                | 0.102            | 0.121            | 0.116          | 0.116          |                                |                |                |              |  |  |  |
| 28-Dec-2014                |                  |                  |                |                | Sunday                         |                |                |              |  |  |  |
| 29-Dec-2014                | 0.112            | 0.160            | 0.116          | 0.131          |                                |                |                |              |  |  |  |
| 30-Dec-2014                | 0.120            | 0.186            | 0.152          | 0.165          |                                |                |                |              |  |  |  |
| 31-Dec-2014                | 0.089            | 0.132            | 0.123          | 0.120          |                                |                |                |              |  |  |  |

|                            | - h - La Cata   | <b></b>        |                  |           |                                                            | ( Block 14 St | ructural A&A   | )            |
|----------------------------|-----------------|----------------|------------------|-----------|------------------------------------------------------------|---------------|----------------|--------------|
| WW 恆                       | 誠建築             | 工程有降           | 艮公司              |           | Monitoring Check Pts.                                      |               | Trigger Levels | ·            |
|                            |                 |                |                  |           |                                                            | Alert level   | Alarm level    | Action level |
| Win Win Way                | Constru         | cnon Comp      | any Lta.         |           | Vibration Monitoring                                       | 2mm/s         | 2.5mm/s        | 3mm/s        |
|                            |                 |                |                  |           | # Vibration at largest span of<br>highest Structural level | 5.0mm/s       | 6.0mm/s        | 7.5mm/s      |
|                            |                 |                | V                | ibration  | Record                                                     |               |                |              |
| Project Title: Central     | Police Station  | n Conservation | & Revitalization | Proje     | ct No: WP201                                               | 1-Jan-2015    | to             | 31-Jan-2015  |
| POINT                      | <b>VM14-1</b> # | VM14-2 #       | VM14-3           | VM14-4    |                                                            |               |                |              |
| DATE PD/(m)                | mm/s            | mm/s           | mm/s             | mm/s      |                                                            |               |                |              |
| 19-Nov-12 (Initial)        | 0.103           | 0.112          | 0.147            | 0.136     |                                                            |               |                |              |
| 1-Jan-2015                 |                 |                | L                | Р         | ublic Holiday                                              | •             |                |              |
| 2-Jan-2015                 | 0.10            | 0.11           | 0.15             | 0.15      |                                                            |               |                |              |
| 3-Jan-2015                 | 0.11            | 0.14           | 0.17             | 0.12      |                                                            |               |                |              |
| 4-Jan-2015                 |                 |                |                  |           | Sunday                                                     | -             | •              | -            |
| 5-Jan-2015                 | 0.10            | 0.13           | 0.13             | 0.13      |                                                            |               |                |              |
| 6-Jan-2015                 | 0.09            | 0.16           | 0.11             | 0.17      |                                                            |               |                |              |
| 7-Jan-2015                 | 0.12            | 0.16           | 0.13             | 0.11      |                                                            |               |                |              |
| 8-Jan-2015                 | 0.14            | 0.13           | 0.11             | 0.16      |                                                            |               |                |              |
| 9-Jan-2015                 | 0.12            | 0.11           | 0.13             | 0.12      |                                                            |               |                |              |
| 10-Jan-2015                | 0.14            | 0.16           | 0.14             | 0.15      |                                                            |               |                |              |
| 11-Jan-2015                |                 | 1              | I                |           | Sunday                                                     |               | 1              | 1            |
| 12-Jan-2015                | 0.11            | 0.13           | 0.13             | 0.13      |                                                            |               |                |              |
| 13-Jan-2015                | 0.12            | 0.13           | 0.14             | 0.11      |                                                            |               |                |              |
| 14-Jan-2015                | 0.10            | 0.11           | 0.12             | 0.12      |                                                            |               |                |              |
| 15-Jan-2015                | 0.10            | 0.12           | 0.15             | 0.18      |                                                            |               |                | -            |
| 16-Jan-2015                | 0.09            | 0.14           | 0.15             | 0.16      |                                                            |               |                | -            |
| 17-Jan-2015                | 0.10            | 0.12           | 0.18             | 0.15      |                                                            |               |                |              |
| 18-Jan-2015                | 0.12            | 0.12           | 0.15             | 0.12      | Sunday                                                     |               |                | 1            |
| 19-Jan-2015                | 0.13            | 0.12           | 0.17             | 0.13      |                                                            |               |                |              |
| 20-Jan-2015<br>21-Jan-2015 | 0.10            | 0.15           | 0.20             | 0.13      |                                                            |               |                |              |
| 21-Jan-2015<br>22-Jan-2015 | 0.09            | 0.12           | 0.12             | 0.15      |                                                            |               |                |              |
| 22-Jan-2015<br>23-Jan-2015 | 0.11            | 0.14           | 0.16             | 0.12      |                                                            |               |                |              |
| 23-Jan-2015<br>24-Jan-2015 | 0.12            | 0.14           | 0.14             | 0.13      |                                                            |               |                |              |
| 24-Jan-2015<br>25-Jan-2015 | 0.09            | 0.12           | 0.15             | 0.14      | Sunday                                                     |               | l              |              |
| 26-Jan-2015                | 0.11            | 0.13           | 0.14             | 0.14      | Sunuay                                                     |               |                |              |
| 27-Jan-2015                |                 |                |                  |           |                                                            |               |                |              |
| 28-Jan-2015                | 0.09            | 0.11 0.13      | 0.12 0.20        | 0.14 0.11 |                                                            | <u> </u>      |                |              |
| 29-Jan-2015                | 0.11            | 0.13           | 0.20             | 0.11      |                                                            |               |                |              |
| 30-Jan-2015                | 0.12            | 0.19           | 0.11             | 0.13      |                                                            |               |                |              |
| 31-Jan-2015                | 0.09            | 0.13           | 0.11             | 0.12      |                                                            |               |                | 1            |

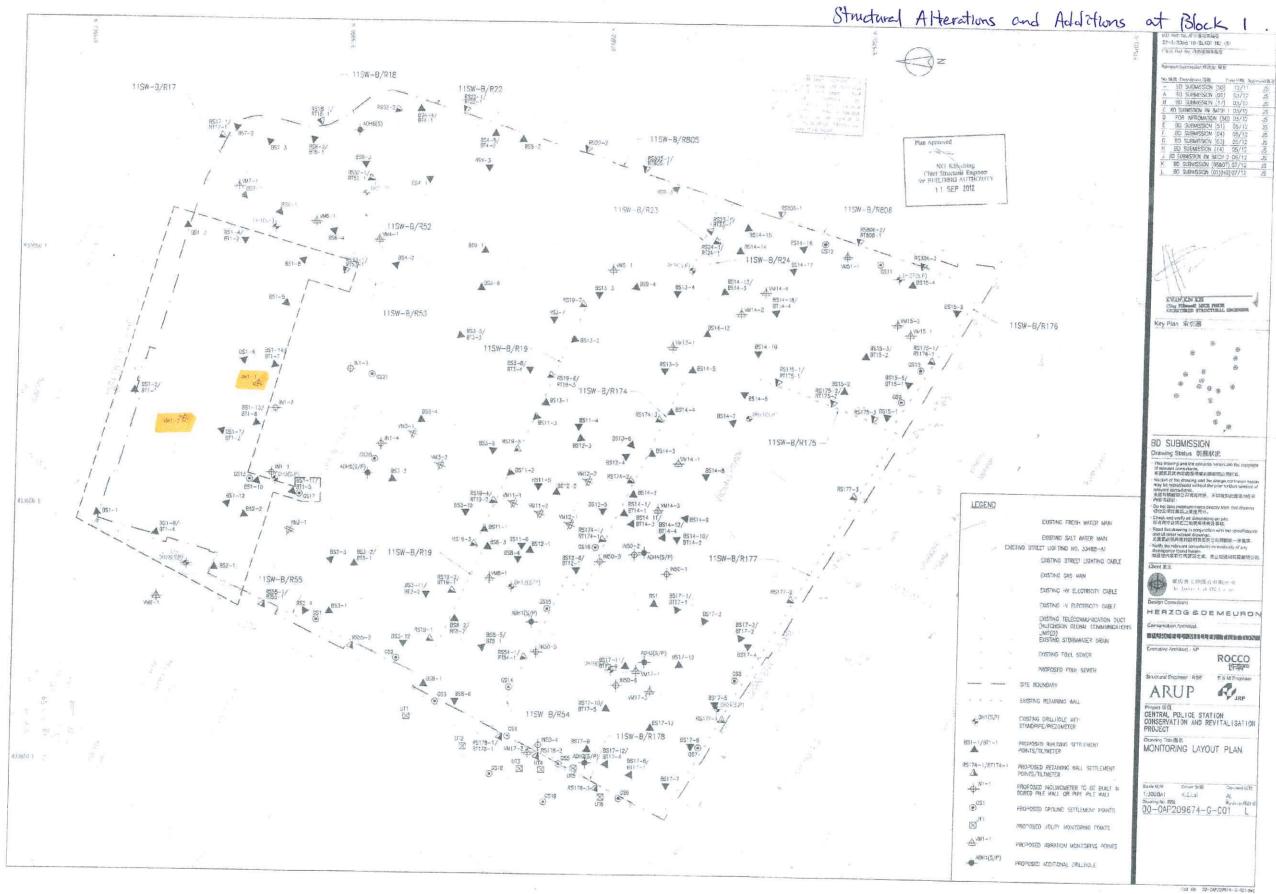

Structural Additions and



| 1 z                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | lock しし<br>B.D. Rel No 用字目的集成版                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15700 M                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 22-3/3066/10/BLK11 (HU) (S)<br>F.S.D. Ref No 法防废搜索编数                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| BIE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Revisian/Submission 性改成/极批                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | No.编述 Description 說明 Date 日期 Approved畫                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| the second                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | - BD SUBMISSION (50) 12/11 JS<br>A BD SUBMISSION (01) 03/12 JS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 44                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | B BC SUBMISSION (17) 03/12 JS<br>C BD SUBMISSION RW BATCH 1 03/12 JS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Shiu King                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | D FOP INFROMATION (50) 03/12 JS<br>E BD SUBMISSION (51) 05/12 JS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Cont                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | F BD SUBMISSION (04) 05/12 JS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | H BD SUBMISSION (14) 05/12 JS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 8. A. C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | J BD SUBMISSION RW BATCH 7 06/12 JS<br>K BD SUBMISSION (06&07) 07/12 JS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | L BD SUBMISSION (01)(H0)07/12 JS<br>M BD SUBMISSION (11) 07/12 JS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| and the second s |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 25 - 42 C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| S & S A MAN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| provide a serie a series a s                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Plan Approved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | CHIONG Kam-yuene Jacky                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 2.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Chief Structural Engineer<br>for BUILDING AUTHORITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| all                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | - 3 OCT 2012                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Cert.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| B/R176                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Key Plan 索引圖                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| C. L . C 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | • • •                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Ę                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 0 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| iipa <sub>c</sub>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | • • • ///                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 0 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| UR/                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | e l                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| HH .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| T                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | BD SUBMISSION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| M. E.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Drawing Status 裂麗狀況 This drawing and the contents berein are the copyright                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| CEOR FISHINGE MICE PHILE C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | of relevant consultants.<br>本確認及其內容的版標屬有關觀問公司所非。<br>- No part of the drawing and the design contained herein                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| A S                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | may be reproduced without the pror written consent of<br>relevant consultants.<br>未維有時期間公司書面印度。不否依對此服紙內任何                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 内容或设计<br>- Do not take measurements directly from this crawing.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| EXISTING FRESH WATER MAIN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 切勿直兆從醫紙上豐度尺寸。<br>Check and vorify all dimensions on site<br>研有尺寸必须在工地現場抱意及審核。                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <ul> <li>Read this drawing in conjunction with the specifications<br/>and all other related drawings,<br/>此關係必須與規格投明實及其它有關團級一併問講。</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| STREET LIGHTING NC. 33488-A1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <ul> <li>Notify the relevant consultants immediately of any<br/>discrepancy found literein,<br/>如發現內容有任何謬蹤之處。應立刻通知有質觀問公司。</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| EXISTING STREET LIGHTING CABLE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 如發現內容有任何謬欲之處。應立刻通知有質範間公司。<br>Client 聚主                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| EXISTING GAS MAIN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | · 赛馬台文物保存有限公司                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| EXISTING HV ELECTRICITY CABLE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | The Jecker Club CP Limited                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| EXISTING LV ELECTRICITY CABLE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| EXISTING TELECOMMUNICATION DUCT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| LIMITED)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Executive Architect / AP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | ROCCO<br>计字严                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Structural Engineer / RSE E & M Engineer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | ARUP RIJRP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Project 項目<br>CENTRAL POLICE STATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| KISTING DRILLHOLE WITH<br>TANDPIPE/PIEZONETER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | CONSERVATION AND REVITALISATION<br>PROJECT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| ROPOSED BUILDING SETTLEMENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Drawing Tate 蜀名<br>MONITORING LAYOUT PLAN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| DINTS/TILTMETER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | MONTONING LATOUT PLAN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| ROPOSED RETAINING WALL SETTLEMENT<br>DINTS/TILTMETER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| DINTS/TILTWETER<br>ROPOSED INCLINOMETER TO BE BUILT IN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Scale 분명 Drawn 변문 Checked 문편                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| oints/tiltmeter<br>Roposed inclinometer to be Built in<br>Ored Pile Wall or Pipe Pile Wall                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1:3009AI K.C.Loi AL<br>Drawing No.圆型 Revision修改版                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| OINTS/TILTMETER<br>ROPOSED INCLINOMETER TO BE BUILT IN<br>ORED PILE WALL OR PIPE PILE WALL<br>ROPOSED GROUND SETTLEMENT POINTS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1:3009AI K.C.Lai AL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| oints/tiltmeter<br>Roposed inclinometer to be Built in<br>Ored Pile Wall or Pipe Pile Wall                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1:3009AI K.C.Loi AL<br>Drawing No.圆型 Revision修改版                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| OINTS/TILTMETER<br>ROPOSED INCLINOMETER TO BE BUILT IN<br>ORED PILE WALL OR PIPE PILE WALL<br>ROPOSED GROUND SETTLEMENT POINTS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1:3009AI K.C.Lai AL<br>Drawing No.圆型 Revision增改图                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | BURITAS<br>EXISTING FRESH WATER MAIN<br>EXISTING FOLL COMUNICATION DUCT<br>(MITTING TELECOMUNICATION |



# Vibration Monitoring Record (November)

|           | Blo   | ck 1  | Block 2 | Blo   | ck 3  | Block 4 | Block | 6 & 7 | Block 9 | Bloc   | k 11   | Bloc   | k 12   | Block 13 | Bloc   | k 15   |
|-----------|-------|-------|---------|-------|-------|---------|-------|-------|---------|--------|--------|--------|--------|----------|--------|--------|
| Point     | VM1-1 | VM1-2 | VM2-1   | VM3-1 | VM3-2 | VM4-1   | VM6-1 | VM7-1 | VM9-1   | VM11-1 | VM11-2 | VM12-1 | VM12-2 | VM13-1   | VM15-1 | VM15-2 |
| Date      | mm/s  | mm/s  | mm/s    | mm/s  | mm/s  | mm/s    | mm/s  | mm/s  | mm/s    | mm/s   | mm/s   | mm/s   | mm/s   | mm/s     | mm/s   | mm/s   |
| 01-Nov-14 | 0.154 | 0.128 | 0.156   | 0.148 | 0.182 | 0.137   | 0.204 | 0.187 | 0.122   | 0.182  | 0.103  | 0.198  | 0.156  | 0.126    | 0.158  | 0.181  |
| 02-Nov-14 |       |       |         |       |       |         |       | Ho    | iday    |        |        |        |        |          |        |        |
| 03-Nov-14 | 0.263 | 0.106 | 0.298   | 0.154 | 0.131 | 0.199   | 0.189 | 0.265 | 0.198   | 0.156  | 0.106  | 0.320  | 0.146  | 0.138    | 0.129  | 0.110  |
| 04-Nov-14 | 0.346 | 0.158 | 0.179   | 0.193 | 0.125 | 0.124   | 0.168 | 0.191 | 0.127   | 0.187  | 0.132  | 0.160  | 0.136  | 0.142    | 0.198  | 0.135  |
| 05-Nov-14 | 0.191 | 0.131 | 0.206   | 0.167 | 0.102 | 0.096   | 0.181 | 0.129 | 0.156   | 0.193  | 0.154  | 0.201  | 0.159  | 0.165    | 0.163  | 0.156  |
| 06-Nov-14 | 0.168 | 0.108 | 0.174   | 0.348 | 0.179 | 0.131   | 0.122 | 0.176 | 0.121   | 0.172  | 0.109  | 0.182  | 0.149  | 0.207    | 0.175  | 0.122  |
| 07-Nov-14 | 0.106 | 0.185 | 0.156   | 0.187 | 0.123 | 0.165   | 0.198 | 0.132 | 0.155   | 0.184  | 0.132  | 0.206  | 0.143  | 0.137    | 0.163  | 0.105  |
| 08-Nov-14 | 0.398 | 0.134 | 0.189   | 0.204 | 0.156 | 0.118   | 0.203 | 0.174 | 0.132   | 0.165  | 0.123  | 0.186  | 0.161  | 0.158    | 0.334  | 0.180  |
| 09-Nov-14 |       |       |         |       |       |         |       | Su    | nday    |        |        |        |        |          |        |        |
| 10-Nov-14 | 0.098 | 0.102 | 0.314   | 0.195 | 0.142 | 0.192   | 0.172 | 0.195 | 0.168   | 0.135  | 0.139  | 0.126  | 0.149  | 0.192    | 0.189  | 0.126  |
| 11-Nov-14 | 0.156 | 0.147 | 0.114   | 0.286 | 0.189 | 0.198   | 0.113 | 0.125 | 0.126   | 0.199  | 0.165  | 0.193  | 0.204  | 0.164    | 0.171  | 0.139  |
| 12-Nov-14 | 0.192 | 0.120 | 0.111   | 0.168 | 0.175 | 0.163   | 0.159 | 0.198 | 0.135   | 0.188  | 0.189  | 0.318  | 0.125  | 0.159    | 0.192  | 0.206  |
| 13-Nov-14 | 0.146 | 0.127 | 0.177   | 0.178 | 0.166 | 0.145   | 0.116 | 0.184 | 0.102   | 0.155  | 0.166  | 0.245  | 0.119  | 0.167    | 0.177  | 0.203  |
| 14-Nov-14 | 0.114 | 0.122 | 0.156   | 0.169 | 0.147 | 0.188   | 0.120 | 0.168 | 0.128   | 0.127  | 0.170  | 0.201  | 0.123  | 0.135    | 0.153  | 0.188  |
| 15-Nov-14 | 0.196 | 0.159 | 0.114   | 0.196 | 0.162 | 0.126   | 0.189 | 0.149 | 0.152   | 0.198  | 0.185  | 0.125  | 0.174  | 0.109    | 0.198  | 0.153  |
| 16-Nov-14 |       |       |         |       |       |         |       | Su    | nday    |        |        |        |        |          |        |        |
| 17-Nov-14 | 0.165 | 0.113 | 0.159   | 0.209 | 0.151 | 0.192   | 0.142 | 0.193 | 0.121   | 0.147  | 0.158  | 0.181  | 0.132  | 0.138    | 0.174  | 0.162  |
| 18-Nov-14 | 0.192 | 0.102 | 0.143   | 0.122 | 0.149 | 0.138   | 0.156 | 0.114 | 0.108   | 0.169  | 0.114  | 0.141  | 0.123  | 0.161    | 0.149  | 0.146  |
| 19-Nov-14 | 0.101 | 0.114 | 0.138   | 0.173 | 0.138 | 0.103   | 0.118 | 0.128 | 0.119   | 0.141  | 0.125  | 0.196  | 0.112  | 0.204    | 0.117  | 0.188  |
| 20-Nov-14 | 0.191 | 0.152 | 0.173   | 0.129 | 0.130 | 0.189   | 0.193 | 0.152 | 0.107   | 0.157  | 0.132  | 0.158  | 0.103  | 0.182    | 0.181  | 0.129  |
| 21-Nov-14 | 0.088 | 0.078 | 0.145   | 0.099 | 0.109 | 0.176   | 0.140 | 0.119 | 0.091   | 0.128  | 0.155  | 0.206  | 0.116  | 0.148    | 0.112  | 0.163  |
| 22-Nov-14 | 0.195 | 0.102 | 0.165   | 0.198 | 0.126 | 0.194   | 0.135 | 0.143 | 0.137   | 0.168  | 0.106  | 0.187  | 0.123  | 0.182    | 0.145  | 0.154  |
| 23-Nov-14 |       |       |         |       |       |         |       | Su    | nday    |        |        |        |        |          |        |        |
| 24-Nov-14 | 0.126 | 0.114 | 0.183   | 0.145 | 0.192 | 0.126   | 0.195 | 0.204 | 0.136   | 0.198  | 0.152  | 0.145  | 0.177  | 0.199    | 0.155  | 0.183  |
| 25-Nov-14 | 0.491 | 0.101 | 0.151   | 0.189 | 0.125 | 0.149   | 0.128 | 0.165 | 0.161   | 0.169  | 0.132  | 0.181  | 0.121  | 0.125    | 0.169  | 0.206  |
| 26-Nov-14 | 0.119 | 0.132 | 0.112   | 0.156 | 0.132 | 0.135   | 0.152 | 0.179 | 0.149   | 0.112  | 0.158  | 0.132  | 0.154  | 0.103    | 0.193  | 0.148  |
| 27-Nov-14 | 0.156 | 0.105 | 0.168   | 0.192 | 0.122 | 0.195   | 0.169 | 0.132 | 0.102   | 0.198  | 0.114  | 0.189  | 0.156  | 0.155    | 0.114  | 0.193  |
| 28-Nov-14 | 0.178 | 0.136 | 0.122   | 0.142 | 0.117 | 0.183   | 0.091 | 0.188 | 0.095   | 0.152  | 0.103  | 0.136  | 0.102  | 0.191    | 0.174  | 0.144  |
| 29-Nov-14 | 0.162 | 0.103 | 0.195   | 0.241 | 0.165 | 0.191   | 0.163 | 0.165 | 0.121   | 0.132  | 0.211  | 0.125  | 0.133  | 0.198    | 0.132  | 0.136  |
| 30-Nov-14 |       |       |         |       |       |         |       | Su    | nday    |        |        |        |        |          |        |        |



# Vibration Monitoring Record (December)

|           | Blo   | ck 1  | Block 2 | Blog  | ck 3  | Block 4 | Block | 6&7   | Block 9 | Bloc   | k 11   | Bloc   | k 12   | Block 13 | Bloc   | k 15   |
|-----------|-------|-------|---------|-------|-------|---------|-------|-------|---------|--------|--------|--------|--------|----------|--------|--------|
| Point     | VM1-1 | VM1-2 | VM2-1   | VM3-1 | VM3-2 | VM4-1   | VM6-1 | VM7-1 | VM9-1   | VM11-1 | VM11-2 | VM12-1 | VM12-2 | VM13-1   | VM15-1 | VM15-2 |
| Date      | mm/s  | mm/s  | mm/s    | mm/s  | mm/s  | mm/s    | mm/s  | mm/s  | mm/s    | mm/s   | mm/s   | mm/s   | mm/s   | mm/s     | mm/s   | mm/s   |
| 01-Dec-14 | 0.165 | 0.132 | 0.198   | 0.351 | 0.196 | 0.135   | 0.198 | 0.165 | 0.102   | 0.147  | 0.132  | 0.198  | 0.121  | 0.112    | 0.125  | 0.133  |
| 02-Dec-14 | 0.189 | 0.103 | 0.151   | 0.258 | 0.161 | 0.123   | 0.155 | 0.131 | 0.109   | 0.132  | 0.111  | 0.198  | 0.132  | 0.198    | 0.165  | 0.121  |
| 03-Dec-14 | 0.165 | 0.128 | 0.196   | 0.143 | 0.185 | 0.192   | 0.182 | 0.157 | 0.128   | 0.113  | 0.103  | 0.151  | 0.120  | 0.164    | 0.147  | 0.166  |
| 04-Dec-14 | 0.113 | 0.123 | 0.165   | 0.198 | 0.118 | 0.175   | 0.137 | 0.172 | 0.105   | 0.180  | 0.123  | 0.164  | 0.154  | 0.155    | 0.311  | 0.150  |
| 05-Dec-14 | 0.198 | 0.114 | 0.127   | 0.231 | 0.105 | 0.152   | 0.174 | 0.140 | 0.158   | 0.122  | 0.168  | 0.121  | 0.198  | 0.133    | 0.135  | 0.204  |
| 06-Dec-14 | 0.117 | 0.165 | 0.125   | 0.173 | 0.151 | 0.133   | 0.198 | 0.115 | 0.102   | 0.193  | 0.147  | 0.122  | 0.103  | 0.247    | 0.172  | 0.135  |
| 07-Dec-14 |       |       |         |       |       |         |       | Su    | nday    |        |        |        |        |          |        |        |
| 08-Dec-14 | 0.135 | 0.156 | 0.114   | 0.198 | 0.113 | 0.098   | 0.114 | 0.153 | 0.237   | 0.152  | 0.106  | 0.135  | 0.133  | 0.168    | 0.149  | 0.103  |
| 09-Dec-14 | 0.168 | 0.132 | 0.166   | 0.143 | 0.120 | 0.152   | 0.173 | 0.140 | 0.114   | 0.115  | 0.103  | 0.172  | 0.114  | 0.139    | 0.125  | 0.138  |
| 10-Dec-14 | 0.176 | 0.104 | 0.137   | 0.122 | 0.161 | 0.107   | 0.155 | 0.138 | 0.102   | 0.114  | 0.132  | 0.152  | 0.103  | 0.175    | 0.173  | 0.162  |
| 11-Dec-14 | 0.143 | 0.111 | 0.195   | 0.173 | 0.124 | 0.139   | 0.170 | 0.162 | 0.119   | 0.216  | 0.138  | 0.115  | 0.108  | 0.158    | 0.114  | 0.153  |
| 12-Dec-14 | 0.147 | 0.102 | 0.165   | 0.165 | 0.114 | 0.150   | 0.213 | 0.126 | 0.105   | 0.130  | 0.105  | 0.168  | 0.111  | 0.119    | 0.132  | 0.155  |
| 13-Dec-14 | 0.113 | 0.097 | 0.130   | 0.148 | 0.109 | 0.113   | 0.176 | 0.193 | 0.101   | 0.166  | 0.115  | 0.172  | 0.132  | 0.235    | 0.120  | 0.193  |
| 14-Dec-14 |       |       |         |       |       |         |       | Su    | nday    |        |        |        |        |          |        |        |
| 15-Dec-14 | 0.198 | 0.112 | 0.175   | 0.169 | 0.124 | 0.162   | 0.202 | 0.135 | 0.117   | 0.136  | 0.104  | 0.120  | 0.183  | 0.159    | 0.143  | 0.150  |
| 16-Dec-14 | 0.136 | 0.105 | 0.113   | 0.152 | 0.108 | 0.114   | 0.175 | 0.162 | 0.133   | 0.136  | 0.112  | 0.103  | 0.154  | 0.176    | 0.129  | 0.114  |
| 17-Dec-14 | 0.155 | 0.114 | 0.136   | 0.159 | 0.112 | 0.143   | 0.219 | 0.146 | 0.105   | 0.114  | 0.165  | 0.112  | 0.130  | 0.184    | 0.111  | 0.134  |
| 18-Dec-14 | 0.119 | 0.103 | 0.154   | 0.135 | 0.114 | 0.174   | 0.205 | 0.114 | 0.109   | 0.114  | 0.133  | 0.182  | 0.145  | 0.231    | 0.166  | 0.193  |
| 19-Dec-14 | 0.125 | 0.117 | 0.140   | 0.144 | 0.132 | 0.167   | 0.198 | 0.122 | 0.120   | 0.121  | 0.127  | 0.162  | 0.149  | 0.218    | 0.177  | 0.174  |
| 20-Dec-14 | 0.110 | 0.163 | 0.189   | 0.183 | 0.112 | 0.113   | 0.167 | 0.209 | 0.101   | 0.196  | 0.154  | 0.152  | 0.114  | 0.176    | 0.182  | 0.127  |
| 21-Dec-14 |       |       |         |       |       |         |       | Su    | nday    |        |        |        |        |          |        |        |
| 22-Dec-14 | 0.143 | 0.182 | 0.122   | 0.149 | 0.112 | 0.162   | 0.193 | 0.114 | 0.113   | 0.111  | 0.165  | 0.132  | 0.103  | 0.125    | 0.175  | 0.163  |
| 23-Dec-14 | 0.114 | 0.162 | 0.103   | 0.138 | 0.108 | 0.105   | 0.136 | 0.105 | 0.096   | 0.116  | 0.162  | 0.106  | 0.153  | 0.120    | 0.124  | 0.128  |
| 24-Dec-14 | 0.102 | 0.122 | 0.122   | 0.129 | 0.170 | 0.117   | 0.108 | 0.115 | 0.113   | 0.126  | 0.113  | 0.102  | 0.149  | 0.131    | 0.119  | 0.138  |
| 25-Dec-14 |       |       |         |       |       |         |       | Ho    | iday    |        |        |        |        |          |        |        |
| 26-Dec-14 |       |       |         |       |       |         |       | Ho    | iday    |        |        |        |        |          |        |        |
| 27-Dec-14 | 0.114 | 0.136 | 0.135   | 0.132 | 0.102 | 0.113   | 0.165 | 0.153 | 0.099   | 0.146  | 0.108  | 0.171  | 0.155  | 0.112    | 0.162  | 0.165  |
| 28-Dec-14 |       |       |         |       |       |         |       | Su    | nday    |        |        |        |        |          |        |        |
| 29-Dec-14 | 0.132 | 0.145 | 0.159   | 0.119 | 0.105 | 0.166   | 0.114 | 0.139 | 0.150   | 0.118  | 0.103  | 0.136  | 0.158  | 0.185    | 0.114  | 0.120  |
| 30-Dec-14 | 0.125 | 0.114 | 0.132   | 0.192 | 0.119 | 0.128   | 0.162 | 0.105 | 0.135   | 0.165  | 0.121  | 0.103  | 0.165  | 0.132    | 0.166  | 0.112  |
| 31-Dec-14 | 0.113 | 0.106 | 0.145   | 0.153 | 0.110 | 0.156   | 0.123 | 0.137 | 0.112   | 0.123  | 0.125  | 0.136  | 0.114  | 0.146    | 0.117  | 0.135  |



## Vibration Monitoring Record (Jan 15)

|           | Blo   | ck 1  | Block 2 | Blog  | ck 3  | Block 4 | Block | 6&7    | Block 9 | Bloc   | k 11   | Bloc   | k 12   | Block 13 | Bloc   | k 15   |
|-----------|-------|-------|---------|-------|-------|---------|-------|--------|---------|--------|--------|--------|--------|----------|--------|--------|
| Point     | VM1-1 | VM1-2 | VM2-1   | VM3-1 | VM3-2 | VM4-1   | VM6-1 | VM7-1  | VM9-1   | VM11-1 | VM11-2 | VM12-1 | VM12-2 | VM13-1   | VM15-1 | VM15-2 |
| Date      | mm/s  | mm/s  | mm/s    | mm/s  | mm/s  | mm/s    | mm/s  | mm/s   | mm/s    | mm/s   | mm/s   | mm/s   | mm/s   | mm/s     | mm/s   | mm/s   |
| 01-Jan-15 |       |       |         |       |       |         |       | Public | Holiday |        |        |        |        |          |        |        |
| 02-Jan-15 | 0.106 | 0.109 | 0.133   | 0.147 | 0.115 | 0.139   | 0.172 | 0.163  | 0.163   | 0.128  | 0.112  | 0.104  | 0.134  | 0.105    | 0.116  | 0.107  |
| 03-Jan-15 | 0.114 | 0.165 | 0.144   | 0.125 | 0.152 | 0.121   | 0.116 | 0.109  | 0.108   | 0.142  | 0.115  | 0.123  | 0.165  | 0.151    | 0.149  | 0.173  |
| 04-Jan-15 |       |       |         |       |       |         |       | Su     | nday    |        |        |        |        |          |        |        |
| 05-Jan-15 | 0.153 | 0.114 | 0.135   | 0.158 | 0.120 | 0.106   | 0.114 | 0.108  | 0.114   | 0.114  | 0.102  | 0.122  | 0.117  | 0.139    | 0.173  | 0.191  |
| 06-Jan-15 | 0.114 | 0.104 | 0.139   | 0.112 | 0.182 | 0.112   | 0.173 | 0.142  | 0.108   | 0.146  | 0.169  | 0.105  | 0.115  | 0.172    | 0.138  | 0.138  |
| 07-Jan-15 | 0.161 | 0.115 | 0.122   | 0.169 | 0.122 | 0.109   | 0.125 | 0.139  | 0.127   | 0.122  | 0.188  | 0.103  | 0.167  | 0.124    | 0.151  | 0.169  |
| 08-Jan-15 | 0.144 | 0.120 | 0.117   | 0.127 | 0.130 | 0.125   | 0.117 | 0.177  | 0.131   | 0.162  | 0.152  | 0.098  | 0.141  | 0.174    | 0.114  | 0.158  |
| 09-Jan-15 | 0.121 | 0.135 | 0.107   | 0.110 | 0.142 | 0.112   | 0.114 | 0.135  | 0.101   | 0.122  | 0.118  | 0.136  | 0.129  | 0.120    | 0.126  | 0.144  |
| 10-Jan-15 | 0.111 | 0.127 | 0.118   | 0.162 | 0.152 | 0.122   | 0.144 | 0.148  | 0.107   | 0.151  | 0.129  | 0.124  | 0.177  | 0.118    | 0.121  | 0.139  |
| 11-Jan-15 |       |       |         |       |       |         |       | Su     | nday    |        |        |        |        |          |        |        |
| 12-Jan-15 | 0.114 | 0.156 | 0.138   | 0.114 | 0.136 | 0.113   | 0.158 | 0.174  | 0.128   | 0.141  | 0.138  | 0.103  | 0.156  | 0.153    | 0.117  | 0.125  |
| 13-Jan-15 | 0.168 | 0.115 | 0.122   | 0.183 | 0.120 | 0.102   | 0.119 | 0.143  | 0.141   | 0.114  | 0.158  | 0.112  | 0.143  | 0.125    | 0.135  | 0.162  |
| 14-Jan-15 | 0.121 | 0.120 | 0.106   | 0.142 | 0.128 | 0.119   | 0.143 | 0.132  | 0.105   | 0.128  | 0.167  | 0.104  | 0.114  | 0.133    | 0.173  | 0.130  |
| 15-Jan-15 | 0.116 | 0.103 | 0.110   | 0.171 | 0.114 | 0.151   | 0.138 | 0.120  | 0.109   | 0.175  | 0.125  | 0.106  | 0.129  | 0.110    | 0.128  | 0.173  |
| 16-Jan-15 | 0.150 | 0.107 | 0.112   | 0.193 | 0.100 | 0.175   | 0.165 | 0.113  | 0.102   | 0.114  | 0.128  | 0.103  | 0.104  | 0.116    | 0.109  | 0.124  |
| 17-Jan-15 | 0.113 | 0.108 | 0.140   | 0.141 | 0.128 | 0.139   | 0.147 | 0.128  | 0.110   | 0.128  | 0.117  | 0.093  | 0.112  | 0.151    | 0.143  | 0.115  |
| 18-Jan-15 |       |       |         |       |       |         |       | Su     | nday    |        |        |        |        |          |        |        |
| 19-Jan-15 | 0.148 | 0.101 | 0.192   | 0.156 | 0.114 | 0.162   | 0.133 | 0.115  | 0.106   | 0.143  | 0.114  | 0.108  | 0.101  | 0.123    | 0.135  | 0.141  |
| 20-Jan-15 | 0.131 | 0.105 | 0.115   | 0.172 | 0.120 | 0.145   | 0.114 | 0.106  | 0.094   | 0.126  | 0.155  | 0.102  | 0.112  | 0.115    | 0.162  | 0.165  |
| 21-Jan-15 | 0.117 | 0.100 | 0.114   | 0.156 | 0.119 | 0.128   | 0.125 | 0.123  | 0.109   | 0.105  | 0.119  | 0.108  | 0.122  | 0.114    | 0.113  | 0.120  |
| 22-Jan-15 | 0.163 | 0.114 | 0.132   | 0.128 | 0.101 | 0.151   | 0.113 | 0.109  | 0.105   | 0.114  | 0.119  | 0.102  | 0.145  | 0.120    | 0.149  | 0.152  |
| 23-Jan-15 | 0.101 | 0.112 | 0.108   | 0.114 | 0.122 | 0.121   | 0.128 | 0.106  | 0.111   | 0.126  | 0.104  | 0.113  | 0.139  | 0.127    | 0.112  | 0.132  |
| 24-Jan-15 | 0.161 | 0.108 | 0.121   | 0.169 | 0.135 | 0.109   | 0.115 | 0.108  | 0.102   | 0.109  | 0.114  | 0.106  | 0.158  | 0.117    | 0.175  | 0.165  |
| 25-Jan-15 |       |       |         |       |       |         |       | Su     | nday    |        |        |        |        |          |        |        |
| 26-Jan-15 | 0.145 | 0.103 | 0.132   | 0.183 | 0.118 | 0.165   | 0.165 | 0.114  | 0.089   | 0.182  | 0.131  | 0.105  | 0.115  | 0.115    | 0.147  | 0.131  |
| 27-Jan-15 | 0.121 | 0.107 | 0.108   | 0.150 | 0.121 | 0.141   | 0.109 | 0.101  | 0.105   | 0.150  | 0.103  | 0.109  | 0.114  | 0.108    | 0.120  | 0.115  |
| 28-Jan-15 | 0.136 | 0.219 | 0.188   | 0.194 | 0.103 | 0.105   | 0.136 | 0.149  | 0.105   | 0.173  | 0.116  | 0.113  | 0.179  | 0.120    | 0.124  | 0.150  |
| 29-Jan-15 | 0.136 | 0.105 | 0.113   | 0.152 | 0.108 | 0.117   | 0.108 | 0.198  | 0.110   | 0.136  | 0.104  | 0.120  | 0.183  | 0.158    | 0.134  | 0.131  |
| 30-Jan-15 | 0.149 | 0.109 | 0.098   | 0.167 | 0.125 | 0.197   | 0.176 | 0.162  | 0.096   | 0.162  | 0.152  | 0.098  | 0.141  | 0.119    | 0.189  | 0.109  |
| 31-Jan-15 | 0.159 | 0.103 | 0.151   | 0.158 | 0.161 | 0.093   | 0.194 | 0.146  | 0.113   | 0.155  | 0.166  | 0.145  | 0.119  | 0.109    | 0.145  | 0.111  |

Annex N

A Summary of Current Condition of Character Defining Elements

**CENTRAL POLICE STATION, HONG KONG** 

#### SCHEDULE OF CHARACTER DEFINING ELEMENTS

This Schedule of Character Defining Elements has been prepared at the request of the Antiquities and Monuments Office (AMO) to support applications for S.6 approval under the Antiquities and Monuments Ordinance and the Environmental Impact assessment Ordinance. The levels of significance and their meanings are derived from the work of James Semple Kerr.

For each element, the level of significance is stated, together with the planned outcome and associated mitigation measure, where applicable, and the resultant impact upon the significance. Generally, only those items subject to change are noted, and the impacts should be read as negative. Where elements are deemed currently to be adverse, the impact of the changes should be read as positive.

The levels of significance and definitions as defined by Kerr are stated below. The criteria used to assess the significance of each element are, as directed by AMO : (i) the association with the operation of the Central Police Station Compound; and (ii) its architectural quality. Where these criteria conflict, the resultant assessment score is aggregated.

Each entry in the schedule is accompanied by a photograph of a sample of the item described. The location of each photograph is noted on the floor plans attached in the appendix to the schedule. Similar examples of each item can be seen by observation.

|          | Level of significance                                                 | Meaning                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |  |  |  |  |  |  |
|----------|-----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|
|          | Exceptional                                                           | Where an individual space or element is assessed as displaying a strong contribution to the overall significance of the place. Spaces, elements or fabric exhibit a high degree of intactness and quality, though minor alterations or degradation may be evident.                                                                                                                                                                                                                                                                                                            |  |  |  |  |  |  |  |
|          | High                                                                  | Where an individual space or element is assessed as making a substantial contribution to the overall significance of the place. Spaces, elements or fabric originally of substantial quality, yet may have undergone considerable alteration or adaption resulting in presentation which is either incomplete or ambiguous. The category also includes spaces, elements or fabric of average quality in terms of design and materials, but which exhibit a high degree of intactness.                                                                                         |  |  |  |  |  |  |  |
| Positive | Moderate Where an individual space or element is assessed as making a |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |  |  |  |  |  |  |
|          | Low                                                                   | Where an individual space or element is assessed as making a minor<br>contribution to the overall significance of the place, especially when<br>compared to other features. Spaces, elements or fabric originally of little<br>intrinsic quality, any may have undergone alteration or degradation. This<br>category also includes original spaces, elements or fabric of any quality which<br>have undergone extensive alteration or adaption to the extent that only<br>isolated remnants survive (resulting in a low degree of intactness and quality<br>of presentation). |  |  |  |  |  |  |  |
|          | Neutral                                                               | Where an individual space or element is assessed as having an unimportant relationship with the overall significance of the place. Spaces, elements or fabric are assessed as having little or no significance.                                                                                                                                                                                                                                                                                                                                                               |  |  |  |  |  |  |  |
|          | Adverse                                                               | Where an individual space or element detracts from the appreciation of cultural significance, by adversely affecting or obscuring other significant areas, elements or items.                                                                                                                                                                                                                                                                                                                                                                                                 |  |  |  |  |  |  |  |

## **Central Police Station**

| Addendum                     | Date         |
|------------------------------|--------------|
| Item no. 10.029 edited entry | 18 June 2013 |
| Item no. 10.030 added        | 18 June 2013 |

### **Central Police Station**

#### **01** Police Headquarters

| Element no. | Description                                                               | Photo ref | Significance | Proposal                                                            | Mitigation                                                                        | Impact |
|-------------|---------------------------------------------------------------------------|-----------|--------------|---------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------|
| 01.001      | Flat plywood<br>ceiling lining with<br>plain rectangular<br>cover battens |           | Adverse      | Replace with T&G<br>boarding to match<br>existing                   | Not applicable                                                                    | High   |
| 01.002      | Plaster coving at<br>abutments of<br>walls and ceilings                   |           | Low          | Remove in exceptional<br>cases eg, where<br>adjacent new lift shaft | Cut back neatly to a<br>square edge and<br>ensure remaining<br>section is secure. | Low    |

### **Central Police Station**

| Element no. | Description                                                                                                            | Photo ref | Significance | Proposal                         | Mitigation                                                                                       | Impact |
|-------------|------------------------------------------------------------------------------------------------------------------------|-----------|--------------|----------------------------------|--------------------------------------------------------------------------------------------------|--------|
| 01.003      | Lay-in grid<br>suspended<br>ceiling                                                                                    |           | Adverse      | Remove                           | Not applicable                                                                                   | High   |
| 01.004      | Timber<br>thresholds at<br>external doors<br>and internal<br>doors between<br>main corridor<br>and individual<br>rooms |           | Low          | Remove to enable level<br>access | Splice extensions to<br>door jambs, extend<br>width of bottom rail of<br>doors to match existing | Low    |

| Element no. | Description            | Photo ref | Significance | Proposal                                                                        | Mitigation                                                                                            | Impact   |
|-------------|------------------------|-----------|--------------|---------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|----------|
| 01.005      | Plaster box<br>cornice |           | Moderate     | Remove in exceptional<br>cases eg. where<br>adjacent new lift shafts            | Cut back neatly to a<br>square edge and<br>ensure remaining<br>section is secure.                     | Moderate |
| 01.006      | Panelled doors         |           | Moderate     | Replace where<br>necessary to achieve<br>fire resistance to<br>comply with Code | Re-use where possible.<br>Record design on<br>survey drawings where<br>element cannot be re-<br>used. | Moderate |

### **Central Police Station**

| Element no. | Description                 | Photo ref | Significance | Proposal                                                                           | Mitigation                   | Impact |
|-------------|-----------------------------|-----------|--------------|------------------------------------------------------------------------------------|------------------------------|--------|
| 01.007      | External shutters           |           | High         | Reinstate to match<br>existing pattern                                             | Not applicable               | High   |
| 01.008      | External terraces<br>at 1/F |           | High         | Overlay existing<br>concrete paving with<br>timber deck to provide<br>level access | New deck to be<br>reversible | Low    |

| Element no. | Description                              | Photo ref | Significance | Proposal                                                             | Mitigation                                                                  | Impact |
|-------------|------------------------------------------|-----------|--------------|----------------------------------------------------------------------|-----------------------------------------------------------------------------|--------|
| 01.009      | Plaster ceilings<br>on GF and LG1        |           | Moderate     | Install cloud ceilings to<br>accommodate new<br>services             | Install fixed grid to<br>minimise damage to<br>ceiling                      | High   |
| 01.010      | Timber door<br>frames and<br>architraves |           | Moderate     | Conceal in exceptional<br>cases eg. where<br>adjacent new lift shaft | Retain architrave and<br>door frame in situ.<br>Avoid damage to<br>joinery. | High   |

### **Central Police Station**

| Element no. | Description    | Photo ref | Significance | Proposal                                                         | Mitigation                                                                                                                                                                                                                                                                                                        | Impact |
|-------------|----------------|-----------|--------------|------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 01.011      | Concrete floor |           | Low          | Replace where new<br>kitchens and plant<br>rooms to be installed | Carefully remove and<br>retain existing<br>floorboards for re-use.<br>Ensure controlled<br>demolition of concrete<br>structure and removal<br>of debris from building<br>to avoid damage to<br>adjacent surfaces.<br>Protect or carefully<br>remove and set aside<br>adjacent elements such<br>as skirting boards | Low    |

| Element no. | Description     | Photo ref | Significance | Proposal                                                                              | Mitigation     | Impact |
|-------------|-----------------|-----------|--------------|---------------------------------------------------------------------------------------|----------------|--------|
| 01.012      | Rainwater goods |           | Adverse      | Replace with cast iron<br>in pattern to match<br>original and in correct<br>locations | Not applicable | High   |

### **Central Police Station**

| Element no. | Description             | Photo ref | Significance | Proposal                 | Mitigation                                                                                               | Impact |
|-------------|-------------------------|-----------|--------------|--------------------------|----------------------------------------------------------------------------------------------------------|--------|
|             | Exterior<br>decorations |           | Adverse      | Strip off and redecorate | Sample and analyse<br>existing paint media;<br>select new media to<br>suit substrate and<br>significance | High   |

| Element no. | Description               | Photo ref | Significance | Proposal                                                   | Mitigation                                                                                                                  | Impact   |
|-------------|---------------------------|-----------|--------------|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|----------|
| 01.014      | Existing door<br>openings |           | Moderate     | Block opening as part<br>of re-planning of<br>interior     | Retain existing door<br>frame and architraves.<br>Use framing and non-<br>combustible sheet<br>linings to block<br>opening. | Moderate |
| 01.015      | Existing walls            |           | Moderate     | Form new opening as<br>part of re-planning of<br>interiors | New doors and frames<br>to be of their time to<br>avoid confusion about<br>provenance                                       | Moderate |

### **Central Police Station**

| Element no. | Description                             | Photo ref | Significance | Proposal                                                                               | Mitigation     | Impact |
|-------------|-----------------------------------------|-----------|--------------|----------------------------------------------------------------------------------------|----------------|--------|
| 01.016      | Altered doors<br>and windows            |           | Adverse      | Repair or renew as<br>necessary existing<br>frames to match<br>original patterns       | Not applicable | High   |
| 01.017      | Mezzanine floor<br>in room<br>01/LG1/13 |           | Adverse      | Remove floor and<br>supporting columns to<br>re-create original<br>double-height space | Not applicable | High   |

## **Central Police Station**

| Element no. | Description                                                 | Photo ref | Significance | Proposal                                                                                                 | Mitigation     | Impact |
|-------------|-------------------------------------------------------------|-----------|--------------|----------------------------------------------------------------------------------------------------------|----------------|--------|
| 01.018      | Cast iron grilles<br>above Service<br>Corridor<br>01/LG1/35 |           | High         | Remove existing steel<br>sheet covering<br>[alterations to grilles<br>awaiting confirmation<br>from HdM] |                |        |
| 01.019      | Perforated<br>concrete deck<br>above lightwell              |           | Adverse      | Remove deck and make<br>good brickwork at<br>abutments                                                   | Not applicable | High   |

November 2012 Draft 10
Purcell Miller Tritton LLP

### **Central Police Station**

| Element no. | Description                                                         | Photo ref | Significance | Proposal                                                                                                                   | Mitigation                                                                                                                                                  | Impact   |
|-------------|---------------------------------------------------------------------|-----------|--------------|----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| 01.020      | External<br>airconditioning<br>units and other<br>external services |           | Adverse      | Remove and make<br>good brickwork                                                                                          | Not applicable                                                                                                                                              | High     |
| 01.021      | Stair balustrades                                                   |           | High         | Balustrades to be<br>supplemented with<br>additional handrails<br>and supports to<br>mitigate non-<br>compliance with code | New fittings to be of<br>their time and made<br>reversible. Physical<br>intervention to existing<br>stairs and balustrades<br>to be kept to the<br>minimum. | Moderate |

### **Central Police Station**

| Element no. | Description    | Photo ref | Significance | Proposal                                                                                     | Mitigation                                                                                                                                                                              | Impact |
|-------------|----------------|-----------|--------------|----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 01.022      | Main corridors |           | High         | Install new lighting, fire<br>sprinklers, fire doors to<br>comply with Fire<br>Services Code | New fittings to be<br>mounted in a manner<br>that is of its time and<br>reversible. Avoid<br>physical intervention<br>with existing plaster<br>box cornices,<br>architraves, dado rails | High   |
| 01.023      | Painted signs  | LOCKLEFT  | High         | Protect in situ                                                                              | Not applicable                                                                                                                                                                          | N/A    |

| Element no. | Description | Photo ref | Significance | Proposal                                                   | Mitigation                                                                           | Impact |
|-------------|-------------|-----------|--------------|------------------------------------------------------------|--------------------------------------------------------------------------------------|--------|
| 01.024      | Fixed signs |           | Low-High     | Remove and<br>refix/display in visitors'<br>centre/discard | Record each sign and<br>assess significance<br>individually and treat<br>accordingly | N/A    |

| Element no. | Description   | Photo ref | Significance | Proposal                                                                         | Mitigation                                                                                                                                                                                                                                                                                        | Impact |
|-------------|---------------|-----------|--------------|----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 01.025      | Pitched roofs |           | High         | New penetrations<br>through roofs for<br>ventilation ducts and<br>other services | Arrange new<br>penetrations so that<br>they conform with the<br>geometry of the<br>existing roof.<br>Model the size and<br>shape of the new ducts<br>so that the impact on<br>the roofscape is<br>minimised.<br>Finish the new ducts in<br>a non-reflective<br>material in a neutral<br>mid-tone. | High   |

| Element no. | Description                                          | Photo ref | Significance | Proposal | Mitigation     | Impact   |
|-------------|------------------------------------------------------|-----------|--------------|----------|----------------|----------|
| 01.026      | Enclosure at First<br>Floor landing of<br>main stair |           | Adverse      | Remove   | Not applicable | Moderate |

| Element no. | Description                                                          | Photo ref | Significance | Proposal                                                 | Mitigation                                        | Impact   |
|-------------|----------------------------------------------------------------------|-----------|--------------|----------------------------------------------------------|---------------------------------------------------|----------|
| 01.027      | Steel railing<br>enclosure at FF<br>level                            |           | Low          | Remove                                                   | Record on measured<br>drawings and<br>photographs | Low      |
| 01.028      | Tongued and<br>grooved flat and<br>sloped timber<br>boarded ceilings |           | Moderate     | Repair where necessary<br>and reinstate where<br>missing | Not applicable                                    | Moderate |

| Element no. | Description          | Photo ref | Significance | Proposal                                                                   | Mitigation                                                                                                                             | Impact   |
|-------------|----------------------|-----------|--------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|----------|
| 01.029      | Modern<br>partitions |           | Adverse      | Remove                                                                     | Not applicable                                                                                                                         | High     |
| 01.030      | Tiled dado           |           | High         | Cut away for<br>enlargement of existing<br>windows to form new<br>doorways | Cut back to joint line<br>and adjust tiling<br>pattern to suit new<br>opening.<br>New tiles to match<br>existing sizes and<br>colours. | Moderate |

| Element no. | Description                                          | Photo ref | Significance | Proposal                                                                           | Mitigation                                                                                                                                                  | Impact   |
|-------------|------------------------------------------------------|-----------|--------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| 01.031      | Reinforced<br>concrete canopy<br>and sash<br>windows |           | Moderate     | Remove canopy and<br>replace sash windows<br>with new windows to<br>match original | Make good brickwork<br>where canopy<br>removed,<br>Reinstate rendered<br>architraves around<br>new window to match<br>similar window facing<br>on West wing | Moderate |

| Element no. | Description                                           | Photo ref | Significance | Proposal                                                                                                                     | Mitigation                                           | Impact |
|-------------|-------------------------------------------------------|-----------|--------------|------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|--------|
| 01.032      | Arched opening<br>in brick wall<br>above ceiling line |           | Low          | Retain insitu and use to<br>pass through future<br>services. Infill only<br>where opening is<br>within a fire<br>compartment | Use non-combustible<br>material to block<br>opening. | Low    |

| Element no. | Description                                                                       | Photo ref | Significance | Proposal                                  | Mitigation | Impact |
|-------------|-----------------------------------------------------------------------------------|-----------|--------------|-------------------------------------------|------------|--------|
| 01.033      | Ceiling void<br>service<br>installation (Cast<br>Iron Water Tank<br>and pipework) |           | Low          | Remove and make<br>good adjacent surfaces | N/A        | Low    |

### **Central Police Station**

#### 02 Armoury

| Element no. | Description                      | Photo ref. | Significance | Proposal | Mitigation     | Impact |
|-------------|----------------------------------|------------|--------------|----------|----------------|--------|
| 02.001      | Lay-in grid<br>suspended ceiling |            | Adverse      | Remove   | Not applicable | High   |
| 02.002      | Modern internal<br>doors         |            | Adverse      | Remove   | Not applicable | High   |

### **Central Police Station**

| Element no. | Description                                                         | Photo ref. | Significance | Proposal                          | Mitigation     | Impact |
|-------------|---------------------------------------------------------------------|------------|--------------|-----------------------------------|----------------|--------|
| 02.003      | Modern<br>partitions                                                |            | Adverse      | Remove                            | Not applicable | High   |
| 02.004      | External<br>airconditioning<br>units and other<br>external services |            | Adverse      | Remove and make good<br>brickwork | Not applicable | High   |

### **Central Police Station**

| Element no. | Description                                                     | Photo ref. | Significance | Proposal                                                        | Mitigation                                                   | Impact |
|-------------|-----------------------------------------------------------------|------------|--------------|-----------------------------------------------------------------|--------------------------------------------------------------|--------|
| 02.005      | Brickwork walls<br>enclosing rooms<br>at GF and FF East<br>side |            | Low          | Remove and reinstate<br>verandah                                | Not applicable                                               | High   |
| 02.006      | Concrete floors                                                 |            | Low          | Selected removal to<br>accommodate new stairs<br>and lift shaft | Carefully form openings<br>to ensure structural<br>stability | Low    |

# **Central Police Station**

| Element no. | Description     | Photo ref. | Significance | Proposal                                                                           | Mitigation    | Impact |
|-------------|-----------------|------------|--------------|------------------------------------------------------------------------------------|---------------|--------|
| 02.007      | Rainwater goods |            | Adverse      | Replace with cast iron in<br>pattern to match original<br>and in correct locations | No applicable | High   |

| Element no. | Description                  | Photo ref. | Significance | Proposal                                                                         | Mitigation     | Impact |
|-------------|------------------------------|------------|--------------|----------------------------------------------------------------------------------|----------------|--------|
| 02.008      | Altered doors<br>and windows |            | Adverse      | Repair or renew as<br>necessary existing frames<br>to match original<br>patterns | Not applicable | High   |

| Element no. | Description     | Photo ref. | Significance | Proposal      | Mitigation     | Impact   |
|-------------|-----------------|------------|--------------|---------------|----------------|----------|
| 02.009      | Concrete stairs |            | Adverse      | Remove stairs | Not applicable | Moderate |

| Element no. | Description                        | Photo ref. | Significance | Proposal                                                                         | Mitigation                                                                                                                                                                                                                                                            | Impact  |
|-------------|------------------------------------|------------|--------------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| 02.010      | Pitched roofs                      |            | High         | New penetrations<br>through roofs for<br>ventilation ducts and<br>other services | Arrange new<br>penetrations so that they<br>conform with the<br>geometry of the existing<br>roof.<br>Model the size and shape<br>of the new ducts to<br>reduce impact.<br>Finish ducts in a non-<br>reflective material that is<br>neutral in colour and<br>mid-tone. | High    |
| 02.011      | Roof structure<br>and tiled soffit |            | High         | Repair and retain.                                                               | N/A                                                                                                                                                                                                                                                                   | Neutral |

#### 03 Barracks Block

| Element no. | Description                      | Photo ref. | Significance | Proposal | Mitigation     | Impact |
|-------------|----------------------------------|------------|--------------|----------|----------------|--------|
| 03.001      | Lay-in grid<br>suspended ceiling |            | Adverse      | Remove   | Not applicable | High   |

| Element no. | Description    | Photo ref. | Significance | Proposal                                                                     | Mitigation                                                                                     | Impact   |
|-------------|----------------|------------|--------------|------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|----------|
| 3.002       | Panelled doors |            | Moderate     | Replace where necessary<br>to achieve fire resistance<br>to comply with Code | Re-use where possible.<br>Record design on survey<br>drawings where item<br>cannot be re-used. | Moderate |

### **Central Police Station**

| Element no. | Description                                                                                                            | Photo ref. | Significance | Proposal                               | Mitigation                                                                                       | Impact |
|-------------|------------------------------------------------------------------------------------------------------------------------|------------|--------------|----------------------------------------|--------------------------------------------------------------------------------------------------|--------|
| 03.003      | External shutters                                                                                                      |            | High         | Reinstate to match<br>existing pattern | Not applicable                                                                                   | High   |
| 03.004      | Timber<br>thresholds at<br>external doors<br>and internal<br>doors between<br>main corridor<br>and individual<br>rooms |            | Low          | Remove to enable level<br>access       | Splice extensions to door<br>jambs, extend width of<br>bottom rail of doors to<br>match existing | Low    |

# **Central Police Station**

| Element no. | Description                                | Photo ref. | Significance | Proposal                                                             | Mitigation                                                                                                                                                                                                                                                                                                             | Impact |
|-------------|--------------------------------------------|------------|--------------|----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 03.005      | Timber spandrel<br>panels below<br>windows |            | Low          | Conceal in exceptional<br>cases eg. where adjacent<br>new lift shaft | Retain frame and<br>spandrel panel where<br>possible. Remove only<br>where necessary in<br>connection with re-<br>planning of interiors.<br>Record on measured<br>survey drawings.                                                                                                                                     | Low    |
| 03.006      | Timber floors                              |            | High         | Replace where new<br>kitchens and plant rooms<br>to be installed     | Limit extent of removal<br>as much as possible.<br>Carefully remove and<br>retain existing<br>floorboards for re-use.<br>Ensure controlled<br>dismantling of timber<br>structure and set aside<br>for possible re-use.<br>Protect or carefully<br>remove and set aside<br>adjacent elements such<br>as skirting boards | Medium |

| Element no. | Description     | Photo ref. | Significance | Proposal                                                                           | Mitigation    | Impact |
|-------------|-----------------|------------|--------------|------------------------------------------------------------------------------------|---------------|--------|
| 03.007      | Rainwater goods |            | Adverse      | Replace with cast iron in<br>pattern to match original<br>and in correct locations | No applicable | High   |

# **Central Police Station**

| Element no. | Description                     | Photo ref. | Significance | Proposal                                         | Mitigation                                                                                                               | Impact |
|-------------|---------------------------------|------------|--------------|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|--------|
| 03.008      | Exterior<br>decorations         |            | Adverse      | Strip off and redecorate                         | Sample and analyse<br>existing paint media;<br>select new media to suit<br>substrate and<br>significance                 | High   |
| 03.009      | Block existing<br>door openings |            | Low          | Block opening as part of re-planning of interior | Retain existing door<br>frame and architraves.<br>Use framing and non-<br>combustible sheet linings<br>to block opening. | Low    |

### **Central Police Station**

| Element no. | Description               | Photo ref. | Significance | Proposal                                                   | Mitigation                                                                                                                                                                       | Impact |
|-------------|---------------------------|------------|--------------|------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 03.010      | Form new door<br>openings |            | Low          | Form new opening as<br>part of re-planning of<br>interiors | New doors and frames to<br>be of their time to avoid<br>confusion about<br>provenance.<br>Re-open original<br>openings where possible.<br>Retain original reveals<br>and arches. | Low    |

| Element no. | Description                  | Photo ref. | Significance | Proposal                                                                         | Mitigation     | Impact |
|-------------|------------------------------|------------|--------------|----------------------------------------------------------------------------------|----------------|--------|
| 03.011      | Altered doors<br>and windows |            | Adverse      | Repair or renew as<br>necessary existing frames<br>to match original<br>patterns | Not applicable | High   |

| Element no. | Description                                                         | Photo ref. | Significance | Proposal                                                                                                                | Mitigation                                                                                                                                               | Impact   |
|-------------|---------------------------------------------------------------------|------------|--------------|-------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| 03.012      | External<br>airconditioning<br>units and other<br>external services |            | Adverse      | Remove and make good<br>brickwork                                                                                       | Not applicable                                                                                                                                           | High     |
| 03.013      | Stair balustrades                                                   |            | High         | Balustrades to be<br>supplemented with<br>additional handrails and<br>supports to mitigate non-<br>compliance with code | New fittings to be of their<br>time and made<br>reversible. Physical<br>intervention to existing<br>stairs and balustrades to<br>be kept to the minimum. | Moderate |

### **Central Police Station**

| Element no. | Description   | Photo ref.                                                                                                                 | Significance | Proposal                                                | Mitigation                                                                           | Impact |
|-------------|---------------|----------------------------------------------------------------------------------------------------------------------------|--------------|---------------------------------------------------------|--------------------------------------------------------------------------------------|--------|
| 03.014      | Painted signs | NO VISITOR WILL BE<br>ADMITTED WITHOUT THE<br>PERMISSION OF THE D.O.<br>OR FORMATION COMMANDER<br>或官管主得未如者訪探<br>進撞得不可許官警值當 | High         | Protect in situ                                         | Not applicable                                                                       | N/A    |
| 03.015      | Fixed signs   | NO. 3 PLATOON<br>R. & F CHANGING ROOM<br>第三隊更衣室                                                                            | Low-High     | Remove and refix/display<br>in visitors' centre/discard | Record each sign and<br>assess significance<br>individually and treat<br>accordingly | N/A    |

| Element no. | Description                                 | Photo ref. | Significance | Proposal                                                                         | Mitigation                                                                                                                                                                                                                                                                                                      | Impact   |
|-------------|---------------------------------------------|------------|--------------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| 03.016      | Pitched roofs                               |            | High         | New penetrations<br>through roofs for<br>ventilation ducts and<br>other services | Arrange new<br>penetrations so that they<br>conform with the<br>geometry of the existing<br>roof.<br>Model the size and shape<br>of the new ducts so that<br>the impact on the<br>roofscape is minimised.<br>Finish the new ducts in a<br>non-reflective material<br>that is neutral in colour<br>and mid-tone. | High     |
| 03.017      | Lean-to structure<br>adjacent North<br>wall |            | Moderate     | Remove                                                                           | Record on measured<br>survey drawings.<br>Make good walls where<br>roof structure abuts                                                                                                                                                                                                                         | Moderate |

| Element no. | Description                                      | Photo ref. | Significance | Proposal                                                                                              | Mitigation                                                                                                                                                                                                                                                                                                                                                                                        | Impact   |
|-------------|--------------------------------------------------|------------|--------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| 03.018      | Metal-frames<br>windows at GF<br>North elevation |            | Adverse      | Remove window frames,<br>masonry spandrel panels<br>below and reinstate<br>verandah                   | Not applicable                                                                                                                                                                                                                                                                                                                                                                                    | High     |
| 03.019      | Internal walls at<br>Ground Floor<br>level       |            | Moderate     | Remove selected internal<br>walls where strictly<br>necessary as part of re-<br>planning of interiors | Walls of early or original<br>date to be retained in<br>part eg. by leaving a<br>"nib" where the wall is<br>bonded to another wall.<br>At the point where the<br>wall is cut away, form the<br>cut-line on the line of a<br>vertical joint in alternate<br>courses. Bricks in the<br>remaining courses to be<br>left "as cut", and not re-<br>bonded.<br>Record walls on<br>measured survey dwgs. | Moderate |

| Element no. | Description                                                | Photo ref. | Significance | Proposal                                                                                                                | Mitigation                                                                                                                                                                                                                                                                        | Impact   |
|-------------|------------------------------------------------------------|------------|--------------|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| 03.020      | Assembly rooms<br>at centre of<br>building (all<br>floors) |            | Moderate     | Sub-divide two rooms on<br>each floor to provide<br>service core, comprising:<br>lifts, toilets, plant rooms,<br>stores | Form new sub-visions<br>using lightweight<br>partitions to achieve<br>reversibility.<br>Form straight joints at<br>abutments with existing<br>retained walls.<br>Notch new partitions<br>around existing brick<br>corbels at high level as a<br>reminder of current<br>condition. | Moderate |
| 03.021      | Exposed soffits of<br>timber floors                        |            | Moderate     | Underline existing floors<br>to achieve specified fire<br>resistance stated in Code                                     | Avoid unnecessary<br>damage to existing<br>structure.<br>New lining will reduce<br>extent of intervention<br>into existing structure.<br>Keep level of new linings<br>well clear of window<br>heads.                                                                              | Moderate |

| Element no. | Description                                    | Photo ref. | Significance | Proposal                                                      | Mitigation                                                                                                                                                                                                                                                                                        | Impact |
|-------------|------------------------------------------------|------------|--------------|---------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 03.022      | Existing window<br>frames/openings             |            | High         | Open up selected<br>openings to form new<br>fire escape doors | Retain any salvageable<br>material for possible re-<br>use elsewhere.<br>Retain existing window<br>jambs intact. Cut away<br>masonry to form door<br>openings along same line<br>as window jamb; do not<br>re-bind cut brickwork.<br>Record existing condition<br>on measured survey<br>drawings. | Low    |
| 03.023      | Single storey<br>outbuildings on<br>south side |            | Adverse      | Demolish                                                      | Check for evidence of<br>early route from<br>Magistracy to Prison.                                                                                                                                                                                                                                | Low    |

| Element no. | Description           | Photo ref. | Significance | Proposal | Mitigation     | Impact  |
|-------------|-----------------------|------------|--------------|----------|----------------|---------|
| 03.024      | Bridge at east<br>end |            | Moderate     | Retain   | Not applicable | Neutral |

### **Central Police Station**

| Element no. | Description                                          | Photo ref. | Significance | Proposal                                                                                                              | Mitigation                                                                                              | Impact  |
|-------------|------------------------------------------------------|------------|--------------|-----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|---------|
| 03.025      | Chimneypiece on<br>Ground Floor                      |            | Low          | Repair and retain in current location                                                                                 | Not applicable                                                                                          | Neutral |
| 03.026      | Window in south<br>wall; original<br>dormitory space |            | Moderate     | Remove window and<br>take down brickwork<br>spandrel; subdivide space<br>to form new fire-<br>protected escape route. | Record existing condition<br>on measured survey<br>drawings.<br>New partition wall to be<br>reversible. | Low     |

### **Central Police Station**

| Element no. | Description                                          | Photo ref. | Significance | Proposal                                       | Mitigation                            | Impact |
|-------------|------------------------------------------------------|------------|--------------|------------------------------------------------|---------------------------------------|--------|
| 03.027      | Clay-tiled floor in<br>store room<br>adjacent stairs |            | Low          | Remove as part of re-<br>planning of interiors | Record on measured<br>survey drawings | Low    |

### **Central Police Station**

#### 04 Dormitory Block A & B

| Element no. | Description                                                                                                            | Photo ref. | Significance | Proposal                         | Mitigation                                                                                       | Impact |
|-------------|------------------------------------------------------------------------------------------------------------------------|------------|--------------|----------------------------------|--------------------------------------------------------------------------------------------------|--------|
| 04.001      | Lay-in grid<br>suspended ceiling                                                                                       |            | Adverse      | Remove                           | Not applicable                                                                                   | High   |
| 04.002      | Timber<br>thresholds at<br>external doors<br>and internal<br>doors between<br>main corridor<br>and individual<br>rooms |            | Low          | Remove to enable level<br>access | Splice extensions to door<br>jambs, extend width of<br>bottom rail of doors to<br>match existing | Low    |

# **Central Police Station**

| Element no. | Description            | Photo ref. | Significance | Proposal                                                                   | Mitigation                                                                        | Impact   |
|-------------|------------------------|------------|--------------|----------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------|
| 04.003      | Plaster box<br>cornice |            | Moderate     | Remove in exceptional<br>cases where eg. where<br>adjacent new lift shafts | Cut back neatly to a<br>square edge and ensure<br>remaining section is<br>secure. | Moderate |

| Element no. | Description     | Photo ref. | Significance | Proposal                                                                           | Mitigation    | Impact |
|-------------|-----------------|------------|--------------|------------------------------------------------------------------------------------|---------------|--------|
| 04.004      | Rainwater goods |            | Adverse      | Replace with cast iron in<br>pattern to match original<br>and in correct locations | No applicable | High   |

| Element no. | Description             | Photo ref. | Significance | Proposal                 | Mitigation                                                                                               | Impact |
|-------------|-------------------------|------------|--------------|--------------------------|----------------------------------------------------------------------------------------------------------|--------|
| 04.005      | Exterior<br>decorations |            | Adverse      | Strip off and redecorate | Sample and analyse<br>existing paint media;<br>select new media to suit<br>substrate and<br>significance | High   |

| Element no. | Description                     | Photo ref. | Significance | Proposal                                         | Mitigation                                                                                                               | Impact   |
|-------------|---------------------------------|------------|--------------|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|----------|
| 04.006      | Block existing<br>door openings |            | Moderate     | Block opening as part of re-planning of interior | Retain existing door<br>frame and architraves.<br>Use framing and non-<br>combustible sheet linings<br>to block opening. | Moderate |

# **Central Police Station**

| Element no. | Description               | Photo ref. | Significance | Proposal                                                   | Mitigation                                                                            | Impact   |
|-------------|---------------------------|------------|--------------|------------------------------------------------------------|---------------------------------------------------------------------------------------|----------|
| 04.007      | Form new door<br>openings |            | Moderate     | Form new opening as<br>part of re-planning of<br>interiors | New doors and frames to<br>be of their time to avoid<br>confusion about<br>provenance | Moderate |

| Element no. | Description                  | Photo ref. | Significance | Proposal                                                                         | Mitigation     | Impact |
|-------------|------------------------------|------------|--------------|----------------------------------------------------------------------------------|----------------|--------|
| 04.008      | Altered doors<br>and windows |            | Adverse      | Repair or renew as<br>necessary existing frames<br>to match original<br>patterns | Not applicable | High   |

| Element no. | Description                                                    | Photo ref. | Significance | Proposal                                                                           | Mitigation     | Impact |
|-------------|----------------------------------------------------------------|------------|--------------|------------------------------------------------------------------------------------|----------------|--------|
| 04.009      | Window frames<br>in arcades of<br>North and East<br>elevations |            | Adverse      | Remove window frames<br>and make good masonry<br>reveals and reinstate<br>verandah | Not applicable | High   |

| Element no. | Description                                                         | Photo ref. | Significance | Proposal                          | Mitigation     | Impact |
|-------------|---------------------------------------------------------------------|------------|--------------|-----------------------------------|----------------|--------|
| 04.010      | External<br>airconditioning<br>units and other<br>external services |            | Adverse      | Remove and make good<br>brickwork | Not applicable | High   |

| Element no. | Description       | Photo ref. | Significance | Proposal                                                                                                                | Mitigation                                                                                                                                               | Impact   |
|-------------|-------------------|------------|--------------|-------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| 04.011      | Stair balustrades |            | High         | Balustrades to be<br>supplemented with<br>additional handrails and<br>supports to mitigate non-<br>compliance with code | New fittings to be of their<br>time and made<br>reversible. Physical<br>intervention to existing<br>stairs and balustrades to<br>be kept to the minimum. | Moderate |

### **Central Police Station**

| Element no. | Description                         | Photo ref. | Significance | Proposal                           | Mitigation                                                                                                | Impact   |
|-------------|-------------------------------------|------------|--------------|------------------------------------|-----------------------------------------------------------------------------------------------------------|----------|
| 04.012      | Stair from First to<br>Second Floor |            | High         | Replace stair to improve<br>safety | New stair to be built of<br>steel to comply with<br>Code and to distinguish it<br>as being "of its time". | Moderate |

| Element no. | Description           | Photo ref. | Significance | Proposal                                                                                                                           | Mitigation                                                                                                                                                                                                                                                                                                         | Impact |
|-------------|-----------------------|------------|--------------|------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 04.013      | External<br>verandahs |            | High         | Install new lighting, fire<br>sprinklers, fire doors to<br>comply with Fire Services<br>Code, extract ducting to<br>external walls | New fittings to be<br>mounted in a manner<br>that is of its time and<br>reversible. Avoid<br>physical intervention<br>with existing plaster box<br>cornices in rooms,<br>architraves, dado rails.<br>Position outlet grilles in<br>extneral walls on centre-<br>line of arcade arches and<br>above structural arch | High   |

### **Central Police Station**

| Element no. | Description   | Photo ref. | Significance | Proposal                                                | Mitigation                                                                           | Impact |
|-------------|---------------|------------|--------------|---------------------------------------------------------|--------------------------------------------------------------------------------------|--------|
| 04.014      | Painted signs | BLOCK A    | High         | Protect in situ                                         | Not applicable                                                                       | N/A    |
| 04.015      | Fixed signs   |            | Low-High     | Remove and refix/display<br>in visitors' centre/discard | Record each sign and<br>assess significance<br>individually and treat<br>accordingly | N/A    |

| Element no. | Description   | Photo ref. | Significance | Proposal                                                                         | Mitigation                                                                                                                                                                                                                                                                                      | Impact |
|-------------|---------------|------------|--------------|----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 04.016      | Pitched roofs |            | High         | New penetrations<br>through roofs for<br>ventilation ducts and<br>other services | Arrange new<br>penetrations so that they<br>conform with the<br>geometry of the existing<br>roof.<br>Model the size and shape<br>of the new ducts so that<br>the impact on the<br>roofscape is minimised.<br>Finish the new ducts in a<br>non-reflective material<br>that is neutral in colour. | High   |

| Element no. | Description                     | Photo ref. | Significance | Proposal                         | Mitigation     | Impact |
|-------------|---------------------------------|------------|--------------|----------------------------------|----------------|--------|
| 04.017      | Toilets at ends of<br>verandahs |            | Adverse      | Remove and make good<br>finishes | Not applicable | High   |

| Element no. | Description                     | Photo ref. | Significance | Proposal                                 | Mitigation                                                         | Impact   |
|-------------|---------------------------------|------------|--------------|------------------------------------------|--------------------------------------------------------------------|----------|
| 04.018      | Partitions at GF<br>Dormitory A |            | High         | Remove to make way for<br>Interpretation | Prepare measured<br>drawings and<br>photographs before<br>removal. | Moderate |

| Element no. | Description                        | Photo ref. | Significance | Proposal                                                        | Mitigation     | Impact |
|-------------|------------------------------------|------------|--------------|-----------------------------------------------------------------|----------------|--------|
| 04.019      | Switchgear in old<br>porch 04/G/13 |            | Adverse      | Open up porch, remove<br>electrical switchgear and<br>make good | Not applicable | High   |

### **Central Police Station**

| Element no. | Description                                                               | Photo ref. | Significance | Proposal                                          | Mitigation     | Impact |
|-------------|---------------------------------------------------------------------------|------------|--------------|---------------------------------------------------|----------------|--------|
| 04.020      | Flat plywood<br>ceiling lining with<br>plain rectangular<br>cover battens |            | Adverse      | Replace with T&G<br>boarding to match<br>existing | Not applicable | High   |

## **Central Police Station**

| Element no. | Description                              | Photo ref. | Significance | Proposal                                                     | Mitigation                                          | Impact   |
|-------------|------------------------------------------|------------|--------------|--------------------------------------------------------------|-----------------------------------------------------|----------|
| 04.021      | Steps up to<br>doorway on FF<br>verandah |            | Moderate     | Remove steps and<br>doorway to form new<br>fore escape route | Record steps and<br>doorway on measured<br>drawings | Moderate |

## **Central Police Station**

| Element no. | Description                                        | Photo ref. | Significance | Proposal                                   | Mitigation                                                           | Impact |
|-------------|----------------------------------------------------|------------|--------------|--------------------------------------------|----------------------------------------------------------------------|--------|
| 04.022      | Timber boarded<br>floors with<br>moulded skirtings |            | High         | Retain all boarded floors<br>and skirtings | Reinstate floor boards<br>and skirtings after fire<br>proofing works | Low    |

| Element no. | Description             | Photo ref. | Significance | Proposal                                                                      | Mitigation                                                                                                                                                                            | Impact |
|-------------|-------------------------|------------|--------------|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 04.023      | Cantilever<br>balconies |            | High         | Retain and repair as<br>necessary.<br>Reinstate balcony on<br>west elevation. | Avoid highly visible<br>intervention to enhance<br>structural integrity<br>and/or compliance with<br>building codes.<br>Restrict access if<br>necessary to achieve this<br>objective. | Low    |

# **Central Police Station**

| Element no. | Description                                              | Photo ref. | Significance | Proposal                          | Mitigation     | Impact  |
|-------------|----------------------------------------------------------|------------|--------------|-----------------------------------|----------------|---------|
| 04.024      | Clay tile floor                                          |            | Low          | Retain and repair as<br>necessary | Not applicable | Neutral |
| 04.025      | Matched-<br>boarded ceiling<br>with perforated<br>border |            | Moderate     | Repair and retain insitu          | Not applicable | Neutral |

# **Central Police Station**

| Element no. | Description  | Photo ref. | Significance | Proposal                 | Mitigation     | Impact  |
|-------------|--------------|------------|--------------|--------------------------|----------------|---------|
| 04.026      | Ceiling rose |            | Low          | Repair and retain insitu | Not applicable | Neutral |

## **Central Police Station**

#### 06 Dormitory C

| Element no. | Description                                | Photo ref. | Significance | Proposal                                                                         | Mitigation                                                                                                                                                                                                                                                                                                      | Impact |
|-------------|--------------------------------------------|------------|--------------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 06.001      | Granite<br>thresholds at<br>external doors |            | Low          | Retain; install timber<br>deck flush with level of<br>step where necessary       | Avoid alteration to step.                                                                                                                                                                                                                                                                                       | Low    |
| 06.002      | Pitched roof                               |            | High         | New penetrations<br>through roofs for<br>ventilation ducts and<br>other services | Arrange new<br>penetrations so that they<br>conform with the<br>geometry of the existing<br>roof.<br>Model the size and shape<br>of the new ducts so that<br>the impact on the<br>roofscape is minimised.<br>Finish the new ducts in a<br>non-reflective material<br>that is neutral in colour<br>and mid-tone. | High   |

### **Central Police Station**

| Element no. | Description             | Photo ref. | Significance | Proposal                                                                           | Mitigation                                                                                               | Impact   |
|-------------|-------------------------|------------|--------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|----------|
| 06.003      | Rainwater goods         |            | Adverse      | Replace with cast iron in<br>pattern to match original<br>and in correct locations | Not applicable                                                                                           | High     |
| 06.004      | Exterior<br>decorations |            | Adverse      | Strip off and redecorate                                                           | Sample and analyse<br>existing paint media;<br>select new media to suit<br>substrate and<br>significance | Moderate |

## **Central Police Station**

| Element no. | Description                                                         | Photo ref. | Significance | Proposal | Mitigation                                                                       | Impact            |
|-------------|---------------------------------------------------------------------|------------|--------------|----------|----------------------------------------------------------------------------------|-------------------|
| 06.005      | Altered doors<br>and windows                                        |            | Adverse      | Adverse  | Repair or renew as<br>necessary existing frames<br>to match original<br>patterns | Not<br>applicable |
| 06.006      | External<br>airconditioning<br>units and other<br>external services |            | Adverse      | Adverse  | Remove and make good<br>brickwork                                                | Not<br>applicable |

## **Central Police Station**

| Element no. | Description   | Photo ref.                                                                               | Significance | Proposal                                                | Mitigation                                                                           | Impact |
|-------------|---------------|------------------------------------------------------------------------------------------|--------------|---------------------------------------------------------|--------------------------------------------------------------------------------------|--------|
| 06.007      | Painted signs | CECCEC                                                                                   | High         | Protect in situ                                         | Not applicable                                                                       | N/A    |
| 06.008      | Fixed signs   | 有生著<br>DEPARTMENT OF HEALTH<br>中央 警署 診療所<br>POLICE MEDICAL POST<br>CENTRAL POLICE STATIN | Low-High     | Remove and refix/display<br>in visitors' centre/discard | Record each sign and<br>assess significance<br>individually and treat<br>accordingly | N/A    |

## **Central Police Station**

| Element no. | Description             | Photo ref. | Significance | Proposal                           | Mitigation                                                                                                                                                                            | Impact |
|-------------|-------------------------|------------|--------------|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 06.009      | Cantilever<br>balconies |            | High         | Retain and repair as necessary.    | Avoid highly visible<br>intervention to enhance<br>structural integrity<br>and/or compliance with<br>building codes.<br>Restrict access if<br>necessary to achieve this<br>objective. | Low    |
| 06.010      | Iron balustrades        |            | High         | Retain and repair as<br>necessary. | Avoid highly visible<br>intervention to enhance<br>structural integrity<br>and/or compliance with<br>building codes.<br>Restrict access if<br>necessary to achieve this<br>objective. | Low    |

| Element no. | Description                                        | Photo ref. | Significance | Proposal                                         | Mitigation                                                                                                                                             | Impact   |
|-------------|----------------------------------------------------|------------|--------------|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| 06.011      | Perforated<br>margin at<br>perimeter of<br>ceiling |            | Low          | Repair and retain.                               | Where fire-proofing of<br>floor is required, use a<br>product that can be<br>installed within the floor<br>void, leaving the ceiling<br>lining intact. | Low      |
| 06.012      | Block existing<br>door openings                    |            | Moderate     | Block opening as part of re-planning of interior | Retain existing door<br>frame and architraves.<br>Use framing and non-<br>combustible sheet linings<br>to block opening.                               | Moderate |

## **Central Police Station**

| Element no. | Description               | Photo ref. | Significance | Proposal                                                                                                                | Mitigation                                                                                                                                               | Impact   |
|-------------|---------------------------|------------|--------------|-------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| 06.013      | Form new door<br>openings |            | Moderate     | Form new opening as<br>part of re-planning of<br>interiors                                                              | New doors and frames to<br>be of their time to avoid<br>confusion about<br>provenance                                                                    | Moderate |
| 06.014      | Stair balustrades         |            | High         | Balustrades to be<br>supplemented with<br>additional handrails and<br>supports to mitigate non-<br>compliance with code | New fittings to be of their<br>time and made<br>reversible. Physical<br>intervention to existing<br>stairs and balustrades to<br>be kept to the minimum. | Moderate |

## **Central Police Station**

| Element no. | Description      | Photo ref. | Significance | Proposal                                                    | Mitigation                                                           | Impact   |
|-------------|------------------|------------|--------------|-------------------------------------------------------------|----------------------------------------------------------------------|----------|
| 06.015      | Timber floors    |            | High         | Retain all boarded floors<br>and skirtings                  | Reinstate floor boards<br>and skirtings after fire<br>proofing works | Low      |
| 06.016      | Vinyl tile floor |            | Adverse      | Remove tiles; renew<br>boarded floor boards if<br>necessary | Not applicable                                                       | Moderate |

## **Central Police Station**

| Element no. | Description                        | Photo ref. | Significance | Proposal                              | Mitigation                                                                                                                       | Impact |
|-------------|------------------------------------|------------|--------------|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|--------|
| 06.017      | Batten and panel<br>ceiling lining |            | Low          | Replace with lath and plaster ceiling | Not applicable                                                                                                                   | Low    |
| 06.018      | Exposed roof<br>covering           |            | Moderate     | Retain as existing                    | Consider insulating<br>between upper and<br>lower layers of roof tiles<br>to provide thermal<br>insulation and vapour<br>barrier | Low    |

#### 07 Dormitory D

| Element no. | Description     | Photo ref. | Significance | Proposal                                                                           | Mitigation                                                                                                                                                                                                                                                                                                      | Impact |
|-------------|-----------------|------------|--------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 07.001      | Pitched roofs   |            | High         | New penetrations<br>through roofs for<br>ventilation ducts and<br>other services   | Arrange new<br>penetrations so that they<br>conform with the<br>geometry of the existing<br>roof.<br>Model the size and shape<br>of the new ducts so that<br>the impact on the<br>roofscape is minimised.<br>Finish the new ducts in a<br>non-reflective material<br>that is neutral in colour<br>and mid-tone. | High   |
| 07.002      | Rainwater goods |            | Adverse      | Replace with cast iron in<br>pattern to match original<br>and in correct locations | No applicable                                                                                                                                                                                                                                                                                                   | High   |

| Element no. | Description                  | Photo ref. | Significance | Proposal                                                                         | Mitigation                                                                                               | Impact |
|-------------|------------------------------|------------|--------------|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|--------|
| 07.003      | Exterior<br>decorations      |            | Adverse      | Strip off and redecorate                                                         | Sample and analyse<br>existing paint media;<br>select new media to suit<br>substrate and<br>significance | High   |
| 07.004      | Altered doors<br>and windows |            | Adverse      | Repair or renew as<br>necessary existing frames<br>to match original<br>patterns | Not applicable                                                                                           | High   |

### **Central Police Station**

| Element no. | Description                                                         | Photo ref. | Significance | Proposal                          | Mitigation     | Impact |
|-------------|---------------------------------------------------------------------|------------|--------------|-----------------------------------|----------------|--------|
| 07.005      | External<br>airconditioning<br>units and other<br>external services |            | Adverse      | Remove and make good<br>brickwork | Not applicable | High   |
| 07.006      | Clothes drying<br>racks                                             |            | Adverse      | Remove                            | Not applicable | Low    |

| Element no. | Description                                       | Photo ref. | Significance | Proposal                                                                   | Mitigation                                                                        | Impact |
|-------------|---------------------------------------------------|------------|--------------|----------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------|
| 07.008      | Lay-in grid<br>suspended ceiling                  |            | Adverse      | Remove                                                                     | Not applicable                                                                    | High   |
| 07.009      | Corbelled<br>brickwork at<br>perimeter of<br>room |            | Low          | Remove in exceptional<br>cases where eg. where<br>adjacent new lift shafts | Cut back neatly to a<br>square edge and ensure<br>remaining section is<br>secure. | Low    |

| Element no. | Description                                                                                                            | Photo ref. | Significance | Proposal                              | Mitigation                                                                                       | Impact |
|-------------|------------------------------------------------------------------------------------------------------------------------|------------|--------------|---------------------------------------|--------------------------------------------------------------------------------------------------|--------|
| 07.010      | Plywood floor                                                                                                          |            | Adverse      | Replace with hardwood<br>floor boards | Not applicable                                                                                   | High   |
| 07.011      | Timber<br>thresholds at<br>external doors<br>and internal<br>doors between<br>main corridor<br>and individual<br>rooms |            | Low          | Remove to enable level<br>access      | Splice extensions to door<br>jambs, extend width of<br>bottom rail of doors to<br>match existing | Low    |

## **Central Police Station**

| Element no. | Description               | Photo ref. | Significance | Proposal                                                                                                                | Mitigation                                                                                                                                               | Impact   |
|-------------|---------------------------|------------|--------------|-------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| 07.012      | Form new door<br>openings |            | Moderate     | Form new opening as<br>part of re-planning of<br>interiors                                                              | New doors and frames to<br>be of their time to avoid<br>confusion about<br>provenance                                                                    | Moderate |
| 07.013      | Stair balustrades         |            | High         | Balustrades to be<br>supplemented with<br>additional handrails and<br>supports to mitigate non-<br>compliance with code | New fittings to be of their<br>time and made<br>reversible. Physical<br>intervention to existing<br>stairs and balustrades to<br>be kept to the minimum. | Moderate |

| Element no. | Description | Photo ref.                                                                                                                                                   | Significance | Proposal                                                | Mitigation                                                                           | Impact |
|-------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------------------------------------------|--------------------------------------------------------------------------------------|--------|
| 07.014      | Fixed signs | 中央子子会子会子<br>Control 1: tree Stanue Acellent Por<br>二日 社会社 月 王<br>日本 日本 日 王<br>日本 日本 日<br>日<br>日本 日本 日<br>日<br>日<br>日<br>日<br>日<br>日<br>日<br>日<br>日<br>日<br>日 | Low-High     | Remove and refix/display<br>in visitors' centre/discard | Record each sign and<br>assess significance<br>individually and treat<br>accordingly | N/A    |

## **Central Police Station**

| Element no. | Description            | Photo ref. | Significance | Proposal                              | Mitigation                                                                                                                       | Impact   |
|-------------|------------------------|------------|--------------|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|----------|
| 07.015      | Exposed roof<br>tiling |            | Moderate     | Retain as existing                    | Consider insulating<br>between upper and<br>lower layers of roof tiles<br>to provide thermal<br>insulation and vapour<br>barrier | Low      |
| 07.016      | Concrete floor         |            | Adverse      | Overlay with hardwood<br>floor boards | Not applicable                                                                                                                   | Moderate |

### **Central Police Station**

#### **08** Ablutions Block

| Element no. | Description     | Photo ref. | Significance | Proposal                                                                           | Mitigation                                                                                        | Impact   |
|-------------|-----------------|------------|--------------|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|----------|
| 08.001      | Panelled doors  |            | Low          | Replace where necessary<br>to achieve compliance<br>with Building Code             | Re-use where possible.<br>Record design on survey<br>drawings where element<br>cannot be re-used. | Moderate |
| 08.002      | Rainwater goods |            | Adverse      | Replace with cast iron in<br>pattern to match original<br>and in correct locations | No applicable                                                                                     | High     |

## **Central Police Station**

| Element no. | Description                     | Photo ref. | Significance | Proposal                                         | Mitigation                                                                                                               | Impact   |
|-------------|---------------------------------|------------|--------------|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|----------|
| 08.003      | Exterior<br>decorations         |            | Adverse      | Strip off and redecorate                         | Sample and analyse<br>existing paint media;<br>select new media to suit<br>substrate and<br>significance                 | High     |
| 08.004      | Block existing<br>door openings |            | Moderate     | Block opening as part of re-planning of interior | Retain existing door<br>frame and architraves.<br>Use framing and non-<br>combustible sheet linings<br>to block opening. | Moderate |

| Element no. | Description                   | Photo ref. | Significance | Proposal | Mitigation                                                                                                                                                                 | Impact  |
|-------------|-------------------------------|------------|--------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| 08.005      | Timber roof<br>structure      |            | High         | Retain   | Not applicable                                                                                                                                                             | Neutral |
| 08.006      | External stair at<br>west end |            | Moderate     | Retain   | Repair as necessary.<br>Alter balustrade to<br>achieve reasonable level<br>of operational safety.<br>Restrict access to repairs<br>and maintenance and<br>means of escape. | Low     |

### **Central Police Station**

| Element no. | Description                                                         | Photo ref.                                                                                                                | Significance | Proposal                          | Mitigation     | Impact |
|-------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|--------------|-----------------------------------|----------------|--------|
| 08.007      | External<br>airconditioning<br>units and other<br>external services |                                                                                                                           | Adverse      | Remove and make good<br>brickwork | Not applicable | High   |
| 08.008      | Painted signs                                                       | NO VISITOR WILL BE<br>ADMITTED WITHOUT THE<br>PERMISSION OF THE D.O.<br>OR FORMARIO/FORMANDER<br>支官查達羅本如者分辨<br>道證得來可非當查頂書 | High         | Protect in situ                   | Not applicable | N/A    |

### **Central Police Station**

| Element no. | Description                        | Photo ref. | Significance | Proposal                                                      | Mitigation                                                                                                                                                                                                                        | Impact |
|-------------|------------------------------------|------------|--------------|---------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 08.009      | Wire mesh<br>screens               |            | Adverse      | Remove                                                        | Not applicable                                                                                                                                                                                                                    | Low    |
| 08.010      | Internal walls and concrete floors |            | Low          | Remove and rebuild in<br>new configuration to suit<br>new use | Ensure retained facades<br>are fully supported<br>during construction<br>operations.<br>Protect retained walls<br>against damage during<br>demolition works.<br>Install new walls and<br>floors to respect<br>fenestration; avoid | Low    |

### **Central Police Station**

| Element no. | Description                              | Photo ref. | Significance | Proposal                 | Mitigation     | Impact |
|-------------|------------------------------------------|------------|--------------|--------------------------|----------------|--------|
|             |                                          |            |              |                          | clashes.       |        |
| 08.011      | Cantilever<br>balconies on<br>north side |            | Moderate     | Repair and retain insitu | Not applicable |        |

| Element no. | Description                       | Photo ref. | Significance | Proposal                                                                                                                                   | Mitigation                                                                                                                                                                                 | Impact |
|-------------|-----------------------------------|------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 08.012      | Bridge access to<br>Barrack Block |            | Moderate     | Retain                                                                                                                                     | Repair as necessary.<br>Alter balustrade to<br>achieve reasonable level<br>of operational safety.<br>Restrict access to repairs<br>and maintenance and<br>means of escape.                 | Low    |
| 08.013      | Balcony<br>balustrades            |            | Low          | Repair as necessary and<br>retain.<br>Remove selected sections<br>to enable installation of<br>new bridge connections<br>to Barrack Block. | Avoid removal of<br>associated iron columns.<br>Form interventions at<br>selected positions so as<br>to maintain the rhythm<br>of the balustrades and<br>ensure proper support at<br>ends. | Low    |

| Element no. | Description                                            | Photo ref. | Significance | Proposal                                     | Mitigation                                                                                                                                                                                                                                | Impact |
|-------------|--------------------------------------------------------|------------|--------------|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 08.014      | Single-storey<br>outbuilding with<br>pitched roof over |            | Low          | Demolish to make way<br>for new loading bay. | Record on measured<br>survey drawings.<br>Infill existing internal<br>opening leaving reveals<br>exposed.<br>Tooth-in new brickwork<br>at abutments after<br>existing walls removed.<br>Salvage cast iron columns<br>for possible re-use. | Low    |
| 08.015      | Corrugated steel<br>sheet on balcony<br>balustrades    |            | Adverse      | Remove                                       | Not applicable                                                                                                                                                                                                                            | Low    |

**Central Police Station** 

### **Central Police Station**

#### 09 Magistracy

| Element no. | Description                      | Photo ref. | Significance | Proposal | Mitigation     | Impact |
|-------------|----------------------------------|------------|--------------|----------|----------------|--------|
| 09.001      | Lay-in grid<br>suspended ceiling |            | Adverse      | Remove   | Not applicable | High   |
| 09.002      | Modern<br>partitions             |            | Adverse      | Remove   | Not applicable | N/A    |

| Element no. | Description            | Photo ref. | Significance | Proposal                                                                                              | Mitigation                                                                                                                                                                                                                                                                                                                                                                                     | Impact   |
|-------------|------------------------|------------|--------------|-------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| 09.003      | Internal walls         |            | Moderate     | Remove selected internal<br>walls where strictly<br>necessary as part of re-<br>planning of interiors | Walls or early or original<br>date to be retained in<br>part eg. By leaving a<br>"nib" where the wall is<br>bonded to another wall.<br>At the point where the<br>wall is cut away, form the<br>cut-line on the line of a<br>vertical joint in alternate<br>courses. Bricks in the<br>remaining courses to be<br>left "as cut", and not re-<br>bonded, as evidence of<br>the current condition. | Moderate |
| 09.004      | Plaster box<br>cornice |            | Moderate     | Remove in exceptional<br>cases eg. Where adjacent<br>new lift shafts                                  | Cut back neatly to a<br>square edge and ensure<br>remaining section is<br>secure.                                                                                                                                                                                                                                                                                                              | Moderate |

# **Central Police Station**

| Element no. | Description    | Photo ref. | Significance | Proposal                                                                     | Mitigation                                                                                        | Impact   |
|-------------|----------------|------------|--------------|------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|----------|
| 09.005      | Panelled doors |            | Moderate     | Replace where necessary<br>to achieve fire resistance<br>to comply with Code | Re-use where possible.<br>Record design on survey<br>drawings where element<br>cannot be re-used. | Moderate |

## **Central Police Station**

| Element no. | Description                     | Photo ref. | Significance | Proposal                                                   | Mitigation                                                                                                               | Impact   |
|-------------|---------------------------------|------------|--------------|------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|----------|
| 09.006      | Block existing<br>door openings |            | Moderate     | Block opening as part of<br>re-planning of interior        | Retain existing door<br>frame and architraves.<br>Use framing and non-<br>combustible sheet linings<br>to block opening. | Moderate |
| 09.007      | Form new door<br>openings       |            | Moderate     | Form new opening as<br>part of re-planning of<br>interiors | New doors and frames to<br>be of their time to avoid<br>confusion about<br>provenance                                    | Moderate |

# **Central Police Station**

| Element no. | Description       | Photo ref. | Significance | Proposal                                                                                                                | Mitigation                                                                                                                                               | Impact   |
|-------------|-------------------|------------|--------------|-------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| 09.008      | Stair balustrades |            | High         | Balustrades to be<br>supplemented with<br>additional handrails and<br>supports to mitigate non-<br>compliance with code | New fittings to be of their<br>time and made<br>reversible. Physical<br>intervention to existing<br>stairs and balustrades to<br>be kept to the minimum. | Moderate |
| 09.009      | Fixed signs       |            | Low-High     | Remove and refix/display<br>in visitors' centre/discard                                                                 | Record each sign and<br>assess significance<br>individually and treat<br>accordingly                                                                     | N/A      |

| Element no. | Description                                                         | Photo ref. | Significance | Proposal                                                                         | Mitigation                                                                                                                                                                                                                                                                                                      | Impact |
|-------------|---------------------------------------------------------------------|------------|--------------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 09.010      | External<br>airconditioning<br>units and other<br>external services |            | Adverse      | Remove and make good<br>brickwork                                                | Not applicable                                                                                                                                                                                                                                                                                                  | High   |
| 09.011      | Pitched roofs                                                       |            | High         | New penetrations<br>through roofs for<br>ventilation ducts and<br>other services | Arrange new<br>penetrations so that they<br>conform with the<br>geometry of the existing<br>roof.<br>Model the size and shape<br>of the new ducts so that<br>the impact on the<br>roofscape is minimised.<br>Finish the new ducts in a<br>non-reflective material<br>that is neutral in colour<br>and mid-tone. | High   |

## **Central Police Station**

| Element no. | Description                        | Photo ref. | Significance | Proposal                                                              | Mitigation                                                                            | Impact |
|-------------|------------------------------------|------------|--------------|-----------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------|
| 09.012      | Rainwater goods                    |            | Moderate     | Replace with larger<br>sizes/closer spacing to<br>improve performance | Use cast iron to match<br>original pattern<br>Make good all redundant<br>fixing holes | High   |
| 09.013      | Metal walkways<br>across lightwell |            | Adverse      | Remove walkways and<br>make good brickwork at<br>abutments            | Not applicable                                                                        | High   |

### **Central Police Station**

| Element no. | Description                                           | Photo ref. | Significance | Proposal                                                                         | Mitigation     | Impact   |
|-------------|-------------------------------------------------------|------------|--------------|----------------------------------------------------------------------------------|----------------|----------|
| 09.014      | Altered doors<br>and windows                          |            | Adverse      | Repair or renew as<br>necessary existing frames<br>to match original<br>patterns | Not applicable | High     |
| 09.015      | Sloping canopy<br>over external<br>stair on west side |            | Adverse      | Remove canopy and<br>supporting structure                                        | Not applicable | Moderate |

# **Central Police Station**

| Element no. | Description                                                    | Photo ref. | Significance | Proposal                                                                                                               | Mitigation                           | Impact  |
|-------------|----------------------------------------------------------------|------------|--------------|------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------|
| 09.016      | Single storey<br>secure shelter at<br>North West<br>corner     |            | Low          | Demolish                                                                                                               | Make good brickwork at<br>abutments. | Low     |
| 09.017      | Iron railing<br>adjacent south<br>side of item<br>09.016 above |            | Moderate     | Retain; including remains<br>of bars (now removed)<br>between existing railings<br>and east side of Barracks<br>Block. | Not applicable                       | Neutral |

| Element no. | Description                        | Photo ref. | Significance | Proposal                                                                                                                  | Mitigation                                                                                                                     | Impact |
|-------------|------------------------------------|------------|--------------|---------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|--------|
| 09.018      | Public toilets in<br>09/LG1/17, 24 |            | Adverse      | Strip out sanitaryware,<br>and fit-out for pottery<br>display/service access.<br>Form new door openings<br>in east walls. | Retain existing door<br>openings and metal-<br>barred gates.<br>Retain external granite<br>steps and existing ground<br>level. | Low    |
| 09.019      | Cell doors                         |            | High         | Re-open to provide<br>access to Retail space                                                                              | Retain existing iron gate                                                                                                      | Low    |

## **Central Police Station**

| Element no. | Description                             | Photo ref. | Significance | Proposal                                                                                      | Mitigation                                                                                            | Impact   |
|-------------|-----------------------------------------|------------|--------------|-----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|----------|
| 09.020      | Meeting room at<br>G/02-05              |            | Moderate     | Remove timber panelling<br>from walls and sub divide<br>to form new toilets and<br>lift shaft | Record existing wall<br>linings, and any earlier<br>lining behind, on<br>measured survey<br>drawings. | Moderate |
| 09.021      | Lobbies within<br>entrance hall<br>G/12 |            | Adverse      | Remove                                                                                        | Not applicable                                                                                        | N/A      |

### **Central Police Station**

| Element no. | Description               | Photo ref. | Significance | Proposal                                                            | Mitigation     | Impact  |
|-------------|---------------------------|------------|--------------|---------------------------------------------------------------------|----------------|---------|
| 09.022      | Public galleries<br>on FF |            | Adverse      | Strip out plant, remove<br>partition walls and<br>restore galleries | Not applicable | High    |
| 09.023      | Chimney piece             |            | Moderate     | Retain                                                              | Not applicable | Neutral |

## **Central Police Station**

| Element no. | Description                         | Photo ref. | Significance | Proposal                                               | Mitigation                                                                                                                                                   | Impact   |
|-------------|-------------------------------------|------------|--------------|--------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| 09.024      | Lanterns above<br>entrance hall     |            | Adverse      | Remove existing lanterns<br>and install single lantern | Not applicable                                                                                                                                               | Moderate |
| 09.025      | Boarded ceilings<br>on Second Floor |            | High         | Repair and retain where possible                       | Limit extent of<br>penetrations as far as<br>practicable.<br>Record on measured<br>survey drawings where<br>ceilings have<br>exceptionally to be<br>removed. | Low      |

| Element no. | Description                                                        | Photo ref. | Significance | Proposal                                                                                                              | Mitigation                                                                          | Impact  |
|-------------|--------------------------------------------------------------------|------------|--------------|-----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 09.026      | Iron gates at top<br>of external stair                             |            | Moderate     | Retain                                                                                                                | No applicable                                                                       | Neutral |
| 09.027      | Iron balustrade<br>adjacent terrace<br>at First Floor east<br>side |            | High         | Retain; install structural<br>glass balustrade inboard<br>of ironwork to provide<br>compliance with Building<br>Codes | Avoid penetration of<br>existing tiled pavement<br>when fixing glass<br>balustrade. | Low     |

### **Central Police Station**

#### **10** Assistant Superintendent's Office

| Element no. | Description                      | Photo ref. | Significance | Proposal                                                             | Mitigation                                                                        | Impact   |
|-------------|----------------------------------|------------|--------------|----------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------|
| 10.001      | Lay-in grid<br>suspended ceiling |            | Adverse      | Remove                                                               | Not applicable                                                                    | High     |
| 10.002      | Plaster box<br>cornice           |            | Moderate     | Remove in exceptional<br>cases eg. Where adjacent<br>new lift shafts | Cut back neatly to a<br>square edge and ensure<br>remaining section is<br>secure. | Moderate |

| Element no. | Description                   | Photo ref. | Significance | Proposal                                                                     | Mitigation                                                                                        | Impact   |
|-------------|-------------------------------|------------|--------------|------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|----------|
| 10.003      | Panelled doors<br>and linings |            | Moderate     | Replace where necessary<br>to achieve fire resistance<br>to comply with Code | Re-use where possible.<br>Record design on survey<br>drawings where element<br>cannot be re-used. | Moderate |

| Element no. | Description                                       | Photo ref. | Significance | Proposal                       | Mitigation                                                                                               | Impact |
|-------------|---------------------------------------------------|------------|--------------|--------------------------------|----------------------------------------------------------------------------------------------------------|--------|
| 10.004      | Timber boarded<br>floor with<br>moulded skirtings |            | High         | Repair as necessary and retain | Lift carefully and refix<br>upon completion of fire-<br>proofing and services<br>installation            | Low    |
| 10.005      | Exterior<br>decorations                           |            | Adverse      | Strip off and redecorate       | Sample and analyse<br>existing paint media;<br>select new media to suit<br>substrate and<br>significance | High   |

# **Central Police Station**

| Element no. | Description                     | Photo ref. | Significance | Proposal                                                   | Mitigation                                                                                                               | Impact   |
|-------------|---------------------------------|------------|--------------|------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|----------|
| 10.006      | Block existing<br>door openings |            | Moderate     | Block opening as part of re-planning of interior           | Retain existing door<br>frame and architraves.<br>Use framing and non-<br>combustible sheet linings<br>to block opening. | Moderate |
| 10.007      | Form new door<br>openings       |            | Moderate     | Form new opening as<br>part of re-planning of<br>interiors | New doors and frames to<br>be of their time to avoid<br>confusion about<br>provenance                                    | Moderate |

| Element no. | Description                                                         | Photo ref. | Significance | Proposal                                                                         | Mitigation     | Impact |
|-------------|---------------------------------------------------------------------|------------|--------------|----------------------------------------------------------------------------------|----------------|--------|
| 10.008      | Altered doors<br>and windows                                        |            | Adverse      | Repair or renew as<br>necessary existing frames<br>to match original<br>patterns | Not applicable | High   |
| 10.009      | External<br>airconditioning<br>units and other<br>external services |            | Adverse      | Remove and make good<br>brickwork                                                | Not applicable | High   |

| Element no. | Description       | Photo ref. | Significance | Proposal                                                                                                                | Mitigation                                                                                                                                               | Impact   |
|-------------|-------------------|------------|--------------|-------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| 10.010      | Stair balustrades |            | High         | Balustrades to be<br>supplemented with<br>additional handrails and<br>supports to mitigate non-<br>compliance with code | New fittings to be of their<br>time and made<br>reversible. Physical<br>intervention to existing<br>stairs and balustrades to<br>be kept to the minimum. | Moderate |

| Element no. | Description   | Photo ref. | Significance | Proposal                                                                         | Mitigation                                                                                                                                                                                                                                                                                                      | Impact |
|-------------|---------------|------------|--------------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 10.011      | Fixed signs   |            | Low-High     | Remove and refix/display<br>in visitors' centre/discard                          | Record each sign and<br>assess significance<br>individually and treat<br>accordingly                                                                                                                                                                                                                            | N/A    |
| 10.012      | Pitched roofs |            | High         | New penetrations<br>through roofs for<br>ventilation ducts and<br>other services | Arrange new<br>penetrations so that they<br>conform with the<br>geometry of the existing<br>roof.<br>Model the size and shape<br>of the new ducts so that<br>the impact on the<br>roofscape is minimised.<br>Finish the new ducts in a<br>non-reflective material<br>that is neutral in colour<br>and mid-tone. | High   |

| Element no. | Description    | Photo ref. | Significance | Proposal                                                                                              | Mitigation                                                                                                                                                                                                                                                                                                                                                                                     | Impact   |
|-------------|----------------|------------|--------------|-------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| 10.013      | Internal walls |            | Moderate     | Remove selected internal<br>walls where strictly<br>necessary as part of re-<br>planning of interiors | Walls or early or original<br>date to be retained in<br>part eg. By leaving a<br>"nib" where the wall is<br>bonded to another wall.<br>At the point where the<br>wall is cut away, form the<br>cut-line on the line of a<br>vertical joint in alternate<br>courses. Bricks in the<br>remaining courses to be<br>left "as cut", and not re-<br>bonded, as evidence of<br>the current condition. | Moderate |

| Element no. | Description                                                    | Photo ref. | Significance | Proposal                                                                 | Mitigation                                | Impact   |
|-------------|----------------------------------------------------------------|------------|--------------|--------------------------------------------------------------------------|-------------------------------------------|----------|
| 10.014      | Partitions on SF                                               |            | Moderate     | Remove partitions                                                        | Record partitions on<br>measured drawings | Moderate |
| 10.015      | Blocked windows<br>on south<br>elevation of<br>south-east wing |            | Adverse      | Re-open window<br>openings and reinstate<br>window frames and<br>glazing | Not applicable                            | Moderate |

# **Central Police Station**

| Element no. | Description                                                       | Photo ref. | Significance | Proposal                                    | Mitigation                                                                                                                                       | Impact  |
|-------------|-------------------------------------------------------------------|------------|--------------|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| 10.016      | Open-joisted<br>ceiling on Ground<br>Floor of south-<br>east wing |            | Moderate     | Underline floor to provide fire protection. | Avoid intrusive<br>alteration.<br>Use fire-proofing<br>products and methods<br>that enable existing<br>structure and boarding to<br>be retained. | Low     |
| 10.017      | Moulded timber<br>picture rail                                    |            | Low          | Repair and retain                           | Not applicable                                                                                                                                   | Neutral |

# **Central Police Station**

| Element no. | Description                                       | Photo ref. | Significance | Proposal                                 | Mitigation                                                | Impact |
|-------------|---------------------------------------------------|------------|--------------|------------------------------------------|-----------------------------------------------------------|--------|
| 10.018      | Timber roof<br>structure above<br>south-east wing |            | Moderate     | Repair as necessary and retain           | Avoid intrusive<br>alteration.<br>Retain open appearance/ | Low    |
| 10.019      | Timber stair                                      |            | Moderate     | Underline with fire-<br>resisting lining | Repair as necessary and retain.                           | Low    |

# **Central Police Station**

| Element no. | Description                                              | Photo ref. | Significance | Proposal                                                            | Mitigation                                                                                   | Impact |
|-------------|----------------------------------------------------------|------------|--------------|---------------------------------------------------------------------|----------------------------------------------------------------------------------------------|--------|
| 10.020      | Clay/terrazzo tile<br>floor on Ground<br>Floor and steps |            | Adverse      | Adjust levels to enable<br>level access and replace<br>floor finish | Not applicable                                                                               | Low    |
| 10.024      | Granite wall on<br>North elevation                       |            | High         | Construct new external steps adjacent wall                          | Keep new stair clear of<br>wall; avoid any physical<br>connection between<br>steps and wall. | Low    |

| Element no. | Description                                          | Photo ref. | Significance | Proposal                                           | Mitigation                                                             | Impact   |
|-------------|------------------------------------------------------|------------|--------------|----------------------------------------------------|------------------------------------------------------------------------|----------|
| 10.025      | Single storey<br>outbuilding at<br>South East corner |            | Moderate     | Demolish outbuilding and<br>make good at abutments | Record outbuilding on<br>measured drawings                             | Low      |
| 10.026      | Blocked archway<br>on East elevation                 |            | Adverse      | Demolish infilling and re-<br>open archway         | Protect original arch and<br>jambs against damage<br>during demolition | Moderate |

| Element no. | Description                  | Photo ref. | Significance | Proposal                       | Mitigation                                                                                             | Impact  |
|-------------|------------------------------|------------|--------------|--------------------------------|--------------------------------------------------------------------------------------------------------|---------|
| 10.027      | Chimney on east<br>elevation |            | Low          | Retain                         | Not applicable                                                                                         | Neutral |
| 10.028      | Cantilever<br>balconies      |            | High         | Repair as necessary and retain | Avoid intrusive<br>interventions.<br>Restrict access if<br>necessary to retain<br>existing appearance. | Neutral |

| Element no. | Description                                             | Photo ref. | Significance | Proposal                       | Mitigation     | Impact   |
|-------------|---------------------------------------------------------|------------|--------------|--------------------------------|----------------|----------|
| 10.029      | Steps on east<br>elevation                              |            | Moderate     | Repair as necessary and retain | Not applicable | Neutral  |
| 10.030      | Decorative metal<br>screen<br>(See also item<br>10.026) |            | Low          | Repair and retain              | Not applicable | Positive |

### **Central Police Station**

#### 11 A Hall

| Element no. | Description               | Photo ref. | Significance | Proposal                                                   | Mitigation                                                                            | Impact |
|-------------|---------------------------|------------|--------------|------------------------------------------------------------|---------------------------------------------------------------------------------------|--------|
| 11.001      | Form new door<br>openings |            | Low          | Form new opening as<br>part of re-planning of<br>interiors | New doors and frames to<br>be of their time to avoid<br>confusion about<br>provenance | Low    |

### **Central Police Station**

| Element no. | Description                                                         | Photo ref. | Significance | Proposal                          | Mitigation     | Impact |
|-------------|---------------------------------------------------------------------|------------|--------------|-----------------------------------|----------------|--------|
| 11.002      | External<br>airconditioning<br>units and other<br>external services |            | Adverse      | Remove and make good<br>brickwork | Not applicable | High   |
| 11.003      | Painted signs                                                       |            | High         | Protect in situ                   | Not applicable | N/A    |

| Element no. | Description     | Photo ref.                              | Significance | Proposal                                                     | Mitigation                                                                           | Impact |
|-------------|-----------------|-----------------------------------------|--------------|--------------------------------------------------------------|--------------------------------------------------------------------------------------|--------|
| 11.004      | Fixed signs     | 警告<br>小心地滑<br>CAUTION<br>SLIPPERY FLOOR | Low-High     | Remove and refix/display<br>in visitors' centre/discard      | Record each sign and<br>assess significance<br>individually and treat<br>accordingly | N/A    |
| 11.005      | Concrete stairs |                                         | Low          | Remove and rebuild as<br>part of re-planning of<br>interiors | None                                                                                 | Low    |

# **Central Police Station**

| Element no. | Description                      | Photo ref. | Significance | Proposal                                                                         | Mitigation                                                             | Impact |
|-------------|----------------------------------|------------|--------------|----------------------------------------------------------------------------------|------------------------------------------------------------------------|--------|
| 11.006      | Flat roof                        |            | Low          | Form new rooftop<br>extension at West end to<br>accommodate fire escape<br>stair | Form straight joint at<br>abutment with building<br>08 Ablutions Block | Low    |
| 11.007      | Security screen at<br>roof level |            | Low          | Remove                                                                           | Record on measured<br>survey drawings                                  | Low    |

| Element no. | Description     | Photo ref. | Significance | Proposal                                                                           | Mitigation     | Impact |
|-------------|-----------------|------------|--------------|------------------------------------------------------------------------------------|----------------|--------|
| 11.008      | Rainwater goods |            | Adverse      | Replace with cast iron in<br>pattern to match original<br>and in correct locations | Not applicable | High   |

| Element no. | Description     | Photo ref. | Significance | Proposal                                                                                         | Mitigation                                                  | Impact |
|-------------|-----------------|------------|--------------|--------------------------------------------------------------------------------------------------|-------------------------------------------------------------|--------|
| 11.009      | Rainwater goods |            | Low          | Remove embedded cast<br>iron pipework set into<br>wall to reduce long term<br>maintenance burden | Record on measured<br>survey drawings.<br>Make good cavity. | Low    |

| Element no. | Description  | Photo ref. | Significance | Proposal          | Mitigation     | Impact  |
|-------------|--------------|------------|--------------|-------------------|----------------|---------|
| 11.010      | Timber doors |            | Low          | Repair and retain | Not applicable | Neutral |

# **Central Police Station**

| Element no. | Description                                   | Photo ref. | Significance | Proposal                                                   | Mitigation                            | Impact  |
|-------------|-----------------------------------------------|------------|--------------|------------------------------------------------------------|---------------------------------------|---------|
| 11.011      | Security screen<br>and door at First<br>Floor |            | Low          | Remove                                                     | Record on measured<br>survey drawings | Low     |
| 11.012      | Door thresholds<br>and plinth                 |            | Low          | Retain; remove paint<br>media from plinth and<br>brickwork | Not applicable                        | Neutral |

# **Central Police Station**

| Element no. | Description                         | Photo ref. | Significance | Proposal | Mitigation     | Impact |
|-------------|-------------------------------------|------------|--------------|----------|----------------|--------|
| 11.013      | Metal louvres on<br>window openings |            | Adverse      | Remove   | Not applicable | Low    |

### **Central Police Station**

#### 12 B Hall

| Element no. | Description       | Photo ref. | Significance | Proposal                                                                                     | Mitigation                                                                                                                                                                                                                 | Impact   |
|-------------|-------------------|------------|--------------|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| 12.001      | Flat roof         |            | Moderate     | Repair and retain                                                                            | Avoid roof penetrations as far as possible                                                                                                                                                                                 | Low      |
| 12.002      | Cells at GF level |            | High         | Remove cells in selected<br>locations to accommodate<br>new North-South route across<br>site | Record existing layout on<br>measured survey drawings.<br>Limit number of cells<br>affected to the minimum<br>necessary.<br>Retain floor structure above.<br>Retain remainder of cells at<br>this level for interpretation | Moderate |

# **Central Police Station**

| Element no. | Description                                                         | Photo ref. | Significance | Proposal                          | Mitigation     | Impact |
|-------------|---------------------------------------------------------------------|------------|--------------|-----------------------------------|----------------|--------|
| 12.003      | External<br>airconditioning units<br>and other external<br>services |            | Adverse      | Remove and make good<br>brickwork | Not applicable | High   |
| 12.004      | Painted signs                                                       |            | High         | Protect in situ                   | Not applicable | N/A    |

| Element no. | Description     | Photo ref. | Significance | Proposal                                                                           | Mitigation                                                                        | Impact |
|-------------|-----------------|------------|--------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------|
| 12.005      | Fixed signs     |            | Low-High     | Remove and refix/display in<br>visitors' centre/discard                            | Record each sign and assess<br>significance individually and<br>treat accordingly | N/A    |
| 12.006      | Rainwater goods |            | Adverse      | Replace with cast iron in<br>pattern to match original and<br>in correct locations | Not applicable                                                                    | High   |

# **Central Police Station**

| Element no. | Description                                   | Photo ref. | Significance | Proposal | Mitigation                          | Impact  |
|-------------|-----------------------------------------------|------------|--------------|----------|-------------------------------------|---------|
| 12.007      | Corbelled brickwork<br>at high level in cells |            | Low          | Retain   | Not applicable                      | Neutral |
| 12.008      | Barbed wire                                   |            | Moderate     | Remove   | Record wire on measured<br>drawings | Low     |

# **Central Police Station**

| Element no. | Description    | Photo ref. | Significance | Proposal                                                                                              | Mitigation                                                                                  | Impact   |
|-------------|----------------|------------|--------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|----------|
| 12.009      | External walls |            | Moderate     | Form openings in North and<br>South walls in conjunction<br>with new North-South route<br>across site | Cut brickwork to form<br>openings in North and South<br>walls; do not re-bond<br>brickwork. | Moderate |

# **Central Police Station**

#### 13 C Hall

| Element no. | Description                                                         | Photo ref. | Significance | Proposal | Mitigation     | Impact   |
|-------------|---------------------------------------------------------------------|------------|--------------|----------|----------------|----------|
| 13.001      | External<br>airconditioning<br>units and other<br>external services |            | Adverse      | Remove   | Not applicable | Moderate |

# **Central Police Station**

| Element no. | Description                         | Photo ref. | Significance | Proposal | Mitigation     | Impact  |
|-------------|-------------------------------------|------------|--------------|----------|----------------|---------|
| 13.002      | Door to Ladder<br>Store             |            | Low          | Retain   | Not applicable | Neutral |
| 13.003      | Security bars at<br>window openings |            | Low          | Retain   | Not applicable | Neutral |

June 2013 Draft 11
Purcell Miller Tritton LLP

142

# **Central Police Station**

| Element no. | Description  | Photo ref. | Significance | Proposal | Mitigation                                     | Impact  |
|-------------|--------------|------------|--------------|----------|------------------------------------------------|---------|
| 13.004      | Flat roof    |            | Low          | Retain   | Avoid roof penetrations<br>as far as possible. | Low     |
| 13.005      | Eaves detail |            | Low          | Retain   | Not applicable                                 | Neutral |

| Element no. | Description                                 | Photo ref. | Significance | Proposal | Mitigation     | Impact  |
|-------------|---------------------------------------------|------------|--------------|----------|----------------|---------|
| 13.006      | Cantilever<br>reinforced<br>concrete canopy |            | Low          | Retain   | Not applicable | Neutral |

# **Central Police Station**

| Element no. | Description                 | Photo ref. | Significance | Proposal                                                | Mitigation                                                                           | Impact |
|-------------|-----------------------------|------------|--------------|---------------------------------------------------------|--------------------------------------------------------------------------------------|--------|
| 13.007      | Internal partition<br>walls |            | Low          | Remove as part of re-<br>planning of interiors          | Record on measured<br>survey drawings                                                | Low    |
| 13.008      | Fixed signs                 |            | Low-High     | Remove and refix/display<br>in visitors' centre/discard | Record each sign and<br>assess significance<br>individually and treat<br>accordingly | N/A    |

# **Central Police Station**

| Element no. | Description                  | Photo ref. | Significance | Proposal              | Mitigation                                                                   | Impact  |
|-------------|------------------------------|------------|--------------|-----------------------|------------------------------------------------------------------------------|---------|
| 13.009      | Metal window<br>frames       |            | Moderate     | Repair and retain     | Not applicable                                                               | Neutral |
| 13.010      | Internal security<br>screens |            | Moderate     | Retain where possible | Where necessary record<br>on measured survey<br>drawings prior to<br>removal | Low     |

# **Central Police Station**

| Element no. | Description                                             | Photo ref. | Significance | Proposal                                                                | Mitigation                                                                  | Impact |
|-------------|---------------------------------------------------------|------------|--------------|-------------------------------------------------------------------------|-----------------------------------------------------------------------------|--------|
| 13.011      | Coving at<br>abutments<br>between RC<br>beams and walls |            | Low          | Avoid penetrations for<br>services installations as<br>far as possible. | Cut away neatly for<br>services penetrations and<br>make good at abutments. | Low    |
| 13.012      | Communal cells<br>at Ground Floor                       |            | Moderate     | Remove as part of re-<br>planning of interiors                          | Record on measured<br>survey drawings                                       | Low    |

# **Central Police Station**

| Element no. | Description                                           | Photo ref. | Significance | Proposal                                       | Mitigation                            | Impact  |
|-------------|-------------------------------------------------------|------------|--------------|------------------------------------------------|---------------------------------------|---------|
| 13.013      | Rooflight and<br>security bars over<br>communal cells |            | Moderate     | Remove as part of re-<br>planning of interiors | Record on measured<br>survey drawings | Low     |
| 13.014      | Granite threshold<br>at external door<br>openings     |            | Low          | Retain                                         | Not applicable                        | Neutral |

# **Central Police Station**

| Element no. | Description                                   | Photo ref. | Significance | Proposal                       | Mitigation     | Impact  |
|-------------|-----------------------------------------------|------------|--------------|--------------------------------|----------------|---------|
| 13.015      | Timber boarded<br>doors with<br>fanlight over |            | Low          | Repair as necessary and retain | Not applicable | Neutral |
| 13.015      | Vinyl tile floor                              |            | Adverse      | Replace                        | Not applicable | Low     |

June 2013 Draft 11
Purcell Miller Tritton LLP

149

### **Central Police Station**

| Element no. | Description | Photo ref. | Significance | Proposal | Mitigation | Impact |
|-------------|-------------|------------|--------------|----------|------------|--------|
|             |             |            |              |          |            |        |

# **Central Police Station**

#### 14 D Hall East Wing

| Element no.<br>Description           | Photo ref. | Significance | Proposal                                    | Mitigation                                                                                                                                                                                                           | Impact |
|--------------------------------------|------------|--------------|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 14.001 West ent<br>Lower Gr<br>Floor |            | Moderate     | Retain as public entrance<br>at this level. | Retain security gate and<br>granite threshold.<br>Adjust adjacent ground<br>level as necessary to<br>achieve barrier-free<br>access.<br>Pin gate back against<br>adjacent wall in the open<br>position if necessary. | Low    |

# **Central Police Station**

| Element no.<br>Description |                                      | Photo ref. | Significance | Proposal | Mitigation                                              | Impact |
|----------------------------|--------------------------------------|------------|--------------|----------|---------------------------------------------------------|--------|
| head                       | -round<br>ded doorway<br>side lights |            | Moderate     | Retain   | Remove air duct and<br>make good masonry<br>above arch. | Low    |

| Element no. | Description                                                                                                       | Photo ref. | Significance | Proposal                                         | Mitigation                                                                          | Impact |
|-------------|-------------------------------------------------------------------------------------------------------------------|------------|--------------|--------------------------------------------------|-------------------------------------------------------------------------------------|--------|
| 14.003      | Granite surround<br>to cells (generally<br>north side,<br>alternating with<br>brick surrounds –<br>see next item) |            | Moderate     | Retain door surround and gate wherever possible. | Pin back gate against<br>wall.<br>Remove paint media to<br>expose granite material. | Low    |

| Element no. | Description                                                                                                                                                              | Photo ref. | Significance | Proposal                                        | Mitigation                 | Impact |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------|-------------------------------------------------|----------------------------|--------|
| 14.004      | Brick reveals with<br>bull-nosed<br>arrisses and<br>segmental arch<br>over (generally<br>north side,<br>alternating with<br>granite surrounds<br>– see previous<br>item) |            | High         | Retain door surround and gate wherever possible | Pin back gate against wall | Low    |

# **Central Police Station**

| Element no. | Description                                             | Photo ref. | Significance | Proposal                                               | Mitigation                                                                                  | Impact |
|-------------|---------------------------------------------------------|------------|--------------|--------------------------------------------------------|---------------------------------------------------------------------------------------------|--------|
| 14.005      | Arched opening<br>at East end First<br>Floor            |            | Low          | Retain as existing                                     | Not applicable                                                                              | Low    |
| 14.006      | Concrete floor<br>generally at<br>Lower Ground<br>Floor |            | Low          | Excavate entire floor to<br>install piled underpinning | Record levels on<br>measured survey<br>drawings.<br>Install new floor at the<br>same level. | Low    |

June 2013 Draft 11
Purcell Miller Tritton LLP

155

| Element no. | Description                                                                         | Photo ref. | Significance | Proposal                                                         | Mitigation                                                                                                     | Impact |
|-------------|-------------------------------------------------------------------------------------|------------|--------------|------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|--------|
| 14.007      | Part-blocked<br>windows at<br>Lower Ground<br>Floor - extent of<br>blocking varies. |            | Moderate     | Open up window<br>opening to full extent.                        | Record existing condition<br>on measured survey<br>drawings. Add further<br>detail during demolition<br>works. | Low    |
| 14.008      | External granite<br>stair from Lower<br>Ground to<br>Ground Floor<br>level          |            | Moderate     | Remove stair to make<br>way for new stair in<br>similar position | Review design proposals<br>to see whether existing<br>stair can be retained.                                   | Low    |

# **Central Police Station**

| Element no. | Description                         | Photo ref. | Significance | Proposal                                           | Mitigation                                                                                                                                 | Impact |
|-------------|-------------------------------------|------------|--------------|----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 14.009      | Ashlar pattern on<br>external walls |            | Moderate     | Form new openings for<br>entrance/exit to building | Set out new openings to<br>cause minimum<br>disruption to ashlar<br>pattern.<br>Record existing pattern<br>on measured survey<br>drawings. | Low    |

| Element no. | Description                                | Photo ref. | Significance | Proposal                            | Mitigation     | Impact  |
|-------------|--------------------------------------------|------------|--------------|-------------------------------------|----------------|---------|
| 14.010      | Blocked doorway<br>at south-east<br>corner |            | Low          | Preserve blocked<br>opening intact. | Not applicable | Neutral |

# **Central Police Station**

| Element no. | Description                       | Photo ref. | Significance | Proposal      | Mitigation                                | Impact  |
|-------------|-----------------------------------|------------|--------------|---------------|-------------------------------------------|---------|
| 14.011      | Metal security<br>gate and screen |            | Low          | Retain insitu | Pin gate in open position<br>if necessary | Neutral |

| Element no. | Description                                                                    | Photo ref. | Significance | Proposal                                     | Mitigation     | Impact   |
|-------------|--------------------------------------------------------------------------------|------------|--------------|----------------------------------------------|----------------|----------|
| 14.012      | Half-round<br>headed doorway<br>and side lights at<br>Ground Floor<br>west end |            | Moderate     | Retain insitu                                | Not applicable | Neutral  |
| 14.013      | Structural<br>steelwork bracing<br>and temporary<br>access stair               |            | Adverse      | Remove upon<br>completion of<br>underpinning | Not applicable | Moderate |

# **Central Police Station**

| Element no. | Description                                      | Photo ref. | Significance | Proposal                                                                                                                                                                | Mitigation                     | Impact |
|-------------|--------------------------------------------------|------------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------|
| 14.014      | RC staircase at<br>north-east corner             |            | Low          | Remove                                                                                                                                                                  | Record on measured<br>drawings | Low    |
| 14.015      | Vinyl tile floor on<br>suspended<br>timber floor |            | Adverse      | Remove vinyl tiles and<br>restore boards if<br>possible; alternatively,<br>replace boards with new<br>timber to match other<br>boarded floors elsewhere<br>on the site. | Not applicable                 | Low    |

| Element no. | Description                   | Photo ref. | Significance | Proposal      | Mitigation                                                                                                                         | Impact |
|-------------|-------------------------------|------------|--------------|---------------|------------------------------------------------------------------------------------------------------------------------------------|--------|
| 14.016      | Cell walls at<br>Ground Floor |            | Moderate     | Retain insitu | Use existing door<br>openings wherever<br>possible.<br>Avoid further alteration<br>to existing altered<br>openings where feasible. | Low    |

| Element no. | Description                                                            | Photo ref. | Significance | Proposal                                                                | Mitigation                                                                           | Impact  |
|-------------|------------------------------------------------------------------------|------------|--------------|-------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------|
| 14.017      | Mortuary                                                               |            | High         | Preserve insitu                                                         | Avoid any service<br>penetrations from<br>adjacent spaces                            | Neutral |
| 14.018      | Brickwork<br>surrounds to<br>doorways with<br>segmental arches<br>over |            | Moderate     | Increase width in<br>selected locations to<br>allow wheelchairs to pass | Record on measured<br>survey drawings.<br>Limit interventions as far<br>as possible. | Low     |

| Element no. | Description                                              | Photo ref. | Significance | Proposal                                                                | Mitigation                                                                           | Impact |
|-------------|----------------------------------------------------------|------------|--------------|-------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------|
| 14.019      | Granite<br>surrounds to<br>doorways with<br>lintels over |            | Moderate     | Increase width in<br>selected locations to<br>allow wheelchairs to pass | Record on measured<br>survey drawings.<br>Limit interventions as far<br>as possible. | Low    |
| 14.020      | Flat ceilings at<br>Ground Floor                         |            | Low          | Form penetrations for<br>services installations<br>where necessary      | Avoid disruption of beams.                                                           | Low    |

# **Central Police Station**

| Element no. | Description                   | Photo ref. | Significance | Proposal      | Mitigation     | Impact  |
|-------------|-------------------------------|------------|--------------|---------------|----------------|---------|
| 14.021      | Arched opening<br>at east end |            | Low          | Retain insitu | Not applicable | Neutral |

# **Central Police Station**

| Element no. | Description             | Photo ref. | Significance | Proposal      | Mitigation     | Impact  |
|-------------|-------------------------|------------|--------------|---------------|----------------|---------|
| 14.022      | Top-lit central<br>hall |            | High         | Retain insitu | Not applicable | Neutral |

| Element no. | Description                                     | Photo ref. | Significance | Proposal      | Mitigation     | Impact  |
|-------------|-------------------------------------------------|------------|--------------|---------------|----------------|---------|
| 14.023      | Arches across<br>central hall at<br>First Floor |            | Moderate     | Retain insitu | Not applicable | Neutral |

| Element no. | Description                                               | Photo ref. | Significance | Proposal               | Mitigation                                                    | Impact |
|-------------|-----------------------------------------------------------|------------|--------------|------------------------|---------------------------------------------------------------|--------|
| 14.024      | Inset security<br>gate and screen<br>in First Floor cells |            | Low          | Remove to suit new use | Remove where<br>necessary.<br>Record on measured<br>drawings. | Low    |

### **Central Police Station**

#### 14 D Hall West Wing

| Element no. | Description | Photo ref. | Significance | Proposal                     | Mitigation                     | Impact |
|-------------|-------------|------------|--------------|------------------------------|--------------------------------|--------|
| 14.030      | Main stair  |            | High         | Remove wire mesh and framing | Record on measured<br>drawings | Low    |

### **Central Police Station**

| Element no. | Description                                          | Photo ref. | Significance | Proposal                               | Mitigation                            | Impact   |
|-------------|------------------------------------------------------|------------|--------------|----------------------------------------|---------------------------------------|----------|
| 14.031      | Brick vault over<br>central hall at<br>Ground Floor  |            | High         | Retain insitu                          | Not applicable                        | Neutral  |
| 14.032      | Terrazzo floor in<br>central hall at<br>Ground floor |            | Moderate     | Remove to enable piled<br>underpinning | Record on measured<br>survey drawings | Moderate |

# **Central Police Station**

| Element no. | Description                  | Photo ref. | Significance | Proposal                                             | Mitigation                      | Impact  |
|-------------|------------------------------|------------|--------------|------------------------------------------------------|---------------------------------|---------|
| 14.033      | Brick vaults<br>above cells  |            | High         | Retain insitu                                        | Avoid penetrations for services | Neutral |
| 14.034      | Cell walls (later additions) |            | Moderate     | Remove where necessary<br>to accommodate new<br>cafe | Record on measured<br>drawings  | Low     |

| Element no. | Description                                                                      | Photo ref. | Significance | Proposal                          | Mitigation                            | Impact |
|-------------|----------------------------------------------------------------------------------|------------|--------------|-----------------------------------|---------------------------------------|--------|
| 14.035      | Brickwork<br>spandrels below<br>cell windows on<br>south side at<br>Ground Floor |            | Moderate     | Remove to accommodate<br>new cafe | Record on measured<br>survey drawings | Low    |

| Element no. | Description                         | Photo ref. | Significance | Proposal                          | Mitigation                                                                                      | Impact   |
|-------------|-------------------------------------|------------|--------------|-----------------------------------|-------------------------------------------------------------------------------------------------|----------|
| 14.036      | Cell walls flanking<br>central hall |            | High         | Remove to accommodate<br>new cafe | Record on measured<br>survey drawings.<br>Retain selected cells for<br>interpretation purposes. | Moderate |

# **Central Police Station**

| Element no. | Description | Photo ref. | Significance | Proposal                               | Mitigation                            | Impact |
|-------------|-------------|------------|--------------|----------------------------------------|---------------------------------------|--------|
| 14.037      | Cell floors |            | Low          | Remove to enable piled<br>underpinning | Record on measured<br>survey drawings | Low    |

| Element no. | Description                                                 | Photo ref. | Significance | Proposal                          | Mitigation                            | Impact |
|-------------|-------------------------------------------------------------|------------|--------------|-----------------------------------|---------------------------------------|--------|
| 14.038      | Partition wall<br>across central<br>hall at Ground<br>Floor |            | Low          | Remove to accommodate<br>new cafe | Record on measured<br>survey drawings | Low    |

| Element no. | Description                                                                   | Photo ref. | Significance | Proposal                              | Mitigation     | Impact  |
|-------------|-------------------------------------------------------------------------------|------------|--------------|---------------------------------------|----------------|---------|
| 14.039      | Granite<br>pavement in<br>cross-passage<br>between East<br>and West Wings     |            | Moderate     | Repair as necessary and retain insitu | Not applicable | Neutral |
| 14.040      | Granite threshold<br>at doorway<br>between cross-<br>passage and East<br>Wing |            | Moderate     | Retain insitu                         | Not applicable | Neutral |

# **Central Police Station**

| Element no. | Description                                        | Photo ref. | Significance | Proposal      | Mitigation                      | Impact  |
|-------------|----------------------------------------------------|------------|--------------|---------------|---------------------------------|---------|
| 14.041      | Brick vault over<br>cross-passage                  |            | High         | Retain insitu | Avoid any services penetrations | Neutral |
| 14.042      | Granite floor in<br>central hall at<br>First Floor |            | Moderate     | Retain insitu | Repair where necessary          | Neutral |

| Element no. | Description                                                     | Photo ref. | Significance | Proposal                    | Mitigation                                                                              | Impact  |
|-------------|-----------------------------------------------------------------|------------|--------------|-----------------------------|-----------------------------------------------------------------------------------------|---------|
| 14.043      | Cell walls flanking<br>central hall at<br>First Floor           |            | High         | Retain insitu               | Not applicable                                                                          | Neutral |
| 14.044      | Brickwork<br>spandrels below<br>cell windows at<br>Second Floor |            | Moderate     | Remove to enable new<br>use | Record on measured<br>drawings.<br>Confine changes to one<br>elevation, north or south. | Low     |

| Element no. | Description                                     | Photo ref. | Significance | Proposal      | Mitigation     | Impact  |
|-------------|-------------------------------------------------|------------|--------------|---------------|----------------|---------|
| 14.045      | Metal security<br>screen adjacent<br>main stair |            | Moderate     | Retain insitu | Not applicable | Neutral |

# **Central Police Station**

| Element no. | Description                                      | Photo ref. | Significance | Proposal      | Mitigation     | Impact  |
|-------------|--------------------------------------------------|------------|--------------|---------------|----------------|---------|
| 14.046      | Double-height<br>central hall at<br>Second Floor |            | High         | Retain insitu | Not applicable | Neutral |

| Element no. | Description                              | Photo ref. | Significance | Proposal      | Mitigation     | Impact   |
|-------------|------------------------------------------|------------|--------------|---------------|----------------|----------|
| 14.047      | View ports<br>adjacent<br>entrance doors |            | Moderate     | Retain insitu | Not applicable | Neutral  |
| 14.048      | Services<br>installations                |            | Adverse      | Remove        | Not applicable | Moderate |

# **Central Police Station**

| Element no. | Description                                                           | Photo ref. | Significance | Proposal                                                                                   | Mitigation                                                                                                                                                                     | Impact |
|-------------|-----------------------------------------------------------------------|------------|--------------|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 14.049      | Metalwork and<br>structural steel<br>framing on<br>exterior (typical) |            | Adverse      | Remove                                                                                     | Not applicable                                                                                                                                                                 | High   |
| 14.050      | Blind arcade,<br>south elevation                                      |            | Low          | Remove infill brickwork<br>within arched openings<br>at ground level to enable<br>new cafe | Record on measured<br>survey drawings.<br>Observe and record any<br>evidence that brickwork<br>infills were built at the<br>same time as the arched<br>openings or added later | Low    |

| Element no. | Description                               | Photo ref. | Significance | Proposal                                                                      | Mitigation                     | Impact  |
|-------------|-------------------------------------------|------------|--------------|-------------------------------------------------------------------------------|--------------------------------|---------|
| 14.051      | Blind arcade,<br>north elevation          |            | Low          | Retain insitu                                                                 | Not applicable                 | Neutral |
| 14.052      | Fence wall, east<br>end of D Hall<br>Yard |            | Low          | Remove to reinstate<br>access to granite stair to<br>Lower Ground Floor level | Record on measured<br>drawings | Low     |

### **Central Police Station**

#### 15 E Hall

| Element no. | Description                                | Photo ref. | Significance | Proposal                               | Mitigation                            | Impact |
|-------------|--------------------------------------------|------------|--------------|----------------------------------------|---------------------------------------|--------|
| 15.001      | Dividing walls at<br>Lower Ground<br>Floor |            | Moderate     | Remove to enable multi-<br>purpose use | Record on measured<br>survey drawings | Low    |
| 15.002      | Dividing walls at<br>Lower Ground<br>Floor |            | Moderate     | Remove to enable multi-<br>purpose use | Record on measured<br>survey drawings | Low    |

| Element no. | Description                      | Photo ref. | Significance | Proposal                                              | Mitigation                            | Impact |
|-------------|----------------------------------|------------|--------------|-------------------------------------------------------|---------------------------------------|--------|
| 15.003      | Staircase within<br>Laundry Yard |            | Moderate     | Remove to enable<br>construction of<br>Arbuthnot Wing | Record on measured<br>survey drawings | Low    |

### **Central Police Station**

| Element no. | Description                                   | Photo ref. | Significance | Proposal | Mitigation                            | Impact   |
|-------------|-----------------------------------------------|------------|--------------|----------|---------------------------------------|----------|
| 15.004      | Services<br>installations                     |            | Adverse      | Remove   | Not applicable                        | Moderate |
| 15.005      | Metal louvres<br>over cell window<br>openings |            | Low          | Remove   | Record on measured<br>survey drawings | Low      |

| Element no. | Description                                 | Photo ref. | Significance | Proposal                         | Mitigation                                                          | Impact |
|-------------|---------------------------------------------|------------|--------------|----------------------------------|---------------------------------------------------------------------|--------|
| 15.006      | Raised ground<br>level adjacent<br>entrance |            | Low          | Remove to enable level<br>access | Record on measured<br>survey drawings                               | Low    |
| 15.007      | Access balconies<br>and apertures           |            | Moderate     | Retain apertures                 | Provide temporary<br>closure as required for<br>operational reasons | Low    |

# **Central Police Station**

| Element no. | Description       | Photo ref. | Significance | Proposal | Mitigation                                                                         | Impact |
|-------------|-------------------|------------|--------------|----------|------------------------------------------------------------------------------------|--------|
| 15.008      | Central staircase |            | High         | Retain   | Provide secondary<br>staircase within cell<br>blocks to achieve code<br>compliance | Low    |

# **Central Police Station**

| Element no. | Description                         | Photo ref. | Significance | Proposal | Mitigation                            | Impact  |
|-------------|-------------------------------------|------------|--------------|----------|---------------------------------------|---------|
| 15.009      | Cell walls flanking<br>central hall |            | High         | Retain   | Pin back cell doors<br>against walls. | Neutral |

| Element no. | Description               | Photo ref. | Significance | Proposal | Mitigation                                                                                                          | Impact   |
|-------------|---------------------------|------------|--------------|----------|---------------------------------------------------------------------------------------------------------------------|----------|
| 15.010      | Services<br>installations |            | Adverse      | Remove   | Not applicable                                                                                                      | Moderate |
| 15.011      | Balcony<br>balustrades    |            | Moderate     | Retain   | Install wire net across<br>aperture to avoid need to<br>upgrade balustrade to<br>meet Building Code<br>requirements | Low      |

| Element no. | Description                  | Photo ref. | Significance | Proposal | Mitigation     | Impact  |
|-------------|------------------------------|------------|--------------|----------|----------------|---------|
| 15.012      | Second Floor<br>central hall |            | High         | Retain   | Not applicable | Neutral |

### **Central Police Station**

#### 17 F Hall

| Element no. | Description                      | Photo ref. | Significance | Proposal | Mitigation     | Impact |
|-------------|----------------------------------|------------|--------------|----------|----------------|--------|
| 17.001      | Lay-in grid suspended<br>ceiling |            | Adverse      | Remove   | Not applicable | High   |

| Element no. | Description          | Photo ref. | Significance | Proposal                                                                                    | Mitigation                                                                                               | Impact |
|-------------|----------------------|------------|--------------|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|--------|
| 17.002      | Rainwater goods      |            | Low          | Remove existing RWPs<br>and install new RWPs<br>externally on North and<br>South Elevations | Improve roof drainage to<br>avoid ponding                                                                | Low    |
| 17.003      | Exterior decorations |            | Adverse      | Strip off and redecorate                                                                    | Sample and analyse<br>existing paint media;<br>select new media to suit<br>substrate and<br>significance | High   |

# **Central Police Station**

| Element no. | Description                                                      | Photo ref.                                        | Significance | Proposal                                                | Mitigation                                                                           | Impact   |
|-------------|------------------------------------------------------------------|---------------------------------------------------|--------------|---------------------------------------------------------|--------------------------------------------------------------------------------------|----------|
| 17.004      | External airconditioning<br>units and other external<br>services |                                                   | Adverse      | Remove and make good<br>brickwork                       | Not applicable                                                                       | High     |
| 17.005      | Fixed signs                                                      | PRISONERS' PRIVATE<br>CLOTHING STORE<br>犯人私家衣服儲藏室 | Moderate     | Remove and refix/display<br>in visitors' centre/discard | Record each sign and<br>assess significance<br>individually and treat<br>accordingly | Moderate |

# **Central Police Station**

| Element no. | Description                                | Photo ref. | Significance | Proposal                                                                                                    | Mitigation                      | Impact   |
|-------------|--------------------------------------------|------------|--------------|-------------------------------------------------------------------------------------------------------------|---------------------------------|----------|
| 17.006      | Security screen at First<br>Floor entrance |            | Low          | Remove                                                                                                      | Record on measured<br>drawings  | Low      |
| 17.007      | Metal windows                              |            | Moderate     | Remove at First Floor to<br>accommodate gallery<br>space and block<br>structural openings with<br>blockwork | Record on measured<br>drawings. | Moderate |

# **Central Police Station**

| Element no. | Description      | Photo ref. | Significance | Proposal                               | Mitigation                     | Impact   |
|-------------|------------------|------------|--------------|----------------------------------------|--------------------------------|----------|
| 17.008      | Fixed furniture  |            | Moderate     | Remove to accommodate<br>gallery space | None                           | Low      |
| 17.009      | Security screens |            | Moderate     | Remove to accommodate<br>gallery space | Record on measured<br>drawings | Moderate |

# **Central Police Station**

| Element no. | Description                                | Photo ref. | Significance | Proposal                                                                                                    | Mitigation                     | Impact   |
|-------------|--------------------------------------------|------------|--------------|-------------------------------------------------------------------------------------------------------------|--------------------------------|----------|
| 17.010      | Timber windows                             |            | Moderate     | Remove at First Floor to<br>accommodate gallery<br>space and block<br>structural openings with<br>blockwork | Record on measured<br>drawings | Moderate |
| 17.011      | Communal<br>washing/lavatory<br>facilities |            | Moderate     | Remove to accommodate<br>gallery space                                                                      | Record on measured<br>drawings | Low      |

| Element no. | Description                          | Photo ref. | Significance | Proposal                                                    | Mitigation                     | Impact |
|-------------|--------------------------------------|------------|--------------|-------------------------------------------------------------|--------------------------------|--------|
| 17.012      | Blocked up lantern light             |            | Low          | Unblock lantern and fit glazing                             | Record on measured<br>drawings | Low    |
| 17.013      | Security gates at Ground<br>openings |            | Moderate     | Remove to enable access<br>to Ground Floor gallery<br>space | Record on measured<br>drawings | Low    |

| Element no. | Description                      | Photo ref. | Significance | Proposal                                              | Mitigation                                                                                                              | Impact   |
|-------------|----------------------------------|------------|--------------|-------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|----------|
| 17.014      | Interview booths                 |            | High         | Remove to accommodate<br>new gallery                  | Rebuild in new location                                                                                                 | Moderate |
| 17.015      | External stair to First<br>Floor |            | Moderate     | Upgrade balustrade to<br>comply with Building<br>Code | Record on measured<br>drawings.<br>Supplement existing<br>balustrade elements with<br>minimal elements if<br>necessary. | Low      |

| Element no. | Description                   | Photo ref. | Significance | Proposal            | Mitigation                                                 | Impact |
|-------------|-------------------------------|------------|--------------|---------------------|------------------------------------------------------------|--------|
| 17.016      | Ground Floor main<br>entrance |            | Low          | Retain as existing. | Keep fixed shut if not<br>required for operational<br>use. | Low    |

| Element no. | Description                                         | Photo ref. | Significance | Proposal                               | Mitigation                     | Impact |
|-------------|-----------------------------------------------------|------------|--------------|----------------------------------------|--------------------------------|--------|
| 17.017      | Security screen at<br>Ground Floor main<br>entrance |            | Low          | Remove to accommodate<br>gallery space | Record on measured<br>drawings | Low    |

# **Central Police Station**

| Element no. | Description                                        | Photo ref. | Significance | Proposal                                                                  | Mitigation                                   | Impact  |
|-------------|----------------------------------------------------|------------|--------------|---------------------------------------------------------------------------|----------------------------------------------|---------|
| 17.018      | Blue Entrance Gate<br>(facing Old Bailey Street)   |            | High         | Retain in situ                                                            | Maintain in working<br>order                 | Neutral |
| 17.019      | Blue Entrance Gate<br>(inner) and enclosed<br>yard |            | Moderate     | Retain gate and enclosing<br>walls and roof in situ;<br>remove cupboards. | Repair and maintain gate<br>in working order | Low     |

# **Central Police Station**

| Element no. | Description                                      | Photo ref. | Significance | Proposal                        | Mitigation                              | Impact |
|-------------|--------------------------------------------------|------------|--------------|---------------------------------|-----------------------------------------|--------|
| 17.020      | Blue Entrance Gate<br>(inner) facing Prison Yard |            | Moderate     | Retain gate and enclosing frame | Repair and maintain in<br>working order | Low    |

# **Central Police Station**

| Element no. | Description | Photo ref. | Significance | Proposal | Mitigation                                                                                    | Impact |
|-------------|-------------|------------|--------------|----------|-----------------------------------------------------------------------------------------------|--------|
| 17.021      | Barbed wire |            | Moderate     | Remove   | Record on measured<br>drawings.<br>Make good fixing points<br>where attached to<br>brickwork. | Low    |

# **Central Police Station**

| Element no. | Description                                                    | Photo ref. | Significance | Proposal                                                                                              | Mitigation                     | Impact |
|-------------|----------------------------------------------------------------|------------|--------------|-------------------------------------------------------------------------------------------------------|--------------------------------|--------|
| 17.022      | Metal security bars at<br>windows                              |            | Moderate     | Remove as part of<br>blocking up window<br>openings to<br>accommodate gallery<br>space at First Floor | Record on measured<br>drawings | Low    |
| 17.023      | External toilets at<br>Ground Floor adjacent<br>East elevation |            | Low          | Remove                                                                                                | Record on measured<br>drawings | Low    |

| Element no. | Description     | Photo ref. | Significance | Proposal                        | Mitigation                                                                                                   | Impact |
|-------------|-----------------|------------|--------------|---------------------------------|--------------------------------------------------------------------------------------------------------------|--------|
| 17.024      | Open Visit Room |            | Low          | Space reallocated to other uses | Record on measured<br>drawings.<br>Salvage entrance sign<br>and re-use in new layout<br>of interview booths. | Low    |

#### **19 Bauhinia House**

| Element<br>no. | Description   | Photo ref. | Significance | Proposal                                                                         | Mitigation                                                                                                                                                                                                                                                                                                   | Impact  |
|----------------|---------------|------------|--------------|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| 19.001         | Pitched roofs |            | High         | New penetrations<br>through roofs for<br>ventilation ducts and<br>other services | Arrange new<br>penetrations so that they<br>conform with the<br>geometry of the existing<br>roof. Model the size and<br>shape of the new ducts<br>so that the impact on the<br>roofscape is minimised.<br>Finish the new ducts in a<br>non-reflective material<br>that is neutral in colour<br>and mid-tone. | High    |
| 19.002         | Chimney       |            | High         | Repair and retain                                                                | Not applicable                                                                                                                                                                                                                                                                                               | Neutral |

| Element<br>no. | Description                                       | Photo ref. | Significance | Proposal                                                                                                                                         | Mitigation     | Impact   |
|----------------|---------------------------------------------------|------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------|
| 19.003         | Rainwater goods<br>and other<br>external services |            | Adverse      | Remove and make good<br>wall surface. Replace<br>defective and non-<br>matching rainwater<br>goods with cast iron<br>fittings to match original. | Not applicable | Moderate |

| Element<br>no. | Description                   | Photo ref. | Significance | Proposal                                                                                                                                           | Mitigation     | Impact   |
|----------------|-------------------------------|------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------|
| 19.004         | External stone<br>wall facing |            | High         | Carry out close<br>inspection of painted<br>areas to determine<br>extent of original granite<br>facing and remove paint<br>media where applicable. | Not applicable | Moderate |

| Element<br>no. | Description | Photo ref. | Significance | Proposal                                                                    | Mitigation     | Impact   |
|----------------|-------------|------------|--------------|-----------------------------------------------------------------------------|----------------|----------|
| 19.005         | Gun loops   |            | High         | Remove concrete infilling<br>and make good<br>stonework where<br>necessary. | Not applicable | Moderate |

| Element<br>no. | Description     | Photo ref. | Significance | Proposal                 | Mitigation     | Impact  |
|----------------|-----------------|------------|--------------|--------------------------|----------------|---------|
| 19.006         | Look-out turret |            | High         | Repair and retain insitu | Not applicable | Neutral |

| Element<br>no. | Description | Photo ref. | Significance | Proposal                                       | Mitigation                                                | Impact   |
|----------------|-------------|------------|--------------|------------------------------------------------|-----------------------------------------------------------|----------|
| 19.007         | Windows     |            | Moderate     | Remove and make good<br>stonework as necessary | Record existing windows<br>on measured survey<br>drawings | Moderate |

| Element<br>no. | Description          | Photo ref. | Significance | Proposal | Mitigation     | Impact   |
|----------------|----------------------|------------|--------------|----------|----------------|----------|
| 19.008         | Modern<br>partitions |            | Adverse      | Remove   | Not applicable | Moderate |

| Element<br>no. | Description                      | Photo ref. | Significance | Proposal | Mitigation     | Impact   |
|----------------|----------------------------------|------------|--------------|----------|----------------|----------|
| 19.009         | Electrical services              |            | Adverse      | Remove   | Not applicable | Moderate |
| 19.010         | Lay-in grid<br>suspended ceiling |            | Adverse      | Remove   | Not applicable | High     |

# **Central Police Station**

| Element<br>no. | Description                      | Photo ref. | Significance | Proposal                 | Mitigation                             | Impact  |
|----------------|----------------------------------|------------|--------------|--------------------------|----------------------------------------|---------|
| 19.011         | Exposed timber<br>roof structure |            | High         | Repair and retain insitu | Not applicable                         | Neutral |
| 19.012         | Timber stair                     |            | Moderate     | Remove                   | Record on measured<br>surveys drawings | Low     |