


Bestwise – SFK Joint Venture

**Contract No. DE/2018/17
Enhancement of Deodourisation System
at Stonecutters Island Sewage
Treatment Works**

**Monthly Environmental
Monitoring and Audit Report
January 2022**

(Version 1.0)

Certified By 
(Environmental Team Leader)

REMARKS:

The information supplied and contained within this report is, to the best of our knowledge, correct at the time of printing.

Wellab accepts no responsibility for changes made to this report by third parties

WELLAB LTD
Room 1714, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong
Tel: (852) 2898 2083 Fax: (852) 2898 7076
Email: info@wellab.com.hk

CE/Harbour Area Treatment Scheme
Drainage Services Department
Sewage Services Branch
Harbour Area Treatment Scheme Division
5/F, Western Magistracy
2A Pokfulam Road, Hong Kong

Attn: Mr. Adrian Leung – E/13 (HATS)

Our Reference
EC/AFK/DC/bw/T261332/
22.01/L-1526

Mott MacDonald
3/F Manulife Place
348 Kwun Tong Road
Kwun Tong
Kowloon
Hong Kong

T +852 2828 5757
F +852 2827 1823
mottmac.hk

Agreement No. CE 8/2009 (EP)
Harbour Area Treatment Scheme Stage 2A
Independent Environmental Checker for Construction Phase – Investigation

Contract No. DE/2018/17 – Enhancement of Deodourisation System at
Stonecutters Island Sewage Treatment Works

Environmental Permit No. EP-322/2008/G – Condition 4.4

Monthly EM&A Report for January 2022 (no. 29) Version 1.0

16 February 2022

By Post

Dear Sir,

I refer to the captioned Monthly EM&A Report for January 2022 (Version 1.0) submitted by ET on 16 February 2022 via email. In accordance with Condition 4.4 of Environmental Permit No. EP-322/2008/G, I hereby verify the captioned Monthly EM&A Report.

Yours faithfully
for MOTT MACDONALD HONG KONG LIMITED



Ir Dr Anne F Kerr
Independent Environmental Checker
T +852 2828 5757
anne.kerr@mottmac.com

c.c.

Ove Arup & Partners Hong Kong Limited

Bestwise – SFK Joint Venture
Wellab Limited

Mr. Mark Ngan /
Mr. Edmund Chow
Mr. Ken Chan
Dr. Priscilla Choy

Fax: 2370 4377

By email
By email

TABLE OF CONTENTS

	Page
EXECUTIVE SUMMARY	1
Introduction	1
Environmental Monitoring Works	1
Environmental Licenses and Permits	2
Environmental Mitigation Implementation Schedule	2
Key Information in the Reporting Month	2
Summary of Complaints and Prosecutions	2
Future Key Issues:	2
1. INTRODUCTION	4
Background	4
Project Organizations	4
Construction Programme	5
Summary of EM&A Requirements	5
2. AIR QUALITY	6
Monitoring Requirements	6
Monitoring Locations	6
Monitoring Equipment	6
Monitoring Parameters, Frequency and Duration	6
Monitoring Methodology and QA/QC Procedure	6
Results and Observations	9
3. NOISE.....	11
Monitoring Requirements	11
Monitoring Locations	11
Monitoring Equipment	11
Monitoring Parameters, Frequency and Duration	11
Monitoring Methodology and QA/QC Procedures	12
Results and Observations	13
4. ENVIRONMENTAL AUDIT	14
Site Audits	14
Implementation Status of Environmental Mitigation Measures	14
Review of Environmental Monitoring Procedures	14
Status of Environmental Licensing and Permitting	14
Status of Waste Management	15
Implementation Status of Event Action Plans	15
Summary of Complaints and Prosecutions	15
5. FUTURE KEY ISSUES	16
Key Issues for the Coming Month	16
Monitoring Schedule for the Next Month	16
Construction Program for the Next Month	16
6. CONCLUSIONS AND RECOMMENDATIONS	17
Conclusions	17
Recommendations for next reporting month	17

LIST OF TABLES

Table I	Summary Table for Non-compliance Recorded in the Reporting Month
Table II	Summary Table for Key Information in the Reporting Month
Table 1.1	Key Project Contacts
Table 2.1	Locations for Air Quality Monitoring
Table 2.2	Impact Dust Monitoring Parameters, Frequency and Duration
Table 2.3	Summary of 1-hour and 24-hour TSP Monitoring Result in Reporting Month
Table 3.1	Locations for Noise Monitoring Stations
Table 3.2	Noise Monitoring Equipment
Table 3.3	Noise Monitoring Parameters, Frequency and Duration
Table 3.4	Summary the Noise Monitoring Results in Reporting Month
Table 4.1	Observations of Site Audit
Table 4.2	Summary of Environmental Licence / Permit for DE/2018/17

LIST OF FIGURES

Figure 1	General Location Plan of the Project and Locations of Air Quality and Noise Monitoring Stations
Figure 2	ET's Organization Chart

LIST OF APPENDICES

A	Action and Limit Levels for Air Quality and Noise
B	Copies of Calibration Certificates
C	Environmental Monitoring Schedules
D	1-hour and 24-hour TSP Monitoring Results and Graphical Presentations
E	Noise Monitoring Results and Graphical Presentations
F	Summary of Exceedance
G	Site Audit Summary
H	Summary of Amount of Waste Generated
I	Event Action Plans
J	Environmental Mitigation Implementation Schedule (EMIS)
K	Complaint Log
L	Construction Programme

ABBREVIATION AND ACRONYM

AL Levels	Action and Limit Levels
DSD	Drainage Services Department
E / ER	Engineer/Engineer's Representative
EIA	Environmental Impact Assessment
EM&A	Environmental Monitoring and Audit
EMIS	Environmental Mitigation Implementation Schedule
EP	Environmental Permit
EPD	Environmental Protection Department
ET	Environmental Team
HVS	High Volume Sampler
IEC	Independent Environmental Checker
RE	Resident Engineer
RH	Relative Humidity
QA/QC	Quality Assurance / Quality Control
SLM	Sound Level Meter
WMP	Waste Management Plan
SCISTW	Stonecutters Island Sewage Treatment Works
HATS Stage 2A	Harbour Area Treatment Scheme Stage 2A
BSJV	Bestwise - SFK Joint Venture

EXECUTIVE SUMMARY**Introduction**

1. This is the 29th Monthly Environmental Monitoring and Audit (EM&A) Report prepared by Wellab Limited for DSD Contract No. DE/2018/17 “Enhancement of Deodourisation System at SCISTW” (The Project) which documents the key information of EM&A and environmental monitoring works at the SCISTW under HATS Stage 2A with the Environmental Permit (Permit No. EP-322/2008/G).
2. According to the information from the Contractor, all construction activities with significant environmental impact of Contract No. DE/2018/17 under Harbour Area Treatment Scheme Stage 2A have been completed on 31 December 2021.

Environmental Monitoring Works

3. The environmental monitoring works of the Project were conducted by the ETs for Contract DE/2018/17, at the SCISTW under HATS 2A with the Environmental Permit (Permit No. EP-322/2008/G). The monitoring results were checked and reviewed and the site audits were conducted once per week. The implementation of the Environmental Mitigation Measures, Event Action Plans, Environmental Complaint and Handling Procedures were also checked.
4. Summary of the non-compliance of the reporting month is tabulated in **Table I**.

Table I Summary Table for Non-compliance Recorded in the Reporting Month

Monitoring Station	Parameter	No. of Exceedance		No. of Exceedance Due to the Project		Action Taken
		Action Level	Limit Level	Action Level	Limit Level	
NM5	Noise	0	0	0	0	N/A
NM6	Noise	0	0	0	0	N/A
AM6b	1-hr TSP	0	0	0	0	N/A
	24-hr TSP	0	0	0	0	N/A
AM7	1-hr TSP	0	0	0	0	N/A
	24-hr TSP	0	0	0	0	N/A
AM8	1-hr TSP	0	0	0	0	N/A
	24-hr TSP	0	0	0	0	N/A

1-hour TSP Monitoring

5. All 1-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.

24-hour TSP Monitoring

6. All 24-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.

Construction Noise

7. All construction noise monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.

Environmental Licenses and Permits

8. Licenses/Permits granted to the Project include the Environmental Permit (EP); Billing account for Disposal of Construction Waste, Registered as Chemical Waste Producer, Construction Noise Permits and Water Discharge License.

Environmental Mitigation Implementation Schedule

9. According to the EIA Report Section 3.74, 4.56 and 13.44, air quality, noise and landscape and visual would be the key environmental issues and mitigation measures shall be implemented during the construction phase. Details of the implementation of mitigation measures are provided in the **Appendix J**.

Key Information in the Reporting Month

10. Summary of key information in the reporting month is tabulated in **Table II**.

Table II Summary Table for Key Information in the Reporting Month

Event	Event Details		Action Taken	Status	Remark
	Number	Nature			
Complaint received	0	---	N/A	N/A	---
Status of submissions under EP	1	Monthly EM&A Report for December 2021	Submitted on 24 January 2022	N/A	---
Notifications of any summons & prosecutions received	0	---	N/A	N/A	---

Summary of Complaints and Prosecutions

11. No environmental complaint and prosecution was received for the Project in the reporting month.
12. There were no environmental complaint and prosecution received since the commencement of the Project. The Complaint Log is presented in **Appendix K**.

Cessation of Construction Phase EM&A Works

13. According to Condition 4.1 of Environmental Permit (EP) No. EP-322/2008/G and sections 15.11 and 15.12 of the EM&A Manual, the Proposal for Cessation of Construction Phase EM&A Programme for the Contract was submitted to EPD on 12 January 2022, and was approved by EPD on 31 January 2022, on the basis as below:

- i) All construction activities with significant environmental impact of Contract No. DE/2018/17 under Harbour Area Treatment Scheme Stage 2A have been completed on 31 December 2021. No major environmental impact was anticipated since then.
- ii) No environmental monitoring (air quality monitoring and noise monitoring) exceedance was recorded over the monitoring period during the construction phase of EM&A works under DE/2018/17.
- iii) No environmental-related prosecution, summons or complaint was recorded under this Contract.

1. INTRODUCTION

Background

- 1.1 The Project ‘Enhancement of Deodourisation System at SCISTW’ under Contract No: DE/2018/17 mainly comprises the following major works:
- Construction of foundation for enhanced deodourisation system;
 - Design, supply, installation, testing and commissioning of enhanced deodourisation systems and associated accessories;
 - Enhancement of isolation devices at chemically enhanced primary treatment (CEPT) tanks;
 - Modification of air ducts at CEPT tanks;
 - Enhancement of sealing performance of existing covers for CEPT tanks; and
 - Any associated works as necessary to complete the above items.
- 1.2 The Project is under Harbour Area Treatment Scheme (HATS) Stage 2A and is a designated project with Register No. : AEIAR-121/2008. The current works under the Project at SCISTW for HATS 2A are covered by the Environmental Permit (Permit No. EP-322/2008/G), which was issued on 9th May 2014 by the Environmental Protection Department (hereinafter called EPD) to the Drainage Services Department (hereinafter called the DSD) as the Permit Holder.
- 1.3 Bestwise - SFK Joint Venture (hereafter called the BSJV) was commissioned by the DSD to undertake the construction of the Contract No. DE/2018/17 “Enhancement of Deodourisation System at SCISTW”. The date of commencement of construction of the Project is 9th July 2019.
- 1.4 Wellab Limited was commissioned by BSJV to undertake the Environmental Monitoring and Audit (EM&A) works for the project and was appointed as the Environmental Team (ET) of the Project under Condition 2.1 of the EP. The date of commencement of EM&A works is 2nd September 2019. The Project cover the environmental monitoring works at monitoring stations AM6b, AM7, AM8, NM5 and NM6. The general location plan of the Project is shown in **Figure 1**.
- 1.5 This is the 29th monthly EM&A report summarizing the EM&A works conducted for the Project in January 2022.

Project Organizations

- 1.6 The contacts of the Project are shown in **Table 1.1** and the organization chart of ET for Contract is shown in **Figure 2**.

Table 1.1 Key Project Contacts

Party	Role	Name	Position	Phone No.
Ove Arup & Partners Hong Kong Ltd	Project Management's Representative	Mr. Edmund Chow	Senior Resident Engineer	2370 4311
	Coordinator	Mr. Kevin Cheung	Resident Engineer	3925 6506
Wellab	Environmental Team	Dr. Priscilla Choy	ET Leader	2151 2089
		Mr. Antony Leung	Project Coordinator	2151 2073
Mott MacDonald	Independent Environmental Checker	Dr. Anne Kerr	Independent Environmental Checker	2828 5757
Bestwise – SFK Joint Venture	Contractor	Mr. Ken Chan	Site Agent	2620 0070
		Mr. Leo Leung	Environmental Officer	2620 0070

Construction Programme

- 1.7 According to the information from the Contractor, all construction activities with significant environmental impact of Contract No. DE/2018/17 under Harbour Area Treatment Scheme Stage 2A have been completed on 31 December 2021.
- 1.8 The construction program is provided in **Appendix L**.

Summary of EM&A Requirements

- 1.9 The EM&A programme requires construction phase monitoring for air quality and construction noise, landscape and visual and environmental site audit. The EM&A requirements for each parameter are described in the following sections, including:
- All monitoring parameters;
 - Action and Limit levels for all environmental parameters;
 - Event Action Plans;
 - Environmental mitigation measures, as recommended in the project EIA study final report; and
 - Environmental requirements in contract documents.
- 1.10 The advice on the implementation status of environmental protection and pollution control/mitigation measures is summarized in **Section 4** of this report.
- 1.11 This report presents the monitoring results, observations, locations, equipment, period, for required monitoring parameter namely air quality, noise and audit works conducted for the Project in January 2022.

2. AIR QUALITY

Monitoring Requirements

- 2.1 1-hour and 24-hour TSP monitoring were conducted to monitor the air quality. **Appendix A** shows the established Action/Limit Levels for the environmental monitoring works.

Monitoring Locations

- 2.2 Three designated monitoring stations, AM6b, AM7 and AM8 were selected for impact dust monitoring for the Project. **Table 2.1** describes the air quality monitoring locations, which are also depicted in **Figure 1**.

Table 2.1 Locations for Air Quality Monitoring

Monitoring Station	Location of Measurement
AM6b ⁽¹⁾	Works site boundary
AM7	North West Kowloon Sewage Pumping Station
AM8	Block A of Government Dockyard

Remark:

(1) AM6b – The pervious location of AM6a was relocated after handover of part of Portion 7.

Monitoring Equipment

- 2.3 **Table 2.2** summarizes the air quality monitoring equipment and **Appendix B** shows the copies of calibration certificates for the equipment at AM6b, AM7 and AM8.

Table 2.2 Air Quality Monitoring Equipment

Equipment	Model and Make	Quantity
Laser Dust Monitor	Met One Instruments no. AEROCET-831	5
HVS Sampler	TISCH: Model no. TE-5170	3
Calibrator	TISCH: Model TE-5025A	1

Monitoring Parameters, Frequency and Duration

- 2.4 **Table 2.3** summarizes the monitoring parameters and frequencies of impact dust monitoring for the whole construction period. The air quality monitoring schedule for the reporting month is shown in **Appendix C**.

Table 2.3 Impact Dust Monitoring Parameters, Frequency and Duration

Monitoring Station	Parameter	Period	Frequency
All monitoring locations	1-hour TSP	0700-1900 hrs	3 times/ every 6 days
	24-hour TSP	0000-2400 hrs	once in every 6 days

Monitoring Methodology and QA/QC Procedure

- 2.5 The monitoring methodology and QA/QC procedures for monitoring station AM6b, AM7 and AM8 are presented as follow:

TSP Monitoring with Laser Dust Monitor

Instrumentation

- 2.6 Direct reading laser dust meter was deployed for the air quality monitoring as shown in **Table 2.2**.
- 2.7 The measuring procedures of the dust meter are in accordance with the Manufacturer's Instruction Manual as follows:

(AEROCET-831)

- The 1-hour dust meter is placed at least 1.3 meters above ground.
- Press and hold the Power key momentarily to power on the unit and make sure that the battery level was not flash or in low level.
- Allow the instrument to stand for about 3 second to display the Sample Screen minutes.
- Press the START / STOP key to run the internal vacuum pump for 1 minute and ready to use.
- Use the select dial to select the PM range and press the START / STOP key to start a measurement.
- Finally, push the START/STOP key to stop the measuring after 1 hour sampling.
- Information such as sampling date, time, value and site condition were recorded during the monitoring period.
- All data were recorded in the data logger for further data processing.

Maintenance/ Calibration

- 2.8 The following maintenance/calibration was required for the direct dust meters:
- Check the meter at a 3-month interval and calibrate the meter at a 1-year interval throughout all stages of the air quality monitoring.

TSP Monitoring with High Volume Sampler

Instrumentation

(TISCH Model: TE-5170)

- 2.9 High volume Samplers (HVS) completed with appropriate sampling inlets were employed for 1-hour & 24-hour TSP monitoring. Each sampler was composed of a motor, a filter holder, a flow controller and a sampling inlet and its performance specification complies with that required by USEPA Standard Title 40, Code of Federation Regulations Chapter 1 (Part 50).

HVS Installation

- 2.10 The following guidelines were adopted during the installation of HVS:
- A horizontal platform with appropriate support was provided to secure the samplers against gusty wind.
 - No two samplers were placed less than 2 meters apart.
 - The distance between the sampler and an obstacle, such as buildings, was at

- least twice the height that the obstacle protrudes above the sampler.
- A minimum of 2 meters of separation from walls, parapets and penthouses was required for rooftop samples.
 - A minimum of 2 meters separation from any supporting structure, measured horizontally was required.
 - No furnaces or incineration flues were nearby.
 - Airflow around the sampler was unrestricted.
 - The samplers were more than 20 meters from the drip line.
 - Any wire fence and gate, to protect the sampler, should not cause any obstruction during monitoring.
 - Permission and access to the monitoring stations have been obtained to set up the samplers; and
 - A secured supply of electricity was provided to operate the samplers.

Filters Preparation

- 2.11 Fibre glass filters, which have a collection efficiency of larger than 99% of particles of 0.3 μm in diameter, were used. A HOKLAS accredited laboratory, Wellab Ltd., (HOKLAS Registration No.083) was responsible for the preparation of 24-hr conditioned and pre-weighed filter papers for Wellab's monitoring team.
- 2.12 All filters, which were prepared by Wellab Ltd., were equilibrated in the conditioning environment for 24 hours before weighing. The conditioning environment temperature was around 25 °C and not variable by more than ± 3 °C; the relative humidity (RH) was < 50% and not variable by more than $\pm 5\%$. A convenient working RH was 40%.

Operation/ Analytical Procedures

- 2.13 Operating/analytical procedures for the air quality monitoring were highlighted as follows:
- Prior to the commencement of the dust sampling, the flow rate of the HVS was properly set (between 1.1 m^3/min . and 1.4 m^3/min .) in accordance with the manufacturer's instruction to within the range recommended in USEPA Standard Title 40, CFR Part 50;
 - The power supply was checked to ensure the sampler worked properly;
 - On sampling, the sampler was operated for 5 minutes to establish thermal equilibrium before placing any filter media at the designated air quality monitoring station;
 - The filter holding frame was then removed by loosening the four nuts and carefully a weighted and conditioned filter was centered with the stamped number upwards, on a supporting screen;
 - The filter was aligned on the screen so that the gasket formed an airtight seal on the outer edges of the filter. Then the filter holding frame was tightened to the filter holder with swing bolts. The applied pressure should be sufficient to avoid air leakage at the edges;
 - The shelter lid was closed and secured with the aluminum strip;
 - The timer was then programmed. Information was recorded on the record sheet, which included the starting time, the weather condition and the filter number (the initial weight of the filter paper can be found out by using the filter number);

- After sampling, the filter was removed and kept in a clean and tightly sealed plastic bag. The filter paper was then be returned to the HOKLAS laboratory (Wellab Ltd.) for reconditioning in the humidity-controlled chamber followed by accurate weighting by an electronic balance with a readout down to 0.1mg. The elapsed time was also recorded; and
- Before weighing, all filters were equilibrated in a conditioning environment for 24 hours. The conditioning environment temperature should be between 25°C and 30°C and not vary by more than $\pm 3^\circ\text{C}$; the RH should be $< 50\%$ and not vary by more than $\pm 5\%$. A convenient working RH is 40%. Weighing results were returned for further analysis of TSP concentrations collected by each filter.

2.14 The general weather conditions (i.e. sunny, cloudy or rainy) were recorded by the field staff's observation on the monitoring day.

Maintenance/ Calibration

2.15 The following maintenance/calibration was required for the HVS:

- The high volume motors and their accessories were properly maintained. Appropriate maintenance such as routine motor brushes replacement and electrical wiring checking were made to ensure that the equipment and necessary power supply are in good working condition.

Results and Observations

2.16 **Table 2.4** summarizes the monitoring results at AM6b, AM7 and AM8 in the reporting month. The details and graphical presentations of the air quality monitoring results are shown in **Appendix D**.

Table 2.4 Summary of 1-hour and 24-hour TSP Monitoring Result in the Reporting Month

Air Quality Monitoring Station	Average $\mu\text{g}/\text{m}^3$	Range $\mu\text{g}/\text{m}^3$	Action Level $\mu\text{g}/\text{m}^3$	Limit Level $\mu\text{g}/\text{m}^3$
1 hour TSP				
AM6b	84	14 – 148	346	500
AM7	114.6	43.4 – 189.4	322	
AM8	104.8	45.3 – 192.0	307	
24 hours TSP				
AM6b	74	15 – 126	196	260
AM7	68	8 – 118	207	
AM8	47	18 – 97	158	

2.17 All 1-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded. Summary of exceedance is presented in **Appendix F**.

2.18 All 24-hr TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded. Summary of exceedance is presented in **Appendix F**.

- 2.19 According to field observations during site inspection, the identified dust sources at the monitoring stations were mainly from vehicles movement and construction works of this Contract in the site.

3. NOISE

Monitoring Requirements

- 3.1 Two noise monitoring stations, namely NM5 and NM6 was designated in the EM&A Manual for impact monitoring. **Appendix A** shows the established Action and Limit Levels for the environmental monitoring works.

Monitoring Locations

- 3.2 Noise monitoring was conducted at two designated monitoring stations as listed in **Table 3.1**, which are also depicted in **Figure 1**.

Table 3.1 Location of Noise Monitoring Stations

Monitoring Station	Location of Measurement
NM5	Near FSD Diving Rescue and Training Centre
NM6	Customs' Marine Base (Block H of Government Dockyard Rooftop)

Monitoring Equipment

- 3.3 Integrating Sound Level Meter was used for construction noise monitoring. The meters are Type 1 sound level meter capable of giving a continuous readout of the noise level readings including equivalent continuous sound pressure level (L_{eq}) and percentile sound pressure level (L_x) that also complied with International Electrotechnical Commission Publications 651:1979 (Type 1) and 804:1985 (Type 1) specifications. **Table 3.2** summarizes the noise monitoring equipment being used. Copies of calibration certificates are attached in **Appendix B**.

Table 3.2 Noise Monitoring Equipment

Equipment	Model and Make	Quantity
Integrating Sound Level Meter	BSWA, Model no.: BSWA 308	4
	SVANTEK, Model no.: SVAN 957	1
Calibrator	SVANTEK. Model no.: SV30A	2
	Brüel & Kjær, Model no.:4231	1

Monitoring Parameters, Frequency and Duration

- 3.4 **Table 3.3** summarizes the monitoring parameters, frequency and total duration of monitoring. The noise monitoring schedule for the reporting month is shown in **Appendix C**.
- 3.5 As advised by the Contractor, no construction work under Contract No. DE/2018/17 was conducted in the restricted hours during the reported month.

Table 3.3 Noise Monitoring Parameters, Frequency and Duration

Monitoring Stations	Parameter	Period	Frequency
NM5 NM6	$L_{eq}(30 \text{ min.})$ dB(A)	0700-1900 hrs. on weekdays	Once per week
	$L_{eq}(5 \text{ min.})$ dB(A)	During restricted hours	Monitoring to be conducted when construction works were to be carried out

Monitoring Methodology and QA/QC Procedures

3.6 The monitoring methodology and QA/QC procedure at NM5 and NM6 are presented as follow:

- The microphone head of the sound level meter was positioned at 1m from the exterior of the noise sensitive I and lowered sufficiently so that the building's external wall acted as a reflecting surface;
- The battery condition was checked to ensure the correct functioning of the meter;
- Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:
 - frequency weighting : A
 - time weighting : Fast
 - time measurement : $L_{eq}(30 \text{ min.})$ dB(A)
(as six consecutive $L_{eq, 5\text{min}}$ readings)
during non-restricted hours (i.e. 0700-1900 hrs on normal weekdays)
- Prior to and after each noise measurement, the meter was calibrated using a Calibrator for 94.0 dB at 1000 Hz. If the difference in the calibration level before and after measurement was more than 1.0 dB, the measurement would be considered invalid and repeat of noise measurement would be required after re- calibration or repair of the equipment;
- During the monitoring period, the L_{eq} , L_{90} and L_{10} were recorded. In addition, site conditions and noise sources were recorded on a standard record sheet;
- Noise measurement was paused temporarily during periods of high intrusive noise (e.g. dog barking, helicopter noise) if possible and observation record during measurement period should be provided; and
- Noise monitoring was cancelled in the presence of fog, rain, and wind with a steady speed exceeding 5 m/s, or wind with gusts exceeding 10 m/s. The wind speed should be checked with a portable wind speed meter capable of measuring the wind speed in m/s.

Maintenance/ Calibration

3.7 The microphone head of the sound level meter and calibrator were cleaned with a

soft cloth at quarterly intervals.

- 3.8 The sound level meter and calibrator were checked and calibrated at yearly intervals.
- 3.9 Immediately prior to and following each noise measurement, the accuracy of the sound level meter should be checked using an acoustic calibrator generating a known sound pressure level at a known frequency. Measurements would be accepted as valid only if the calibration levels before and after the noise measurement agreed to within 1.0 dB.

Results and Observations

- 3.10 The noise monitoring results are summarized in **Table 3.4**. Detailed monitoring results and graphical presentations of noise monitoring are shown in **Appendix E**.

Table 3.4 Summary the Noise Monitoring Results in Reporting Month

For the time period 0700-1900 hrs. on weekdays		
Noise Monitoring Station	Range, dB(A) L _{eq} (30 min.)	Limit Level dB(A)
NM5	55.6 – 66.1	75.0
NM6	53.9 – 61.0	75.0

- 3.11 All noise monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded in the reporting month. Summary of exceedance is presented in **Appendix F**.
- 3.12 1900-2300 hours noise monitoring was not conducted in the reporting month as there were no construction works during the period of restricted hours.
- 3.13 The major noise sources identified at the designated noise monitoring stations were vehicle movement and construction equipment, as well as construction activities from this Contract in Stonecutters Island STW.

4. ENVIRONMENTAL AUDIT**Site Audits**

- 4.1 Site audits were conducted on a weekly basis to monitor the implementation of environmental management practices and mitigation measures at the site area by the Contractor.
- 4.2 Site inspections were undertaken to ensure and check that the implementation and maintenance of mitigation measures for Air Quality, Noise, Water Quality, Waste Management, Landscape and Visual are being properly carried out in the reporting month in accordance to section 14.1 of the EM&A Manual. No non-compliance was observed during the site inspections.
- 4.3 The summaries of site audits are attached in **Appendix G**.

Implementation Status of Environmental Mitigation Measures

- 4.4 Details of the implementation of mitigation measures are provided in **Appendix J**.
- 4.5 During the weekly environmental site inspections in the reporting period, no non-conformance was identified. The observations of the site audit for the Projects are summarized in **Table 4.1**.

Table 4.1 Observations of Site Audit

Parameters	Ref. Number	Observations	Follow Up Action
Water Quality	N/A	There was no observation in the reporting month.	N/A
Air Quality	N/A	There was no observation in the reporting month.	N/A
Noise	N/A	There was no observation in the reporting month.	N/A
Waste/ Chemical Management	N/A	There was no observation in the reporting month.	N/A
Landscape and Visual	N/A	There was no observation in the reporting month.	N/A
Permit/ Licenses	N/A	There was no observation in the reporting month.	N/A

Review of Environmental Monitoring Procedures

- 4.6 The monitoring works conducted by Contract DE/2018/17's ET were reviewed at a regular basis to ensure the monitoring procedures were carried out properly.

Status of Environmental Licensing and Permitting

- 4.7 All permits/licenses obtained for the Contract DE/2018/17 are summarized in **Table 4.2**.

Table 4.2 Summary of Environmental Licence / Permit for DE/2018/17

Reference Number	Valid Period		Details	Status
	From	To		
<i>Water Discharge License</i>				
WT00035198-2019	15/1/2020	31/1/2025	The application was approved on 15-1-2020.	Valid
<i>Registered Chemical Waste Producer</i>				
WPN5213-269-B2565-01	N/A	N/A	The application was approved on 14-8-2019.	Valid
<i>Billing Account for Disposal of Construction Waste</i>				
CSW03680	6/8/2019	N/A	The application was approved on 6-8-2019.	Valid
<i>Notification of Works Under APCO</i>				
447348	N/A	N/A	Notice form received by EPD on 17-7-2019.	N/A
<i>Construction Noise Permit</i>				
GW-RW0374-21	26/9/2021	25/3/2022	The application was approved on 24/9/2021	Valid

Status of Waste Management

- 4.8 The amount of wastes generated by the activities of the Project in the reporting month is shown in **Appendix H**.

Implementation Status of Event Action Plans

- 4.9 The Event Action Plans for air quality and noise are presented in **Appendix I**.

1-hr TSP

- 4.10 No Action/Limit Level exceedance was recorded.

24-hr TSP

- 4.11 No Action/Limit Level exceedance was recorded.

Construction Noise

- 4.12 No Action/Limit Level exceedance was recorded.

Landscape and Visual

- 4.13 No non-compliance was recorded.

Summary of Complaints and Prosecutions

- 4.14 No environmental complaint and prosecution was received for the Project in the reporting month.
- 4.15 There were no environmental complaint and prosecution received since the commencement of the Project. The Complaint Log is presented in **Appendix K**.

5. FUTURE KEY ISSUES

- 5.1 According to the information from the Contractor, all construction activities with significant environmental impact of Contract No. DE/2018/17 under Harbour Area Treatment Scheme Stage 2A have been completed on 31 December 2021. The termination date of EM&A programme was on 31st January 2022. Therefore, there was no construction activities after January 2022 under Contract No. DE/2018/17. In addition, the Proposal for Cessation of Construction Phase EM&A Programme for the Contract was submitted to EPD on 12 January 2022, and was approved by EPD on 31 January 2022.

Key Issues for the Coming Month

- 5.2 Key environmental issues in the coming month include:

- N/A

Monitoring Schedule for the Next Month

- N/A

6. CONCLUSIONS AND RECOMMENDATIONS

Conclusions

- 6.1 Environmental monitoring and audit works were performed in the reporting month and all monitoring results were checked and reviewed.

1-hour TSP Monitoring

- 6.2 All 1-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.

24-hour TSP Monitoring

- 6.3 All 24-hour TSP monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.

Construction Noise Monitoring

- 6.4 All Construction Noise monitoring was conducted as scheduled in the reporting month. No Action/Limit Level exceedance was recorded.

Environmental Audit

- 6.5 Environmental site audits were conducted as weekly basis in the reporting month. No non-compliance was recorded.

Complaint and Prosecution

- 6.6 No environmental complaint and prosecution was received in the reporting month.

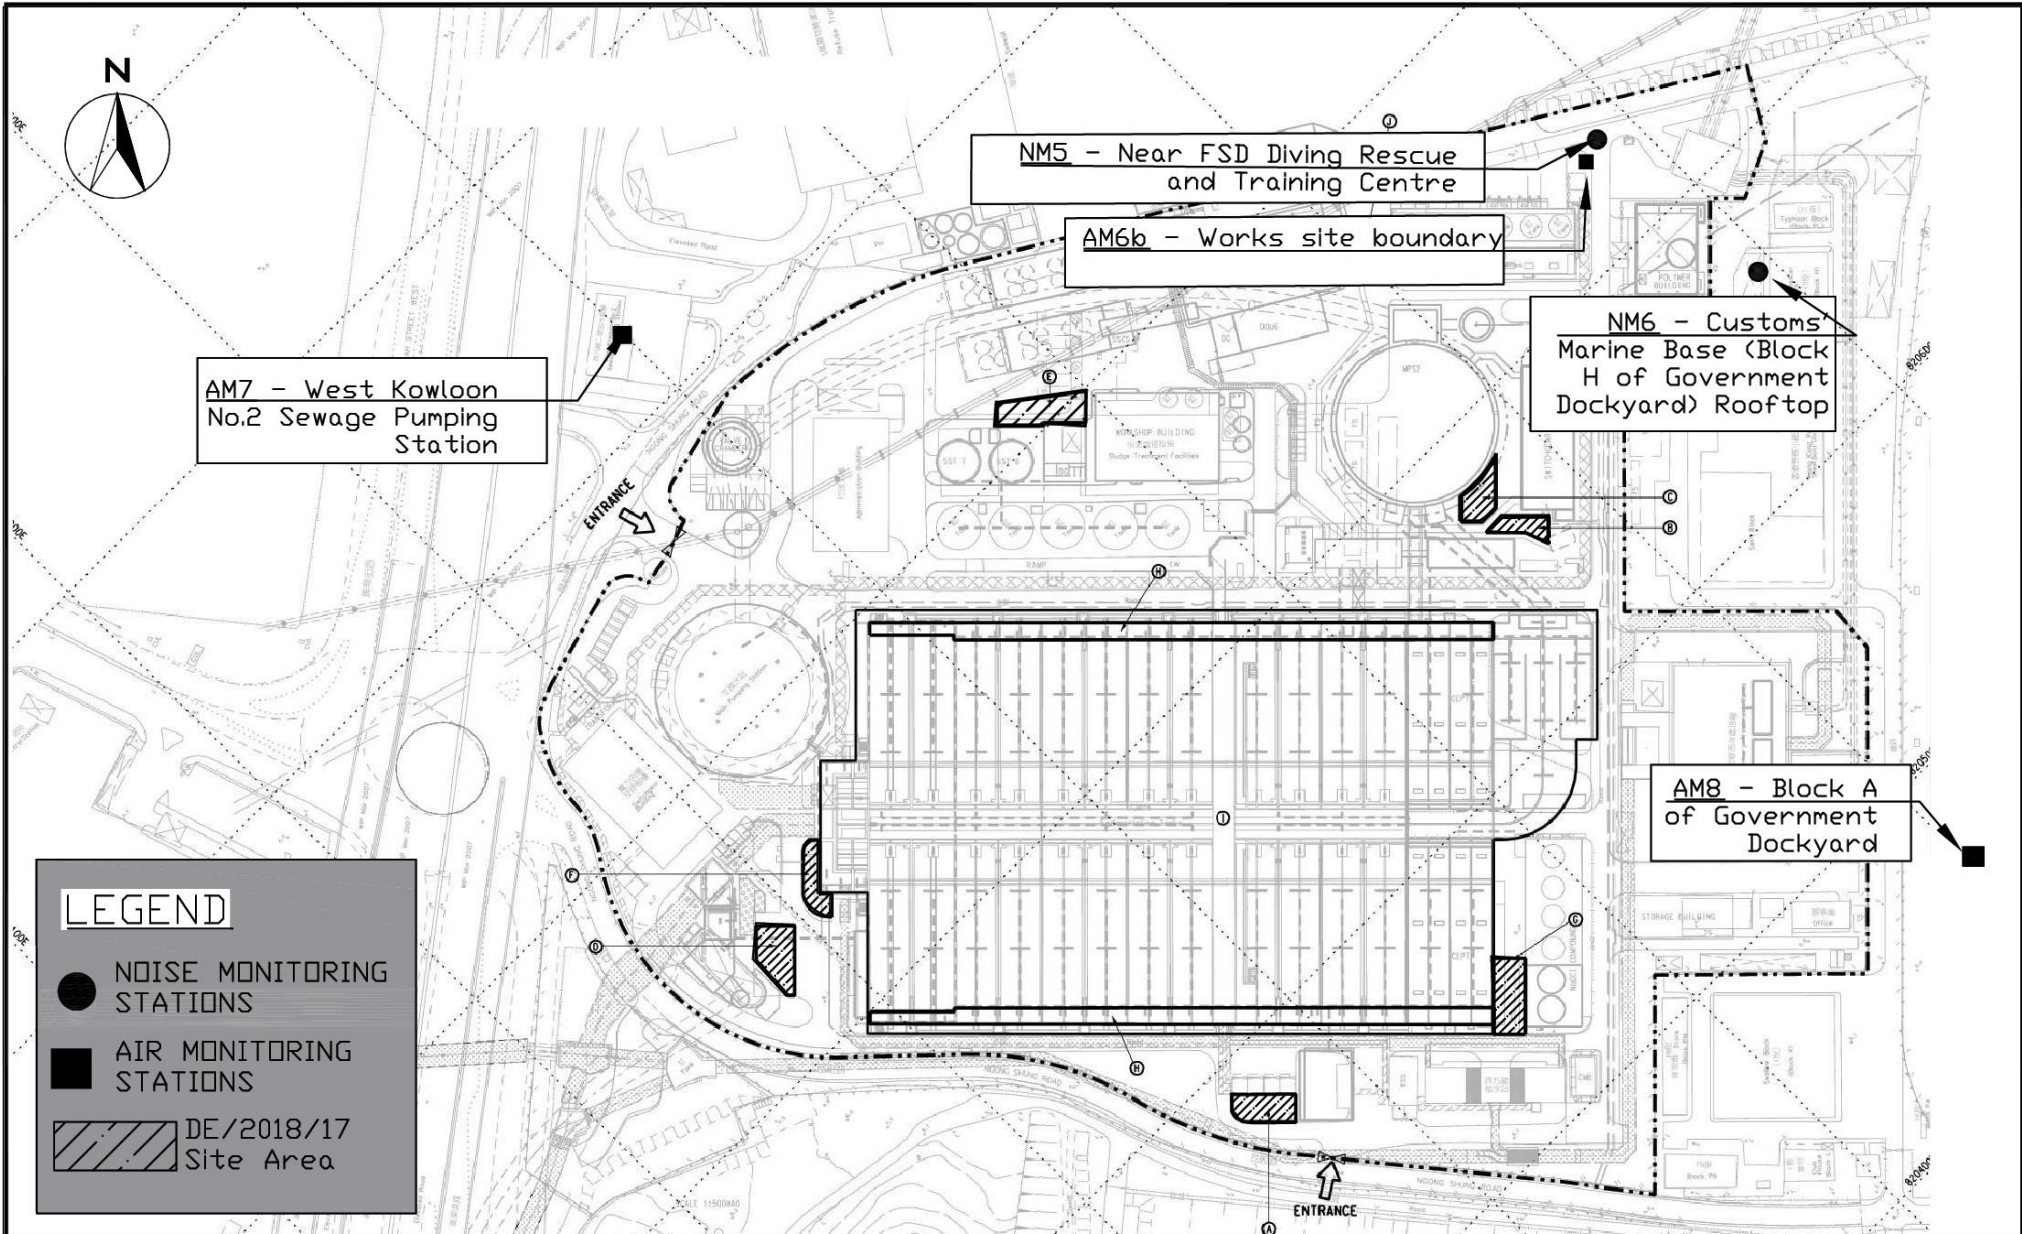
Recommendations for next reporting month

- 6.7 According to the information from the Contractor, all construction activities with significant environmental impact of Contract No. DE/2018/17 under Harbour Area Treatment Scheme Stage 2A have been completed on 31 December 2021. The termination date of EM&A programme was on 31st January 2022. Therefore, there was no construction activities after January 2022 under Contract No. DE/2018/17. In addition, the Proposal for Cessation of Construction Phase EM&A Programme for the Contract was submitted to EPD on 12 January 2022, and was approved by EPD on 31 January 2022.

- 6.8 The following recommendations were made for the next report month:

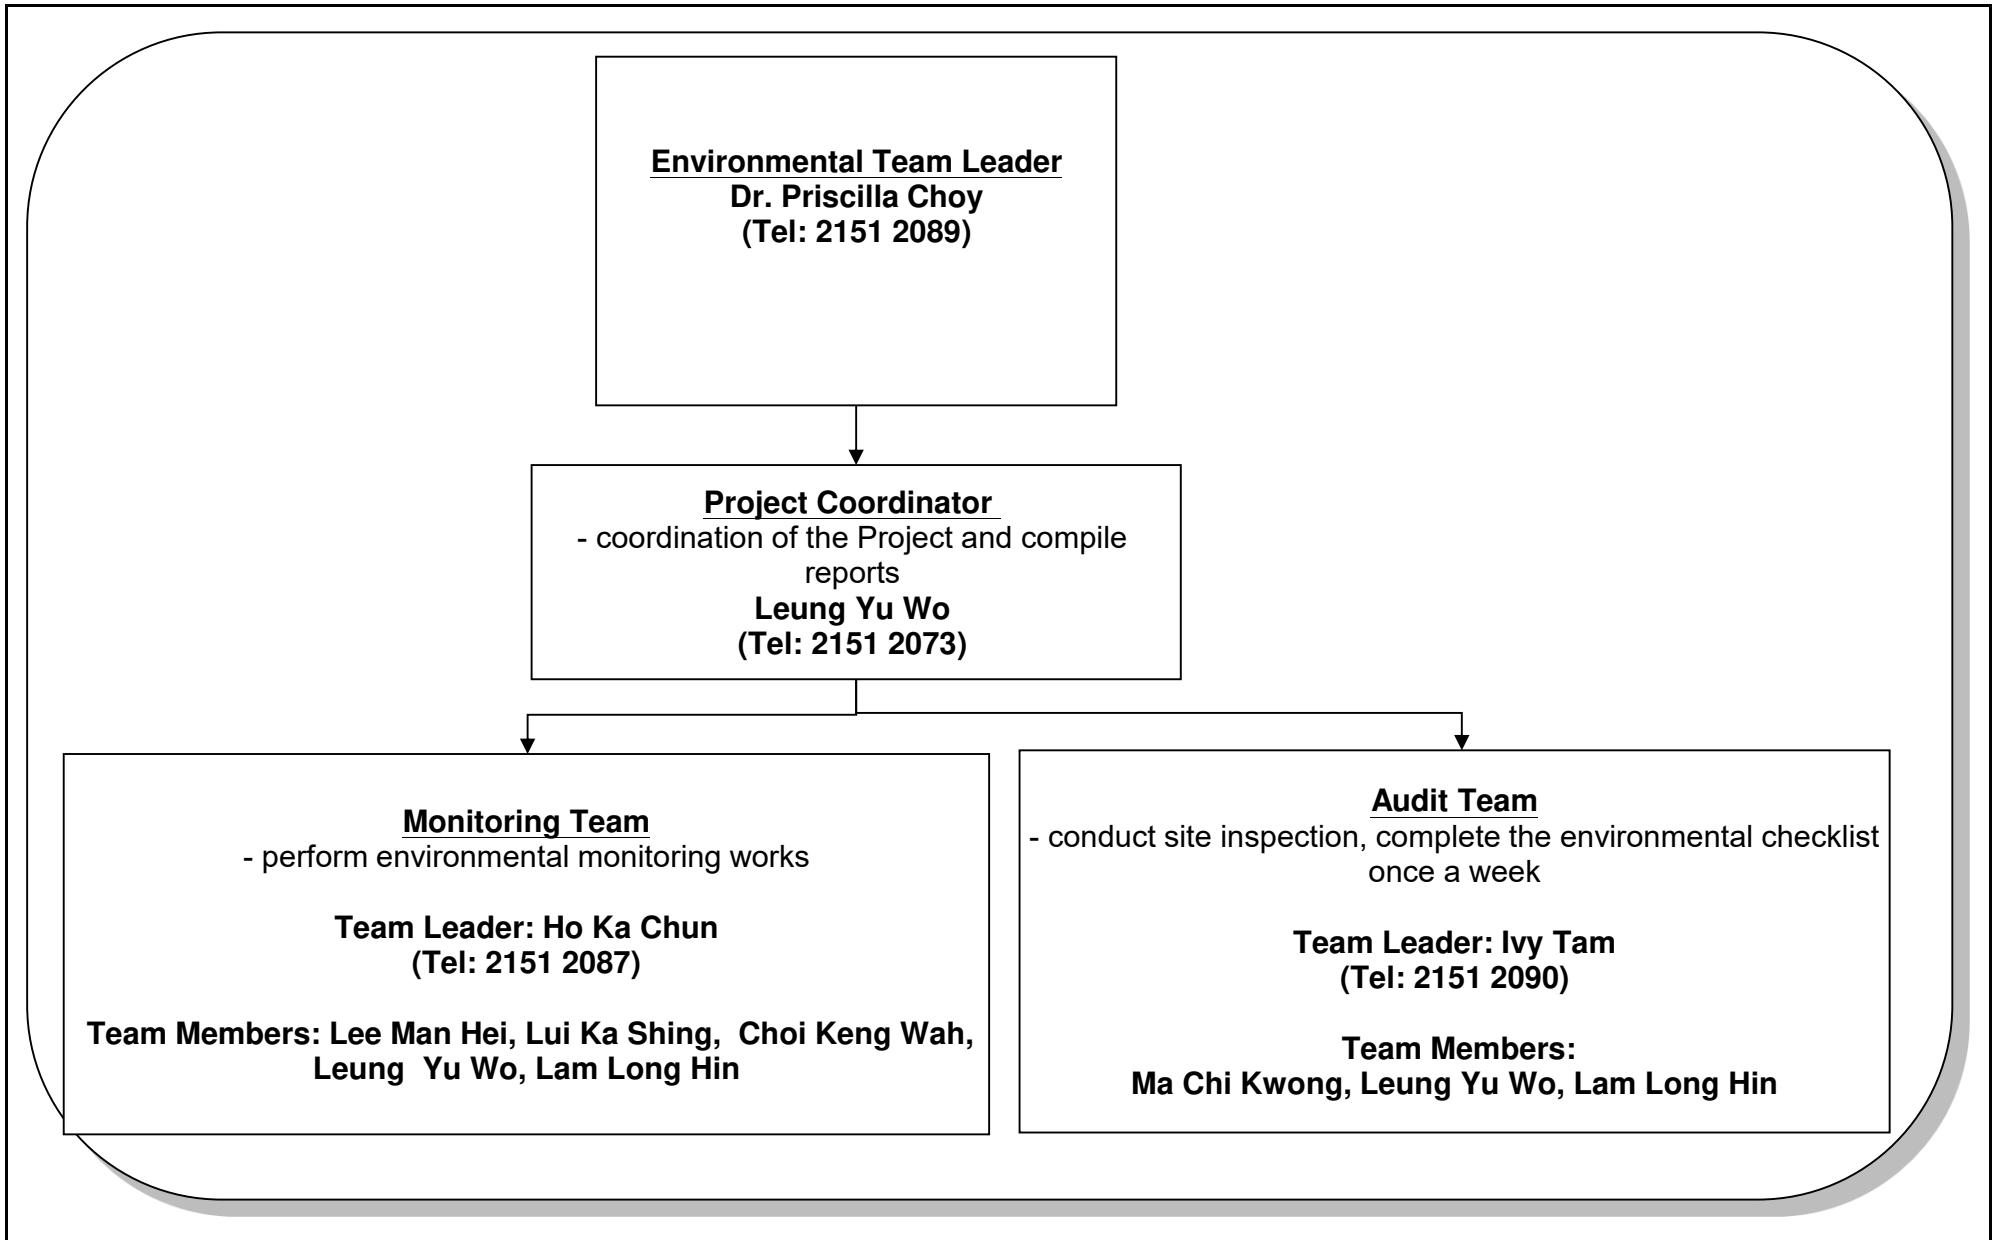
- N/A

FIGURES



Contract No. DE/2018/17 Enhancement of Deodourisation System at Stonecutters Island Sewage Treatment Works
 General Location Plan of the project and Locations of Air and Noise Monitoring Locations

SCALE	1:180 @ A4	DATE	Nov 2020
CHECK	-	DRAWN	HC
Project No	WMA19011	FIGURE NO.	1
		REV	-



Title	Contract No. DE/2018/17 Enhancement of Deodourisation System at SCISTW	Scale	Project	 consulting . testing . research
		N.T.S	No. WMA19011	
	ET's Organization Chart	Version	Figure	
		v.3	2	

**APPENDIX A
ACTION AND LIMIT LEVELS FOR AIR
QUALITY AND NOISE QUALITY**

Appendix A Action and Limit Levels

Table A-1 Action and Limit Levels for 1-Hour TSP and 24-Hour TSP

Monitoring Stations	Action Level ($\mu\text{g}/\text{m}^3$)		Limit Level ($\mu\text{g}/\text{m}^3$)	
	1-hour	24-hour	1-hour	24-hour
AM6b	346	196	500	260
AM7	322	207	500	260
AM8	307	158	500	260

Table A-2 Action and Limit Level for Construction Noise

Monitoring Stations	Time Period	Action Level	Limit Level in dB(A)
NM5 NM6	0700-1900 hours on normal weekdays	When one documented complaint is received	75
	Evening Time of normal weekdays and General Holidays: All days during the evening (1900 to 2300 hours), and general holidays (including Sundays) during the day-time and evening (0700 to 2300 hours)	N/A	70 ⁽¹⁾

Notes: If works are to be carried out during restricted hours, the conditions stipulated in the Construction Noise Permit (CNP) issued by the Noise Control Authority have to be followed.

**APPENDIX B
COPIES OF CALIBRATION
CERTIFICATES**

TEST REPORT

APPLICANT: Wellab Limited
(EM&A Department)
Room 1808, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	36237
Date of Issue:	2022-01-10
Date Received:	2022-01-07
Date Tested:	2022-01-07
Date Completed:	2022-01-10
Next Due Date:	2022-03-09

Page: 1 of 1

ATTN: Ms. Meiling Tang

Certificate of Calibration

Item for Calibration:

Description : Dust Monitor
 Manufacturer : Met One Instruments
 Model No. : AEROCET-831
 Serial No. : X23807
 Flow rate : 0.1 cfm
 Zero Count Test : 0 count per 1 minute
 Equipment No. : WA-01-01

Test Conditions:

Room Temperature : 17-22 degree Celsius
 Relative Humidity : 40-70%

Test Specifications & Methodology:

1. Instruction and Operation Manual High Volume Sampler, Tisch Environmental Inc.
2. In-house method in according to the instruction manual: The Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Dust Monitor and High Volume Sampler.

Results:

Correlation Factor (CF)	1.121
-------------------------	-------

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
General Manager

TEST REPORT

APPLICANT: Wellab Limited
(EM&A Department)
Room 1808, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	36236A
Date of Issue:	2022-01-03
Date Received:	2021-12-31
Date Tested:	2021-12-31
Date Completed:	2022-01-03
Next Due Date:	2022-03-02

Page: 1 of 1

ATTN: Ms. Meiling Tang

Certificate of Calibration

Item for Calibration:

Description : Dust Monitor
Manufacturer : Met One Instruments
Model No. : AEROCET-831
Serial No. : X24477
Flow rate : 0.1 cfm
Zero Count Test : 0 count per 1 minute
Equipment No. : WA-01-06

Test Conditions:

Room Temperature : 17-22 degree Celsius
Relative Humidity : 40-70%

Test Specifications & Methodology:

1. Instruction and Operation Manual High Volume Sampler, Tisch Environmental Inc.
2. In-house method in according to the instruction manual: The Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Dust Monitor and High Volume Sampler.

Results:

Correlation Factor (CF)	1.108
-------------------------	-------

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**


PATRICK TSE
General Manager

TEST REPORT

APPLICANT: Wellab Limited
(EM&A Department)
Room 1808, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	36236B
Date of Issue:	2022-01-03
Date Received:	2021-12-31
Date Tested:	2021-12-31
Date Completed:	2022-01-03
Next Due Date:	2022-03-02

Page: 1 of 1

ATTN: Ms. Meiling Tang

Certificate of Calibration

Item for Calibration:

Description : Dust Monitor
Manufacturer : Met One Instruments
Model No. : AEROCET-831
Serial No. : X24479
Flow rate : 0.1 cfm
Zero Count Test : 0 count per 1 minute
Equipment No. : WA-01-08

Test Conditions:

Room Temperature : 17-22 degree Celsius
Relative Humidity : 40-70%

Test Specifications & Methodology:

1. Instruction and Operation Manual High Volume Sampler, Tisch Environmental Inc.
2. In-house method in according to the instruction manual: The Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Dust Monitor and High Volume Sampler.

Results:

Correlation Factor (CF)	1.116
-------------------------	-------

PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**


PATRICK TSE
General Manager

TEST REPORT

**APPLICANT: Wellab Limited
(EM&A Department)
Room 1808, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong**

Test Report No.:	36236C
Date of Issue:	2022-01-03
Date Received:	2021-12-31
Date Tested:	2021-12-31
Date Completed:	2022-01-03
Next Due Date:	2022-03-02

Page: 1 of 1

ATTN: Ms. Meiling Tang

Certificate of Calibration

Item for Calibration:

Description : Dust Monitor
Manufacturer : Met One Instruments
Model No. : AEROCET-831
Serial No. : X23811
Flow rate : 0.1 cfm
Zero Count Test : 0 count per 1 minute
Equipment No. : WA-01-09

Test Conditions:

Room Temperature : 17-22 degree Celsius
Relative Humidity : 40-70%

Test Specifications & Methodology:

1. Instruction and Operation Manual High Volume Sampler, Tisch Environmental Inc.
2. In-house method in according to the instruction manual: The Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Dust Monitor and High Volume Sampler.

Results:

Correlation Factor (CF)	1.101
-------------------------	-------

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**


PATRICK TSE
Laboratory Manager

TEST REPORT

APPLICANT: Wellab Limited
(EM&A Department)
Room 1808, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	36236D
Date of Issue:	2022-01-03
Date Received:	2021-12-31
Date Tested:	2021-12-31
Date Completed:	2022-01-03
Next Due Date:	2022-03-02

Page: 1 of 1

ATTN: Ms. Meiling Tang

Certificate of Calibration

Item for Calibration:

Description : Dust Monitor
 Manufacturer : Met One Instruments
 Model No. : AEROCET-831
 Serial No. : X24478
 Flow rate : 0.1 cfm
 Zero Count Test : 0 count per 1 minute
 Equipment No. : WA-01-10

Test Conditions:

Room Temperature : 17-22 degree Celsius
 Relative Humidity : 40-70%

Test Specifications & Methodology:

1. Instruction and Operation Manual High Volume Sampler, Tisch Environmental Inc.
2. In-house method in according to the instruction manual: The Dust Monitor was compared with a calibrated High Volume Sampler and the result was used to generate the Correlation Factor (CF) between the Dust Monitor and High Volume Sampler.

Results:

Correlation Factor (CF)	1.065
-------------------------	-------

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**


PATRICK TSE
General Manager

High-Volume TSP Sampler
5-POINT CALIBRATION DATA SHEET

File No. WMA19011/WA12/0004

Station AM6 - Works Site Boundary Operator: HL
Date: 29-Nov-21 Next Due Date: 28-Jan-22
Equipment No.: WA-12-12 Serial No. 2355

Ambient Condition			
Temperature, Ta (K)	293.2	Pressure, Pa (mmHg)	766.8

Orifice Transfer Standard Information					
Serial No.	0993	Slope, mc	0.0569	Intercept, bc	-0.01398
Last Calibration Date:	28-Jan-21	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	28-Jan-22	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	ΔH (orifice), in. of water	$[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$	Qstd (CFM) X - axis	ΔW (HVS), in. of water	$[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Y-axis
1	13.8	3.76	66.38	8.6	2.97
2	10.4	3.27	57.66	6.7	2.62
3	7.7	2.81	49.65	5.0	2.26
4	5.1	2.29	40.45	3.6	1.92
5	3.4	1.87	33.07	2.4	1.57

By Linear Regression of Y on X
Slope, mw = 0.0417 Intercept, bw = 0.2058
Correlation coefficient* = 0.9994
*If Correlation Coefficient < 0.990, check and recalibrate.

Set Point Calculation

From the TSP Field Calibration Curve, take Qstd = 43 CFM
From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; $W = (mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$ 3.90

Remarks: _____

Conducted by: [Signature] Signature: [Signature] Date: 29-11-2021
Checked by: [Signature] Signature: [Signature] Date: 28/11/21

**High-Volume TSP Sampler
5-POINT CALIBRATION DATA SHEET**

File No. WMA19011/WA12/0005

Station AM6 - Works Site Boundary Operator: HL
 Date: 27-Jan-22 Next Due Date: 26-Mar-22
 Equipment No.: WA-12-12 Serial No. 2355

Ambient Condition			
Temperature, Ta (K)	294.3	Pressure, Pa (mmHg)	765.8

Orifice Transfer Standard Information					
Serial No.	0993	Slope, mc	0.0569	Intercept, bc	-0.01398
Last Calibration Date:	28-Jan-21	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	28-Jan-22	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	ΔH (orifice), in. of water	$[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$	Qstd (CFM) X - axis	ΔW (HVS), in. of water	$[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Y-axis
1	13.4	3.70	65.25	8.8	3.00
2	10.8	3.32	58.61	6.7	2.61
3	7.6	2.78	49.20	5.1	2.28
4	5.4	2.35	41.51	3.8	1.97
5	3.3	1.83	32.51	2.5	1.60

By Linear Regression of Y on X

Slope, mw = 0.0416 Intercept, bw : 0.2372
 Correlation coefficient* = 0.9976

*If Correlation Coefficient < 0.990, check and recalibrate.



Set Point Calculation

From the TSP Field Calibration Curve, take Qstd = 43 CFM
 From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; $W = (mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$ 4.02

Remarks: _____

Conducted by: Bob Man Han Signature:  Date: 27/1/2022
 Checked by: Ho Kei Chu Signature:  Date: 27/1/2022

High-Volume TSP Sampler 5-POINT CALIBRATION DATA SHEET

File No. WMA19011/WA14/0004

Station AM7 - North West Kowloon Sewage Pumping Station Operator: HL
 Date: 29-Nov-21 Next Due Date: 28-Jan-22
 Equipment No.: WA-12-14 Serial No. 2353

Ambient Condition			
Temperature, Ta (K)	293.3	Pressure, Pa (mmHg)	766.9

Orifice Transfer Standard Information					
Serial No.	0993	Slope, mc	0.0569	Intercept, bc	-0.01398
Last Calibration Date:	28-Jan-21	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	28-Jan-22	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	ΔH (orifice), in. of water	$[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$	Qstd (CFM) X - axis	ΔW (HVS), in. of water	$[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Y-axis
1	12.4	3.57	62.93	8.4	2.93
2	10.7	3.31	58.48	7.2	2.72
3	8.0	2.86	50.60	5.4	2.35
4	5.3	2.33	41.23	3.7	1.95
5	3.3	1.84	32.58	2.3	1.54

By Linear Regression of Y on X

Slope, mw = 0.0457 Intercept, bw : 0.0503

Correlation coefficient* = 0.9999

*If Correlation Coefficient < 0.990, check and recalibrate.

Set Point Calculation	
From the TSP Field Calibration Curve, take Qstd = 43 CFM	
From the Regression Equation, the "Y" value according to	
$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$	
Therefore, Set Point; $W = (mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$	<u>3.96</u>

Remarks: _____

Conducted by: Lee Man Hei Signature: Lee Man Hei Date: 29-11-2021
 Checked by: Lee Ka Chun Signature: Lee Ka Chun Date: 29/11/2021

High-Volume TSP Sampler
5-POINT CALIBRATION DATA SHEET

File No. WMA19011/WA14/0005

Station AM7 - North West Kowloon Sewage Pumping Station Operator: HL
Date: 27-Jan-22 Next Due Date: 26-Mar-22
Equipment No.: WA-12-14 Serial No. 2353

Ambient Condition			
Temperature, Ta (K)	294.5	Pressure, Pa (mmHg)	765.7

Orifice Transfer Standard Information					
Serial No.	0993	Slope, mc	0.0569	Intercept, bc	-0.01398
Last Calibration Date:	28-Jan-21	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	28-Jan-22	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	ΔH (orifice), in. of water	$[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$	Qstd (CFM) X - axis	ΔW (HVS), in. of water	$[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Y-axis
1	12.2	3.53	62.25	8.0	2.86
2	10.8	3.32	58.58	6.9	2.65
3	8.4	2.93	51.69	5.5	2.37
4	5.4	2.35	41.50	3.8	1.97
5	3.4	1.86	32.98	2.3	1.53

By Linear Regression of Y on X

Slope, mw = 0.0439 Intercept, bw = 0.1051
Correlation coefficient* = 0.9986

*If Correlation Coefficient < 0.990, check and recalibrate.

Set Point Calculation	
From the TSP Field Calibration Curve, take Qstd = 43 CFM	
From the Regression Equation, the "Y" value according to	
$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$	
Therefore, Set Point; W = $(mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$	<u>3.90</u>

Remarks: _____

Conducted by: Leo Man Ho Signature: Leo Man Ho Date: 27/1/2022
Checked by: Ho Ka Chi Signature: Ho Ka Chi Date: 27/1/2022

High-Volume TSP Sampler
5-POINT CALIBRATION DATA SHEET

File No. WMA19011/WA18/0004

Station AM8 - Block A of Government Dockyard Operator: HL
 Date: 29-Nov-21 Next Due Date: 28-Jan-22
 Equipment No.: WA-12-18 Serial No. 3219

Ambient Condition			
Temperature, Ta (K)	294.3	Pressure, Pa (mmHg)	767.1

Orifice Transfer Standard Information					
Serial No.	0993	Slope, mc	0.0569	Intercept, bc	-0.01398
Last Calibration Date:	28-Jan-21	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	28-Jan-22	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	ΔH (orifice), in. of water	$[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$	Qstd (CFM) X - axis	ΔW (HVS), in. of water	$[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Y-axis
1	12.0	3.50	61.81	8.2	2.89
2	9.6	3.13	55.31	6.6	2.60
3	7.4	2.75	48.59	5.4	2.35
4	5.6	2.39	42.31	3.8	1.97
5	3.6	1.92	33.97	2.5	1.60

By Linear Regression of Y on X

Slope, mw = 0.0469 Intercept, bw = 0.0139

Correlation coefficient* = 0.9979

*If Correlation Coefficient < 0.990, check and recalibrate.

Set Point Calculation



From the TSP Field Calibration Curve, take Qstd = 43 CFM

From the Regression Equation, the "Y" value according to

$$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$$

Therefore, Set Point; W = $(mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$ 4.03

Remarks: _____

Conducted by: Leo Man Hzi Signature:  Date: 29-11-2021
 Checked by: No. Leo Hzi Signature:  Date: 29/11/2021

High-Volume TSP Sampler 5-POINT CALIBRATION DATA SHEET

File No. WMA19011/WA18/0005

Station AM8 - Block A of Government Dockyard Operator: HL
 Date: 27-Jan-22 Next Due Date: 26-Mar-22
 Equipment No.: WA-12-18 Serial No. 3219

Ambient Condition			
Temperature, Ta (K)	294.5	Pressure, Pa (mmHg)	765.6

Orifice Transfer Standard Information					
Serial No.	0993	Slope, mc	0.0569	Intercept, bc	-0.01398
Last Calibration Date:	28-Jan-21	$mc \times Qstd + bc = [\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$			
Next Calibration Date:	28-Jan-22	$Qstd = \{[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2} - bc\} / mc$			

Calibration of TSP Sampler					
Calibration Point	Orifice			HVS	
	ΔH (orifice), in. of water	$[\Delta H \times (Pa/760) \times (298/Ta)]^{1/2}$	Qstd (CFM) X - axis	ΔW (HVS), in. of water	$[\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$ Y-axis
1	12.6	3.58	63.25	8.4	2.93
2	9.7	3.14	55.53	6.6	2.59
3	7.2	2.71	47.87	4.9	2.23
4	5.4	2.35	41.49	3.8	1.97
5	3.3	1.83	32.49	2.6	1.63

By Linear Regression of Y on X



Slope, mw = 0.0426 Intercept, bw = 0.2200

Correlation coefficient* = 0.9992

*If Correlation Coefficient < 0.990, check and recalibrate.

Set Point Calculation	
From the TSP Field Calibration Curve, take Qstd = 43 CFM	
From the Regression Equation, the "Y" value according to	
$mw \times Qstd + bw = [\Delta W \times (Pa/760) \times (298/Ta)]^{1/2}$	
Therefore, Set Point, W = $(mw \times Qstd + bw)^2 \times (760 / Pa) \times (Ta / 298) =$	<u>4.13</u>

Remarks: _____

Conducted by: LEE MAN HO Signature:  Date: 27/1/2022
 Checked by: Lo Ka On Signature:  Date: 27/1/2022



RECALIBRATION
DUE DATE:
January 28, 2022

Certificate of Calibration

Calibration Certification Information			
Cal. Date: January 28, 2021	Rootsmeter S/N: 438320	Ta: 294	°K
Operator: Jim Tisch		Pa: 763.5	mm Hg
Calibration Model #: TE-5025A	Calibrator S/N: 0993		

Run	Vol. Init (m3)	Vol. Final (m3)	ΔVol. (m3)	ΔTime (min)	ΔP (mm Hg)	ΔH (in H2O)
1	1	2	1	1.4160	3.3	2.00
2	3	4	1	0.9980	6.4	4.00
3	5	6	1	0.8890	8.0	5.00
4	7	8	1	0.8500	8.8	5.50
5	9	10	1	0.7020	12.9	8.00

Data Tabulation					
Vstd (m3)	Qstd (x-axis)	$\sqrt{\Delta H \left(\frac{Pa}{Pstd} \right) \left(\frac{Tstd}{Ta} \right)}$ (y-axis)	Va	Qa (x-axis)	$\sqrt{\Delta H (Ta/Pa)}$ (y-axis)
1.0139	0.7160	1.4271	0.9957	0.7032	0.8776
1.0098	1.0118	2.0182	0.9916	0.9936	1.2411
1.0076	1.1334	2.2564	0.9895	1.1131	1.3875
1.0066	1.1842	2.3666	0.9885	1.1629	1.4553
1.0011	1.4261	2.8542	0.9831	1.4004	1.7551
QSTD	m=	2.00902	QA	m=	1.25802
	b=	-0.01398		b=	-0.00860
	r=	0.99997		r=	0.99997

Calculations			
Vstd = ΔVol((Pa-ΔP)/Pstd)(Tstd/Ta)	Va = ΔVol((Pa-ΔP)/Pa)		
Qstd = Vstd/ΔTime	Qa = Va/ΔTime		
For subsequent flow rate calculations:			
Qstd = 1/m $\left(\left(\sqrt{\Delta H \left(\frac{Pa}{Pstd} \right) \left(\frac{Tstd}{Ta} \right)} \right) - b \right)$		Qa = 1/m $\left(\left(\sqrt{\Delta H (Ta/Pa)} \right) - b \right)$	

Standard Conditions	
Tstd:	298.15 °K
Pstd:	760 mm Hg
Key	
ΔH: calibrator manometer reading (in H2O)	
ΔP: rootsmeter manometer reading (mm Hg)	
Ta: actual absolute temperature (°K)	
Pa: actual barometric pressure (mm Hg)	
b: intercept	
m: slope	

RECALIBRATION
US EPA recommends annual recalibration per 1998 40 Code of Federal Regulations Part 50 to 51, Appendix B to Part 50, Reference Method for the Determination of Suspended Particulate Matter in the Atmosphere, 9.2.17, page 30

Tisch Environmental, Inc.
 145 South Miami Avenue
 Village of Cleves, OH 45002

www.tisch-env.com
 TOLL FREE: (877)263-7610
 FAX: (513)467-9009

TEST REPORT

APPLICANT: Wellab Limited
(EM&A Department)
Room 1701, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	34872A
Date of Issue:	2021-03-08
Date Received:	2021-03-05
Date Tested:	2021-03-05
Date Completed:	2021-03-08
Next Due Date:	2022-03-07

Page: 1 of 1

ATTN: Mr. W. K. Tang

Certificate of Calibration

Item for calibration:

Description	: Sound Level Meter
Manufacturer	: BSWA
Model No.	: BSWA 308
Serial No.	: 580004
Equipment No.	: WN-01-02

Test conditions:

Room Temperature	: 17-22 degree Celsius
Relative Humidity	: 40-70%

Test Specifications:

Performance checking at 94 and 114 dB

Methodology:

In-house method, according to manufacturer instruction manual

Results:

Reference Set Point, dB	Instrument Readings, dB
94	94.0
114	114.0

PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**


PATRICK TSE
General Manager

TEST REPORT

APPLICANT: Wellab Limited
(EM&A Department)
Room 1701, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	34872C
Date of Issue:	2021-03-08
Date Received:	2021-03-05
Date Tested:	2021-03-05
Date Completed:	2021-03-08
Next Due Date:	2022-03-07

Page: 1 of 1

ATTN: Mr. W. K. Tang

Certificate of Calibration

Item for calibration:

Description	: Sound Level Meter
Manufacturer	: BSWA
Model No.	: BSWA 308
Serial No.	: 580006
Equipment No.	: WN-01-04

Test conditions:

Room Temperature	: 17-22 degree Celsius
Relative Humidity	: 40-70%

Test Specifications:

Performance checking at 94 and 114 dB

Methodology:

In-house method, according to manufacturer instruction manual

Results:

Reference Set Point, dB	Instrument Readings, dB
94	94.0
114	114.0

PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**


PATRICK TSE
General Manager

TEST REPORT

APPLICANT: Wellab Limited
(EM&A Department)
Room 1701, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	34873
Date of Issue:	2021-03-15
Date Received:	2021-03-12
Date Tested:	2021-03-12
Date Completed:	2021-03-15
Next Due Date:	2022-03-14

Page: 1 of 1

ATTN: Mr. W. K. Tang

Certificate of Calibration

Item for calibration:

Description	: Sound Level Meter
Manufacturer	: BSWA
Model No.	: BSWA 308
Serial No.	: 580011
Equipment No.	: WN-01-08

Test conditions:

Room Temperature	: 17-22 degree Celsius
Relative Humidity	: 40-70%

Test Specifications:

Performance checking at 94 and 114 dB

Methodology:

In-house method, according to manufacturer instruction manual

Results:

Reference Set Point, dB	Instrument Readings, dB
94	94.0
114	114.0

PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**


PATRICK TSE
General Manager

TEST REPORT

APPLICANT: Wellab Limited
(EM&A Department)
Room 1701, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	34873B
Date of Issue:	2021-03-15
Date Received:	2021-03-12
Date Tested:	2021-03-12
Date Completed:	2021-03-15
Next Due Date:	2022-03-14

Page: 1 of 1

ATTN: Mr. W. K. Tang

Certificate of Calibration

Item for calibration:

Description	: Sound Level Meter
Manufacturer	: BSWA
Model No.	: BSWA 308
Serial No.	: 580017
Equipment No.	: WN-01-10

Test conditions:

Room Temperature	: 17-22 degree Celsius
Relative Humidity	: 40-70%

Test Specifications:

Performance checking at 94 and 114 dB

Methodology:

In-house method, according to manufacturer instruction manual

Results:

Reference Set Point, dB	Instrument Readings, dB
94	94.0
114	114.0

PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**


PATRICK TSE
General Manager

TEST REPORT

APPLICANT: Wellab Limited
(EM&A Department)
Room 1808, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	35658
Date of Issue:	2021-08-23
Date Received:	2021-08-20
Date Tested:	2021-08-20
Date Completed:	2021-08-23
Next Due Date:	2022-08-22

Page: 1 of 1

ATTN: Ms. Meiling Tang

Certificate of Calibration

Item for Calibration:

Description : Acoustical Calibrator
 Manufacturer : Brüel & Kjær
 Model No. : 4231
 Serial No. : 2412367
 Equipment No. : N-02-03

Test Conditions:

Room Temperature : 17-22 degree Celsius
 Relative Humidity : 40-70%

Methodology:

The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

Results:

Sound Pressure Level (1kHz)	Measured SPL	Tolerance
At 94 dB SPL	94.0	94.0 ± 0.1dB
At 114 dB SPL	114.0	114.0 ± 0.1dB

Remark: This report supersedes the one dated 2019-08-20 with certificate number 31951.

PREPARED AND CHECKED BY:
 For and On Behalf of **WELLAB Ltd.**


PATRICK TSE
 General Manager

TEST REPORT

APPLICANT: Wellab Limited
(EM&A Department)
Room 1701, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	35909
Date of Issue:	2021-10-04
Date Received:	2021-10-02
Date Tested:	2021-10-02
Date Completed:	2021-10-04
Next Due Date:	2022-10-03

Page: 1 of 1

ATTN: Ms. Meiling Tang

Certificate of Calibration

Item for calibration:

Description : Acoustical Calibrator
Manufacturer : SVANTEK
Model No. : SV30A
Serial No. : 24803
Equipment No. : N-09-03

Test conditions:

Room Temperature : 17-22 degree Celsius
Relative Humidity : 40-70%

Methodology:

The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

Results:

Sound Pressure Level (1kHz)	Measured SPL	Tolerance
At 94 dB SPL	94.0	94.0 ± 0.1 dB
At 114 dB SPL	114.0	114.0 ± 0.1 dB

PREPARED AND CHECKED BY:

For and On Behalf of **WELLAB Ltd.**


PATRICK TSE
General Manager

TEST REPORT

APPLICANT: Wellab Limited
(EM&A Department)
Room 1808, Technology Park,
18 On Lai Street,
Shatin, NT, Hong Kong

Test Report No.:	35658A
Date of Issue:	2021-08-23
Date Received:	2021-08-20
Date Tested:	2021-08-20
Date Completed:	2021-08-23
Next Due Date:	2022-08-22

Page: 1 of 1

ATTN: Ms. Meiling Tang

Certificate of Calibration

Item for calibration:

Description : Acoustical Calibrator
Manufacturer : SVANTEK
Model No. : SV30A
Serial No. : 24791
Equipment No. : N-09-04

Test conditions:

Room Temperature : 17-22 degree Celsius
Relative Humidity : 40-70%

Methodology:

The Sound Level Calibrator has been calibrated in accordance with the documented procedures and using standard(s) and instrument(s) which are recommended by the manufacturer, or equivalent.

Results:

Sound Pressure Level (1kHz)	Measured SPL	Tolerance
At 94 dB SPL	94.0	94.0 ± 0.1 dB
At 114 dB SPL	114.0	114.0 ± 0.1 dB

PREPARED AND CHECKED BY:
For and On Behalf of **WELLAB Ltd.**



PATRICK TSE
General Manager

**APPENDIX C
ENVIRONMENTAL MONITORING
SCHEDULES**

**DE/2018/17, Enhancement of Deodourisation System at Stonecutters Island Sewage Treatment Works
Impact Air Quality and Noise Monitoring Schedule (January 2022)**

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
						1-Jan
2-Jan	3-Jan	4-Jan	5-Jan	6-Jan	7-Jan	8-Jan
		24 hr TSP	1hr TSP X 3 Noise 24 hr TSP			
9-Jan	10-Jan	11-Jan	12-Jan	13-Jan	14-Jan	15-Jan
	24 hr TSP	1hr TSP X 3 Noise			24 hr TSP	
16-Jan	17-Jan	18-Jan	19-Jan	20-Jan	21-Jan	22-Jan
	1hr TSP X 3 Noise			24 hr TSP	1hr TSP X 3	
23-Jan	24-Jan	25-Jan	26-Jan	27-Jan	28-Jan	29-Jan
			24 hr TSP	1hr TSP X 3 Noise		
30-Jan	31-Jan					
	1hr TSP X 3 Noise 24 hr TSP					

Air Quality Monitoring Station

AM7 - West Kowloon No.2 Sewage Pumping Station
AM8 - Block A of Government Dockyard
AM6b - Works Site Boundary

Noise Monitoring Station

NM6 - Customs' Marine Base (Block H of Government Dockyard) Rooftop
NM5 - FSD Diving Training Centre

**APPENDIX D
1-HOUR AND 24-HOUR TSP
MONITORING RESULTS AND
GRAPHICAL PRESENTATION**

Appendix D - 1-hour TSP Monitoring Results

Location AM6b - Works Site Boundary

Start Date	Start Time	Weather Condition	Air Temp. (K)	Filter Weight (g)		Particulate weight (g)	Elapse Time		Sampling Time(hrs.)	Flow Rate (m ³ /min.)		Av. flow (m ³ /min)	Total vol. (m ³)	Conc. (µg/m ³)	Filter ID no.
				Initial	Final		Initial	Final		Initial	Final				
5-Jan-22	9:00	Sunny	292.7	3.3288	3.3349	0.0061	13067.8	13068.8	1.0	1.22	1.22	1.22	73.1	83.4	220101/011
5-Jan-22	10:00	Sunny	293.9	3.3032	3.3103	0.0071	13068.8	13069.8	1.0	1.22	1.21	1.22	72.9	97.4	220101/012
5-Jan-22	11:00	Sunny	294.9	3.3568	3.3676	0.0108	13069.8	13070.8	1.0	1.21	1.21	1.21	72.8	148.4	220101/013
11-Jan-22	9:00	Sunny	287.1	3.2868	3.2930	0.0062	13094.8	13095.8	1.0	1.23	1.23	1.23	74.0	83.7	220101/020
11-Jan-22	10:00	Sunny	288.0	3.3443	3.3474	0.0031	13095.8	13096.8	1.0	1.23	1.23	1.23	73.9	41.9	220101/021
11-Jan-22	11:00	Sunny	288.9	3.2599	3.2631	0.0032	13096.8	13097.8	1.0	1.23	1.23	1.23	73.8	43.4	220101/022
17-Jan-22	9:00	Sunny	290.8	3.2810	3.2892	0.0082	13121.8	13122.8	1.0	1.23	1.22	1.22	73.5	111.6	220101/027
17-Jan-22	10:00	Sunny	291.1	3.3623	3.3697	0.0074	13122.8	13123.8	1.0	1.22	1.22	1.22	73.5	100.7	220101/028
17-Jan-22	11:00	Sunny	291.3	3.2586	3.2650	0.0064	13123.8	13124.8	1.0	1.22	1.22	1.22	73.4	87.2	220101/029
21-Jan-22	9:00	Sunny	290.9	3.3647	3.3741	0.0094	13148.8	13149.8	1.0	1.22	1.22	1.22	73.4	128.1	220101/066
21-Jan-22	10:00	Sunny	291.3	3.3948	3.4048	0.0100	13149.8	13150.8	1.0	1.22	1.22	1.22	73.3	136.4	220101/069
21-Jan-22	11:00	Sunny	291.8	3.3760	3.3832	0.0072	13150.8	13151.8	1.0	1.22	1.22	1.22	73.3	98.3	220101/070
27-Jan-22	9:00	Cloudy	292.4	3.3262	3.3348	0.0086	13175.8	13176.8	1.0	1.22	1.22	1.22	73.1	117.6	220101/084
27-Jan-22	10:00	Cloudy	292.8	3.3083	3.3140	0.0057	13176.8	13177.8	1.0	1.22	1.22	1.22	73.1	78.0	220101/085
27-Jan-22	11:00	Cloudy	293.6	3.3195	3.3266	0.0071	13177.8	13178.8	1.0	1.22	1.21	1.22	73.0	97.3	220101/082
31-Jan-22	13:00	Cloudy	287.7	3.3783	3.3802	0.0019	13178.8	13179.8	1.0	1.23	1.23	1.23	73.8	26.3	211201/023
31-Jan-22	14:00	Cloudy	287.9	3.3375	3.3394	0.0019	13179.8	13180.8	1.0	1.23	1.23	1.23	73.7	25.2	211201/025
31-Jan-22	15:00	Cloudy	287.9	3.3007	3.3017	0.0010	13180.8	13181.8	1.0	1.23	1.23	1.23	73.7	13.8	211201/026
													Min	14	
													Max	148	
													Average	84	

Appendix D - 1-hour TSP Monitoring Results

Location AM7 - North West Kowloon Sewage Pumping Station			
Date	Time	Weather	Particulate Concentration ($\mu\text{g}/\text{m}^3$)
5-Jan-22	9:00	Sunny	147.0
5-Jan-22	10:00	Sunny	150.5
5-Jan-22	11:00	Sunny	123.6
11-Jan-22	13:30	Sunny	124.6
11-Jan-22	14:30	Sunny	127.1
11-Jan-22	15:30	Sunny	132.2
17-Jan-22	9:00	Sunny	180.7
17-Jan-22	10:00	Sunny	176.0
17-Jan-22	11:00	Sunny	189.4
21-Jan-22	9:00	Sunny	69.3
21-Jan-22	10:00	Sunny	74.1
21-Jan-22	11:00	Sunny	83.5
27-Jan-22	9:00	Fine	125.3
27-Jan-22	10:00	Fine	108.7
27-Jan-22	11:00	Fine	113.5
31-Jan-22	9:00	Cloudy	43.4
31-Jan-22	10:00	Cloudy	48.5
31-Jan-22	11:00	Cloudy	45.1
		Minimum	43.4
		Maximum	189.4
		Average	114.6

Location AM8 - Block A of Government Dockyard			
Date	Time	Weather	Particulate Concentration ($\mu\text{g}/\text{m}^3$)
5-Jan-22	13:00	Sunny	113.0
5-Jan-22	14:00	Sunny	108.8
5-Jan-22	15:00	Sunny	111.2
11-Jan-22	9:00	Sunny	108.5
11-Jan-22	10:00	Sunny	106.7
11-Jan-22	11:00	Sunny	105.9
17-Jan-22	13:00	Sunny	187.7
17-Jan-22	14:00	Sunny	190.1
17-Jan-22	15:00	Sunny	192.0
21-Jan-22	13:00	Sunny	72.1
21-Jan-22	14:00	Sunny	60.1
21-Jan-22	15:00	Sunny	62.7
27-Jan-22	13:00	Fine	108.7
27-Jan-22	14:00	Fine	102.5
27-Jan-22	15:00	Fine	104.8
31-Jan-22	13:00	Cloudy	45.3
31-Jan-22	14:00	Cloudy	57.6
31-Jan-22	15:00	Cloudy	48.3
		Minimum	45.3
		Maximum	192.0
		Average	104.8

Appendix D - 24-hour TSP Monitoring Results

Location AM6b - Works Site Boundary

Start Date	Weather Condition	Air Temp. (K)	Filter Weight (g)		Particulate weight (g)	Elapse Time		Sampling Time(hrs.)	Flow Rate (m ³ /min.)		Av. flow (m ³ /min)	Total vol. (m ³)	Conc. (µg/m ³)	Filter ID no.
			Initial	Final		Initial	Final		Initial	Final				
4-Jan-22	Sunny	291.9	3.2759	3.3861	0.1102	13043.8	13067.8	24.0	1.22	1.22	1.22	1758.4	62.7	211201/022
10-Jan-22	Cloudy	288.7	3.2760	3.4305	0.1545	13070.8	13094.8	24.0	1.22	1.23	1.23	1769.9	87.3	220101/023
14-Jan-22	Sunny	289.7	3.5064	3.7293	0.2229	13097.8	13121.8	24.0	1.23	1.23	1.23	1767.5	126.1	211002/099
20-Jan-22	Sunny	290.4	3.4514	3.5885	0.1371	13124.8	13148.8	24.0	1.23	1.22	1.22	1763.3	77.8	220101/030
26-Jan-22	Sunny	291.7	3.2988	3.4269	0.1281	13151.8	13175.8	24.0	1.22	1.22	1.22	1757.5	72.9	220101/071
31-Jan-22	Cloudy	287.7	3.3025	3.3293	0.0268	13181.8	13205.8	24.0	1.23	1.23	1.23	1769.2	15.1	220101/006
												Min	15	
												Max	126	
												Average	74	

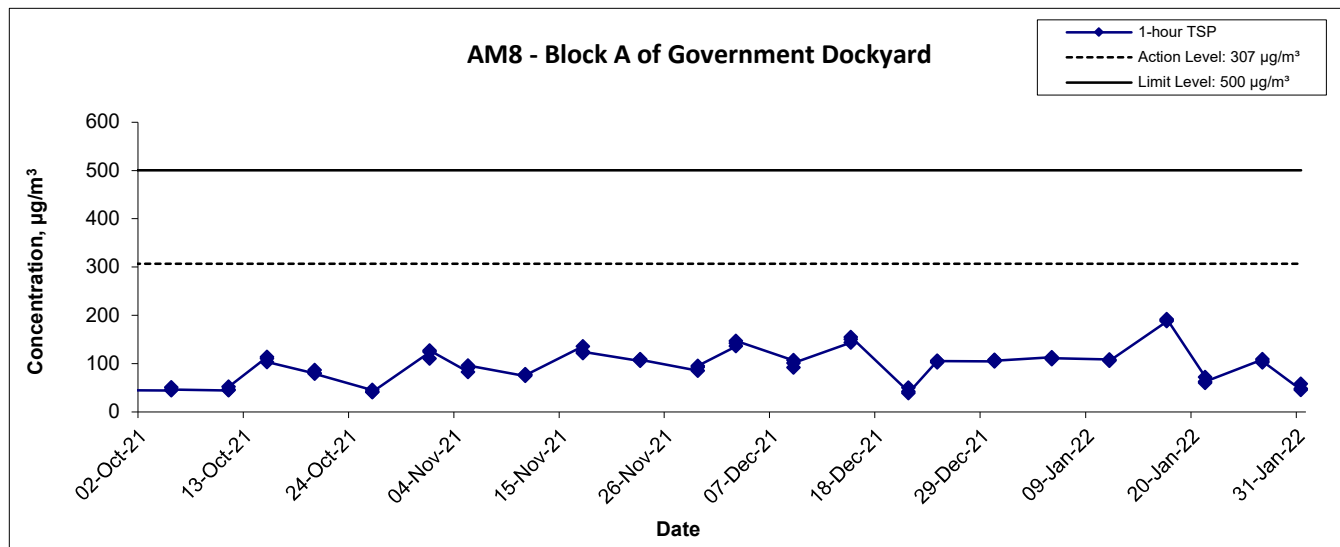
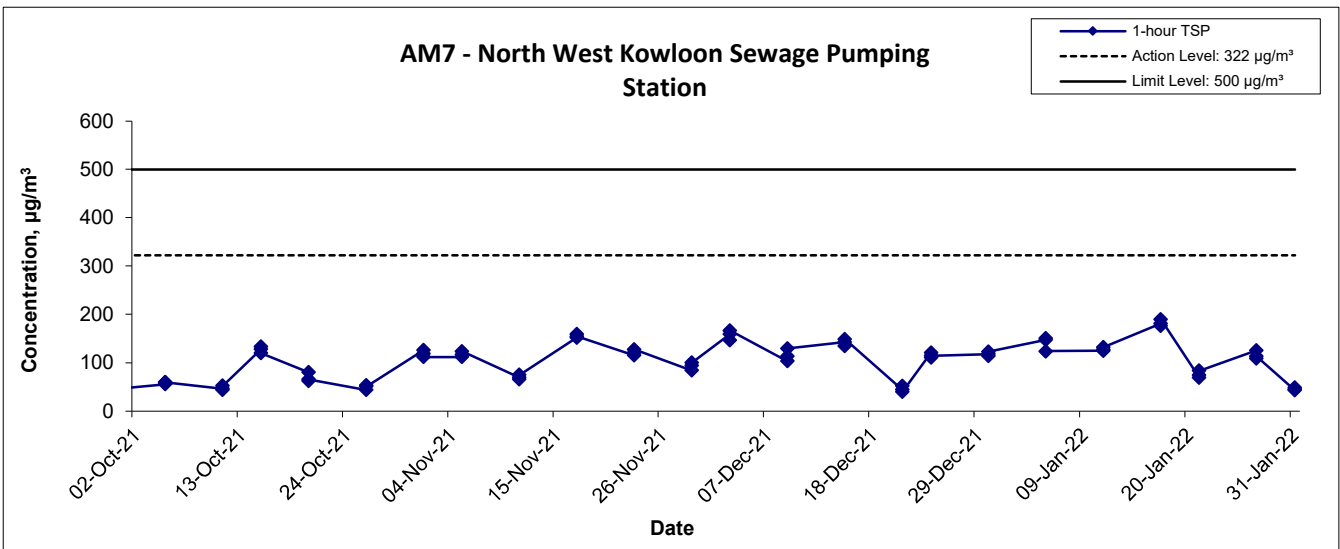
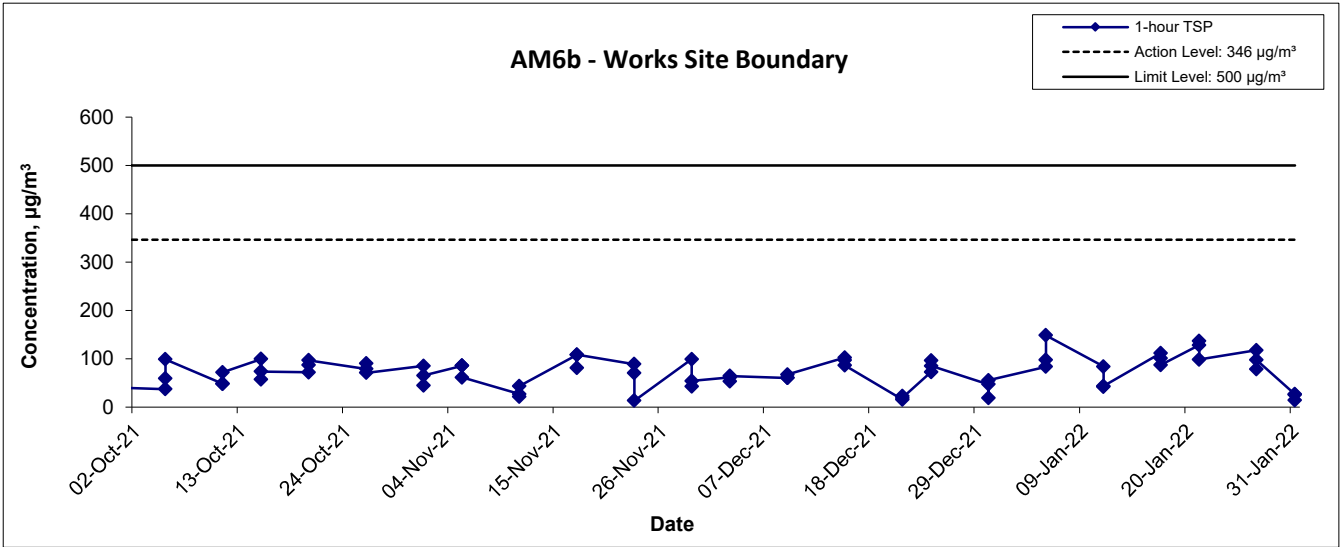
Location AM7 - North West Kowloon Sewage Pumping Station

Start Date	Weather Condition	Air Temp. (K)	Filter Weight (g)		Particulate weight (g)	Elapse Time		Sampling Time(hrs.)	Flow Rate (m ³ /min.)		Av. flow (m ³ /min)	Total vol. (m ³)	Conc. (µg/m ³)	Filter ID no.
			Initial	Final		Initial	Final		Initial	Final				
4-Jan-22	Sunny	291.9	2.6493	2.8576	0.2083	42102.4	42126.4	24.0	1.23	1.22	1.23	1766.0	118.0	211102/060
10-Jan-22	Cloudy	288.7	3.2940	3.3967	0.1027	42126.4	42150.4	24.0	1.23	1.24	1.23	1776.6	57.8	220101/015
14-Jan-22	Sunny	289.7	3.3444	3.5188	0.1744	42150.4	42174.4	24.0	1.23	1.23	1.23	1774.4	98.3	220101/025
20-Jan-22	Sunny	290.4	3.2397	3.3619	0.1222	42174.4	42198.4	24.0	1.23	1.23	1.23	1770.5	69.0	220101/026
26-Jan-22	Sunny	291.7	3.3701	3.4678	0.0977	42198.4	42222.4	24.0	1.23	1.22	1.23	1765.1	55.3	220101/067
31-Jan-22	Cloudy	287.7	3.2665	3.2804	0.0139	42222.4	42246.4	24.0	1.23	1.23	1.23	1775.3	7.8	211201/024
												Min	8	
												Max	118	
												Average	68	

Location AM8 - Block A of Government Dockyard

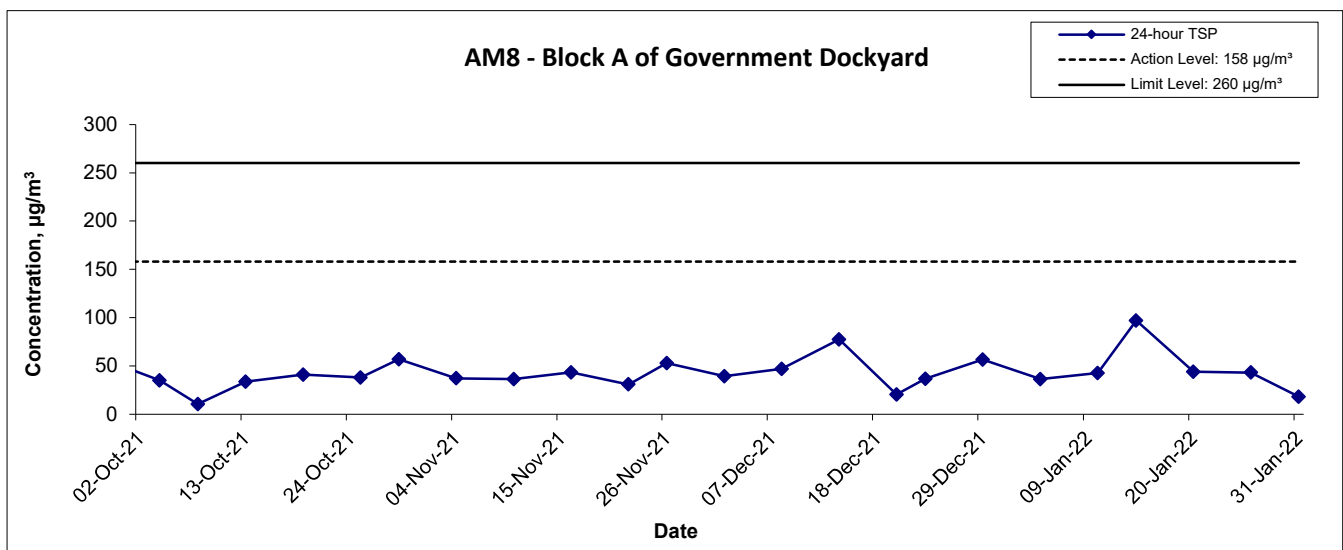
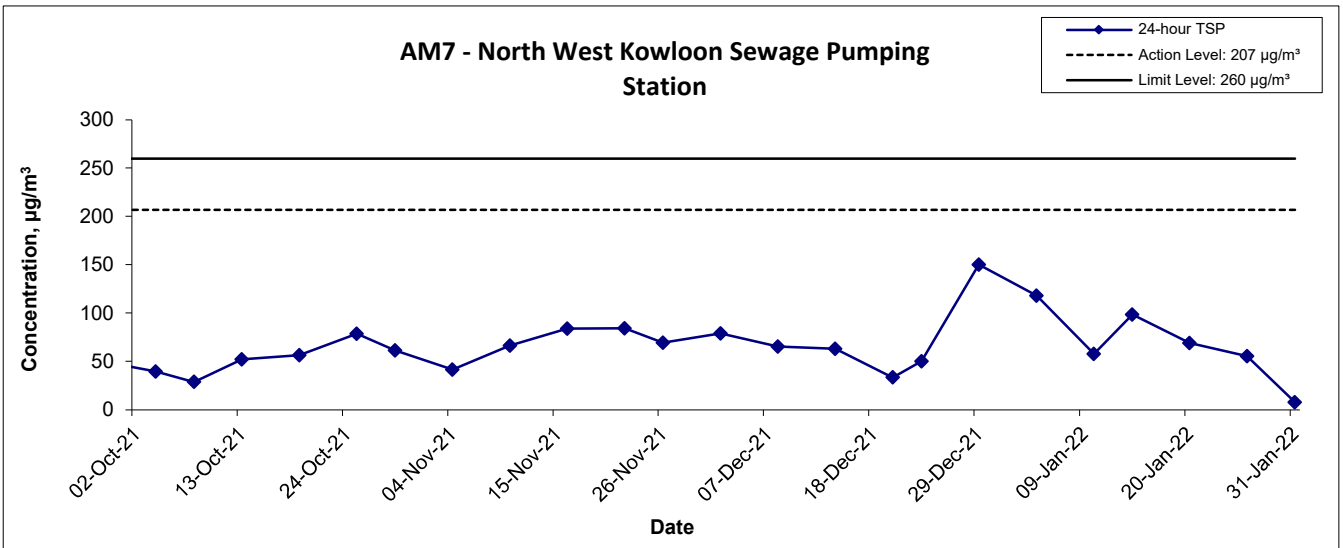
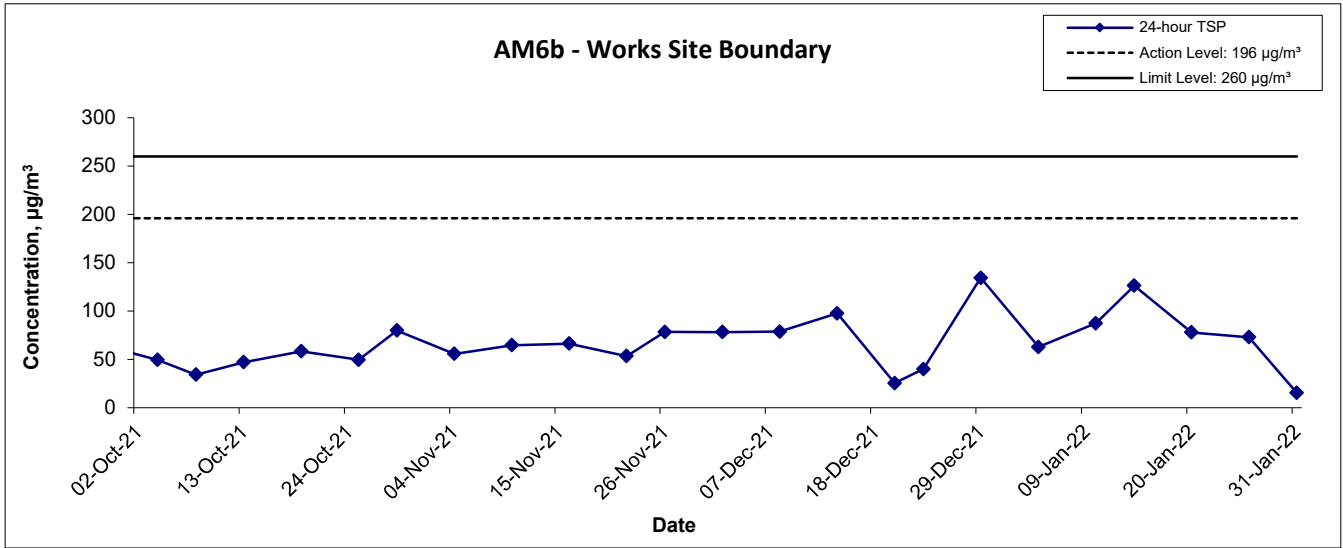
Start Date	Weather Condition	Air Temp. (K)	Filter Weight (g)		Particulate weight (g)	Elapse Time		Sampling Time(hrs.)	Flow Rate (m ³ /min.)		Av. flow (m ³ /min)	Total vol. (m ³)	Conc. (µg/m ³)	Filter ID no.
			Initial	Final		Initial	Final		Initial	Final				
4-Jan-22	Sunny	291.9	3.2575	3.3212	0.0637	15036.2	15060.2	24.0	1.22	1.22	1.22	1752.4	36.3	211201/028
10-Jan-22	Cloudy	288.7	3.3631	3.4383	0.0752	15060.2	15084.2	24.0	1.22	1.23	1.22	1762.8	42.7	221010/016
14-Jan-22	Sunny	289.7	3.2919	3.4627	0.1708	15084.2	15108.2	24.0	1.22	1.22	1.22	1760.6	97.0	220101/025
20-Jan-22	Sunny	290.4	3.3982	3.4755	0.0773	15108.2	15132.2	24.0	1.22	1.22	1.22	1756.8	44.0	220101/031
26-Jan-22	Sunny	291.7	3.2828	3.3584	0.0756	15132.2	15156.2	24.0	1.22	1.22	1.22	1751.6	43.2	220101/068
31-Jan-22	Cloudy	287.7	3.3347	3.3666	0.0319	15156.2	15180.2	24.0	1.23	1.23	1.23	1768.4	18.0	220101/007
												Min	18	
												Max	97	
												Average	47	


1-hr TSP Concentration Levels



Title Contract No. DE/2018/17 Enhancement of Deodourisation System at Stonecutters Island Sewage Treatment Works Graphical Presentation of 1-hour TSP Monitoring Results	Scale N.T.S	Project No. WMA19011	
	Date Jan 22	Appendix D	

24-hr TSP Concentration Levels



Title Contract No. DE/2018/17 Enhancement of Deodourisation System at Stonecutters Island Sewage Treatment Works Graphical Presentation of 24-hour TSP Monitoring Results	Scale N.T.S	Project No. WMA19011	 consulting . testing . research
	Date Jan 22	Appendix D	

**APPENDIX E
NOISE MONITORING RESULTS AND
GRAPHICAL PRESENTATIONS**

Appendix E - Noise Monitoring Results

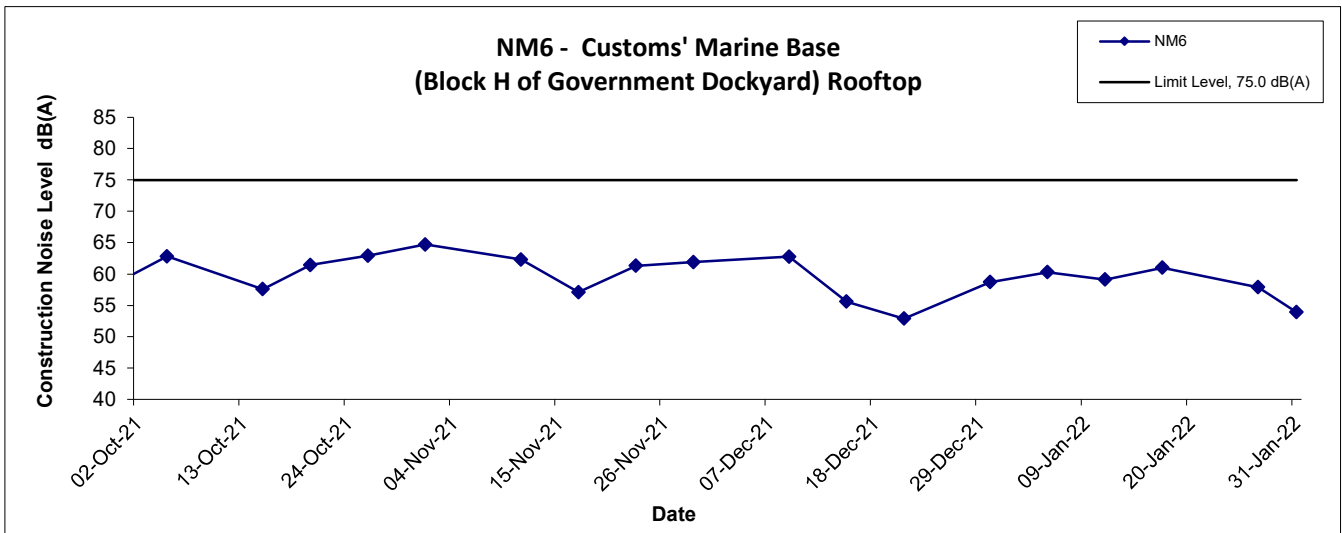
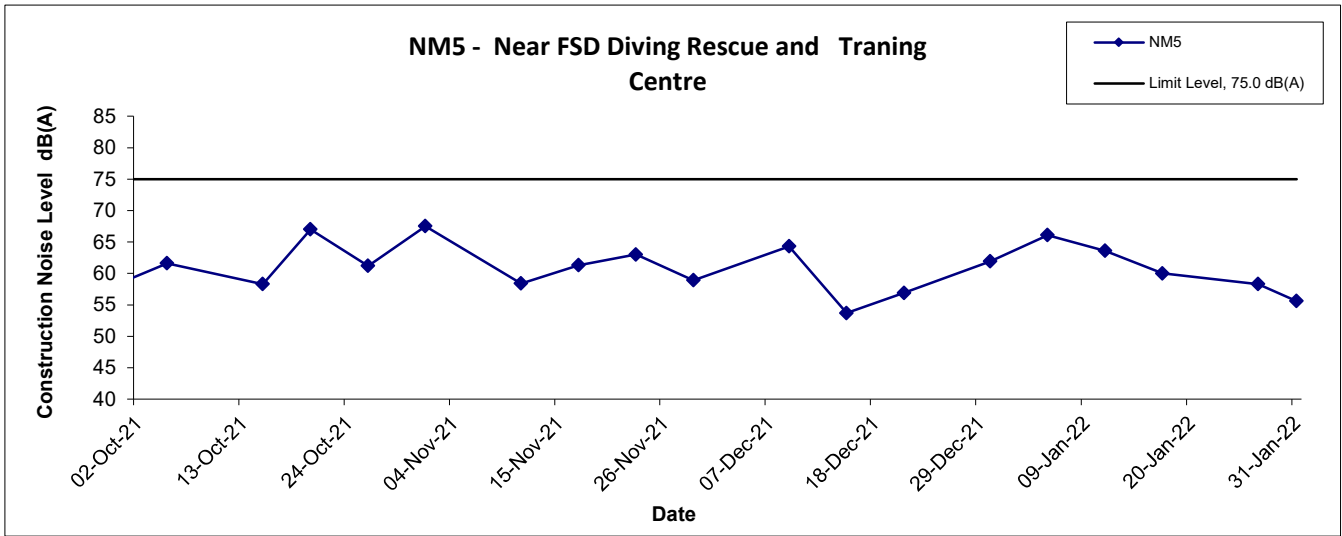
(0700-1900 hrs on Normal Weekdays)

Location NM5 - Near FSD Diving Rescue and Training Centre					
Date	Time	Weather	Unit: dB (A) (30-min)		
			Measured Noise Level		
			L _{eq}	L ₁₀	L ₉₀
5-Jan-22	09:00	Sunny	66.1	68.4	62.2
11-Jan-22	09:10	Sunny	63.6	65.4	62.0
17-Jan-22	09:26	Sunny	60.0	63.3	52.3
27-Jan-22	09:00	Cloudy	58.3	60.1	56.6
31-Jan-22	13:15	Cloudy	55.6	57.3	54.2
		Maximum	66.1		
		Minimum	55.6		

Location NM6 - Customs' Marine Base (Block H of Government Dockyard) Rooftop					
Date	Time	Weather	Unit: dB (A) (30-min)		
			Measured Noise Level		
			L _{eq}	L ₁₀	L ₉₀
5-Jan-22	13:10	Sunny	60.3	62.6	56.1
11-Jan-22	09:50	Sunny	59.1	61.8	57.9
17-Jan-22	13:45	Sunny	61.0	64.1	56.3
27-Jan-22	13:00	Sunny	57.9	60.0	56.9
31-Jan-22	14:30	Cloudy	53.9	55.6	50.6
		Maximum	61.0		
		Minimum	53.9		

Noise Levels

(0700-1900 hrs on Normal Weekdays)



Title Contract No. DE/2018/17 Enhancement of Deodourisation System at Stonecutters Island Sewage Treatment Works Graphical Presentation of Noise Monitoring Result	Scale N.T.S	Project No. WMA19011	consulting . testing . research
	Date Jan 22	Appendix E	

APPENDIX F
SUMMARY OF EXCEEDANCE

APPENDIX F – SUMMARY OF EXCEEDANCE

Reporting Month: January 2022

- a) Exceedance Report for 1-hr TSP (NIL)**
- b) Exceedance Report for 24-hr TSP (NIL)**
- c) Exceedance Report for Construction Noise (NIL)**

**APPENDIX G
SITE AUDIT SUMMARY**



Record Summary of Environmental Site Inspection

Inspection Information

Checklist Reference Number	220106
Date	6 Jan 2022 (Thursday)
Time	09:30-10:30

Ref. No.	Non-Compliance	Related Item No.
-	None identified	-

Ref. No.	Remarks/Observations	Related Item No.
	<p>Part A - Water Quality</p> <ul style="list-style-type: none"> No environmental deficiency was identified during the site inspection. <p>Part B – Landscape and Visual</p> <ul style="list-style-type: none"> No environmental deficiency was identified during the site inspection. <p>Part C - Air Quality</p> <ul style="list-style-type: none"> No environmental deficiency was identified during the site inspection. <p>Part D – Noise</p> <ul style="list-style-type: none"> No environmental deficiency was identified during the site inspection. <p>Part E – Waste / Chemical Management</p> <ul style="list-style-type: none"> No environmental deficiency was identified during the site inspection. <p>Part F - Permit / Licence</p> <ul style="list-style-type: none"> No environmental deficiency was identified during the site inspection. <p>Others</p> <ul style="list-style-type: none"> No environmental deficiency was identified during the site inspection. <p>Remark:</p> <ul style="list-style-type: none"> Follow-up on previous audit session: On previous audit session (Ref. No.: 211230), no environmental deficiency was identified during site inspection. 	

	Name	Signature	Date
Recorded by	Marco Ma		6 January 2022
Checked by	Dr. Priscilla Choy		6 January 2022

Contract No: DE/2018/17

Enhancement of Deodourisation System at SCISTW



Record Summary of Environmental Site Inspection

Inspection Information

Checklist Reference Number	220113
Date	13 Jan 2022 (Thursday)
Time	09:30-10:30

Ref. No.	Non-Compliance	Related Item No.
-	None identified	-

Ref. No.	Remarks/Observations	Related Item No.
	<p>Part A - Water Quality</p> <ul style="list-style-type: none">No environmental deficiency was identified during the site inspection. <p>Part B - Landscape and Visual</p> <ul style="list-style-type: none">No environmental deficiency was identified during the site inspection. <p>Part C - Air Quality</p> <ul style="list-style-type: none">No environmental deficiency was identified during the site inspection. <p>Part D - Noise</p> <ul style="list-style-type: none">No environmental deficiency was identified during the site inspection. <p>Part E - Waste / Chemical Management</p> <ul style="list-style-type: none">No environmental deficiency was identified during the site inspection. <p>Part F - Permit / Licence</p> <ul style="list-style-type: none">No environmental deficiency was identified during the site inspection. <p>Others</p> <ul style="list-style-type: none">No environmental deficiency was identified during the site inspection. <p>Remark:</p> <ul style="list-style-type: none">Follow-up on previous audit session: On previous audit session (Ref. No.: 220106), no environmental deficiency was identified during site inspection.	

	Name	Signature	Date
Recorded by	Marco Ma		13 January 2022
Checked by	Dr. Priscilla Choy		13 January 2022



Record Summary of Environmental Site Inspection

Inspection Information

Checklist Reference Number	220119
Date	19 Jan 2022 (Wednesday)
Time	14:00-15:00

Ref. No.	Non-Compliance	Related Item No.
-	None identified	-

Ref. No.	Remarks/Observations	Related Item No.
	<p>Part A - Water Quality</p> <ul style="list-style-type: none"> No environmental deficiency was identified during the site inspection. <p>Part B – Landscape and Visual</p> <ul style="list-style-type: none"> No environmental deficiency was identified during the site inspection. <p>Part C - Air Quality</p> <ul style="list-style-type: none"> No environmental deficiency was identified during the site inspection. <p>Part D – Noise</p> <ul style="list-style-type: none"> No environmental deficiency was identified during the site inspection. <p>Part E – Waste / Chemical Management</p> <ul style="list-style-type: none"> No environmental deficiency was identified during the site inspection. <p>Part F - Permit / Licence</p> <ul style="list-style-type: none"> No environmental deficiency was identified during the site inspection. <p>Others</p> <ul style="list-style-type: none"> No environmental deficiency was identified during the site inspection. <p>Remark:</p> <ul style="list-style-type: none"> Follow-up on previous audit session: On previous audit session (Ref. No.: 220113), no environmental deficiency was identified during site inspection. 	

	Name	Signature	Date
Recorded by	Marco Ma		19 January 2022
Checked by	Dr. Priscilla Choy		19 January 2022

Contract No: DE/2018/17

Enhancement of Deodourisation System at SCISTW



Record Summary of Environmental Site Inspection

Inspection Information

Checklist Reference Number	220127
Date	27 Jan 2022 (Thursday)
Time	09:30-10:30

Ref. No.	Non-Compliance	Related Item No.
-	None identified	-

Ref. No.	Remarks/Observations	Related Item No.
	<p>Part A - Water Quality</p> <ul style="list-style-type: none">No environmental deficiency was identified during the site inspection. <p>Part B - Landscape and Visual</p> <ul style="list-style-type: none">No environmental deficiency was identified during the site inspection. <p>Part C - Air Quality</p> <ul style="list-style-type: none">No environmental deficiency was identified during the site inspection. <p>Part D - Noise</p> <ul style="list-style-type: none">No environmental deficiency was identified during the site inspection. <p>Part E - Waste / Chemical Management</p> <ul style="list-style-type: none">No environmental deficiency was identified during the site inspection. <p>Part F - Permit / Licence</p> <ul style="list-style-type: none">No environmental deficiency was identified during the site inspection. <p>Others</p> <ul style="list-style-type: none">No environmental deficiency was identified during the site inspection. <p>Remark:</p> <ul style="list-style-type: none">Follow-up on previous audit session: On previous audit session (Ref. No.: 220119), no environmental deficiency was identified during site inspection.	

	Name	Signature	Date
Recorded by	Marco Ma		27 January 2022
Checked by	Dr. Priscilla Choy		27 January 2022

**APPENDIX H
SUMMARY OF AMOUNT OF WASTE
GENERATED**

Name of Department: DSD

Contract No. : DE/2018/17

Monthly Summary Waste Flow Table for 2022 (year)

Month	Actual Quantities of inert C&D Materials Generated Monthly						Actual Quantities of C&D Materials Generated Monthly				
	Total Quantity Generated	Hard Rock and Large Broken Concrete	Reused in the Contract	Reused in other Projects	Disposed as Public Fill	Imported Fill	Metals	Paper/ cardboard packaging	Plastics (see Note 3)	Chemical Waste	Other, e.g. general refuse
	(In '000m ³)	(In '000m ³)	(In '000m ³)	(In '000m ³)	(In '000m ³)	(In '000m ³)	(In '000kg)	(In '000kg)	(In '000kg)	(In '000kg)	(In '000m ³)
Jan	0.000	0.000	0.000	0.000	0.000	0.000	0.000	2.571	0.000	0.000	0.005
Feb											
Mar											
Apr											
May											
June											
Sub-total	0.000	0.000	0.000	0.000	0.000	0.000	0.000	2.571	0.000	0.000	0.005
July											
Aug											
Sep											
Oct											
Nov											
Dec											
Total	0.000	0.000	0.000	0.000	0.000	0.000	0.000	2.571	0.000	0.000	0.005
Total since commence ment of project	4.508	0.399	0.000	0.000	4.508	0.000	12.260	22.232	0.000	0.000	0.111

- Notes:
- (1) The performance targets are given in PS Clause 25.37(14).
 - (2) The waste flow table shall include C&D materials that are specified in the Contract to be imported for use at the Site.
 - (3) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material
 - (4) The conversion factor for tonne to m³ for inert C&D materials is 1.9 tonne/m³.
 - (5) The conversion factor for tonne to m³ for general refuse is 1.8 tonne/m³.

**APPENDIX I
EVENT ACTION PLANS**

APPENDIX I – Event / Action Plans

Table I-1 Event / Action Plan for Air Quality

EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
ACTION LEVEL				
1. Exceedance for one sample	<ol style="list-style-type: none"> 1. Identify source, investigate the causes of exceedance and propose remedial measures; 2. Inform IEC and ER; 3. Repeat measurement to confirm finding; 4. Increase monitoring frequency to daily. 	<ol style="list-style-type: none"> 1. Check monitoring data submitted by ET; 2. Check Contractor’s working method. 	<ol style="list-style-type: none"> 1. Notify Contractor. 	<ol style="list-style-type: none"> 1. Rectify any unacceptable practice; 2. Amend working methods if appropriate.
2. Exceedance for two or more consecutive samples	<ol style="list-style-type: none"> 1. Identify source; 2. Inform IEC and ER; 3. Advise the ER on the effectiveness of the proposed remedial measures; 4. Repeat measurements to confirm findings; 5. Increase monitoring frequency to daily; 6. Discuss with IEC and Contractor on remedial action required; 7. If exceedance continues, arrange meeting with IEC and ER; 8. If exceedance stops, cease additional monitoring 	<ol style="list-style-type: none"> 1. Check monitoring data submitted by ET; 2. Check Contractor’s working method; 3. Discuss with ET and Contractor on possible remedial measures; 4. Advise the ET on the effectiveness of the proposed remedial measures; 5. Supervise Implementation of remedial measures. 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. Ensure remedial measures properly implemented 	<ol style="list-style-type: none"> 1. Submit proposals for remedial to ER within 3 working days of notification; 2. Implement the agreed proposals; 3. Amend proposal if appropriate

EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
LIMIT LEVEL				
1. Exceedance for one sample	1. Identify source, investigate the causes of exceedance and propose remedial measures; 2. Inform ER, Contractor and EPD; 3. Repeat measurement to confirm finding; 4. Increase monitoring frequency to daily; 5. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results.	1. Check monitoring data submitted by ET; 2. Check Contractor's working method; 3. Discuss with ET and Contractor on possible remedial measures; 4. Advise the ER on the effectiveness of the proposed remedial measures; 5. Supervise implementation of remedial measures	1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. Ensure remedial measures properly implemented	1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to IEC within 3 working days of notification; 3. Implement the agreed proposals; 4. Amend proposal if appropriate
2. Exceedance for two or more consecutive samples	1. Notify IEC, ER, Contractor and EPD; 2. Identify source; 3. Repeat measurement to confirm findings; 4. Increase monitoring frequency to daily; 5. Carry out analysis of Contractor's working procedures to determine possible mitigation to be	1. Check monitoring data submitted by ET; 2. Check Contractor's working method; 3. Discuss amongst ER, ET, and Contractor on the potential remedial actions; 4. Review Contractor's remedial actions whenever necessary to assure their effectiveness and	1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented; 4. Ensure remedial measures properly implemented;	1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to IEC within 3 working days of notification; 3. Implement the agreed proposals; 4. Resubmit proposals if problem still not under

EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
	<p>implemented;</p> <p>6. Arrange meeting with IEC and ER to discuss the remedial actions to be taken;</p> <p>7. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results;</p> <p>8. If exceedance stops, cease additional monitoring</p>	<p>advise the ER accordingly;</p> <p>5. Supervise the implementation of remedial measures.</p>	<p>5. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated.</p>	<p>control;</p> <p>5. Stop the relevant portion of works as determined by the ER until the exceedance is abated</p>

Table I-2 Event / Action Plan for Construction Noise

EVENT	ACTION			
	ET	IEC	ER	CONTRACTOR
Action Level being exceeded	<ol style="list-style-type: none"> 1. Notify ER, IEC and Contractor; 2. Carry out investigation; 3. Report the results of investigation to the IEC, ER and Contractor; 4. Discuss with the IEC and Contractor on remedial measures required; 5. Increase monitoring frequency to check mitigation effectiveness 	<ol style="list-style-type: none"> 1. Review the investigation results submitted by the ET; 2. Review the proposed remedial measures by the Contractor and advise the ER accordingly; 3. Advise the ER on the effectiveness of the proposed remedial measures 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented; 4. Supervise the implementation of remedial measures 	<ol style="list-style-type: none"> 1. Submit noise mitigation proposals to IEC and ER; 2. Implement noise mitigation proposals
Limit Level being exceeded	<ol style="list-style-type: none"> 1. Inform IEC, ER, Contractor and EPD; 2. Repeat measurements to confirm findings; 3. Increase monitoring frequency; 4. Identify source and investigate the cause of exceedance; 5. Carry out analysis of Contractor's working procedures; 6. Discuss with the IEC, Contractor and ER on remedial measures required; 7. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; 8. If exceedance stops, cease additional monitoring 	<ol style="list-style-type: none"> 1. Discuss amongst ER, ET, and Contractor on the potential remedial actions; 2. Review Contractor's remedial action whenever necessary to assure their effectiveness and advise the ER accordingly 	<ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. In consolidation with the IEC, agree with the Contractor on the remedial measures to be implemented; 4. Supervise the implementation of remedial measures; 5. If exceedance continues, consider stopping the Contractor to continue working on that portion of work which causes the exceedance until the exceedance is abated 	<ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to IEC and ER within 3 working days of notification; 3. Implement the agreed proposals; 4. Submit further proposal if problem still not under control; 5. Stop the relevant portion of works as instructed by the ER until the exceedance is abated

**APPENDIX J
ENVIRONMENTAL MITIGATION
IMPLEMENTATION SCHEDULE (EMIS)**

APPENDIX J IMPLEMENTATION SCHEDULE OF ENVIRONMENTAL MITIGATION MEASURES (EMIS)

EIA Ref.	Recommended Mitigation Measures	Location of the measure	Implementation Status
A	Air Quality		
3.74	Skip hoist for material transport should be totally enclosed by impervious sheeting.	All construction sites	^
	Vehicle washing facilities should be provided at every vehicle exit point.		^
	The area where vehicle washing takes place and the section of the road between the washing facilities and the exit point should be paved with concrete, bituminous materials or hardcore.		^
	Where a site boundary adjoins a road, streets or other areas accessible to the public, hoarding of not less than 2.4 m high from ground level should be provided along the entire length except for a site entrance or exit.		N/A
	Use of regular watering, with complete coverage, to reduce dust emissions from exposed site surfaces and unpaved roads, particularly during dry weather.		^
	Side enclosure and covering of any aggregate or dusty material storage piles to reduce emissions. Where this is not practicable owing to frequent usage, watering shall be applied to aggregate fines.		^
	Open stockpiles shall be avoided or covered. Where possible, prevent placing dusty material storage piles near ASRs.		^
	Tarpaulin covering of all dusty vehicle loads transported to, from and between site locations.		^
	Imposition of speed controls for vehicles on unpaved site roads. Ten kilometers per hour is the recommended limit.		^
	Every stock of more than 20 bags of cement should be covered entirely by impervious sheeting placed in an area sheltered on the top and the 3 sides.		^
	Every vehicle should be washed to remove any dusty materials from its body and wheels before leaving the construction sites.		^
3.74	Instigation of an environmental monitoring and auditing program to monitor the construction process in order to enforce controls and modify method of work if dusty conditions arise.	All construction sites	^

EIA Ref.	Recommended Mitigation Measures	Location of the measure	Implementation Status
B	Airborne Noise		
4.56– 4.61	Use of quiet PME, movable barriers and acoustic mats.	All construction sites	^
4.67	Only well-maintained plant shall be operated on-site and plant shall be serviced regularly during the construction program.		^
	Silencers or mufflers on construction equipment shall be utilized and shall be properly maintained during the construction program.		^
	Mobile plant, if any, shall be sited as far away from NSRs as possible.		^
	Machines and plant (such as trucks) that may be in intermittent use shall be shut down between works periods or shall be throttled down to a minimum.		^
4.67	Plant known to emit noise strongly in one direction shall, wherever possible, be orientated so that the noise is directed away from the nearby NSRs.		^
	Material stockpiles and other structures shall be effectively utilized, wherever practicable, in screening noise from on-site construction activities.		^
C	Water Quality		
6.349 to 6.375	Construction Site Runoff and General Construction Activities The mitigation measures as outlined in the ProPECC PN 1/94 Construction Site Drainage should be adopted where applicable.	All construction sites	^
6.376	Effluent Discharge There is a need to apply to EPD for a discharge licence for discharge of effluent from the construction site under the WPCO. The discharge quality must meet the requirements specified in the discharge licence. If monitoring of the treated effluent quality from the works areas is required during the construction phase of the Project, the monitoring should be carried out in accordance with the WPCO license which is under the ambit of regional office (RO) of EPD. Minimum distances of 100 m should be maintained between the discharge points of construction site effluent and the existing saltwater intakes.		^
6.377	Accidental Spillage of Chemicals Contractor must register as a chemical waste producer if chemical wastes would be produced from the construction activities. The Waste Disposal Ordinance (Cap 354) and its subsidiary regulations in particular the Waste Disposal (Chemical Waste) (General)		^

EIA Ref.	Recommended Mitigation Measures	Location of the measure	Implementation Status
	Regulation should be observed and complied with for control of chemical wastes.		
6.378	Any service shop and maintenance facilities should be located on hard standings within a bunded area, and sumps and oil interceptors should be provided. Maintenance of vehicles and equipment involving activities with potential for leakage and spillage should only be undertaken within the areas appropriately equipped to control these discharges.		^
6.379	<p>Disposal of chemical wastes should be carried out in compliance with the Waste Disposal Ordinance. The Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes published under the Waste Disposal Ordinance details the requirements to deal with chemical wastes. General requirements are given as follows:</p> <ul style="list-style-type: none"> • Suitable containers should be used to hold the chemical wastes to avoid leakage or spillage during storage, handling and transport. • Chemical waste containers should be suitably labelled, to notify and warn the personnel who are handling the wastes, to avoid accidents. • Storage area should be selected at a safe location on site and adequate space should be allocated to the storage area. 		^
6.380	<p>Construction Works in Close Proximity of Storm Drains or Seafront:</p> <p>To minimize the potential water quality impacts from the construction works located at or near any watercourse, the practices outlined below should be adopted where applicable.</p> <ul style="list-style-type: none"> • The use of less or smaller construction plants may be specified to reduce the disturbance to the storm water courses or marine environment. • Temporary storage of materials (e.g. equipment, filling materials, chemicals and fuel) and temporary stockpile of construction materials should be located well away from any water courses during carrying out of the construction works. • Stockpiling of construction materials and dusty materials should be covered and located away from any water courses. • Construction debris and spoil should be covered up and/or disposed of as soon as possible to avoid being washed into the nearby water receivers. • Construction activities, which generate large amount of wastewater, should be carried out in a distance away from the waterfront, where practicable. • Proper shoring may need to be erected in order to prevent soil/mud from slipping into the storm culvert or sea. 	All construction sites	^

EIA Ref.	Recommended Mitigation Measures	Location of the measure	Implementation Status
D	Waste Management		
9.107	Reusable steel or concrete panel shutters, fencing and hoarding and signboard should be used as a preferred alternative to items made of wood, to minimize wastage of wood. Attention should be paid to WBTC No. 19/2001 - Metallic Site Hoardings and Signboards to reduce the amount of timber used on construction sites. Metallic alternatives to timber are readily available and should be used rather than new timber. Precast concrete units should be adopted wherever feasible to minimize the use of timber formwork.	All construction sites	^
9.109	All waste materials should be segregated into categories covering: <ul style="list-style-type: none"> • excavated materials suitable for reuse on-site; • excavated materials suitable for public filling facilities; • remaining C&D waste for landfill; • chemical waste; and • general refuse for landfill. 	All construction sites	^
9.113	Sort C&D waste from demolition of existing facilities to recover recyclable portions such as metals.		^
	Segregation and storage of different types of waste in different containers, skips or stockpiles to enhance reuse or recycling of materials and their proper disposal.		^
	Encourage collection of aluminum cans, PET bottles and paper by providing separate labeled bins to enable these wastes to be segregated from other general refuse generated by the work force.		^
	Any unused chemicals or those with remaining functional capacity shall be recycled.		^
	Proper storage and site practices to minimize the potential for damage or contamination of construction materials.		^
9.115	Nomination of an approved person, such as a site manager, to be responsible for good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site.		^
	Training of site personnel in proper waste management and chemical waste handling procedures.		^
9.115	Develop and provide toolbox talk for on-site sorting of C&D materials to enhance worker's awareness in handling, sorting, reuse and recycling of C&D materials.		^
	Provision of sufficient waste disposal points and regular collection of waste.		^
	Regular cleaning and maintenance programme for drainage systems, sumps and oil		^

EIA Ref.	Recommended Mitigation Measures	Location of the measure	Implementation Status
	interceptors.		
9.125	Bentonite slurries used in diaphragm wall construction should be reconditioned and reused wherever practicable. The disposal of residual used bentonite slurry should follow the good practice guidelines stated in ProPECC PN 1/94 "Construction Site Drainage".	All construction sites	^
9.131	Adequate number of portable toilets at temporary works areas or the PTWs to ensure that sewage from site staff would be properly collected.		^
9.133	General refuse should be stored in enclosed bins, skips or compaction units separating from C&D material and disposed of at designated landfill.		^
9.135	The recyclable component of the municipal waste generated by the workforce, such as aluminum cans, paper and cleansed plastic containers should be separated from other waste. Provision and collection of recycling bins for different types of recyclable waste should be set up by the Contractor. The Contractor should also be responsible for arranging recycling companies to collect these materials.		^
9.137	If chemical wastes are produced at the construction site, the Contractor would be required to register with the EPD as a chemical waste producer and to follow the guidelines stated in the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes. Good quality containers compatible with the chemical wastes should be used, and incompatible chemicals should be stored separately. Appropriate labels should be securely attached on each chemical waste container indicating the corresponding chemical characteristics of the chemical waste, such as explosive, flammable, oxidizing, irritant, toxic, harmful, corrosive, etc. The Contractor shall use a licensed collector to transport and dispose of the chemical wastes, to either the approved Chemical Waste Treatment Centre, or another licensed facility, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation.		^
9.142	Prior to excavation of the marine deposit layer, the deposit should be tested in accordance with the ETWB TC(W) No. 34/2002 and the results should be presented in a Preliminary Sediment Quality Report. The marine deposit should be disposed of at the disposal site designated by the Marine Fill Committee (MFC) or Director of Environmental Protection (DEP) depending on the test results.		N/A

EIA Ref.	Recommended Mitigation Measures	Location of the measure	Implementation Status
E Terrestrial Ecology			
10.94	To implement effective noise mitigation measures as recommended in Section 4 of EIA.	All construction sites	N/A
10.95	Dust control practices such as regular watering, complete coverage of any aggregate or dusty material storage piles, and re-schedule of dusty activities during high-wind conditions as well as other measures recommended in Section 3 of EIA, should be implemented.		^
10.96	Fences/hoardings should be erected and installed along the boundary of the works areas.		^
10.97	Standard good site practices as suggested in Section 10 of EIA should be implemented.		N/A
10.98	Provision of proper drainage system and runoff control measures such as use of sand/silt traps, oil/grease separators, sedimentation tanks, etc.		^
F Landscape and Visual			
Table 13.7	Topsoil, where identified, should be stripped and stored for re-use in the construction of the soft landscape works, where practical.	All construction sites	^
	Existing trees to be retained on site should be carefully protected during construction.		^
	Trees unavoidably affected by the works should be transplanted where practical.		^
	Compensatory tree planting should be provided to compensate for felled trees.		^
	Control of night-time lighting.		^
Table 13.7	Erection of decorative screen hoarding compatible with the surrounding setting.	All construction sites	N/A
G Marine Ecology			
11.137	To minimize the potential indirect impacts on water quality from construction site runoff and various construction activities, the practices outlined in ProPECC PN 1/94 Construction Site Drainage should be adopted.	All construction sites	^
H Hazard to Life			
14A.201	Limiting use of cranes in terms of locations, lifting height, swing angle and setting up safety zone.	Exact location will be determined on construction site by the engineer	^

Remarks:	^ Compliance of mitigation measure;
	N/A Not Applicable;
	* Recommendation was made during site audit but improved/rectified by the contractor.
	# Recommendation was made during site audit and to be improved / rectified by the contractor.
	X Non-compliance of mitigation measure;
	• Non-compliance but rectified by the contractor;


**APPENDIX K
COMPLAINT LOG**

APPENDIX K – COMPLAINT LOG**Reporting Month:** January 2022

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
N.A.	N.A.	N.A.	N.A.	N.A.	N.A.

Remarks: No environmental complaint was received in the reporting month.

APPENDIX L
CONSTRUCTION PROGRAMME

Contract Title : Enhancement of Deodourisation System at Stonecutters Island Sewage Treatment Works	 Bestwise - SFK JV
Contract No. : DE/2018/17	

Contractor's General Submission

To : Project Manager's Representative	<h1>ARUP</h1>
Attn. : Mr. Edmund Chow (Senior Resident Engineer)	

CGS No.: CIV:032158/EDS/CGS/O/0986	Rev. 0	Date: 04 Oct 2021
A-TTA EM-Environmental I-ICE RD-Road & Drainage T-Temporary Works	B-Building Works EW-Earth Works L-Landscape Works SA-Safety O-Others	BSEM - Building Services-Electrical Mechanical GI-Ground Investigation M-Material & Testing ST-Structures
		BSP-Building Services-Plumbing GW-Geotechnical Works P-Piling Works SU-Survey

Title of Submission:	Submission of 3-month Rolling programme (Sep 2021 - Nov 2021)
Proposed Location of Works :	-
Specification Reference:	-
Drawing Reference:	-


Description of Contents:

We would like to submit herewith the 3-month Rolling programme (Sep 2021 - Nov 2021) for your reference.

Attachment : No Yes Page 1 of 1

Remarks :

Purpose of Submission : For Comment (if any) and approval For Reference and Record

Prepared by :	For and on behalf of
Name : Terry Cheung	Bestwise - SFK Joint Venture
Post : Construction Manager (Civil and General)	
	Ken Chan (Site Agent)

c.c. :

Activity ID	Activity Name	Activity % Complete	Total Float	Original Duration	Start	Finish	2021	
							Q3	Q4
Works Programme (Revise Programme_20210810)								
Infrastructure Construction Works								
Section 1 of the Works								
CEPT tank								
Air ducts of effluent drop shaft								
A7090_CE	Installation of FRP air relief duct for effluent drop structure for PST9-29 (Odd no)	0%	54	48	07-Dec-20 A	11-Nov-21		Installation of FRP air relief duct for effluent drop structure for PST9-29 (Odd no)
A7091_CE	Installation of FRP air relief duct for effluent drop structure for PST31-54 (Odd no)	70%	54	40	27-Jan-21 A	17-Nov-21		Installation of FRP air relief duct for effluent drop structure for PST31-54 (Odd no)
A7091_CE	Delivery of air relief ducts and support affected by Covid-19 in China at end 2020	71.11%	124	90	15-Feb-21 A	04-Sep-21	Delivery of air relief ducts and support affected by Covid-19 in China at end 2020	
A7092_CE	Installation of FRP air relief duct for effluent drop structure for PST10-30 (even no)	50%	54	40	02-Mar-21 A	24-Nov-21		Installation of FRP air relief duct for effluent drop structure for PST10-30 (even no)
A7093_CE	Installation of FRP air relief duct for effluent drop structure for PST32-54 (Even no)	0%	48	40	23-Mar-21 A	01-Dec-21		Installation of FRP air relief duct for effluent drop structure for PST32-54 (Even no)
A7180_CE	Reliability Test of FRP air relief ducts for effluent Drop Structure	0%	30	55	05-Mar-21 A	22-Dec-21		Reliability Test of FRP air relief ducts for effluent Drop Structure
Effluent Launder								
A7130	Full scale Installation of Isolation Devices for Effluent Drop Structure	51.25%	26	240	09-Oct-19 A	28-Dec-21		Full scale Installation of Isolation Devices for Effluent Drop Structure
A7130_CE	Repair of existing concrete surface at CEPT launder (24nos)	99.44%	26	180	25-Jan-20 A	29-Dec-21		Repair of existing concrete surface at CEPT launder (24nos)
A7185	Installation of isolation devices at the existing CEPT launder (24 Nos)	45.11%	26	180	25-Jan-20 A	29-Dec-21		Installation of isolation devices at the existing CEPT launder (24 Nos)
A7190	Performance test (smoke Test) of the isolation device for effluent drop structure	34.44%	26	180	25-Jan-20 A	29-Dec-21		Performance test (smoke Test) of the isolation device for effluent drop structure
Section 2 of the Works								
E&M Design Submission (DDA)								
A6138	Approval of DDA Design of Functional Design Specification for DOU Polishing Systems	65%	30	200	13-Sep-20 A	18-Oct-21		Approval of DDA Design of Functional Design Specification for DOU Polishing Systems
A8310	Approval of DDA Design of network integration with the existing DCS	70.66%	125	167	16-Oct-20 A	27-Sep-21		Approval of DDA Design of network integration with the existing DCS
A8780	Re-submission of DDA I/O schedule, cable schedule, cabling routing for DOUs polishing stage	0%	143	3	24-Mar-21 A	06-Sep-21	Re-submission of DDA I/O schedule, cable schedule, cabling routing for DOUs polishing stage	
A8790	Approval of DDA I/O schedule, cable schedule, cabling routing for DOUs polishing stage	0%	143	3	07-Sep-21	09-Sep-21	Approval of DDA I/O schedule, cable schedule, cabling routing for DOUs polishing stage	
Procurement and Delivery of Equipment/ Material for Section 2 of Works								
A6310	FAT of PLC and SCADA Systems for DOU Polishing Systems and fiber network equipment	50%	67	14	11-Apr-21 A	16-Aug-21	FAT of PLC and SCADA Systems for DOU Polishing Systems and fiber network equipment	
A6320	Delivery of hardware of PLC and SCADA Systems for DOU Polishing Systems and fiber network equipment	0%	67	12	17-Aug-21	28-Aug-21	Delivery of hardware of PLC and SCADA Systems for DOU Polishing Systems and fiber network equipment	
A6322	Procurement of DCS for DOU polishing systems	71.11%	132	90	25-Feb-21 A	04-Sep-21	Procurement of DCS for DOU polishing systems	
A6324	FAT of DCS for DOU polishing systems	0%	132	7	05-Sep-21	11-Sep-21	FAT of DCS for DOU polishing systems	
A6326	Delivery of DCS for DOU polishing systems	0%	132	9	12-Sep-21	20-Sep-21	Delivery of DCS for DOU polishing systems	
A8630_NC	Procurement of kiosks of fluorescent type sensor (SS316)	49.21%	142	63	16-Jul-21 A	10-Sep-21	Procurement of kiosks of fluorescent type sensor (SS316)	
DOU 1								
E&M installation (2nd stage)								
A7210	Installation of DOU1 wet scrubber and air duct connection for DOU1	88%	62	175	26-Oct-20 A	03-Sep-21	Installation of DOU1 wet scrubber and air duct connection for DOU1	08-Nov-21, E&M installation (2nd stage)
A7233	Wiring works for PLC of DOU equipments	53.49%	61	43	12-May-21	01-Sep-21	Wiring works for PLC of DOU equipments	
A7242	Installation of Building Service, earthing and lightning protection for DOU polishing system, MCC room	90.48%	84	105	02-Jan-21 A	20-Aug-21	Installation of Building Service, earthing and lightning protection for DOU polishing system, MCC room	
A7252	Installation of Fire services for DOU polishing system & MCC room	82.86%	77	105	18-Mar-21 A	30-Aug-21	Installation of Fire services for DOU polishing system & MCC room	
A7292	Software development for new DOU polishing stage	70.83%	68	120	12-Apr-21 A	08-Nov-21	Software development for new DOU polishing stage	
A7300_NC	Installation of kiosk and fluorescent type sensor (SS316)	0%	80	21	10-Sep-21*	08-Oct-21	Installation of kiosk and fluorescent type sensor (SS316)	
Underground Drainage and cabling works								
A8840	Submit WWO46 Part 4&5 for WSD inspection and water meter connection	0%	40	47	30-Aug-21*	15-Oct-21	Submit WWO46 Part 4&5 for WSD inspection and water meter connection	
Testing and commissioning								
A7152	Installation test, leakage test & megger test for DOU1PS	0%	110	5	05-Jul-21 A	27-Aug-21	Installation test, leakage test & megger test for DOU1PS	
A7262	Performance Test of the DOU1 wet scrubber	0%	37	8	11-Oct-21*	18-Oct-21	Performance Test of the DOU1 wet scrubber	
A7267	Function test of DOU1PS	12%	80	50	02-Aug-21 A	08-Oct-21	Function test of DOU1PS	
A7272	Hardware, point/end to point/end, interlock, simulation & interface test for PLC, SCADA & DCS for DOU polishing system	0%	74	10	02-Sep-21	12-Sep-21	Hardware, point/end to point/end, interlock, simulation & interface test for PLC, SCADA & DCS for DOU polishing system	
A7280_NC	Calibration and function test of kiosks and fluorescent type sensor	0%	75	5	11-Oct-21*	15-Oct-21	Calibration and function test of kiosks and fluorescent type sensor	
A7282	Reliability test of the polishing system of DOU1	0%	17	36	08-Nov-21*	13-Dec-21	Reliability test of the polishing system of DOU1	
A7312	Performance test of building service for DOU polishing system, MCC room and NaOH bulk storage compound	0%	91	31	31-Aug-21*	30-Sep-21	Performance test of building service for DOU polishing system, MCC room and NaOH bulk storage compound	
A7322	Performance test of fire service for DOU polishing system, MCC room and NaOH bulk storage compound	0%	92	30	31-Aug-21	29-Sep-21	Performance test of fire service for DOU polishing system, MCC room and NaOH bulk storage compound	
DOU 1R								
Underground Drainage and cabling works								
A8930	Submit WWO46 Part 4&5 for WSD inspection and water meter connection	29.73%	56	74	19-Jul-21 A	30-Sep-21	Submit WWO46 Part 4&5 for WSD inspection and water meter connection	
E&M installation								
A7311	Wiring works for PLC of DOU equipments	50%	50	30	02-Jun-21 A	26-Aug-21	Wiring works for PLC of DOU equipments	
A7315_EV	Installation of byproduct drainage pipework (to MDC)	0%	100	16	20-Aug-21*	10-Sep-21	Installation of byproduct drainage pipework (to MDC)	
A8260	Software development for new DOU polishing stage	43.33%	31	60	05-Apr-21 A	18-Sep-21	Software development for new DOU polishing stage	
A8270_NC	Installation of kiosks and fluorescent type sensor (SS316)	0%	90	11	10-Sep-21*	24-Sep-21	Installation of kiosks and fluorescent type sensor (SS316)	
Testing and commissioning								
A7335	Performance Test of the DOU1R	0%	38	7	04-Oct-21*	11-Oct-21	Performance Test of the DOU1R	22-Nov-21, Test
A7435	Function test of DOU1R	0%	90	5	19-Jul-21 A	24-Sep-21	Function test of DOU1R	
A7530	Hardware, point/end to point/end, interlock, simulation & interface test for PLC, SCADA & DCS for DOU polishing system	0%	38	30	19-Sep-21	18-Oct-21	Hardware, point/end to point/end, interlock, simulation & interface test for PLC, SCADA & DCS for DOU polishing system	
A7540_NE	Calibration and function test of kiosk and fluorescent type sensor	0%	84	7	24-Sep-21*	04-Oct-21	Calibration and function test of kiosk and fluorescent type sensor	
A7550	Reliability test of the polishing system of DOU1R	0%	38	35	19-Oct-21	22-Nov-21	Reliability test of the polishing system of DOU1R	
A7570	Performance test of building service for DOU polishing system & MCC room	0%	104	36	13-Aug-21*	17-Sep-21	Performance test of building service for DOU polishing system & MCC room	
A7580	Performance test of fire service for DOU polishing system, MCC room and NaOH bulk storage compound	0%	91	31	31-Aug-21*	30-Sep-21	Performance test of fire service for DOU polishing system, MCC room and NaOH bulk storage compound	
DOU 2								
Underground Drainage and cabling works								
A9020	Submit WWO46 Part 4&5 for WSD inspection and water meter connection	0%	46	47	30-Aug-21*	15-Oct-21	Submit WWO46 Part 4&5 for WSD inspection and water meter connection	
E&M installation								
A6880	Installation of the chemical scrubber and air duct for DOU2	82.14%	55	168	09-Nov-20 A	14-Sep-21	Installation of the chemical scrubber and air duct for DOU2	
A6880_NC	Installation of air ducts for connection of DOU3 and DOU2	0%	0	85	10-Aug-21*	18-Nov-21	Installation of air ducts for connection of DOU3 and DOU2	Installation of air ducts for connection of DOU3 and DOU2
A7450_NC	Installation of Power supply and distribution system for DOU polishing systems (including panel and cabling works)	63.85%	37	130	17-Dec-20 A	04-Oct-21	Installation of Power supply and distribution system for DOU polishing systems (including panel and cabling works)	
A7460_NC	Upgrading and Replacement of the existing power supply system	0%	48	6	01-Feb-21 A	04-Oct-21	Upgrading and Replacement of the existing power supply system	
A7471	Wiring works for PLC of DOU equipments	86.05%	64	43	12-May-21	06-Sep-21	Wiring works for PLC of DOU equipments	
A7480	Installation of Building Service, earthing and lightning protection for DOU polishing system, MCC room	0%	40	54	10-Aug-21*	12-Oct-21	Installation of Building Service, earthing and lightning protection for DOU polishing system, MCC room	

█ Actual Work ◆ Milestone
█ Remaining Work ▼ Summary
█ Critical Remaining Work

Contract No. DE/2018/17
 Enhancement of Deodorization System at Stonecutter Island Sewage Treatment Works
 3 Month Rolling Programme (Sep 2021 to Nov 2021)

Sheet 1 of 2 Date: 04-Sep-21 Revision: Rev. 0 Checked: Approved:

Activity ID	Activity Name	Activity % Complete	Total Float	Original Duration	Start	Finish	2021	
							Q3	Q4
A7490	Installation of Fire services for DOU polishing system & MCC room	0%	67	24	13-Aug-21*	10-Sep-21	Installation of Fire services for DOU polishing system & MCC room	
A8400	Software development for new DOU polishing stage	30%	26	60	30-May-21*	06-Dec-21	Software development for new DOU polishing stage	
A8420_NC	Installation of kiosk and fluorescent type sensor (SS316)	0%	50	51	10-Sep-21*	19-Nov-21	Installation of kiosk and fluorescent type sensor (SS316)	
Testing and commissioning								
A6850	Installation test, leakage test and megger test	0%	55	41	17-Sep-21*	12-Nov-21	Installation test, leakage test and megger test	
A6910	Function test of DOU2PS	0%	50	37	30-Sep-21*	19-Nov-21	Function test of DOU2PS	
A7590	Hardware, point/end to point/end, interlock, simulation & interface test for PLC, SCADA & DCS for DOU polishing system	0%	30	13	19-Oct-21	31-Oct-21	Hardware, point/end to point/end, interlock, simulation & interface test for PLC, SCADA & DCS for DOU polishing system	
A7630	Performance test of building service for DOU polishing system and MCC room	0%	48	31	13-Oct-21*	12-Nov-21	Performance test of building service for DOU polishing system and MCC room	
A7640	Performance test of fire service for DOU polishing system and MCC room	0%	80	31	11-Sep-21*	11-Oct-21	Performance test of fire service for DOU polishing system and MCC room	
DOU 4								
RC works								
A7208_CE	RC footing for air duct support (10nr)	56.67%	62	60	25-Mar-21 A	09-Sep-21	RC footing for air duct support (10nr)	
Underground Drainage and cabling works								
A9110	Submit WWO46 Part 4&5 for WSD inspection and water meter connection	0%	39	74	10-Aug-21*	22-Oct-21	Submit WWO46 Part 4&5 for WSD inspection and water meter connection	
E&M installation								
A6700	Installation of the DOU4 polishing Unit and air duct connection for DOU4	61.33%	30	150	03-Dec-20 A	18-Oct-21	Installation of the DOU4 polishing Unit and air duct connection for DOU4	
A6710_NC	Installation of NaOCl feed pipe (upgrading)	0%	100	21	13-Aug-21*	10-Sep-21	Installation of NaOCl feed pipe (upgrading)	
A7421	Wiring works for PLC for DOU equipments	56%	56	45	05-May-21	16-Sep-21	Wiring works for PLC for DOU equipments	
A8420	Software development for new DOU polishing stage	70%	59	40	03-May-21	17-Sep-21	Software development for new DOU polishing stage	
A8425_NC	Installation of kiosks and fluorescent type sensor (SS314)	0%	70	31	10-Sep-21*	22-Oct-21	Installation of kiosks and fluorescent type sensor (SS314)	
Testing and commissioning								
A6705	Installation check, leakage test & megger test	0%	64	44	01-Sep-21*	01-Nov-21	Installation check, leakage test & megger test	
A6710	Performance Test of the DOU4 polishing Unit	0%	22	8	01-Nov-21*	08-Nov-21	Performance Test of the DOU4 polishing Unit	
A6740	Function test of DOU4PS	0%	64	32	17-Sep-21*	01-Nov-21	Function test of DOU4PS	
A7650	Hardware, point/end to point/end, interlock, simulation & interface test for PLC, SCADA & DCS for DOU polishing system	0%	22	18	22-Oct-21*	08-Nov-21	Hardware, point/end to point/end, interlock, simulation & interface test for PLC, SCADA & DCS for DOU polishing system	
A7660_NC	Calibration and function test of kiosks and fluorescent type sensor	0%	63	8	22-Oct-21*	02-Nov-21	Calibration and function test of kiosks and fluorescent type sensor	
A7670	Reliability test of the polishing system of DOU4	0%	22	30	09-Nov-21	08-Dec-21	Reliability test of the polishing system of DOU4	
A7680	Reliability test of NaOH bulk Storage and transfer system	15%	88	30	18-Apr-21 A	04-Sep-21	Reliability test of NaOH bulk Storage and transfer system	
A7690	Performance test of building service for DOU polishing system and MCC room	0%	91	31	31-Aug-21*	30-Sep-21	Performance test of building service for DOU polishing system and MCC room	
A7700	Performance test of fire service for DOU polishing system and MCC room	0%	91	31	31-Aug-21*	30-Sep-21	Performance test of fire service for DOU polishing system and MCC room	
DOU 5								
Underground Drainage and cabling works								
A9200	Submit WWO46 Part 4&5 for WSD inspection and water meter connection	0%	43	47	30-Aug-21*	15-Oct-21	Submit WWO46 Part 4&5 for WSD inspection and water meter connection	
E&M installation								
A7070_CE	Installation of cable containment and power cable of DOU5 PS	46.67%	1	30	15-Mar-21 A	27-Aug-21	Installation of cable containment and power cable of DOU5 PS	
A7070_NC	Installation of air ducts for connection of DOU5	36.67%	36	60	16-Apr-21 A	30-Sep-21	Installation of air ducts for connection of DOU5	
A7345_NC	Installation of Power supply and distribution system for DOU polishing systems (including panel and cabling works)	87.69%	8	130	19-Nov-20 A	27-Aug-21	Installation of Power supply and distribution system for DOU polishing systems (including panel and cabling works)	
A7366	Wiring works for PLC of DOU equipments	73.33%	5	45	03-May-21	23-Aug-21	Wiring works for PLC of DOU equipments	
A7375	Installation of Building Service, earthing and lightning protection for DOU polishing system, MCC room	82.5%	73	120	19-Nov-20 A	03-Sep-21	Installation of Building Service, earthing and lightning protection for DOU polishing system, MCC room	
A7385	Installation of Fire services for DOU polishing system, MCC room and NaOH bulk storage compound	91.67%	84	120	26-Dec-20 A	20-Aug-21	Installation of Fire services for DOU polishing system, MCC room and NaOH bulk storage compound	
A7395_NC	Installation of kiosk and fluorescent type sensor	0%	60	41	10-Sep-21*	05-Nov-21	Installation of kiosk and fluorescent type sensor	
A8440	Software development for new DOU polishing stage	83.08%	32	65	07-Apr-21 A	30-Oct-21	Software development for new DOU polishing stage	
A8450_CE	Installation of new SCADA system at Sludge Dewatering Building	0%	52	41	10-Aug-21*	27-Sep-21	Installation of new SCADA system at Sludge Dewatering Building	
Testing and commissioning								
A7381	Installation test, leakage test & megger test	0%	62	29	24-Sep-21*	03-Nov-21	Installation test, leakage test & megger test	
A7705	Function test of DOU5PS	0%	50	35	04-Oct-21*	19-Nov-21	Function test of DOU5PS	
A7710	Hardware, point/end to point/end, interlock, simulation & interface test for PLC, SCADA & DCS for DOU polishing system	0%	1	91	28-Aug-21	26-Nov-21	Hardware, point/end to point/end, interlock, simulation & interface test for PLC, SCADA & DCS for DOU polishing system	
A7720_NC	Calibration and function test of kiosks and fluorescent type sensor	0%	113	5	05-Nov-21 A	24-Aug-21	Calibration and function test of kiosks and fluorescent type sensor	
A7750	Performance test of building service for DOU polishing system and MCC room	0%	87	31	04-Sep-21*	04-Oct-21	Performance test of building service for DOU polishing system and MCC room	
A7760	Performance test of fire service for DOU polishing system and MCC room	0%	91	31	31-Aug-21*	30-Sep-21	Performance test of fire service for DOU polishing system and MCC room	
MPS1 SYSCON, MPS2 and sludge Dewatering Bldg (SDB)								
A7349	Hardware test of SCADA	0%	53	24	10-Aug-21	07-Sep-21*	Hardware test of SCADA	
A7350	Integration works for MPS1 SYSCON and MPS2	0%	32	24	20-Sep-21	19-Oct-21	Integration works for MPS1 SYSCON and MPS2	
A7355	Network intergation and interface test	0%	53	24	25-Aug-21	22-Sep-21	Network intergation and interface test	
A7370	Software development for SCADA-DCS interface	67.11%	65	76	07-Apr-21 A	08-Sep-21	Software development for SCADA-DCS interface	
A7380	Installation of DCS equipment	0%	101	19	10-Aug-21*	31-Aug-21	Installation of DCS equipment	
Statutory Inspection by FSD								
A7759	Comment and approval of DG application of DOUs	0%	55	45	10-Aug-21	23-Sep-21	Comment and approval of DG application of DOUs	
A7769	DG inspection by FSD	0%	55	45	24-Sep-21	07-Nov-21	DG inspection by FSD	
A7770	Submission of Application for FS inspection of FSD	0%	1	14	30-Oct-21*	12-Nov-21	Submission of Application for FS inspection of FSD	
Handover of E&M equipment								
A8210	Submission of O&M manual, Training manual, draft as-built drawings and spare part list	0%	6	30	04-Oct-21*	08-Nov-21	Submission of O&M manual, Training manual, draft as-built drawings and spare part list	
A8220	Submission of final version of training manual	0%	6	24	09-Nov-21	06-Dec-21	Submission of final version of training manual	
A8235	Prehandover inspection of electrical and mechanical system and ICA system of DOU polishing unit	0%	18	40	06-Nov-21	22-Dec-21	Prehandover inspection of electrical and mechanical system and ICA system of DOU polishing unit	

█ Actual Work ◆ Milestone
█ Remaining Work ▼ Summary
█ Critical Remaining Work

Contract No. DE/2018/17
 Enhancement of Deodorization System at Stonecutter Island Sewage Treatment Works
 3 Month Rolling Programme (Sep 2021 to Nov 2021)