

Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2

Monthly EM&A Report

March 2017

Submitted to

Prepared By

Environmental Protection Department

Meinhardt Infrastructure and Environment Ltd

Meinhardt Infrastructure and Environment Limited

Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2

Monthly EM&A Report

(March 2017)

Certified by:	Fredrick Leong
Position:	Environmental Team Leader
Date:	12 April 2017



Hyder-Arup-Black & Veatch Joint Venture c/o Arcadis 20/F, AXA Tower, Landmark East, 100 How Ming Street, Kwun Tong, Hong Kong Attn: Mr. James Penny

Your Reference

Our Reference JFP/EC/ST/pl/T329380/22 .05/L-0163

20/F AIA Kowloon Tower Landmark East 100 How Ming Street Kwun Tong Kowloon Hong Kong

T +852 2828 5757 F +852 2827 1823 mottmac.hk Environmental Monitoring and Audit (EM&A) for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling Stage 2 (between Tai Hang to Wo Hop Shek Interchange) – Entrusted Works Environmental Permit No. EP-324/2008/E Condition 3.3 – Submission of Monthly EM&A Report – March 2017 for the portion of Stage 2 works entrusted to Civil Engineering and Development Department (CEDD) under Contract No. CV/2012/09

12 April 2017 By Fax (2805 5028) & Hand

We refer to the revised Monthly EM&A Report – March 2017 received on 12 April 2017 submitted by the Environmental Team via email. Pursuant to Environmental Permit Condition 3.3, I hereby verify the Monthly EM&A Report – March 2017 (Rev. 0) for the portion of works under Stage 2 of the captioned Project which is entrusted to CEDD under Contract No. CV/2012/09.

Yours faithfully for MOTT MACDONALD HONG KONG LIMITED

Steven Tang Independent Environmental Checker

c.c. HyD CEDD/BCP AECOM Meinhardt

Mr. Chung Lok Chin Mr. Desmond Lam Mr. Alan Lee Mr. Fredrick Leong By Fax (2714 5198) By Fax (3547 1659) By Fax (3922 9797) By Fax (2559 1613)

Date	Revision	Prepared By	Checked By	Approved By
12 April 2017	0	WK CHIU Vąnessa HO		Helen ¢OCHRANE
		Nonem Ho	m	In
		· / · /· · · · · · · · · · · · · · · ·	7	00



Contents

			Page
EXE	CUTIVE	SUMMARY	i
1	INTRO	DUCTION	1
	1.2	Purpose of the Report	1
	1.3	Report Structure	1
2	PROJE	CT INFORMATION	2
	2.1	Background	2
	2.2	Site Description	3
	2.3	Construction Programme and Activities	3
	2.4	Project Organisation	4
3	STATU	S OF ENVIRONMENTAL LICENSES, NOTIFICATION AND PERMITS	5
4	AIR QU	ALITY MONITORING	9
	4.1	Monitoring Requirement	9
	4.2	Monitoring Equipment	9
	4.3	Monitoring Location	9
	4.4	Monitoring Parameters, Frequency and Duration	9
	4.5	Monitoring Methodology	10
	4.6	Monitoring Schedule for the Reporting month	10
	4.7	Monitoring Results	10
5	NOISE	MONITORING	12
	5.1	Monitoring Requirements	12
	5.2	Monitoring Equipment	12
	5.3	Monitoring Locations	12
	5.4	Monitoring Parameters, Frequency and Duration	12
	5.5	Monitoring Methodology	13
	5.6	Monitoring Schedule for the Reporting Month	13
	5.7	Monitoring Results	13
6	WATEF	R MONITORING	15
7	WASTE	MANAGEMENT	18
8	ENVIRG	ONMENTAL SITE INSPECTION AND AUDIT	19
	8.1	Site Inspection	19
9	IMPLE	MENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES	20
10	SUMMA	ARY OF EP SUBMISSION IN THE REPORTING MONTH	21
11	ENVIRG	DNMENTAL NON-CONFORMANCE	22
	11.1	Summary of Monitoring Exceedances	22



	11.2	Summary of Environmental Non-Compliance	22
	11.3	Summary of Environmental Complaints	22
	11.4	Summary of Environmental Summon and Successful Prosecutions	22
12	FUTUR	E KEY ISSUES	23
	12.1	Construction Programme for the Next Month	23
	12.2	Key Issues for the Coming Month	23
	12.3	Monitoring Schedule for the Next Month	24
13	CONCL	USIONS AND RECOMMENDATIONS	25
	13.1	Conclusions	25
	13.2	Recommendations	25

List of Tables

- Table 2.1 Contact Information of Key Personnel
- Table 3.1 Status of Environmental Licenses, Notifications and Permits
- Table 4.1 Air Quality Monitoring Equipment
- Location of Air Quality Monitoring Table 4.2
- Air Quality Monitoring Parameters, Frequency and Duration Table 4.3
- Table 4.4 Summary of 1-hr TSP Monitoring Results
- Table 4.5 Summary of 24-hr TSP Monitoring Results
- Table 5.1 Noise Monitoring Equipment
- Table 5.2 Location of Noise Monitoring
- Table 5.3 Noise Monitoring Parameters, Frequency and Duration
- Table 5.4 Summary of Noise Monitoring Results
- Table 8.1 Observations and Recommendations of Site Audit
- Table 10.1 Status of Required Submission under Environmental Permit

List of Figures

- Demarcation of Entrusted Portion of Widening of Tolo Highway / Fanling Highway Figure 1 between Island House Interchange and Fanling - Stage 2
- Air and Noise Monitoring Locations Figure 2

List of Appendices

Appendix A Construction Programme

- Appendix B Project Organization Structure
- Appendix C Calibration Certificates of Monitoring Equipment
- Appendix D EM&A Monitoring Schedules
- Appendix E Meteorological Data Extracted from Hong Kong Observatory
- Appendix F Air Quality Monitoring Results and their Graphical Presentation
- Appendix G Summary of Event and Action Plan
- Appendix H Noise Monitoring Results and their Graphical Presentation
- Appendix I Laboratory Results for Water Quality
- Appendix J Water Quality Monitoring Results and their Graphical Presentation
- Appendix K Waste Flow Table
- Appendix L Implementation Schedule of Environmental Mitigation Measures (EMIS)
- Appendix M Investigation Report for Exceedances
- Appendix N Statistics on Complaints, Notifications of Summons and Successful Prosecutions



EXECUTIVE SUMMARY

The Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2 (hereafter called "the Project") covers part of the construction of the widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling which aimed to widen Tolo Highway and Fanling Highway to dual 4-lane carriageway in order to alleviate the current traffic congestion problems and to cope with the increasing transport demands to and from the urban areas and also cross boundary traffic. The Project covers construction activities at Yuen Leng along the existing Fanling Highway.

The impact EM&A for the Project includes air quality, noise and water quality monitoring. The EM&A programme commenced on 5 November 2013.

This report documents the findings of EM&A works conducted in March 2017. As informed by the Contractor, the major activities in the reporting month were:

- Abutment Construction;
- Boundary wall construction for DSD pumping station;
- Cable detection and trial trenches;
- Existing Kiu Tau Vehicular Bridge demolition;
- Extended podium construction near bored pile wall;
- Footbridge Construction;
- Noise barrier construction;
- Pier table Construction;
- Portal construction;
- Remaining base slab of Box Culvert ID4 Construction;
- Roadworks;
- Roundabout Modification Works;
- Utilities duct laying;
- Viaduct segment erection;
- Water main laying works;
- Gabion wall construction;
- Installation of Noise barrier steel column & panel;
- Pre-drilling for noise barrier;
- Pit construction for heading works;
- Parapet Installation; and,
- Planter Wall construction.

Breach of Action and Limit Levels for Air Quality

No exceedance of Action and Limit Level was recorded for 24-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.



No exceedance of Action and Limit Level was recorded for 1-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.

Breach of Action and Limit Levels for Noise

No noise complaint was received in the reporting month, so no Action Level exceedance was recorded. Also, no Limit Level exceedance of noise monitoring was recorded in the reporting month.

Breach of Action and Limit Levels for Water Quality

Two exceedances of Action Level and one exceedance of Limit Level was recorded at the monitoring location I5 in the reporting month.

Complaint, Notification of Summons and Successful Prosecution

No complaint, notification of summons and successful prosecution was received in the reporting month.

Future Key Issues

The major construction works in the coming reporting month are anticipated to include:

- Boundary wall for pumping station;
- Cable detection and trial trenches;
- Extended podium construction near bored pile wall;
- Gabion wall construction;
- Installation of noise barrier steel post & panel;
- Footbridge Construction;
- Mini-pile installation works;
- Noise barrier construction;
- Pier table construction;
- Pipe jacking works for DN2200 water mains;
- Portal construction;
- Profile barrier Construction on Viaduct;
- Roadworks;
- Utilities duct laying;
- Viaduct Segment erection;
- Water main laying works;
- Parapet Installation;
- Planter Wall construction; and
- Existing Kiu Tau Footbridge demolition.



Potential environmental impacts arising from the above construction activities are anticipated to be mainly associated with construction dust, noise, water quality and waste management.



1 INTRODUCTION

1.1.1 Chun Wo Construction & Engineering Co Ltd (Chun Wo) was commissioned by the Civil Engineering and Development Department (CEDD) as the Civil Contractor for the Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2. Meinhardt Infrastructure & Environment Ltd (MIEL) has been appointed by Chun Wo as the Environmental Team (ET) to fulfill the corresponding EM&A requirements pursuant to Environmental Permit No. EP-324/2008/E in accordance with the Updated EM&A Manual (dated October 2013) for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling Stage 2. The EM&A programme commenced on 5 November 2013.

1.2 Purpose of the Report

1.2.1 This is the monthly EM&A Report which summaries the impact monitoring results and audit findings for the Project during the reporting month of March 2017.

1.3 Report Structure

1.3.1 This monthly EM&A Report comprises the following sections:

Section 1: Introduction

Section 2: Project Information

Section 3: Status of Environmental Licenses, Notifications and Permits

Section 4: Air Quality Monitoring

Section 5: Noise Monitoring

Section 6: Water Monitoring

- Section 7: Waste Management
- Section 8: Environmental Site Inspection and Audit
- Section 9: Implementation Status of Environmental Mitigation Measures

Section 10: Summary of EP Submission in the Reporting Month

Section 11: Environmental Non-Conformance

Section 12: Future Key Issues

Section 13: Conclusions and Recommendations



2 **PROJECT INFORMATION**

2.1 Background

- 2.1.1 Tolo Highway and Fanling Highway are expressways in the North East New Territories connecting Sha Tin, Tai Po and Fanling. These highways form a vital part of the strategic Route 1, which links Hong Kong Island to Shenzhen. At present, this section of Route 1 is a dual 3-lane carriageway. However, at several major interchanges along this section of Route 1, the highway is only dual-2 lane. Severe congestion is a frequent occurrence during peak periods, particularly in the Kowloon bound direction.
- 2.1.2 The objective of the Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling is to widen Tolo Highway and Fanling Highway to dual 4-lane carriageway in order to alleviate the current traffic congestion problems and to cope with the increasing transport demands to and from the urban areas and also cross boundary traffic.
- 2.1.3 The construction works for the Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling are to be delivered in 2 stages:

Stage 1 – Construction works between Island House Interchange and Tai Hang; and

Stage 2 – Construction works between Tai Hang and Wo Hop Shek Interchange.

- 2.1.4 The construction works of Stage 1 under the EP commenced in November 2009 and was planned to be completed in December 2013 tentatively. The works of Stage 2 was planned to commence in November 2013 and complete by end of 2016. Hyder-Arup-Black and Veatch Joint Venture (HABVJV) was appointed by the Highways Department (HyD) as the consultants for the design and construction assignment for the Project. Mott MacDonald Hong Kong Ltd is the Independent Environmental Checker (IEC) of both Stage 1 and Stage 2 works.
- 2.1.5 A portion of Stage 2 works of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling (hereafter called "the Project") is entrusted to the contractor of Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure Works Contract 3, i.e. Chun Wo. AECOM Asia Co Ltd was appointed by the CEDD as the consultant for the design and construction assignment for the Liantang development.
- 2.1.6 The Project is a Designated Project under the Environmental Impact Assessment Ordinance (EIAO) (Cap. 499). An Environmental Impact Assessment (EIA) Report together with an Environmental Monitoring and Audit (EM&A) Manual were approved on 14 July 2000 (Register Number: EIA-043/2000). The Project is governed by an Environmental Permit (EP) (EP-324/2008) which was granted on 23 December 2008. A variation of EP (VEP) was applied and the VEP (EP-324/2008/A) was subsequently granted on 31 January 2012. An additional VEP has been applied on 24 February 2014 and the VEP (EP-324/2008/B) was subsequently granted on 17 March 2014. Furthermore, an additional VEP has been applied on 9 March 2015 and the VEP (EP-324/2008/C) was subsequently granted on 27 March 2015. The previous VEP (EP-324/2008/D) was granted on 27 August 2015. The current VEP (EP-324/2008/E) was granted on 26 January 2017.



2.2 Site Description

2.2.1 The major construction activities under the Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2 include:

At-Grade Road Works – Temporary and permanent road formation, pipe laying, road drainage, footpath and noise barrier construction;

Demolition of existing Kiu Tau Footbridge and Footbridge Reprovision; and

Box Culvert Extension – Flow diversion of existing stream, excavation, sub-base and blinding, base, wall and top slab construction.

2.2.2 **Figure 1** shows the works areas for the Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2.

2.3 Construction Programme and Activities

- 2.3.1 The major construction activities undertaken in the reporting month are summarized below:
 - Abutment Construction;
 - Boundary wall construction for DSD pumping station;
 - Cable detection and trial trenches;
 - Existing Kiu Tau Vehicular Bridge demolition;
 - Extended podium construction near bored pile wall;
 - Footbridge Construction;
 - Noise barrier construction;
 - Pier table Construction;
 - Portal construction;
 - Remaining base slab of Box Culvert ID4 Construction;
 - Roadworks;
 - Roundabout Modification Works;
 - Utilities duct laying;
 - Viaduct segment erection;
 - Water main laying works;
 - Gabion wall construction;
 - Installation of Noise barrier steel column & panel;
 - Pre-drilling for noise barrier;
 - Pit construction for heading works;
 - Parapet Installation; and
 - Planter Wall construction.



2.3.2 The construction programme is presented in **Appendix A**.

2.4 **Project Organisation**

2.4.1 The project organization structure is shown in **Appendix B**. The key personnel contact names and numbers for the Project are summarised in **Table 2.1**.

Party	Role	Position	Name	Telephone	Fax
AECOM	Engineer's	Senior Resident Engineer	Mr. Alan Lee	2171 3303	- 2171 3498
AECOM	Representative	Resident Engineer (Environmental)	Mr. Perry Yam	2171 3350	2171 3496
Mott MacDonald	Independent Environmental Checker (IEC)	IEC	Mr. Steven Tang	2828 5920	2827 1823
Ohum M/a	O a star star	Site Agent	Mr. Daniel Ho	2638 6144	0000 7077
Chun Wo	Contractor	Environmental Officer	Mr. Victor Huang	2638 6181	2638 7077
Meinhardt	Environmental Team (ET)	ET Leader	Mr. Fredrick Leong	2859 1739	2540 1580

 Table 2.1
 Contact Information of Key Personnel

3 STATUS OF ENVIRONMENTAL LICENSES, NOTIFICATION AND PERMITS

3.1.1 The relevant environmental licenses, permits and/or notifications on environmental protection for this Project and valid in the reporting month are summarized in **Table 3.1**.

Permit / License No. / Notification /	Valid Period		Otatura	Demortes	
Reference No.	From	То	Status	Remarks	
Environmental Permit	t				
EP-324/2008/E	26 Jan 2017		Granted on 26 Jan 2017		
Construction Noise P	ermit	1		1	
GW-RN0646-16	10 Sep 2016	9 Mar 2017	Valid	For segment erection of pier AA4, AB6, AD7 and AA18	
GW-RN0653-16	11 Sep 2016	10 Mar 2017	Valid	For segment erection AB7 to AB10	
GW-RN0654-16	15 Sep 2016	14 Mar 2017	Valid	For segment erection crossing over MTRC's Rail Track of Pier AB11 and AD12 (1900-2300)	
GW-RN0729-16	5 Oct 2016	31 Mar 2017	Valid	For segment erection of spans AA11, AA12, AC3 and AC4 across Fanling Highway	
GW-RN0795-16	5 Nov 2016	29 Apr 2017	Valid	For falsework modification of pier AD12	
GW-RN0816-16	13 Nov 2016	27 Mar 2017	Valid	For lane shifting work at Fanling Highway Northbound	
GW-RN0833-16	13 Nov 2016	10 May 2017	Valid	For segment erection crossing over MTRC's Rail Track of Pier AB11 and AD12 (0115-0500)	
GW-RN0843-16	18 Nov 2016	17 May 2017	Cancelled on 10 Mar 2017	For segment erection of Pier AB11	
GW-RN0836-16	15 Nov 2016	31 Mar 2017	Valid	For segment erection at AC1 end span	

Table 3.1 Status of Environmental Licenses, Notifications and Permits



Permit / License No.	Valid	Period	Otatura	Demortes
/ Notification / Reference No.	From	То	Status	Remarks
GW-RN0871-16	29 Nov 2016	20 May 2017	Valid	For segment stitches concreting between AA11 and AA12 crossing over Fanling Highway
GW-RN0872-16	29 Nov 2016	20 May 2017	Valid	For segment stitches concreting from AB3 to AB5 crossing over Fanling Highway
GW-RN0870-16	30 Nov 2016	13 May 2017	Valid	Road marking works in Fanling Highway bothbounds
GW-RN0901-16	11 Dec 2016	4 Jun 2017	Valid	Demolition of Vehicular Bridge at Fanling Highway Southbound in Sunday and Public Holidays
GW-RN0939-16	22 Dec 2016	21 Jun 2017	Valid	For general works at southward of site office
GW-RN0002-17	8 Jan 2017	4 Jun 2017	Valid	For welding work of steel truss on Fanling Highway
GW-RN0021-17	19 Jan 2017	8 Jul 2017	Valid	For traffic road works at a section of Fanling Highway both bounds
GW-RN0029-17	19 Jan 2017	8 Jul 2017	Valid	For loading and unloading along Fanling Highway both bounds
GW-RN0040-17	25 Feb 2017	24 Aug 2017	Valid	For general works at the northward of site office
GW-RN0048-17	25 Jan 2017	16 Jun 2017	Valid	For road diversion and maintenance of Fanling Highway Southbound
GW-RN0066-17	3 Feb 2017	15 Jul 2017	Valid	For installation of steel truss of Kiu Tau Footbridge at Fanling Highway Northbound



Permit / License No.	Valid I	Period		
/ Notification / Reference No.	From	То	Status	Remarks
GW-RN0069-17	15 Feb 2017	14 Aug 2017	Valid	For tractor with trailer entering the Construction Site next to MTRC's East Rail Line at Tong Hang
GW-RN0070-17	3 Feb 2017	15 Jul 2017	Valid	For installation of steel truss of Kiu Tau Footbridge at Fanling Highway Southbound
GW-RN0071-17	16 Feb 2017	15 Aug 2017	Valid	For fuel delivery and tractor with trailer entering the construction site next to MTRC's East Rail Line at Tong Hang Tung
GW-RN0078-17	16 Feb 2017	21 Jun 2017	Valid	For dismantling of catch fence within MTR Protection Zone at Tong Hang Tung Chuen
GW-RN0084-17	8 Feb 2017	15 Jul 2017	Valid	For concreting slab of Kiu Tau Footbridge at Fanling Highway Both Bound
GW-RN0092-17	19 Feb 2017	30 Jul 2017	Valid	For loading and unloading along Fanling Highway both bounds on general holiday daytime
GW-RN0096-17	19 Feb 2017	10 Jul 2017	Valid	For road resurfacing of Fanling Highway Southbound
GW-RN0099-17	17 Feb 2017	12 Aug 2017	Valid	For road diversion and maintenance of Fanling Highway Northbound
GW-RN0103-17	24 Feb 2017	31 Mar 2017	Valid	For segment erection across Fanling Highway
GW-RN0111-17	26 Feb 2017	30 Jul 2017	Valid	For concreting the Bridge Deck of Kiu Tau Footbridge at Fanling Highway Both Bound



Permit / License No.	Valid Period		Status	Remarks	
/ Notification / Reference No.	From	То	Status	Remarks	
GW-RN0119-17	25 Feb 2017	31 Mar 2017	Valid	For segment erection across Fanling Highway and MTRC's East Rail Line	
GW-RN0115-17	2 Mar 2017	26 Aug 2017	Valid	For concreting of stitch construction between AD12 and pier AB11R	
GW-RN0130-17	10 Mar 2017	9 Jun 2017	Valid	For Segment Erection of Pier AD12	
Wastewater Discharg	e License	Γ	T		
WT00016832-2013	28 Aug 2013	31 Aug 2018	Valid		
Chemical Waste Prod	ucer Registrati	on	T		
5113-634-C3817-01	7 Oct 2013		Valid		
Billing Account for Construction Waste Disposal					
7017914	2 Aug 2013		Account Active		
Notification Under Air	Pollution Cont	rol (Construction	on Dust) Regulati	on	
	31 Jul 2013	30 Jul 2019	Notified		



4 AIR QUALITY MONITORING

4.1 Monitoring Requirement

4.1.1 In accordance with the Updated EM&A Manual, 1-hr and 24-hr total suspended particulate (TSP) levels at the designated air quality monitoring station are required. Impact 24-hour TSP monitoring should be carried out for at least once every 6 days. For the 1-hr TSP impact monitoring, the sampling frequency of at least three times in every 6 days should be undertaken when the highest dust impact occurs.

4.2 Monitoring Equipment

4.2.1 The 1hr- TSP and 24-hr TSP air quality monitoring were performed using a High Volume Sampler (HVS), of which its location and operation satisfy, as far as practicable, all the requirements as specified in the Updated EM&A Manual. The brand and model of the equipment are given in **Table 4.1**.

 Table 4.1
 Air Quality Monitoring Equipment

Equipment	Brand and Model	Quantity	Serial Number
High Volume	Tisch Total Suspended Particulate		
Sampler	Mass Flow Controlled High Volume	1	2359
(1-hr TSP and	Air Sampler (Model No. TE-5170	1	2509
24-hr TSP)	MFC)		

- 4.2.2 The HVS and its accessories were maintained in good working condition, such as replacing motor brushes routinely and checking electrical wiring to ensure a continuous power supply.
- 4.2.3 Calibration of the HVS (five point calibration) using Calibration Kit was carried out every two months. The HVS calibration orifice will be calibrated annually. Calibration certificate of the TE-5025A Calibration Kit and the HVS are provided in **Appendix C**.

4.3 Monitoring Location

4.3.1 Air quality monitoring was conducted at the location specified in the Updated EM&A Manual. **Table 4.2** describes the details of the air quality monitoring station with its location as shown in **Figure 2**.

 Table 4.2
 Location of Air Quality Monitoring

Air Monitoring Station ID	Monitoring Location	Description	
AM1(SR77) *	Yuen Leng 2 *	Residential, Ground floor	

Remark:

Location and Station / ASR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

4.4 Monitoring Parameters, Frequency and Duration

4.4.1 **Table 4.3** summarizes the monitoring parameters, frequency and duration of impact TSP monitoring.



Parameter	Frequency and Duration
1-hour TSP	At least three times in every 6 days should be undertaken when the highest dust impact occur
24-hour TSP	Once every 6 days

4.5 Monitoring Methodology

1-hr and 24-hr TSP Monitoring

- 4.5.1 With the consideration of criteria stated in the Updated EM&A Manual, the HVS was installed in the vicinity of the air sensitive receivers.
- 4.5.2 The relevant data including temperature, pressure, weather conditions, elapsed-time meter reading for the start and stop of the sampler, identification and weight of the filter paper, and any special phenomena observed were recorded. The weather information was referenced from Hong Kong Observatory (http://www.weather.gov.hk/wxinfo/pastwx/extractc.htm).
- 4.5.3 A HOKLAS accredited laboratory with constant temperature and humidity control, and equipped with necessary measuring and conditioning instruments, to handle the 24-hr TSP samples, was employed for sample analysis.
- 4.5.4 Filter papers of size 8"x10" were labelled before sampling. They were inspected to be clean with no pin holes and conditioned in a humidity controlled chamber for over 24-hr and were pre-weighed before use for the sampling.
- 4.5.5 The 24-hr TSP levels were measured by following the standard high volume sampling method for TSP as set out in the Title 40 of the United States Code of Federal Regulations, Chapter 1 (Part 50), Appendix B. TSP was sampled by drawing air through a conditioned, pre-weighted filter paper inside the HVS at a controlled air flow rate. After 24-hr sampling, the filter papers loaded with dust were kept in a clean and tightly sealed plastic bag, and then returned to the laboratory for reconditioning in the humidity controlled chamber followed by accurate weighing by an electronic balance with a readout down to 0.1 mg.
- 4.5.6 All the collected samples were kept in a good condition for 6 months before disposal.
- 4.5.7 For 1-hr TSP monitoring, monitoring methodology is the same as 24-hr TSP monitoring which has been presented in **Section 4.5.1** to **Section 4.5.6**, but with sampling period changed to 1 hour.

4.6 Monitoring Schedule for the Reporting month

4.6.1 The schedule for environmental monitoring for the reporting month is provided in **Appendix D**. Meteorological data extracted from Hong Kong Observatory for the reporting month is provided in **Appendix E**.

4.7 Monitoring Results

4.7.1 The monitoring results for 1-hr and 24-hr TSP are summarised in **Table 4.4** and **Table 4.5** respectively. Detailed air quality monitoring results and the graphical presentation



of air quality monitoring data for the current and past three reporting months are presented in **Appendix F**.

Table 4.4 Summary of 1-hr TSP Monitoring Results

ASR ID	Average (μg/m³)	Range (μg/m³)	Action Level (μg/m³)	Limit Level (µg/m³)
AM1(SR77) *	175.5	121.2 – 227.4	292.7	500

Remark:

Station / ASR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

Table 4.5 Summary of 24-hr TSP Monitoring Results

ASR ID	Average (μg/m³)	Range (μg/m³)	Action Level (μg/m³)	Limit Level (µg/m³)
AM1(SR77) *	77.2	42.5 – 124.4	170.3	260

Remark:

Station / ASR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

- 4.7.2 No exceedance of Action and Limit Level was recorded for 24-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.
- 4.7.3 No exceedance of Action and Limit Level was recorded for 1-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.
- 4.7.4 The Event and Action Plan for the occurrence of non-compliance of the air quality criteria is annexed in **Appendix G**.



5 NOISE MONITORING

5.1 Monitoring Requirements

5.1.1 In accordance with the Updated EM&A Manual, the impact noise monitoring frequency shall depend on the scale of the construction activities. An initial guide on the regular monitoring frequency should be at least once per week when noise generating activities are underway.

5.2 Monitoring Equipment

5.2.1 Noise monitoring was performed using a sound level meter at the monitoring station. The sound level meter deployed complies with the International Electrotechnical Commission Publications 651:1979 (Type 1) and 804:1985 (Type 1) specifications. An acoustic calibrator was deployed to check the sound level meter at a known sound pressure level. The brand and model of the equipment is given in **Table 5.1**.

 Table 5.1
 Noise Monitoring Equipment

Equipment	Brand and Model	Quantity	Serial Number
Sound Level Calibrator	Rion (Model No. NC-74)	1	34857296
Sound Level Meter	B&K (Model No. 2238)	1	2694908

5.2.2 The sound level calibrator and sound level meter were verified by a certified laboratory every year. Calibration certificates of the sound level meter and acoustic calibrator are provided in **Appendix C**.

5.3 Monitoring Locations

5.3.1 Impact noise monitoring was conducted at the location specified in the Updated EM&A Manual. **Table 5.2** describes the details of the noise monitoring station with its location as shown in **Figure 2**.

NSR ID	Monitoring Location	Description
M1(SR77) *	Yuen Leng 2 *	Residential, Ground floor

Remark:

Location and Station / NSR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

5.4 Monitoring Parameters, Frequency and Duration

5.4.1 **Table 5.3** summarizes the monitoring parameters, frequency and duration of impact noise monitoring.



Table 5.3 Noise Monitoring Parameters, Frequency and Duration

Parameter and Duration	Frequency
30-mins measurement at between 0700 and 1900 on normal weekdays. Leq, L10 and L90 would be recorded.	At least once per week

5.5 Monitoring Methodology

5.5.1 The monitoring procedures are summarised as follows:

The sound level meter was set on a tripod at a height of 1.2 m above the ground for free-field measurements at monitoring station SR77;

The battery condition was checked to ensure good functioning of the meter;

Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:

Frequency weighting: A

Time weighting: Fast

Parameters: Leq, L10 and L90

Time measurement: Leq(30-minutes) during non-restricted hours i.e. 07:00 – 19:00 hrs on normal weekdays

Prior to and after each noise measurement, the meter was calibrated using the acoustic calibrator for 94dB(A) at 1000 Hz. If the difference in the calibration level before and after measurement was more than 1dB(A), the measurement would be considered invalid and repeat of noise measurement would be required after re-calibration or repair of the equipment.

At the end of the monitoring period, the Leq, L10 and L90 were recorded. In addition, site conditions and noise sources were recorded on a standard record sheet.

A façade correction of +3dB (A) shall be made to the noise parameter obtained by free field measurement.

5.6 Monitoring Schedule for the Reporting Month

5.6.1 The schedule for environmental monitoring for the reporting month is provided in **Appendix D**. Meteorological data extracted from Hong Kong Observatory for the reporting month is provided in **Appendix E**.

5.7 Monitoring Results

5.7.1 The monitoring results for noise are summarized in **Table 5.4** and the monitoring results and the graphical presentation of noise level for the current and past three reporting months are presented in **Appendix H**.



 Table 5.4
 Summary of Noise Monitoring Results

Noise Monitoring Station ID	Average, dB(A), Leq (30min) ⁽²⁾	Range, dB(A), Leq (30min) ⁽²⁾	Action Level	Limit Level, dB(A)
M1(SR77) ⁽¹⁾	67.6	65.5 – 70.0	When one documented valid complaint is received	75

Remark:

(1) Station / NSR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

(2) +3dB(A) façade correction included

- 5.7.2 Major noise sources during the noise monitoring included construction activities of the Project and that along Tai Wo Service Road East, and nearby traffic noise.
- 5.7.3 No noise complaint was received in the reporting month, so no Action Level exceedance was recorded. Also, no Limit Level exceedance of noise monitoring was recorded in the reporting month.
- 5.7.4 The Event and Action Plan for the occurrence of non-compliance of the noise criteria is annexed in **Appendix G**.



6 WATER MONITORING

6.1 Introduction

- 6.1.1 The box culvert works have been partially completed by the end of March 2014 except the last construction activity, installation of a base slab at Box Culvert ID4. Due to the loading requirement of a fresh water main under the box culvert, installation of the base slab at Box Culvert ID4 has been commenced in December 2016.
- 6.1.2 Impact monitoring for water quality were carried out eleven (11) times in the reporting month. The water quality monitoring was taken on 1, 3, 6, 8, 10, 13, 15, 17, 20, 22, 24, 27 and 29 March 2017.
- 6.1.3 The 4-week post construction water quality monitoring has been commenced after the completion of box culvert works on 31 March 2017 in the same manner as the impact monitoring. EPD has been notified for the commencement of post construction monitoring.

6.2 Monitoring Requirements

6.2.1 In accordance with the Updated EM&A Manual, during the course of the culvert extension works, monitoring shall be undertaken on three occasions per week. The interval between two sets of monitoring shall not be less than 36 hours except where there are exceedances of Action and/or Limit levels. The results are included in **Appendix I** and **Appendix J**.

6.3 Monitoring Equipment

6.3.1 The equipment used in the water quality monitoring programme is summarised in **Table 6.1**.

Equipment	Model and Make
Turbidity meter	HACH Model 2100Q is (Serial No. 13120C004242)
Multifunctional Meter (Scope of Test: Conductivity, Dissolved Oxygen, pH, Salinity and Temperature)	Professional Plus (Serial No. 10D101566)

 Table 6.1
 Water Quality Monitoring Equipment

6.3.2 The monitoring instruments were checked, calibrated and certified by a laboratory accredited under HOKLAS before use and subsequently re-calibrated at 3-monthly intervals throughout all stages of the water quality monitoring. Copies of the calibration certificates for the water quality monitoring equipment are attached in **Appendix C**.

6.4 Monitoring Parameters, Frequency and Duration

6.4.1 Measurements for each monitoring station were conducted 3 days per week for the reporting month. **Table 6.2** summarises the monitoring parameters, frequency and duration of the baseline water quality monitoring.

Monitoring Stations	Parameter, unit	Frequency
Control Stations: C3a and C3b Impact Station: I5	 Depth, m Temperature, °C Salinity, ppt pH DO, mg/L DO Saturation, % Turbidity, NTU SS, mg/L 	3 days per week

Table 6.2 Water Quality Monitoring Parameters, Frequency and Duration

6.5 Monitoring Locations

6.5.1 According to the Updated EM&A Manual, measurements were taken at all impact and control stations as summarised in **Table 6.3**. The locations of the monitoring stations are shown in **Figure 3**.

Station	Description	Easting	Northing
15	Downstream of Ma Wat River (Yuen Leng)	833931	837859
C3a	Upstream of Ma Wat River (Nam Wa Po)	833816	837644
C3b	Upstream of Ma Wat River (Yuen Leng)	833931	837736

 Table 6.3 Locations of Water Quality Monitoring

6.6 Monitoring Methodology

Instrumentation

6.6.1 The parameters of in-situ measurements included water depth, dissolved oxygen (DO), dissolved oxygen saturation (DOS), turbidity level, pH value and water temperature.

Operating/Analytical Procedures

- 6.6.2 Since water depths for all monitoring stations were less than 1m throughout the whole baseline measurement period, only mid-depth level was monitored.
- 6.6.3 At each monitoring station, at least duplicate readings of dissolved oxygen content and turbidity were taken. The probes were retrieved out of the water after the first measurement and then re-deployed for the second measurement.
- 6.6.4 Water samples were collected by the water sampler and filled into polyethylene bottles for laboratory determination of suspended solids. Sampling bottles were pre-rinsed with the same water samples, and filled up to the rim, capped tightly and labeled immediately. The sample bottles were then packed into a cool-box kept at 4°C, and delivered to a HOKLAS accredited laboratory, Enviro Labs Ltd. (HOKLAS no.: 128) for analysis. The results for laboratory analysis of suspended solids are presented in **Appendix I**.



6.7 Monitoring Schedule for the Reporting Month

6.7.1 The schedule for environmental monitoring for the reporting month is provided in **Appendix D**. Meteorological data extracted from Hong Kong Observatory for the reporting month is provided in **Appendix E**.

6.8 Monitoring Results

6.8.1 The water quality criteria, namely Action and Limit Levels, as specified in the Updated EM&A Manual are shown in **Table 6.4**.

Parameters	Action	Limit
DO in mg/L	6.7 mg/L	4 mg/L or 40% saturation at 15 degree Celsius
SS in mg/L	42.6 mg/L or 120% of upstream control station's SS of the same day	46.8 mg/L or 130% of upstream station's SS of the same day and specific sensitive receiver water quality requirements
Turbidity (Tby) in NTU	81.9NTU or 120% of upstream control station's Tby of the same day	91.9NTU or 130% of upstream control station's Tby of the same day

Table 6.4 Action and Limit Levels for Water Quality Monitoring

Notes:

Appendix J.

For DO, non-compliance of the water quality limits occurs when monitoring result is lower than the limits. For SS and Tby, non-compliance of the water quality limits occurs when monitoring result is higher than the limits.

- 6.8.2 The detailed water quality monitoring results and the graphical presentation of water guality monitoring data for the current and past three reporting months are presented in
- 6.8.3 The possible influences in monitoring results were suspected to be natural variation.
- 6.8.4 One (1) exceedance of Limit Level on Suspended Solid was recorded at the monitoring location I5 on 31 March 2017. Two (2) exceedance of Action Level on Dissolved Oxygen was recorded at the monitoring location I5 on 22 March 2017 and 29 March 2017. Investigation for the exceedance was conducted which concluded that the exceedance was not related to the project works. The investigation report is presented in **Appendix M**.
- 6.8.5 The Event and Action Plan for the occurrence of non-compliance of the water quality criteria is annexed in **Appendix G**.



7 WASTE MANAGEMENT

- 7.1.1 The Contractor has registered as a chemical waste producer of the Project. The C&D materials and waste sorting were carried out on-site. Receptacles were provided for general refuse collection.
- 7.1.2 As advised by the Contractor, a total of 2,287m³ of excavated material has been generated. 1,662m³ of inert C&D materials was disposed of at public fill to Tuen Mun Area 38. 60m³ inert C&D materials were reused on site. 115m³ of general refuse was disposed of at North East New Territories (NENT) Landfill. No plastic was collected by recycling contractor in the reporting month. No paper/cardboard packaging was collected by recycling contractor in the reporting month. No metal was collected by recycling contractor in the reporting month. No metal was collected by recycling contractor in the reporting month. No chemical waste was collected by licensed contractor in the reporting period. Details of the waste management data are presented in **Appendix K**.



8 ENVIRONMENTAL SITE INSPECTION AND AUDIT

8.1 Site Inspection

- 8.1.1 Site inspections were carried out on a weekly basis to monitor the implementation of proper environmental pollution control and mitigation measures for the Project. A summary of the site inspection is provided in **Appendix L**.
- 8.1.2 In the reporting month, 4 site inspections were carried out on 6, 15, 20 and 27 March 2017. The one held on 27 March 2017 was a joint inspection with the IEC, ER, ET and Contractor. No site inspection was conducted by the EPD during the reporting month. No non-compliance was recorded during the site inspection. A summary of the reminders and observations recorded during the site inspections are presented in **Table 8.1**.

Parameters	Date	Observations and Recommendations	Follow-up
Water Quality	N/A	N/A	N/A
Air Quality	N/A	N/A	N/A
Noise	N/A	N/A	N/A
Water Quality	06 Mar 2017	Contractor is reminded to clean the de-silting facility to avoid site surface runoff at SA12.	The contractor has cleared the filter and the de-silting facility at SA12 on 9 March 2017 and was observed clean during the 15 March 2017 site inspection.
	20 Mar 2017	Sediments and muddy water are observed at the nullah near site office from ID5. The contractor is to find out the source of pollution and take preventive actions.	The nullah was observed as clear near site office during 27 March 2017 site inspection.
	27 Mar 2017	Site surface runoff is observed at SA12. The contract is reminded to enhance the de-silting facilities to treat surface runoff before discharge.	The follow up action will be reviewed in the next monthly EM&A report.
Waste / Chemical Managem- ent	N/A	N/A	N/A
Landscape & Visual	N/A	N/A	N/A
Permits / Licenses	N/A	N/A	N/A

Table 8.1 Observations and Recommendations of Site Audit



9 IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES

9.1.1 The Contractor has implemented the relevant environmental mitigation measures as specified in the EIA Reports, EPs and updated EM&A Manual. The implementation status of environmental mitigation measures during the reporting period is summarized in **Appendix L**.



10 SUMMARY OF EP SUBMISSION IN THE REPORTING MONTH

10.1.1 The status of the required submission under the EP during the reporting period is summarized in **Table 10.1**.

Table 10.1 Status of Required Submission under Environmental Permit

EP Condition	Submission	Submission Date
Condition 3.3	Monthly EM&A Report for February 2017	13 March 2017



11 ENVIRONMENTAL NON-CONFORMANCE

11.1 Summary of Monitoring Exceedances

- 11.1.1 No exceedance of Action and Limit Level was recorded for 24-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.
- 11.1.2 No exceedance of Action and Limit Level was recorded for 1-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.
- 11.1.3 No noise complaint was received in the reporting month, so no Action Level exceedance was recorded. Also, no Limit Level exceedance of noise monitoring was recorded in the reporting month.
- 11.1.4 Two (2) exceedance of Action Level was recorded for water quality monitoring at the monitoring location I5 in the reporting month. One (1) Limit Level exceedance was recorded for water quality monitoring at the monitoring location I5 in the reporting month,

11.2 Summary of Environmental Non-Compliance

11.2.1 No environmental non-compliance was recorded in the reporting month. The cumulative statistics are provided in **Appendix N**.

11.3 Summary of Environmental Complaints

11.3.1 No environmental complaints were received in the reporting month. The cumulative statistics are provided in **Appendix N**.

11.4 Summary of Environmental Summon and Successful Prosecutions

11.4.1 No environmental related prosecution or notification of summons was received in the reporting month. The cumulative statistics are provided in **Appendix N**.



12 FUTURE KEY ISSUES

12.1 Construction Programme for the Next Month

- 12.1.1 The major construction works in the coming reporting month are anticipated to include:
 - Boundary wall for pumping station;
 - Cable detection and trial trenches;
 - Extended podium construction near bored pile wall;
 - Gabion wall construction;
 - Installation of noise barrier steel post & panel;
 - Footbridge Construction;
 - Mini-pile installation works;
 - Noise barrier construction;
 - Pier table construction;
 - Pipe jacking works for DN2200 water mains;
 - Portal construction;
 - Profile barrier Construction on Viaduct;
 - Roadworks;
 - Utilities duct laying;
 - Viaduct Segment erection;
 - Water main laying works;
 - Parapet Installation;
 - Planter Wall construction; and
 - Existing Kiu Tau Footbridge demolition.

12.2 Key Issues for the Coming Month

- 12.2.1 Key issues to be considered in the coming month are anticipated to include:
 - Site discharges should be properly collected and treated prior to discharge;
 - Properly maintain all drainage facilities and wheel washing facilities on site;
 - Expose slopes and dusty stockpile should be covered up properly if no work will be conducted;
 - Operation of construction plant should be sequenced where practicable;
 - Good housekeeping should be maintained and general refuse should be removed regularly;
 - Chemical waste should be stored, handled and disposed of properly;



- Properly store and label oils and chemicals on site; and
- A spill response procedure shall be in place and absorption material available for minor spillages.

12.3 Monitoring Schedule for the Next Month

12.3.1 The tentative schedule for environmental monitoring for the coming month is provided in **Appendix D**.



13 CONCLUSIONS AND RECOMMENDATIONS

13.1 Conclusions

- 13.1.1 The construction phase EM&A programme of the Project commenced on 5 November 2013.
- 13.1.2 The 1-hr TSP, 24-hr TSP, noise and water quality monitoring were carried out in the reporting period.
- 13.1.3 No exceedance of Action and Limit Level was recorded for 24-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.
- 13.1.4 No exceedance of Action and Limit Level was recorded for 1-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.
- 13.1.5 No noise complaint was received in the reporting month, so no Action Level exceedance was recorded. Also, no Limit Level exceedance of noise monitoring was recorded in the reporting month.
- 13.1.6 Two (2) exceedance of Action Level on Dissolved Oxygen and one (1) exceedance of Limit Level on Suspended Solid were recorded for water quality monitoring at the monitoring location I5 in the reporting month.
- 13.1.7 Four (4) environmental site inspections were carried out in the reporting month. Recommendations on remedial actions were given to the Contractors for the deficiencies identified during the site audit.

13.2 Recommendations

13.2.1 According to the environmental site inspections performed in the reporting month, the following recommendation was provided:


Water Quality

• Ensure the de-silting facilities are cleared frequently to prevent direct discharge of construction site runoff

April 2017




Figure

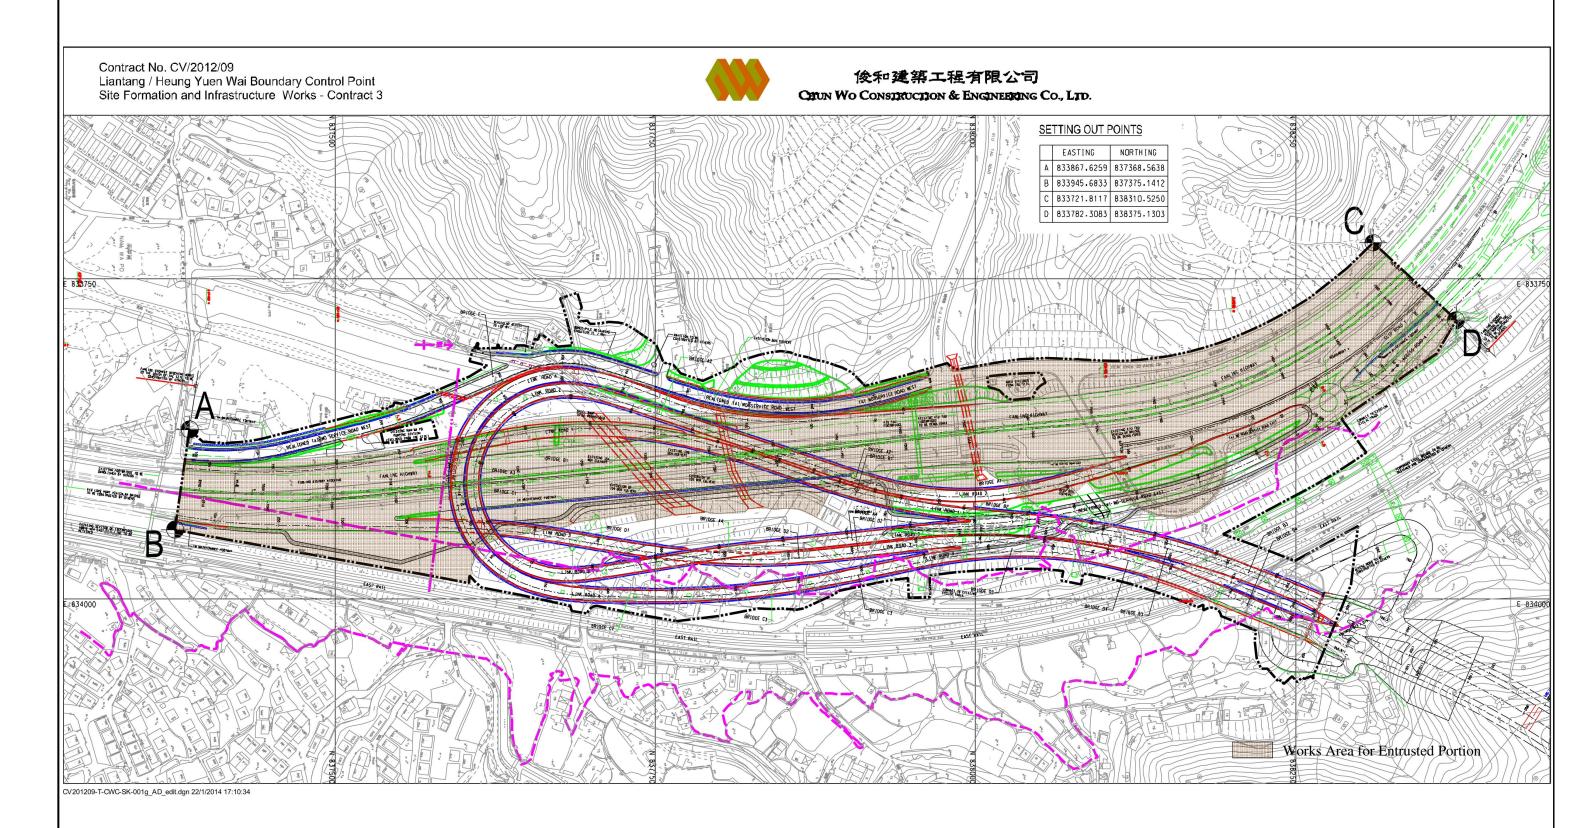



Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2

Figure 1: Demarcation of Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling – Stage 2

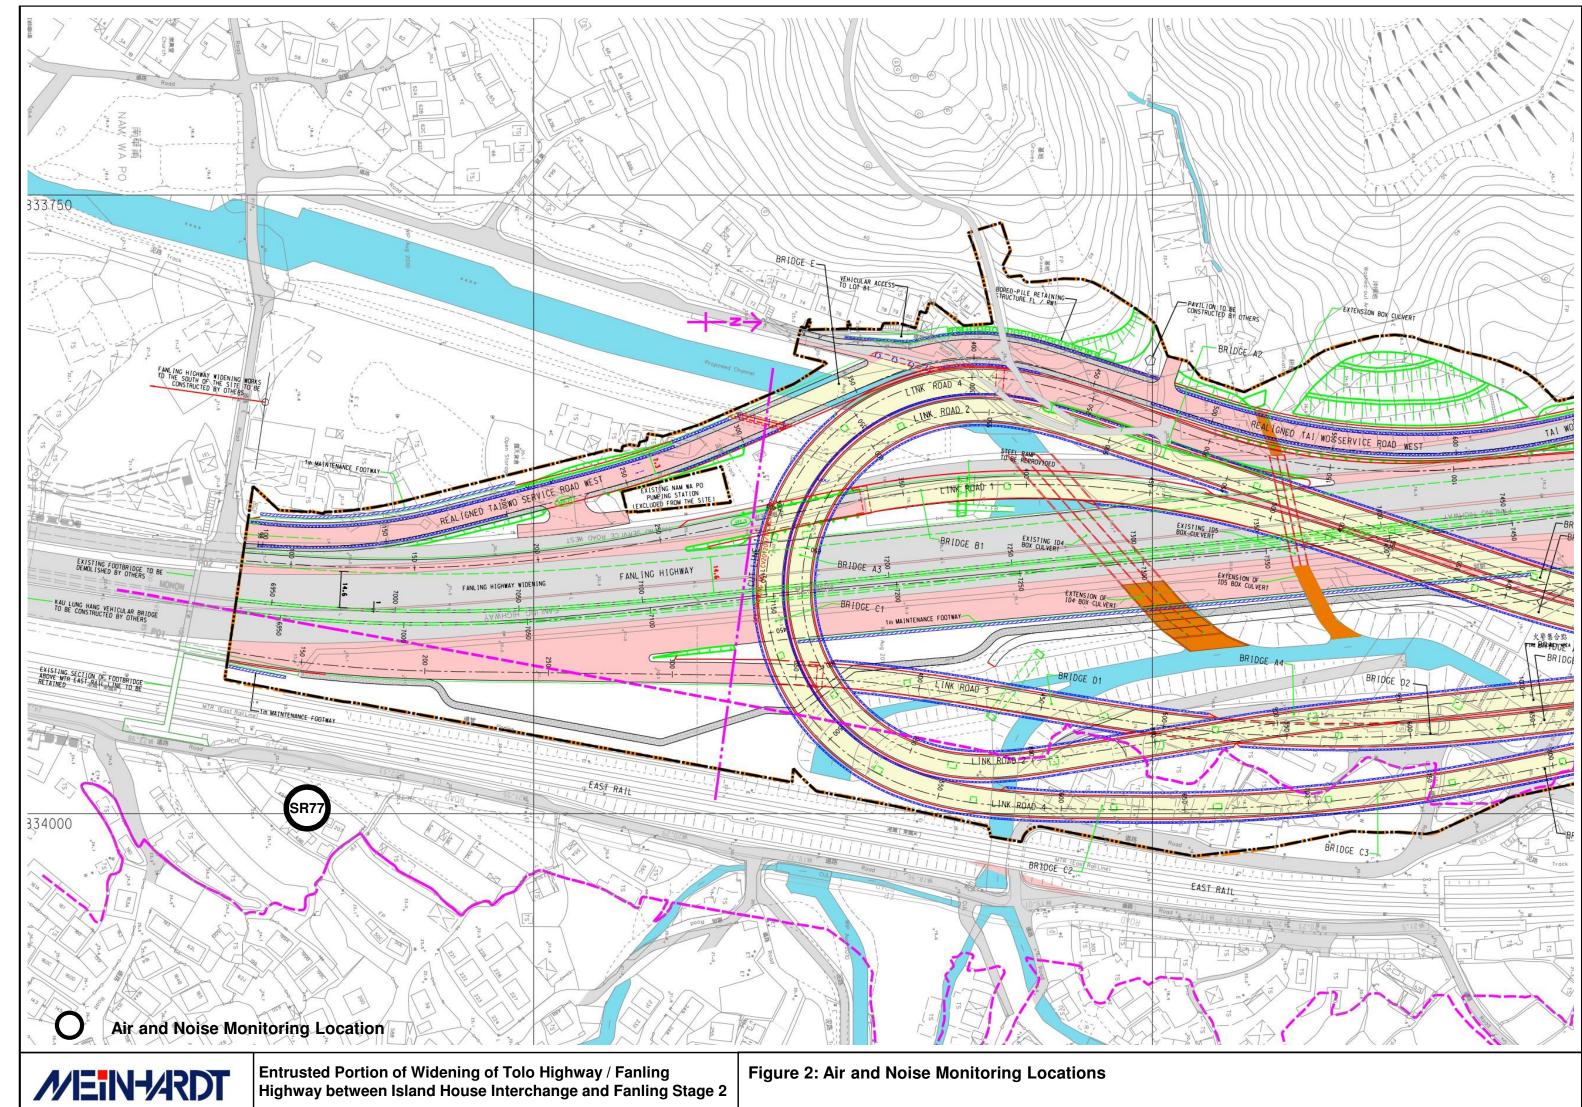



Appendix A Construction Programme

ivity ID	Activity Name	OD	RD	Start	Finish	TF	-		20				
2 Manth Dalling	Programme 2017 02 21 (Peeed on LIMPOS)						b	Mar	Apr	1	Мау	Jun	Jul
-	Programme 2017-03-21 (Based on UMP05)												
Key Dates (Cont KD-1300	KD10: Stage S4 - Completion of road widening of Fanling Highway within SBZ2 and	0	0		20-Mar-17*	-108	2		 KD10: Stage S4 - Completion of road wideni 	ng of Fanling High	way within SBZ2 and al	low access for HY/2012/0	6
12 1000	allow access for HY/2012/06	Ŭ	Ű		20 1101 11		,						
	stones from Other Contracts												
Related to South									ermanent alighment by FHW3 Contractor				
	Shift existing TWSRW NB to per manent alignment by FHW3 Contractor	0	0	20-Feb-17				ang IWSRW NB top	 Shift existing FLHS SB 3 lanes e 	astward by FHW	3 Contractor		
WIS-562110	Shift existing FLHS SB 3 lanes eastward by FHW3 Contractor	0	0	31-Mar-17)						
Major Milestones	s and Events												
MS-1080a	T8a: TTA to shift FLH NB Fast Lane to the Permanent Alignment (4th lane) (South Portion)	1	1	23-Mar-17		C			T8a: TTA to shift FLH NB Fast Lane to th		nment (4th lane) (South	Portion)	
MS-0310	Demolition of the whole Kiu Tau Vehicular Bridge	0	0		31-Mar-17*	0)		 Demolition of the whole Kiu Tau 				
MS-1060a	T6a: TTA to shift FLH SB eastward (shift 2 Lanes) (North Portion)	1	1	04-Apr-17	04-Apr-17	36	5		T6a: TTA to shift FLH SB e				
MS-1070a	T7a: TTA to shift FLHS SB eastward (shift 3 lanes), within SBZ	1	1	23-Apr-17	23-Apr-17	19)		• ⁰ T7a:	TTA to shift FLHS	SB eastward (shift 3 lan	nes), within SBZ	
MS-1080b	T8b: TTA to shift FLH NB Middle Lane to the Permanent Alignment (3rd lane) (South Portion)	1	1	07-May-17	7 07-May-17	1	I			🛿 т8b: т	TA to shift FLH NB Midd	le Lane to the Permanent	Alignment (3rd I
MS-1080c	T8c: TTA to shift FLH NB Slow Lane to the Permanent Alignment (2nd lane) (South Portion)	1	1	10-Jun-17	' 10-Jun-17	1	l					T8c: TTA to shift	FLH NB Slow La
MS-1060b	T6b: TTA to shift FLH SB eastward (shift 3 Lanes) (North Portion)	1	1	01-Jul-17	01-Jul-17	1							T6b: TTA
Major Procurem	-												
Footbridge Steel MM-3020	Fabrication Delivery of Footbridge Steel Truss (incl. KT-P3, P4, KT-RP-1 & 2,	92	0	30-Aug-16	A 10-Mar-17 A			Fa	prication Delivery of Footbridge Steel Truss (inc	I. KT-P3, P4, KT-R	RP-1 & 2, KT-SC-1, KT-A	B1 & AB2), Eastern Side	
Lift for New Kiu	KT-SC-1, KT-AB1 & AB2), Eastern Side												
MM-4000	Procurement, Fabrication and delivery of Lift	120	120	02-Apr-17	30-Jul-17	117	,			: ;			
Design and Subr	missions												
Statutory Approv													
PRE-1280	Consent for pre-drilling and mini-piling works within WSD Tau Pass Restricted Zone -WSD	60	7	03-Oct-16/	A 27-Mar-17	C			Consent for pre-drilling and mini-pilir	ng works within W	SD Tau Pass Restricted	Zone -WSD, Consent for	pre-drilling and
PRE-1410	Approval of Lift for BFA for new Kiu Tau Footbridge - HyD	60	12	27-Jul-16 A	A 01-Apr-17	92			Approval of Lift for BFA for new	w Kiu Tau Footbrid	lge - HyD, Approval of L	ift for BFA for new Kiu Ta	u Footbridge - H
PRE-1060	Submission & approval of CDIA report for temporary works on nullah for construction of new retaining wall 3SW-D/FR32	90	90	02-May-17	* 17-Aug-17	61							
Design Confirma	ation								A Orafferration of Naira Damina 5	-	70)	dii	
	Confirmation of Noise Barrier Footing Design (NB70) and assoicated watermain diversion works	0	0		31-Mar-17*	19			 Confirmation of Noise Barrier F 	ooting Design (NE			
PRE-1600	Confirmation of construction details of FL/C2 to cater for existing wall	0	0		31-May-17*	70)				♦ Cc	onfirmation of construction	details of FL/C2
Method Statemer	nt and Design (Major) Approved by AECOM												
PRE-2030	Submission of E&M design for lighting of Kiu Tau Footbridge	60	14	05-Sep-16	A 05-Apr-17	12	2		Submission of E&M design	for lighting of Kiu	I Tau Footbridge, Submis	ssion of E&M design for liq	hting of Kiu Tau
PRE-2040	Submission of E&M design for lighting inside viaduct structures of Bridge A, B, C & D	60	14	01-Apr-16	A 05-Apr-17	57			Submission of E&M design			idge A, B, C & D, Submis	
Section IA & IB -	Fanling Highway Widening (KD-1 & KD-2)												
	South Portion between CH6935 and CH7470												
	y Zone 1 between CH6935 and CH7130 (within SBZ2)												
At-Grade Road													
FHW-1220a	Noise Barrier NB68 - Footing at central median (Bay 4, 14m)	63	0	11-Nov-16	A 15-Mar-17 A			Noi	se Barrier NB68 - Footing at central median (Ba	ay 4, 14m)			
										0.14	4 D. W. D.		00.04
	Actual	Work				С	EDD Cor	tract No. C	v/2012/09			me updated to 2017	
	Remai	ining W	/ork							Date	Revision	Checked	Approved
		nary Ba			Liantang	/ H	eung Yue	en Wai BCP	- Site Formation &	21-Mar-17	Rev.1	SL	
後和	建筑工程有限公司				9			ure Works,					
	Vo Construction & Engineering Co., Ltd.	l Rema	ining \	Work			าสอเป็นปไ	1 C WOINS,					
CHUN	Milesto						3-Month	Rolling Pro	gramme				
	Projec	t Basel	line Ba	ar		•			granne				
					Programme II	ו אי		ata Data: 20 I	Mar-17)Page 1 of 10				

Activity ID	Activity Name	OD	RD	Start	Finish	TF				20	17		
, surry in		00		Jan	1 111311		b	Mar		Apr	May	Jun	Jul
FHW-1230	Road Formation (Middle Part: FLH NB Fast lanes), except CH.6935 - CH.7035	50	3	17-Jan-17 A	22-Mar-17	C			Road F	ormation (Middle Part: FLH NB Fa	ast lanes), except CH.6935 - CH.703	5, Road Formation (Middle Part: F	LH NB Fast
FHW-1150	Road Formation and Temporary Road Pavement (FLH SB 1 st lane)	48	26	19-Jan-17 A	22-Apr-17	14				Boad	Formation and Temporary Road Pa	vement (FLHSB1stlane) Road F	ormation an
FHW-1220b	Noise Barrier NB68 - Footing at central median (Bay 1 - 3, 63m)	68	42	05-Dec-16 A	13-May-17	2					Noise Barrier NB	68 - Footing at central median (Ba	y 1 - 3, 63m),
FHW-1140a	Watermain diversion for construction of NB70	55	55	01-Apr-17	12-Jun-17	19						Wate rmain div ers	sion for consti
FHW-1310	Remaining Road Drainage, Road Formation & Temporary Road Pavement (FLH NB	35	35	22-Jun-17	02-Aug-17	C				-			
FHW-1160	1st lane) Road Drainage, Road Formation & Pavement (FLH SB 4th lane)	90	90	24-Apr-17	10-Aug-17	15							
11100		30	30	24-Api-17	10-Aug-17	13				<u>د ــــــــــــــــــــــــــــــــــــ</u>			
FHW-1140b	Noise Barrier NB70 - Footing adjacent to SB lane (30m)	70	70	13-Jun-17	02-Sep-17	19							
	ay Zone 2 between CH7130 and CH7290												
At-Grade Roa FHW-2230	ndworks (160m)	50	3	17-Jan-17 A	22 Mar 17	0							
FHVV-2230	Road Pavement (Middle Part: FLH NB 4th lanes)	50	3	T7-Jan-T7 A	22-Mar-17				Road P	avement (Middle Part: FLH NB 4ti	h lanes), Road Pavement (Middle P	art: FLH NB 4th lanes)	
FHW-2360	Temporary Platform for Mini-Pile Installation Works within W SD Restriction Zone	12	12	28-Mar-17	11-Apr-17	C				Temporary Platforr	n for Mini-Pile Installation Works with	nin WSD Restriction Zone	
FHW-2310	Road Pavement (FLH NB 3rd lane) by re-surfacing	32	32	24-Mar-17	06-May-17	C					Road Pavement (FLH NE	3 3rd lane) by re-surfacing	
FHW-2370	Opening on the existing retaining wall for piling works	28	28	12-Apr-17	19-May-17	C					Opening o	n the existing retaining wall for pilin	g works
FHW-2320	Road Pavement (FLH NB 2nd lane) by re-surfacing	28	28	08-May-17	09-Jun-17	1						Road Pavement (FL	H NB 2nd la
FHW-2330A	Noise Barrier NB67 - Pre-drilling and Mini-Piling adjacent to NB lane within WSD	70	70	20-May-17	11-Aug-17	C							
	Restriction Zone (Type ID4-1A: 22 nos)												
FHW-2330B	Noise Barrier NB67 - Pre-drilling and Mini-Piling adjacent to NB lane (Type F5: 36 nos)	82	82	12-Jun-17	15-Sep-17	C							
Fanling Highw	ay Zone 3 between CH7290 and CH7380												
	Extension - ID4												
ID4-3090	Bay 1 - Remaining Base Slab (To be carried out after diversion of DN1400 water mains)	95	0	30-Nov-16 A	14-Mar-17 A						To be carried out after diversion of D		
	ndworks (130m)												
FHW-3210	Noise Barrier NB68A - Pre-drilling and Mini-Piling at central median (CSD: 20 nos)	50	0	21-May-16 A	21-Feb-17 A		Noise	Barrier NB68A - Pre-c	rilling and Mir	Piling at central median (CSD: 20	0 nos)		
FHW-3220A	Noise Barrier NB68A - Footing at central median (Bay 13, 30m)	73	0	11-Oct-16 A	06-Mar-17 A			Noise Barri	r NB68A - F	opting at central median (Bay 13, 3	30m)		
FHW-3230	Road Pavement (Middle Part: FLH NB 4th lanes)	55	3	17-Jan-17 A	22-Mar-17	0			Bood B	avement (Middle Bart: ELLI NB 4t	h lanes), Road Pavement (Middle P		
										avenient (middle Fart, FEITND 40			
FHW-3310	Road Pavement (FLH NB 3rd lane) by re-surfacing	32	32	24-Mar-17	06-May-17	C					Road Pavement (FLH NE	3 ard lane) by re-surfacing	
FHW-3320	Road Pavement (FLH NB 2nd lane) by re-surfacing	28	28	08-May-17	09-Jun-17	1						Road Pavement (FL	H NB 2nd la
FHW-3220C	Noise Barrier NB68A - Footing at central median (Bay 16 - 18, 25m)	45	45	06-May-17	28-Jun-17	0							Noise Barr
													NUISE Bail
FHW-3330	Noise Barrier NB69 - Pre-drilling & Mini-Piling adjacent to NB lane (30nos)	84	84	12-Jun-17	18-Sep-17	C							
Fanling Highwa	ay North Portion between CH7470 and CH7925												
	ray Zone 4 between CH7380 and CH7470												
At-Grade Roa FHW-4240	Demolition of existing central divider	42	42	05-Apr-17	29-May-17	27						Demolition of existing central divid	ter
	-												
FHW-4250	Road Pavement (FLH NB 4th lane) by re-surfacing	27	27	03-Jul-17	02-Aug-17	C							
FHW-4210	Noise Barrier NB68A - Footing at central median (Bay 19 - 20, 54m)	85	85	18-May-17	26-Aug-17	0						1	
	A stur	Work				C		ontract No. C	V/2012	/∩9	3-Month Rolling Pro	gramme updated to 2017-03	3-21
						Ŭ			1,2012	100	Date Revisio		Approved
		ining W			Liantana	/ н/	una Vi	ion Wai BCB	- Sito	Formation &	21-Mar-17 Rev.1	SL	
	い建築工程右限公司	nary Ba	ır		Liantariy								
	□ 建 築 工 程 有 限 公 司 Wo Construction & Engineering Co., Ltd.	l Rema	aining	Work		ini	rastruc	ture Works,	Contra	CT 3			
CHUN	Milesto	one								_			
	Project	t Base	line Ba	ar			-Month	Rolling Pro	gramm	e			
										n			
				P	rogramme ID): 3l	1PR044 (Data Date: 20-	Mar-17)_	Page 2 of 10		•	

/ ID	Activity Name	OD	RD	Start	Finish		b Mar	20 Apr	17 May	Jun	J
FHW-4100A	Noise Barrier NB72 - Footing adjacent to SB lane (78m)	111	111	02-May-17	11-Sep-17	2		, 4 ,			
Fanling Highway	y Zone 5 between CH7470 and CH7600 (Provision of Kiu Tau Footbridge)										
	ridge Reprovision (East)										
FHW-5010A2	KT-AB1 (South Portion) - Pile Cap, Abutment and Bearing Installation	44	0	05-Sep-16 A	20-Feb-17 A		KT-AB1 (South Portion) - Pile Cap, Abuti	nent and Bearing Installation			
FHW-5040a	Steel Truss Installation across Fanling Highway	3	0	20-Feb-17 A	23-Feb-17 A		Steel Truss Installation across Fanling	Highway			
FHW-5040b	On-site Welding and touch up paint for FB-1-1 and FB-1-2 after main truss erection	5	3	24-Feb-17 A	22-Mar-17	0	On-s	te Welding and touch up paint for FB	1	1	ich up pain
FHW-5020	Steel Truss Installation at TWSR East	3	3	28-Mar-17*	30-Mar-17	10		Steel Truss Install	ation at TWSR East		
FHW-5050b	Installation of Bridge Decking and Cladding (Portion: at TWSRE)	5	5	31-Mar-17	06-Apr-17	10		Installat	tion of Bridge Decking and Cladding	(Portion: at TWSRE)	
FHW-5050c	Installation of Bridge Decking and Cladding (Portion: at TWSRW)	18	17	17-Mar-17 A	08-Apr-17	8		Installation of Bridge D	ecking and Cladding (Portion: at TV	/\$RW), Installation of Bridge D	ecking and
FHW-5050a	Installation of Bridge Decking and Cladding (Portion: across FLH)	18	18	28-Mar-17	21-Apr-17	0	l	Installat	tion of Bridge Decking and Cladding	(Portion: across FLH)	
FHW-5060	Opening of new footbridge	1	1	22-Apr-17	22-Apr-17	0		l Openi	ng of new footbridge		
FHW-5090b	Additional BFA Facilities - Sump Pit (covered by VO no. 59)	35	35	31-Mar-17	17-May-17	98				Additional BFA Facilities - Sum	
FHW-5070a	Installation of Lighting Facilities	55	55	24-Apr-17	29-Jun-17	173					Inst
FHW-5070b	Installation of Drainage Pipe	55	55	24-Apr-17	29-Jun-17	173					- Insta
Provision of B	FA Facilities (Lift)										
FHW-L-1000	RC Works for Lift Shaft	38	38	31-Mar-17	20-May-17	98				RC Works for Lift Shaft	
FHW-L-1010	Glazing & Louvre Installation	38	38	22-May-17	06-Jul-17	98					
FHW-L-1020	Metal Roof	20	20	07-Jul-17	29-Jul-17	98					
FHW-L-1050	E&M Works including T&C	60	60	22-May-17	01-Aug-17	146					
Works at existin FHW-5440	ng TWSRE Demolition of existing Kiu Tau Footbridge	17	17	24-Apr-17	15-May-17	0			Demolition of ex	xisting Kiu Tau Footbridge	
	Preparation Works for TTA scheme E3B (Shifting TWSRE East Westward, at the	38	38	16-May-17	29-Jun-17	0					Pre
FHW-5470	area of existing Kiu Tau Footbridge) Implementation of TTA - Scherne E3B (Shifting TWSRE East Westward, at the area	0	0	30-Jun-17		0					🔶 İmş
	of existing Kiu Tau Footbridge) Noise Barrier NB72 & NB73 (Stage 1) - Footing adjacent to SB lane (97m)	125	125	30-Jun-17	27-Nov-17	0					4
At-Grade Road	Works (130m)										
FHW-5230	Demolition of existing central divider	42	42	05-Apr-17	29-May-17	27				Demolition of existing central d	
FHW-5240	Road Pavement (FLH NB 4th lane) by re-surfacing	27	27	03-Jul-17	02-Aug-17	0					
FHW-5210	Road Formation & Pavement, Central Barrier (South Side) (FLH SB 4th lane)	143	143	05-Apr-17	26-Sep-17	26					
	y Zone 6 between CH7600 and CH7660 (Existing Vehicular Bridge)										
At-Grade Road FHW-6110	Road Formation & Pavement (FLH SB 2nd - 3rd lanes)	50	13	17-Jan-17 A	03-Apr-17	0		Road Formation & Pavemer	nt (FLH SB 2nd - 3rd lanes), Road F	ormation & Pavement (FLH SE	3 2nd - 3r
	Implementation of TTA - Scheme 6C-1 (Shifting TWSRE East Westward, at the area near existing J-Bridge)	0	0	18-May-17		28			 Implementat 	ion of TTA - Scheme 6C-1 (Shif	fting TWSF
	Teal existing 3-binuge/								<u>.</u>	<u>;</u>	
	Actual	1 More				C	EDD Contract No. CV/201	2/09	3-Month Rolling Pro	gramme updated to 2017-	-03-21
						Ŭ		2/00	Date Revisio		Appro
		ining V			Liantana	/ ப/	eung Yuen Wai BCP - Site	Earmation 8	21-Mar-17 Rev.1	SL	
💧 俊 和	建筑工程有限公司	nary Ba			Liamany		rastructure Works, Contr			-	
	O CONSTRUCTION & ENGINEERING CO., LTD.		aining	VVORK							
	♦ Milest	one					Manth Dalling Dragram	n o			
	Projec	ct Base	eline Ba	ar I			-Month Rolling Program	lie			

ctivity ID	Activity Name	OD	RD	Start	Finish	TF				201	7			
							b	Mar		Apr		Мау	Jun	Jul
FHW-6230	Demolition of existing central divider	42	42	05-Apr-17	29-May-17	27							Demolition of existing central div	vider
FHW-6120	Road Formation & Pavement (FLH SB 1st lanes)	39	39	16-May-17	30-Jun-17	0								Road Fo
FHW-6240	Road Pavement (FLH NB 4th lane) by re-surfacing	27	27	03-Jul-17	02-Aug-17	0								
FHW-6140	Noise Barrier NB73 - Footing adjacent to SB lane (95m)	108	108	18-May-17	22-Sep-17	28								
FHW-6210	Road Drainage, Road Formation & Pavement and Central Barrier (South Side) (FLH SB 4th lane)	143	143	05-Apr-17	26-Sep-17	26								
	ay Zone 7 between CH7660 and CH7925													
At-Grade Road FHW-7210	Interpretation (Interpretation & Temporary Pavement (FLH SB 4th lane) - Stage (incl. MS12.1 ~ 12.3a)	125	0	08-Sep-16 A	06-Mar-17 A					Road Drainage, Road Forma	ation & Tempo	rary Pavement (FLH S	B 4 th lane) - Stage 1 (incl. MS1	12.1 ~ 12.3a)
	ks for Noise Barrier along widened Fanling Highway													
FHW-NB-210	Noise Barrier Steelworks & Panel for NB68 (14m), Fanling Highway central median at Zones 3	7	3	02-Mar-17 A	22-Mar-17	0			Noise B	arrier Steelworks & Panel for NB68	8 (14m), Fanlir	ng Highway central me	dian at Zones 3, Noise Barrier	Steelworks & I
FHW-NB-230	Noise Barrier Steelworks & Panel for NB68A (225m), Fanling Highway central median at Zones 2 & 3	12	3	02-Mar-17 A	22-Mar-17	0		L	Noise B	arrier Steelworks & Panel for NB68	8A (225m), Fa	nling Highway central i	median at Zones 2 & 3, Noise B	Barrier Steelwo
FHW-NB-140	Noise Barrier Steelworks & Panel for NB71 (254m), adjacent to Fanling Highway SB lanes at Zones 2,3 & 4	40	31	24-Jan-17 A	28-Apr-17	229					Noise Barrier	Steelworks & Panel for	NB71 (254m), adjacent to Far	nling Highway
FHW-NB-220	Noise Barrier Steelworks & Panel for NB68 (63m), Fanling Highway central median at Zones 1	13	13	15-May-17	29-May-17	76							Noise Barrier Steelworks & Par	nel før NB68 (6
Section II - Rem	ainder of the Works (KD-3)												 	
	oad at Fanling Highway Interchange													
· · · ·	ear Abutment AB1)	0	0		06 Mar 47 4			Completion of	Abutment AP					
FHI-LR1-1010	Completion of Abutment AB1	0	0		06-Mar-17 A				, southent Ab					
FHI-LR1-1200	Completion of Segment Erection Works at TWSRW	0	0		25-Apr-17	692				♦ Co	mpletion of Se	gment Erection Works	at TWSRW	
FHI-LR1-1030	Noise Barrier NB66 - Footing adjacent NB lane (50m long, Bay 1 - Bay 4)	90	74	02-Mar-17 A	21-Jun-17	0	1			· 	1		Nois	e Barrier NB6
FHI-LR1-1070	Noise Barrier NB67 - Pre-drilling & Mini-Piling (Cap 10-20 for raking piles, 26no.)	106	82	20-Feb-17 A	30-Jun-17	74				 	<u></u>		L	Noise Ba
FHI-LR1-1040	Noise Barrier NB66 - Footing adjacent NB lane (24m long, Bay 5 - Bay 6)	54	54	22-Jun-17	24-Aug-17	48								
FHI-LR1-1320	Construction of Footing of sign gantry DS1	56	56	03-Jul-17	05-Sep-17	115								
FHI-LR1-1080	Noise Barrier NB67 - Footing (96m) (Bay 4 - Bay 11)	95	95	20-May-17	09-Sep-17	74								
FHI-LR1-1020	Construction of Retaining Wall beside Abutment AB1 and filling work	156	156	26-Apr-17	01-Nov-17	2							1	
	ear Abutment AA1)					í.								
FHI-LR2-2010	Completion of Abutment AA1	0	0		20-Feb-17 A		 Complet 	ion of Abutment AA1						
FHI-LR2-2000	Completion of Demolition of Existing Vehicular Bridge	0	0		22-Mar-17	133			Comple	ton of Demolition of Existing Vehice	dar Bridge			
FHI-LR2-2040c	Footing of Sign Gantry DS11 and FADS11	30	30	05-Apr-17	15-May-17	0				L		Footing of Sign (Santry DS11 and FADS11	
FHI-LR2-2040b	Road Formation, Road Drainage, Kerb (SMH1302 - 1303 & MY2.4 - 2.5)	45	45	05-Apr-17	02-Jun-17	24	1				- -		Road Formation, Road Dra	ainage, Kerb (
FHI-LR2-2020	Construction of Retaining Wall beside Abutment AA1	120	120	04-May-17	22-Sep-17	28							L	
Link Road 3 (ne	ear Abutment AD1)													
	Construction of Retaining Wall beside Abutment AD1	120	120	19-Jun-17*	09-Nov-17	0	1							
Link Dood (/r	ear Abutment AC1)													
											1		1	I
	Ι													
	Actua	al Work				С	EDD Cor	tract No. C	V/2012	/09			gramme updated to 2017-0	
	Rema	aining V	Nork								Date	Revisior		Approved
	Sum	mary Ba			Liantang	/He	eung Yue	en Wai BCP	- Site F	Formation &	21-Mar-17	Rev.1	SL	
((後 和	建筑工程有限公司	al Rema		Work	_	Inf	rastructu	ure Works,	Contra	ct 3				
CHUN V	Vo Construction & Engineering Co., Ltd.		aming	VVOIK				- - , -						
	♦ Milest					-	-Month I	Rolling Pro	aramm	٩				
	Proie	ct Base	eline Ba	ar I				volining i ro	gramm	0				
	Proje	ct Base	eline Ba					ata Date: 20-I	-	Page 4 of 10				

ity ID	Activity Name	OD	RD	Start	Finish	" .				2017		,	
	Operative of Database Wall basids Abstract AO4	400	400	00 Max 47t	45 Aug 47	b	Ma	r .	Apr		May	Jun	J
FHI-LR4-4020	Construction of Retaining Wall beside Abutment AC1	120	120	20-Mar-17*	15-Aug-17	36	_						
WSD Works													
DN450 Fire Main													
WA-3030	Pipe Laying - CHA 765 - 800 (DN 450) along Ext. TWSR West SB, 35m	32	0	07-Feb-17 A	15-Mar-17 A	-	,	Pipe Laying - C	HA 765 - 800 (DN 450) along Ex	. TWSR West S	B, 35m		
WA-2010	Pipe Laying - CHA 460 - 508 (DN 450) along Ext. TWSR West NB, 48m	188	58	01-Sep-16 A	02-Jun-17	89						Pipe Laying - CHA 460 -	508 (DN 45
WA-3010b	Pipe Laying - CHA705 - 720 (DN450) (saw-cut) along Ext. TWSR West SB, 15m (Disrupted by Ching Ming Festival)	37	37	18-Apr-17*	02-Jun-17	-23						Pipe Laying - CHA 705 -	720 (DN 45
WA-1010	Pipe Laying - CHA 0 - 55 (DN450) near Ext. TWSR West, 55m	48	48	08-May-17	04-Jul-17	22		-					-
WA-1130	Pipe Laying - CHA 315 - 385 (DN450) near Ext. TWSR West, 70m	47	47	15-May-17*	10-Jul-17	18							
WA-2080	Pipe Laying - CHA 625 - 675 (DN 450) along Ext. TWSR West SB, 50m	40	40	03-Jun-17	20-Jul-17	-23							
DN600 Water Ma	lains (CHB)					J							
WB-1030C	Pipe Laying - CHB 410 - 430 (DN600), 20m, from IT inspection tee chamber to Pier AB7	24	24	21-Apr-17	20-May-17	4					Pipe Laying - C	HB 410 - 430 (DN600),	20m, from
WB-1050	Pipe Laying - CHB 455 - 510 (DN600), 55m, from combined valve chamber to Realigned TWSR East	28	28	13-May-17	15-Jun-17	145				-		Pipe Layir	ng - CHB 4
WB-1040	Pipe Laying - CHB 430 - 455 (DN600), 25m, from Pier AB7 to combined valve chamber	28	28	16-Jun-17	19-Jul-17	145							
DN1200 Water I	Mains (CHC)												
WC-1090D	Pipe Laying - CHC 770 - 810 (DN1200) from combined chamber to Realigned TWSR East	14	0	13-Feb-17 A	28-Feb-17 A	-	Pipe Laying - CH0	: 770 - 810 (DN	1200) from combined chamber	to Realigned TW	/SR East		
WC-1090C	Pipe Laying - CHC 660 - 705 (DN1200), 45m, from IT inspection tee chamber to combined valve chamber	24	24	21-Apr-17	20-May-17	4					Pipe Laying - C	HC 660 - 705 (DN1200)	, 45m, fro
WC-1000B	Pipe Laying - CHC 0 - 70 (DN1200) near Realigned TWSR West (TW SRW: CH100-155), 70m long & 3m depth	45	45	10-May-17	03-Jul-17	5				Ē			
WC-1090B	Pipe Laying - CHC 610 - 660 (DN1200), 50m, from TWSRE to IT inspection tee chamber	50	50	16-Jun-17	14-Aug-17	73							_
Twin DN1400 V	ater Mains (CHE & CHG)												
WE-1060a	Pipe Laying - CHG 280 - 325 (Twin DN1400) from Portal AB7/AD9/AC12 to combined valve chamber	33	24	09-Mar-17 A	20-Apr-17	0			Pipe L	aying - CHG 28	0 - 325 (Twin DN1400) from	n Portal AB7/AD9/AC12 t	o combine
WE-1040	Pipe Laying - CHE & CHG 220 - 260 (Twin DN1400) near Pier AA4	43	43	25-Mar-17	20-May-17	0					Pipe Laying - C	:HE & CHG 220 - 260 (Ti	win DN140
WE-1050	Pipe Laying - CHE & CHG 260 - 280 (Twin DN1400) near Pier AD8	28	28	12-May-17	14-Jun-17	0						Pipe Laying	g - CHE &
WE-1080	Construction of combined valve chamber with MBV installation	109	82	25-Jan-17 A	30-Jun-17	3							Co
WE-3010B	Pipe Cleaning for CHG (Stage 2 Diversion)	17	17	15-Jun-17	05-Jul-17	0							
WE-3020B	Pressure Test for CHG (Stage 2 Diversion)	7	7	06-Jul-17	13-Jul-17	0							
WE-3040B	CCTV Inspection and Sterilization for CHG (Stage 2 Diversion)	11	11	14-Jul-17	26-Jul-17	0							
WE-1060b	Pipe Laying - CHE 280 - 325 (Twin DN1400) from Portal AB7/AD9/AC12 to combined valve chamber	38	38	15-Jun-17	29-Jul-17	0							
DN2200 Water I													
WF-1000B	Construction of Launching Pit (Pit 2) for DN2200 (CHF), Section 1 (near Pier AB3)	33	21	17-Mar-17 A	13-Apr-17	-20		-	Construction of	f Launching Pit	(Pit 2) for DN2200 (CHF), \$	Section 1 (near Pier AB3)	, Construc
WF-1000A	Construction of Receiving Pit (Pit 1) for DN2200 (CHF), Section 1 (near Pier AA8)	21	21	03-Apr-17*	02-May-17	-18				Constru	ction of Receiving Pit (Pit 1)	for DN2200 (CHF), Sec	tion 1 (nea
WF-1050 A	Construction of Launching Pit (Pit 3) for DN2200 (CHF), Section 3 (near Pier AA7)	33	33	05-Apr-17*	18-May-17	-20					Construction of L	aunching Pit (Pit 3) for D	N2200 (CI
WF-1050 B	Construction of Receiving Pit (Pit 4) for DN2200 (CHF), Section 3 (near FLH NB)	30	30	19-May-17*	23-Jun-17	-20							Constructi
				1			1						
	Actual	l Work				CE	O Contract No.	CV/2012	2/09		Month Rolling Program		1
	Pama	inina V	Vork							Date	Revision	Checked	Appro
			ar		Liantana	/ 🏎	g Yuen Wai BC	D _ Sito	Formation &	21-Mar-1	7 Rev.1	SL	
	Rema	ining V			Liantana	/ 🏎	a Vuon Wai BC	D - Sito	Formation &				

CHUN WO CONSTRUCTION & ENGINEERING CO., LTD.

Milestone
 Project Baseline Bar

3-Month Rolling Programme

Programme ID: 3MPR044 (Data Date: 20-Mar-17)_____Page 5 of 10

KHW Zkow between CH378 and CH320 Construction of Retaining Structures Construction of Retaining Structures Construction of Retaining Structures Construction of Retaining Structures Constructures Cons	Window Percentage (Party) Second of (P		Activity Name	OD	RD	Start	Finish	T	-			201	7					
with the set and yound back back with the set of the set	Window Service (MP 1960) Service (MP 1								b	Mar		Apr		Мау	Jun		Jul	
Windle Control (Control (Cont	W1-00 Overland (Ph 1) Overland (Ph 2) Overland (WF-1080	Trench Excavation from Pit 4 to Connection Point near FLH NB, Section 4	36	36	12-Jun-17	24-Jul-17		1									
Medac, the log Medac,	Method, the kroe Method, the	WF-1100	Expose existing DN2200 bend block	18	18	08-Jul-17	28-Jul-17		1									
With the with the descent of 14 (b) (2003) across (b) (V) (V) (V) (b) (b) (b) (b) (b) (b) (b) (b) (b) (b	Wi-110 Example To - 0.4 (D/2200) arrows of M/3000 y Interferes Minols 440 10 10 10.4 (a) 0.4 (a) <td< td=""><td>WF-1060</td><td></td><td>60</td><td>60</td><td>24-Jun-17</td><td>02-Sep-17</td><td>-2</td><td>D</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></td<>	WF-1060		60	60	24-Jun-17	02-Sep-17	-2	D									
Control Note No. To Note Science Name of Science Name o	Charmene Name Pare Research Law Research Carlow Scatter (Research Carlow	WF-1010	Excavation - CHF 9 - 54 (DN2200) across ext. TWSRW by Trenchless Method, 45m	115	115	18-Apr-17	02-Sep-17	-2	D									
Photon Contraction All Mos Sources Work Road Mar (No.7) No. 1 Set Mar All Mos Sources Road Mar (No.7) Stage AL ALL Contraction All Mos Sources Road Mar (No.7) Set Mar All Mos Sources Road Mar (No.7) Set Mar All Mos Sources Road Mar (No.7) Stage AL ALL Contraction All Mos Sources Road Mar (No.7) Set Mar Mar (No.7) S	Photom Contraction Non-Backards, Will in Plance, Statuth (PGT) Contraction	Existing Nam W	5										+				••••	
UPDRM 2002 UPDRM 2002 <th colsp<="" td=""><td>United State /td><td></td><td></td><td>80</td><td>176</td><td>25-Nov-16 A</td><td>21-Oct-17</td><td>8</td><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></th>	<td>United State /td> <td></td> <td></td> <td>80</td> <td>176</td> <td>25-Nov-16 A</td> <td>21-Oct-17</td> <td>8</td> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>	United State			80	176	25-Nov-16 A	21-Oct-17	8	5								
At-Gase Jose Jose Contraction of Advances (Lobus Southern Turk Southe	AK-Gade Journet AK-Gade Journet Solube 140 Sol	Stage 1A - Real	lignment of Tai Wo Service Road West (KD-7)															
TVSRW-10 Remaining Road Formation & Pavement (Lidove Southem Tunk Sover) 20 0	TV38W-110 Revaring Reading Permiter Reference (Hists and Decision and Permenent (doore Southern Tunk Severe) Sol a 1-bee 1A Sol a 1-bee 1A </td <td>TWSRW Zone 1</td> <td>betweeen CH100 and CH155</td> <td></td>	TWSRW Zone 1	betweeen CH100 and CH155															
NEW 2000 Central Control Contende Control Control Contende Control Contr	Network Network <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>, , , ,</td><td></td><td></td></t<>														, , , ,			
Ar-Grade Notational Relative Relati	At-Grade motive contraining and at Parameter (Address Southern Turk Server) 0 </td <td>TWSRW-1170</td> <td>Remaining Road Formation & Pavement (above Southern Trunk Sewer)</td> <td>30</td> <td>0</td> <td>31-Dec-16 A</td> <td>20-Feb-17 A</td> <td></td> <td>Remair</td> <td>ning Road Formation &</td> <td>Pavement (a</td> <td>bove Southern Trunk Sewer)</td> <td></td> <td></td> <td></td> <td></td> <td></td>	TWSRW-1170	Remaining Road Formation & Pavement (above Southern Trunk Sewer)	30	0	31-Dec-16 A	20-Feb-17 A		Remair	ning Road Formation &	Pavement (a	bove Southern Trunk Sewer)						
TWSRW 2000 Remaining Road Formation & Pavement (above Southern Turk Sower) 30 0 31-De: 164 20-Feb: 17A 2 WSRW 2000 Contracted of Befe Contracted of Affe E WSRW 2000 Contracted of Affe E Contracted of Affe E Contracted of Affe E Contracted of Affe E Contracted of Affe E Contracted of Affe E Contracted of Affe E Contracted of Affe E Contracted of Affe E Contracted of Affe E Contracted of Affe E Contracted of Affe E Contracted of Affe E Contracted of Affe E Contracted of Affe E Contracted of Affe E Contracted of Affe E Contracted of Affe E Contracted of Affe E Contracted of Affee E Contracted Affee E Contracted Affee E Contracted D Con	TWSRW 2000 Remaining Road Formation & Reveneent (above Southem Tunk Severe) 30 0 0 0.5 Peer 140 SP Feed 70 Per Remaining Road Formation & Reveneent (above Southem Tunk Severe) 9 9 0.5 Peer 140 24 Peer 140 24																	
KWS 200 Construction of Bridge E Construction of Bridge E Construction of Bridge E Construction of Bridge E Construction of Bridge E Filling Works between Retaining Wal RW7 and RWa Filling Works between Retaining	WSW 2006 0F Letteree CH176 Construction of Shridge E Filling Works behaves netwing Walt RW7 and RW8 Filling Works Walt Walt RW7 and RW8 Filling Works Walt Walt RW7 and RW8 </td <td></td> <td></td> <td>30</td> <td>0</td> <td>31-Dec-16 A</td> <td>20-Feb-17 A</td> <td></td> <td>Remair</td> <td>ning Road Formation &</td> <td>Pavement (a</td> <td>above Southern Trunk Sewer)</td> <td></td> <td></td> <td></td> <td></td> <td></td>			30	0	31-Dec-16 A	20-Feb-17 A		Remair	ning Road Formation &	Pavement (a	above Southern Trunk Sewer)						
Construction of Ending E U 0 Jam 17A 24 April 7 24 <td< td=""><td>Construction of Biology E U Quarter A Quarter A</td><td>TWODW Zone 4</td><td>Laturean CH245 and CH276</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>,</td><td></td><td></td><td></td><td></td><td></td></td<>	Construction of Biology E U Quarter A	TWODW Zone 4	Laturean CH245 and CH276									,						
TWSRW 4100 Conduction of Gabion Walland Remaining Stope Reinstatement Works, Or 68 27 0.3-Jan 17A 24-Apr 17 24 Conduction of Gabion Walland Remaining Stope Reinstatement Works, Or TWSRW 4100 Construction of Gabion Walland Remaining Stope Reinstatement Works, Or File Construction of Gabion Walland Remaining Stope Reinstatement Works, Or TWSRW 4100 Stope Works for FL-C2 near Retaining Wall FWR4 60 60 60 0 0.4-Jan 17 10-Aug 17 70 TWSRW 4100 Stope Works for FL-C2 near Retaining Wall FW7 - Bay 7001 (6.7m) (covered by VO.No.100) 30 0 0 0.4-Jan 16.Aug 17 12 14 13-May 17 17 TWSRW 4100 Construction of Agebon Malland Remaining Wall FW7 - Bay 7001 (6.7m) (covered by VO.No.100) 30 0 0 13-May 17 22 14 14 14 14 14 14 14 14-May 17 1	TWSRW 4100 Conduction of Gabion Wall and Remaining Stope Reinstatement Works, Christ 24 24 Conduction of Gabion Wall and Remaining Stope Reinstatement Works, Christ TWSRW 4100 Sope Works for FL-C2 near Retaining Wall FURW4 60 0											-					•••	
Construction Construction <td>OPENATION STRUCTURE UNSRW-500 Induction of PLC 2 near Retaining Wal FLRW Induction of PLC 2 near Retaining Wal FLR W2 near Retaining Wal FLR W2 near Retaining Wal FLR W2 near Retaining wal RW7 and RW8 Induction of PLC 2 near Retaining Wal FLR W2 near Retaining Wal F</td> <td></td> <td></td> <td>68</td> <td>27</td> <td>03-Jan-17 A</td> <td>24-Apr-17</td> <td>23</td> <td>4</td> <td></td> <td></td> <td>Con</td> <td>struction of Ga</td> <td>bion Walland Remain</td> <td>ing Slope Reinstateme</td> <td>t Works,</td> <td>Constru</td>	OPENATION STRUCTURE UNSRW-500 Induction of PLC 2 near Retaining Wal FLRW Induction of PLC 2 near Retaining Wal FLR W2 near Retaining Wal FLR W2 near Retaining Wal FLR W2 near Retaining wal RW7 and RW8 Induction of PLC 2 near Retaining Wal FLR W2 near Retaining Wal F			68	27	03-Jan-17 A	24-Apr-17	23	4			Con	struction of Ga	bion Walland Remain	ing Slope Reinstateme	t Works,	Constru	
Construction Construction <td>OPENATION STRUCTURE UNSRW-500 Induction of PLC 2 near Retaining Wal FLRW Induction of PLC 2 near Retaining Wal FLR W2 near Retaining Wal FLR W2 near Retaining Wal FLR W2 near Retaining wal RW7 and RW8 Induction of PLC 2 near Retaining Wal FLR W2 near Retaining Wal F</td> <td>TWSRW Zone 5</td> <td>betweeen CH376 and CH520</td> <td></td>	OPENATION STRUCTURE UNSRW-500 Induction of PLC 2 near Retaining Wal FLRW Induction of PLC 2 near Retaining Wal FLR W2 near Retaining Wal FLR W2 near Retaining Wal FLR W2 near Retaining wal RW7 and RW8 Induction of PLC 2 near Retaining Wal FLR W2 near Retaining Wal F	TWSRW Zone 5	betweeen CH376 and CH520															
AcCase Rescale Accase	Ar-Grade Acode Arrow Base Arr																	
TWSRW-5100C Remaining Retaining Walf RW7 - Bay 7001 (6.7m) (covered by VO No.100) 30 30 18-Nov-16A 22-Feb-17A Image: Remaining Retaining Walf RW7 - Bay 7001 (6.7m) (covered by VO No.100) TWSRW-5120A Filing Works between Retaining Wall RW7 and RW8 192 42 07-Jun-16A 13-May-17 27 7 Filing Works between Retaining Wall RW7 and RW8 remaining Retaining Wall RW7 and RW8	WSRW-5100 Remaining Retaining Wall RW7 - Bay 7001 (6.7m) (covered by VO No.100) 30 30 0 18-Nov-16A 22-Feb-17A 0 Remaining Retaining Wall RW7 - Bay 7001 (6.7m) (covered by VO No.100) TWSRW-5120 Filing Works between Retaining Wall RW7 and RW8 192 42 07-Jun-16A 13-May-17 7 TWSRW-5120 Permanent Vehicular Access to Lot 81 (nd. filing works behind retaining wall RW7 and RW8 56 56 15-May-17 22-Jul-17 7 7 TWSRW-5120 Construction of Extended Podulum near RW7 ind. filing works & dope protection 65 20 27-Oct-16A 30-Nor-17 52 TWSRW-5120 Construction of Extended Podulum near RW7 ind. filing works & dope protection 65 20 27-Oct-16A 30-Nor-17 52 TWSRW-5120 Construction of Extended Podulum near RW7 ind. filing works & dope protection 65 20 27-Oct-16A 30-Nor-17 52 TWSRW-5120 Construction of Extended Podulum near RW7 ind. filing works & dope protection 65 20 20-Feb-17A 20-Feb-17A 20-Feb-17A 56 TWSRW-500 Visite State Visite State Visite State Visite State Visite State Visite State Visit	TW SRW-5150	Slope Works for FL-C2 near Retaining Wall FL/RW4	60	60	01-Jun-17	10-Aug-17	7	D								-	
WSRW-5120A Filling Works between Retaining Wall RW7 and RW8 192 42 07-Jun-16A 13-May-17 7 TWSRW-5120A Permanent Vehicular Access to Lot 81 (ind. filling works behind retaining wall RW7) 58 15-May-17 22-Jul-17 7 TWSRW-5120A Permanent Vehicular Access to Lot 81 (ind. filling works behind retaining wall RW7) 58 15-May-17 22-Jul-17 7 TWSRW-5120A Construction of Extended Polium near RW7 ind. filling works & slope protection (covered by VO No. 100) 58 20 27-Oct-16A 30-Nov-17 52 TWSRW-5020 Construction of Extended Polium near RW7 ind. filling works & slope protection (covered by VO No. 100) 58 70 27-Oct-16A 30-Nov-17 52 TWSRW-5020 Steel Truss Installation at TWSR West 4 0 16-Feb-17A 20-Feb-17A 2 TWSRW-5020 Steel Truss Installation at TWSR West 58 16-Sep-16A 20-Mar-17 56 UU-1030A UBlites Duct Laying in Area 3, Phase 2, CLP- 132kV (150mVA), approx. 50m 21 33 04-Jul-17 567 Switch-Over CF Steel Truss Installation at TWSR West 568 569	WSRW-5120A Filing Works between Retaining Wall RW7 and RW8 192 42 07-Jun-16A 13-May-17 7 TWSRW-5120A Permanent Vehicular Access to Lot 81 (nd. filing works behind retaining wall RW8) 58 58 15-May-17 22-Jul-17 7 TWSRW-5120A Permanent Vehicular Access to Lot 81 (nd. filing works & slope protection (covered by VO No.100) 58 59 27-Oct-16A 30-Nov-17 52 TWSRW-5120A Construction of Extended Podum near RW7 ind. filing works & slope protection (covered by VO No.100) 58 20 27-Oct-16A 30-Nov-17 52 TWSRW-500A Construction of Extended Podum near RW7 ind. filing works & slope protection (covered by VO No.100) 58 20 27-Oct-16A 30-Nov-17 52 TWSRW-500A Steel Truss Installation at TWSR West 4 0 16-Feb-17A 20-Feb-17A 56 UU-1030A Utilities Louing in Area3, Phase 2, CLP- 132kV(150mVA), approx. 30m 27 27 26-Apr-17 29-May-17 56 UU-1040A Utilities Louing in Area3, Phase 2, CLP- 132kV(150mVA), approx. 50m 12 33 15-Sep-16A 03-Jul-17 507	At-Grade Road	lworks														•••••••••	
TWSRW-5108 Permanent Vehicular Access to Lot 81 (ind, filing works behind retaining wall RVW 8) 58 58 15-May 17 22-Jul-17 7 TWSRW-5108 Construction of Extended Podium near RW7 ind. filing works & slope protection as long of y VO No.100) 58 20 27-Oct-16A 30-Nov-17 52 TWSRW-5080 Construction of Extended Podium near RW7 ind. filing works & slope protection as long of y VO No.100) 58 20 27-Oct-16A 30-Nov-17 52 TWSRW-5080 Steel Truss Installation at TWSR West	WSRW-51005 Permanent Vehicular Access to Lot 81 (ind, filling works behind retaining wall RWB) 58 58 58 15-May-17 22-Jul-17 7 TWSRW-51005 Construction of Extended Podium near RW7 ind, filling works & slope protection (covered by VO No.100) 58 209 27-Oct-16 A 30-Nov-17 52 TWSRW-5006 Detrovement CH605 TWSRW-5006	TWSRW-51000	C Remaining Retaining Wall RW7 - Bay 7001 (6.7m) (covered by VO No.100)	30	0	18-Nov-16 A	22-Feb-17 A		Rem	aining Retaining Wall F	W7 - Bay 700	01 (6.7m) (covered by VO No.100)						
NVSRW-5160 Construction of Extended Podium near RW7 ind, filling works & slope protection (covered by VO No.100) Sol 209 27-Oct.16 30-Nov.17 52 VVSRW-5160 Covered by VO No.100) Covered by VO No.100) Sol <	TWSRW-1600 Construction of Extended Podium near RW7 ind, filling works & slope protection 85 209 27-Oct-16A 30-Nov-17 52 TWSRW-20ne B between CH640 and CH605 Kur Law Footback Representation of West State Transition of Transition of West UU-10400 Utilities Lawing Works Utilities Duct Lawing in Area 4, Phase 2, Towngas - DN600 & DN400, approx. 50m 27 27 26-Apr-17 29-May-17 568 UU-10400 Utilities Duct Lawing in Area 4, Phase 2, Towngas - DN600 & DN400, approx. 50m 21 83 15-Sep-16A 03-Jul-17 507 Switch-Over of Existing Utilities UU-1040A Utilities Duct Lawing in Area 4, Phase 2, Towngas - DN600 & DN400, approx. 50m 21 83 15-Sep-16A 03-Jul-17 507 Switch-Over of Existing Utilities UU-1040A Utilities Duct Lawing in Area 4, Phase 2, Towngas - DN600 & DN400, approx. 50m 23 33 34 04-Jul-17 10-Aug-17 507 Switch-Over of Existing Utilities UU-1040A Utilities Duct Lawing in Area 4,	TWSRW-5120	A Filling Works between Retaining Wall RW7 and RW8	192	42	07-Jun-16 A	13-May-17	-	7					Filling Works betw	een Retaining Wall RW	and RW	8 Filling	
Image: concerned by VO No.100) Image:	(covered by VO No.100) (c) (TWSRW-5120E	B Permanent Vehicular Access to Lot 81 (incl. filling works behind retaining wall RW8)	58	58	15-May-17	22-Jul-17	-	7						1		<u> </u>	
TWSRW Zone 8 between CH640 and CH695 Ku Tau Postbridge Reprovision (West) TWSRW-8040 Steel Truss Installation at TWSR West Steel Truss Installation at TWSR West 4 0 16-Feb-17A 20-Feb-17A Remainder of the Works Utilities Luxing in Area 3, Phase 2, CLP- 132kV(150mVA), approx. 30m 27 27 26-Apr-17 29-May.17 568 UU-1030A Utilities Duct Laying in Area 4, Phase 2, Towngas - DN600 & DN400, approx. 50m 121 83 15-Sep-16A 03-Jul-17 507 UU-1040A Utilities Duct Laying in Area 4, Phase 2, CLP- 132kV(150mVA), approx. 50m (by ther own TTA) 10-Aug-17 507 Switch-Over of Existing Utilitiess UU-SO-2000 Cabling Works for CLP 132kV (300mVA), Cabling Works for CLP 132kV (300mVA), Cabling Works for CLP 132kV (300mVA), Cabling Works for CLP 11kV 20-Mar-17 111 UU-SO-2020 Cabling Works for CLP 11kV 21 1 17-Dec-16A 20-Mar-17 111	TWSRW Zone 8 between CH640 and CH695 Ku Tau Footbridge Reprovision (West) TWSRW-8040 Steel Truss Installation at TWSR West Wisself Truss Installation at TWSR West 4 0 16-Feb-17A 20-Feb-17A Remainder of the Works Utilities Loughing Works 58 58 UU-1030A Utilities Duct Laying in Area 3, Phase 2, CLP- 132kV(150mVA), approx. 30m 27 27 26-Apr-17 29-May-17 568 UU-1040A Utilities Duct Laying in Area 4, Phase 2, Towngas - DN600 & DN400, approx. 50m 121 83 15-Sep-16A 03-Jul-17 507 Wuth-1040A Utilities Duct Laying in Area 4, Phase 2, CLP- 132kV(150mVA), approx. 50m (by their own TTA) 33 33 04-Jul-17 10-Aug-17 507 Switch-Over of Existing Utilities UU-SO-2000 Cabling Works for CLP 132kV (300mVA), Cabling Works for CLP 132kV (300mVA), Cabling Works for CLP 132kV (300mVA) 21 1 05-Dec-16A 20-Mar-17 10 UU-SO-2020 Cabling Works for CLP 11kV 21 1 17-Dec-16A 20-Mar-17 11 Cabling Works for CLP 11kV, Cabling Works for CLP 11kV 21 1 17-Dec-16A 20-Mar-17 11 UU-SO-2020 Cabling Works for CLP 11kV	TWSRW-5160		85	209	27-Oct-16 A	30-Nov-17	5	2	1 1 1 1					1 1 1 1			
Kiu Tau Footbridge Reprovision (West) Vest Stell Truss Installation at TWSR West 4 0 16-Feb-17A 20-Feb-17A 20-Feb-17	Kiu Tau Footbridge Reprovision (West) V	TWSRW Zone 8																
Remainder of Works Works Watches Watch	Remainder of the Works Work Image: Constraint of the Works Image: Constraint of the	Kiu Tau Footbi	ridge Reprovision (West)															
Utilities Laying Works UU-1030A Utilities Duct Laying in Area 3, Phase 2, CLP - 132kV(150mVA), approx. 30m 27 27 26-Apr-17 29-May-17 568 Image: Colspan="6">Colspan="6">Utilities Duct Laying in Area 4, Phase 2, Towngas - DN600 & DN400, approx. 50m 121 83 15-Sep-16A 03-Jul-17 507 UU-1040B Utilities Duct Laying in Area 4, Phase 2, CLP - 132kV(150mVA), approx. 50m (by their own TTA) 10-Aug-17 507 Image: Colspan="6">Colspan="6">Colspan="6">Utilities Duct Laying in Area 4, Phase 2, CLP - 132kV(150mVA), approx. 50m (by their own TTA) 33 33 04-Jul-17 10-Aug-17 507 Image: Colspan="6">Colspan="6">Colspan="6">Colspan="6">Colspan="6">Colspan="6">Colspan="6">Colspan="6">Colspan="6">Colspan="6">Colspan="6">Colspan="6">Colspan="6">Colspan="6">Colspan="6">Colspan="6">Colspan="6"Colspan="6">Colspan="6"Colspa	Utilities Laying Works Utilities Duct Laying in Area 3, Phase 2, CLP-132kV (150mVA), approx. 30m 27 27 26-Apr-17 29-May-17 568 UU-1040A Utilities Duct Laying in Area 4, Phase 2, Towngas - DN600 & DN400, approx. 50m 121 83 15-Sep-16A 03-Jul-17 507 UU-1040B Utilities Duct Laying in Area 4, Phase 2, CLP-132kV (150mVA), approx. 50m (by approx. 50m (b) approx. 50	TW SRW-8040	Steel Truss Installation at TWSR West	4	0	16-Feb-17 A	20-Feb-17 A		Steel T	uss Installation at TWS	R West							
UU-1030A Utilities Duct Laying in Area 3, Phase 2, CLP- 132kV(150mVA), approx. 30m 27 27 26-Apr-17 29-May-17 568 Image: Constraint of the constrai	UU-1030A Utilities Duct Laying in Area 3, Phase 2, CLP- 132kV (150mVA), approx. 30m 27 27 26-Apr-17 29-May-17 568 UU-1040A Utilities Duct Laying in Area 4, Phase 2, Towngas - DN600 & DN400, approx. 50m 121 83 15-Sep-16 A 03-Jul-17 507 UU-1040B Utilities Duct Laying in Area 4, Phase 2, CLP- 132kV (150mVA), approx. 50m (by their own TTA) 33 33 04-Jul-17 10-Aug-17 507 Switch-Over of Existing Utilities UU-1040K 21 1 05-Dec-16 A 20-Mar-17 107 UU-SO-2020 Cabling Works for CLP 132kV (300mVA) 21 1 17-Dec-16 A 20-Mar-17 111 Cabling Works for CLP 11kV, Cabling Works for CLP 11kV																	
UU-1040A Utilities Duct Laying in Area 4, Phase 2, Towngas - DN600 & DN400, approx. 50m 121 83 15-Sep-16A 03-Jul-17 507 UU-1040B Utilities Duct Laying in Area 4, Phase 2, CLP - 132kV(150mVA), approx. 50m (by 33 33 04-Jul-17 10-Aug-17 507 Switch-Over of Existing Utilitiess Uu-SO-2000 Cabling Works for CLP 132kV (300mVA) 21 1 05-Dec-16A 20-Mar-17 107 UU-SO-2020 Cabling Works for CLP 11kV 21 1 17-Dec-16A 20-Mar-17 11 Cabling Works for CLP 11kV, Cabling Works for CLP 11kV, Cabling Works for CLP 11kV, Cabling Works for CLP 11kV	UU-1040A Utilities Duct Laying in Area 4, Phase 2, Towngas - DN600 & DN400, approx. 50m 121 83 15-Sep-16A 03-Jul-17 507 UU-1040B Utilities Duct Laying in Area 4, Phase 2, CLP - 132kV(150mVA), approx. 50m (by 33 33 04-Jul-17 10-Aug-17 507 Switch-Over of Existing Utilitiess Utilities Duct Laying in Area 4, Phase 2, CLP - 132kV(150mVA), approx. 50m (by 33 33 04-Jul-17 10-Aug-17 507 Switch-Over of Existing Utilitiess Utilities Duct Laying in Area 4, Phase 2, CLP - 132kV(1300mVA), approx. 50m (by 33 05-Dec -16A 20-Mar-17 107 UU-SO-2000 Cabling Works for CLP 132kV (300mVA) 21 1 05-Dec -16A 20-Mar-17 117 Cabling Works for CLP 132kV (300mVA), Cabling Works for CLP 132kV (300mVA) Image: Cabling Works for CLP 132kV (300mVA), Cabling Works for CLP 132kV (300mVA) Image: Cabling Works for CLP 11kV, Cabling Works for CLP 11kV Image: Cabling Works for CLP 11kV, Cabling Works for CLP 11kV Image: Cabling Works for CLP 11kV, Cabling Works for CLP 11kV Image: Cabling Works for CLP 11kV, Cabling Works for CLP 11kV Image: Cabling Works for CLP 11kV, Cabling Works for CLP 11kV Image: Cabling Works for CLP 11kV, Cabling Works for CLP 11kV Image: Cabling Works for CLP 11kV, Cabling Works for CLP 11kV Image: Cabling			27	27	26-Apr-17	29-May-17	56	8						Litilities Duct Laving	n Area 3	Phase 2	
(by their own TTA) (b) (c)	(by their own TfA) (by their own TfA) (b) (c) (c) <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>IIAIea J,</td><td></td></t<>															IIAIea J,		
their own TTA) their own TTA) <thtea own="" th="" their="" tta)<=""> <t< td=""><td>their own TTA) their own TTA) <thtea own="" th="" their="" tta)<=""> <t< td=""><td></td><td>(by their own TTA)</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></t<></thtea></td></t<></thtea>	their own TTA) their own TTA) <thtea own="" th="" their="" tta)<=""> <t< td=""><td></td><td>(by their own TTA)</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></t<></thtea>		(by their own TTA)															
UU-SO-2000 Cabling Works for CLP 132kV (300mVA) 21 1 05-Dec-16 A 20-Mar-17 107 Cabling Works for CLP 132kV (300mVA), Cabling Works for CLP 132kV (300mVA), Cabling Works for CLP 132kV (300mVA) UU-SO-2020 Cabling Works for CLP 11kV 21 1 17-Dec-16 A 20-Mar-17 111 Cabling Works for CLP 11kV, Cabling Works for CLP 11kV, Cabling Works for CLP 11kV	UU-SO-2000 Cabling Works for CLP 132kV (300mVA) 21 1 05-Dec-16A 20-Mar-17 107 Cabling Works for CLP 132kV (300mVA), Cabling Works for CLP 132kV (300mVA), Cabling Works for CLP 132kV (300mVA), Cabling Works for CLP 132kV (300mVA) UU-SO-2020 Cabling Works for CLP 11kV 21 1 17-Dec-16A 20-Mar-17 111 Cabling Works for CLP 11kV, Cabling Works for CLP 11kV	00-1040B		33	33	04-JUI-17	TU-Aug-17	50	'									
UU-SO-2020 Cabling Works for CLP 11kV 21 1 17-Dec-16 A 20-Mar-17 111 Cabling Works for CLP 11kV, Cabling Works for CLP 11kV	UU-SO-2020 Cabling Works for CLP 11kV 21 1 17-Dec-16 A 20-Mar-17 111 Cabling Works for CLP 11kV, Cabling Works for CLP 11kV									<u> </u>								
		UU-SO-2000	Cabling Works for CLP 132kV (300mVA)	21	1	05-Dec-16 A	20-Mar-17	10	/	1	Cabling W	orks for CLP 132kV (300mVA), Ca	bling Works fo	r CLP 132kV (300mV	A)			
101-SC-2500 Switch-over Works (CLP 132W/ 300mVA) 16 16 21-Mar.17* 05-0nr.17 134	UU-SO-2500 Switch-over Works (CLP 132kV, 300mVA) 16 16 21-Mar-17* 05-Apr-17 134	UU-SO-2020	Cabling Works for CLP 11kV	21	1	17-Dec-16 A	20-Mar-17	11	1	-	Cabling W	orks for CLP 11kV, Cabling Works	for CLP 11kV		L			
50 50 2000 Ovince over works (CLP 122KV, 300mVA)		UU-SO-2500	Switch-over Works (CLP 132kV, 300mVA)	16	16	21-Mar-17*	05-Apr-17	13	4			Switch-over Works (CLP 1	32kV, 300mV/	A)				
	UU-SO-2520 Switch-over Works (CLP 11kV) 16 16 21-Mar-17* 05-Apr-17 138 Switch-over Works (CLP 11kV)	UU-SO-2520	Switch-over Works (CLP 11kV)	16	16	21-Mar-17*	05-Apr-17	13	В			Switch-over Works (CLP 1	1kV)					
	Switch-over works (CLP 12xX, 3001/VA)	UU-1030A UU-1040A UU-1040B Switch-Over of UU-SO-2000 UU-SO-2020	Utilities Duct Laying in Area 3, Phase 2, CLP - 132kV(150mVA), approx. 30m Utilities Duct Laying in Area 4, Phase 2, Towngas - DN600 & DN400, approx. 50m (by their own TTA) Utilities Duct Laying in Area 4, Phase 2, CLP - 132kV(150mVA), approx. 50m (by their own TTA) Existing Utilitiess Cabling Works for CLP 132kV (300mVA) Cabling Works for CLP 11kV	121 33 21 21	83 33 1 1	15-Sep-16 A 04-Jul-17 05-Dec-16 A 17-Dec-16 A	. 03-Jul-17 10-Aug-17 . 20-Mar-17 . 20-Mar-17	50 50 10 11	7			orks for CLP 11kV, Cabling Works	for CLP 11kV			n	Area 3,	

ctivity ID	Activity Name	OD	RD	Start	Finish	TF	b	Mar	201 Apr	17 May		Jun	Jul
UU-SO-1010	Cabling Works for telecom utilities	132	132	20-Mar-17*	29-Jul-17	0	0	iviai	Арі	iviay		JUII	Jul
Starre NAA & NA	B - Realignment of Tai Wo Service Road East (KD-13 & KD-14)												
	between CH100 and CH270												
At-Grade Roadw													
TWSRE-1170	Remaining Noise Barrier NB3 Stem Wall (a total of 24m long)	45	45	23-Mar-17	20-May-17	8					Remaining	g Noise Barrier NB3	Stem Wall (a
TWSRE-1160	Road Formation, Road Drainage, Kerb, Planter and Pavement (Incl. FL/F8A, FL/F9)	125	125	28-Mar-17	29-Aug-17	4	ł						+
	Pipe laying - DN600 & DN1200 Watermains (CHB & CHC) along Realigned TWSR East	145	145	21-Apr-17	13-Oct-17	73	6						
	etween CH270 and CH380												
At-Grade Roadw		07	0	00 14-1 17.4	00 14 47	0							
TWSRE-2060C	Demolition of Existing Kiu Tau Vehicular Bridge (Portion 3), above new TWSRE	27	3	02-Mar-17 A	22-Mar-17	8			Demolition of Existing Kiu Tau Ve	ehicular Bridge (Portion 3), abo	ove new TWSRE, I	Demolition of Existing	g Kiu Tau Ve
TW SRE-2080	Remaining Noise Barrier NB3 Stem Wall (total 2 bays)	45	45	23-Mar-17	20-May-17	18	6				Remaining	g Noise Barrier NB3	Stem Wall (
TW SRE-2090	Road Formation, Kerb, Footpath, Cycle Track, Planter and Pavement	70	70	22-May-17	12-Aug-17	18							
	etween CH380 and CH456												
At-Grade Roadw				00.11	10.1								
TW SRE-3040	Road Formation, Kerb, Footpath, Cycle Track, Planter and Pavement (Incl. FL/F10)	70	70	22-May-17	12-Aug-17	18							
	Slip Road and Access Road												
TWSRE-5010	Modification Works to new Roundabout A	90	9	29-Nov-16 A	29-Mar-17	2			Modification Works to new Rounda	about A, Modification Works to	new Roundabout	A	
TWSRE-5020	Hand Over the area to BBI Contractor	0	0		29-Mar-17*	2			Hand Over the area to BBI Contra	ićtor			
Stago 1C - Viadu	ct Structure & TCSS Civil Provisions (KD-9)												
Foundation & Pie	. ,												
Bridge A													
BA-01-1020C	Abutment AA1 - Plinth Construction	6	0	13-Feb-17 A	20-Feb-17 A			htAA1 - Plinth Constr	uction				
Bridge B													
BB-12-1020C	Abutment AB12/AD14 - Plinth Construction	14	0	13-Feb-17 A	20-Feb-17 A		Abutme	nt AB12/AD14 - Plinth	Construction				
BB-01-1020B	Abutment AB1 - Abutment Wall	28	0	06-Jan-17 A	20-Feb-17 A		Abutme	nt AB1 - Abutment Wa	1				
BB-01-1020C	Abutment AB1 - Plinth Construction	6	0	01-Mar-17 A	06-Mar-17 A			Abutment A	B1 - Plinth Construction				
Bridge D													
	Portal AD11 - Portal Beam Construction together with Kicker	65	31	23-Feb-17 A	28-Apr-17	-110				Portal A		Construction togethe	
Pier Table Consti	inuction												
Bridge A			_										
PA-1020	Pier Table Construction at Portal AA2 (2 nos.)	15	7	10-Mar-17 A	27-Mar-17	6	5		Pier Table Construction at Portal AA2	2 (2 nos.), Pier Table Construct	tion at Portal AA2 (2 nos.)	
PA-1060	Pier Table Construction at Pier AA6 (3 nos.)	25	19	25-Feb-17 A	11-Apr-17	0			Pier Table Construc	tion at Pier AA6 (3 nos.), Pier	Table Construction	at Pier AA6 (3 nos.)	,
Bridge B													
PB-1040	Pier Table Construction at Pier AB4 (3 nos.)	25	0	10-Feb-17 A	25-Feb-17 A		Pi	er Table Construction a	at Pier AB4 (3 nos.)				
Bridge D													
	Pier Table Construction at Pier AD12 (4 nos.)	15	0	27-Jan-17 A	23-Feb-17 A		Pier	Table Construction at	Pier AD12 (4 nos.)				
PD-1130	Pier Table Construction at Pier AD13 (4 nos.)	15	15	27-Mar-17*	13-Apr-17	-50	-		Pier Table Constr	ruction at Pier AD13 (4 nos.)			
								l			<u> </u>		
	Actua	l Work				С	EDD Col	ntract No. C	V/2012/09	3-Month Rolling	g Programme ur	pdated to 2017-0	3-21
						-				Date Re	evision	Checked	Approved
		ining W			Liantana	/ ப/		n Wai BCD	- Site Formation &	21-Mar-17 Rev.1		SL	
	建筑工程方限公司	nary Ba	r										
	建 祭 工 程 有 限 公 司 Vo Construction & Engineering Co., Ltd.	al Rema	aining \	Nork		int	rastruct	ure Works, (Contract 3				
CHUN W	VO CONSTRUCTION & ENGINEERING CO., LTD.	one				_	. Ma					<u>├</u>	
	Project	ct Basel	line Ba	ar		3	s-wonth	Rolling Prog	gramme				
									Ner (7) Deve 7 of (0				
				<u> </u> Pr	ogramme ID): 3N	WPR044 (D	ata Date: 20-	Mar-17)Page 7 of 10			·	

ivity ID	Activity Name	OD	RD	Start	Finish	TF	b	Mar		20 Apr	May	Jun		Jul
PD-1110	Pier Table Construction at Portal AD11 (4 nos.)	15	15	09-May-17	25-May-17	-110		iviai		Λμ	Iviay		Construction	
Viad uct Bridge	Segement Erection													
Bridge A														
EA-1180	Bridge Deck Construction at Pier AA18 by Typical Lifting Frame (24 nos)	9	0	09-Feb-17 A	22-Feb-17 A		Bridge Deck Constr	ruction at I	Pier AA18 by	Typical Lifting Frame (24 nos)				
EA-1010A	Erection of Segment AA1U0	20	20	20-Mar-17*	12-Apr-17	12	_			Erection of Segm	ent AA1U0			
EA-1020	Bridge Deck Construction at Portal AA2 by Crane (14 nos)	8	8	12-Apr-17	24-Apr-17	6				Bric	dge Deck Construction at Porta	II AA2 by Crane (14 nos)		
EA-1010B	Bridge Deck Construction at Abutment AA1 (End-span) by Falsework & Crane (6 nos)	6	6	25-Apr-17	02-May-17	12					Bridge Deck Construction	n at Abutment AA1 (End-span)	by Falsewor	rk & Cra
EA-1060	Bridge Deck Construction at Pier AA6 by Typical Lifting Frame (22 nos)	38	38	20-Apr-17	06-Jun-17	0						Bridge Deck C	onstruction a	at Pier
Bridge B														
EB-1110	Bridge Deck Construction at Pier AB11 by Special Lifting Frame (52 nos in which 20 nos above MTR Railway)	107	0	21-Sep-16 A	02-Mar-17 A		Bridge De	eck Const	ruction at Pie	r AB11 by Special Lifting Frame (- 1			
EB-1020	Bridge Deck Construction at Pier AB2 by Crane (20 nos)	12	0	22-Feb-17 A	07-Mar-17 A			Bridge D	eck Construc	tion at Pier AB2 by Crane (20 no				
EB-1040	Bridge Deck Construction at Pier AB4 by Typical Lifting Frame (22 nos)	33	19	03-Mar-17 A	11-Apr-17	0				Bridge Deck Const	truction at Pier AB4 by Typical L	ifting Frame (22 nos), Bridge I	Deck Constru	uction
EB-1010A	Erection of Segment AB1U0	20	20	20-Mar-17	12-Apr-17	2		-		Erection of	f Segment AB1U0			
EB-1010B	Bridge Deck Construction at Abutment AB1 (End-span) by Falsework & Crane (11 nos)	4	4	21-Apr-17	25-Apr-17	2					Bridge Deck Construction at Al	outment AB1 (End-span) by Fa	lsework & Cr	rane (
EB-1120A	Erection of Segment AB12U0	28	28	01-Apr-17	10-May-17	-95					Erection of Seg			
EB-1120B	Bridge Deck Construction at Abutment AB12 (End-span) by Falsework & Crane (12 nos)	4	4	19-May-17	23-May-17	-95						Bridge Deck Construction at Ab		
Bridge D		I												
ED-1010B	Bridge Deck Construction at Abutment AD1 (End-span) by Falsework & Crane (13 nos)	12	0	13-Mar-17 A	16-Mar-17 A				Bridg	e Deck Construction at Abutment	t AD1 (End-span) by Falsework	« & Crane (13 nos)		
ED-1140A	Erection of Segment AD 14U0	35	35	22-Apr-17	05-Jun-17	-85					-	Erection of Segr	nent AD 14U	JO
ED-1120	Bridge Deck Construction at Pier AD12 by Special Lifting Frame (50 nos in which 21 nos above MTR Railway)	84	75	09-Mar-17 A	22-Jun-17	-147							Bridge De)eck C
ED-1130	Bridge Deck Construction at Pier AD13 by Crane (12 nos)	4	4	18-Jul-17	21-Jul-17	-124								
ED-1110	Bridge Deck Construction at Portal AD11 by Special Lifting Frame (54 nos in which 12 nos above MTR Railway)	43	43	11-Jul-17	29-Aug-17	-147								-
	Erection and Stitch Casting (Wide-box Section)		0	40 E-1 47 A	00 5-6 47 4									
KS-D-1080	Erection AD8W K9 and stitching works	14	0	10-Feb-17 A	20-Feb-17 A		Erection AD8W K9 and	[
KS-C-1100	Erection AC10K11 and stitching works	14	0	17-Feb-17 A	27-Feb-17 A		Erection AC10	0K11 and	stitching wor	ks				
KS-A-1170	Erection AA17K18 and stitching works	12	0	23-Feb-17 A	03-Mar-17 A				8 and stitching					
KS-A-1180	Erection AB6E K7 and stitching works	12	0	23-Feb-17 A	09-Mar-17 A		Er	rection AB	36EK7 and sti	tching works				
KS-B-1060A	Erection AB6W K7 and stitching works	12	7	14-Mar-17 A	27-Mar-17	2			Ere	ection AB6W K7 and stitching worl	ks, Erection AB6WK7 and stitch	ning works		
KS-A-1090	Erection AA9K10 and stitching works	12	18	05-Jan-17 A	10-Apr-17	2			-	Erection AA9K10 an	nd stitching works, Erection AAS	9K10 and stitching works		
KS-B-1020	Erection AB2K3 and stitching works	12	12	28-Mar-17	11-Apr-17	2				Erection AB2K3 an	nd stitching works			
KS-A-1100	Erection AA10K11 and stitching works	12	12	11-Apr-17	27-Apr-17	2					Erection AA10K11 and stitching	g works		
							1					. <u> </u>		
	Actua	l Work				С	EDD Contract N	lo. C\	//2012/	09	3-Month Rolling	g Programme updated to 2	2017-03-2	1
						-					Date Re	evision Checke	ed Ap	oprov
		ining W			Liantana	/ ப/	eung Yuen Wai		- Sito E	formation &	21-Mar-17 Rev.1	SL		<u> </u>
A IA In	、本統エモモ相バラ Sumn	nary Ba	ır		Liantany									
	·建築工程有限公司	al Rema	aining	Work		Inf	rastructure Wo	rks, (Jontrac	et 3				
CHUN V	No Construction & Engineering Co., Ltd.	one												
		ct Base	line Ba	ar		3	8-Month Rolling	Prog	gramme	9				
	1			I P	roarammo IF)· 31	/IPR044 (Data Date	· 20-M	lar-17)	Page 8 of 10	l	I		


Activity ID	Activity Name	OD	RD	Start	Finish	TF			201	7		
							b Mar		Apr	Мау	Jun	Jul
KS-A-1080	Erection AA8K9 and stitching works	12	12	12-Apr-17	28-Apr-17	2	2			Erection AA8K9 and stitching	vorks	
KS-B-1030	Erection AB3K4 and stitching works	12	12	28-Apr-17	13-May-17	2	2			Erection ABS	K4 and stitching works	
KS-A-1020	Erection AA2K3 and stitching works	12	12	29-Apr-17	15-May-17	2	-			Erection A	A2K3 and stitching works	
KS-B-1010	Stitching Works between AB1 End Span and AB2	6	6	15-May-17	20-May-17	2	-				titching Works between AB1 End Sp	
KS-A-1010	Stitching Works between AA1 End Span and AA2	6	6	16-May-17	22-May-17	2	2				Stitching Works between AA1 End S	pan and AA2
KS-A-1070	Erection AA7K8 and stitching works	12	12	22-May-17	05-Jun-17	11					Erection AA7K8 and	stitching works
KS-B-1040	Erection AB4K5 and stitching works	12	12	23-May-17	06-Jun-17	2	2				Erection AB4K5 and	d stitching works
KS-A-1050	Erection AA5K6 and stitching works	12	12	07-Jun-17	20-Jun-17	10)				Ere	ection AA5K6 and
KS-A-1060	Erection AA6K7 and stitching works	12	12	07-Jun-17	20-Jun-17	10)				Erec	tion AA6K7 and
Key Segment I	Erection and Stitch Casting (Narrow-box Section)											
KS-B-1100A	Stitching Works between AB10W and AB11W	12	12	23-Mar-17	06-Apr-17	-48	8		Stitching Works between	AB10W and AB11W		
KS-B-1100B	Stitching Works between AB10E and AB11E	12	12	23-Mar-17	06-Apr-17	-48	8		Stitching Works between	AB10E and AB11E		
KS-B-1110A	Stitching Works between AB11W and AB12W End Span	12	12	08-Jun-17	21-Jun-17	-83	8				Stito	hing Works betw
KS-B-1110B	Stitching Works between AB11E and AB12E End Span	12	12	08-Jun-17	21-Jun-17	-95	5				Stito	hing Works betw
Major Works on	n Deck Surfaces											
	ternal Tendon Stressing Works				00.1	-						
PP-D-1030	Permanent Prestressing for Bridge D (AD8W-AD10W)	15	15	20-Mar-17*	06-Apr-17	86	5 		Permanent Prestressing f	or Bridge D (AD8W-AD10W)		
PP-C-1040	Permanent Prestressing for Bridge C (AC11-AD10E)	17	17	20-Mar-17*	08-Apr-17	54	ŀ		Permanent Prestressing	g for Bridge C (AC11-AD10E)		
PP-D-1020	Permanent Prestressing for Bridge D (AD5-AD8W)	21	23	13-Feb-17 A	19-Apr-17	37			Permanen	t Prestressing for Bridge D (A	D5-AD8W), Permanent Prestressing	for Bridge D (AI
PP-D-1010	Permanent Prestressing for Bridge D (AD1-AD5)	24	24	20-Mar-17	20-Apr-17	59)			Permanent Prestres	sing for Bridge D (AD1-AD5)	
PP-C-1030	Permanent Prestressing for Bridge C (AC8-AC11)	17	17	30-Mar-17*	22-Apr-17	17			Perma	nent Prestressing for Bridge C	(AC8-AC11)	
PP-A-1040	Permanent Prestressing for Bridge A (AA13-AA18)	26	26	24-Mar-17	27-Apr-17	41				Permanent Prestressing for B	ridge A (AA13-AA18)	
PP-C-1010	Permanent Prestressing for Bridge C (AC1-AC5)	27	27	25-Mar-17*	29-Apr-17	16	ò			Permanent Prestressing for	Bridge C (AC1-AC5)	
PP-A-1050	Permanent Prestressing for Bridge A (AA18-AB10E)	24	24	22-Apr-17*	22-May-17	22	2			P	rmanent Prestressing for Bridge A (A	
PP-B-1020	Permanent Prestressing for Bridge B (AB6-AB10W)	26	26	06-May-17*	06-Jun-17	40					Permanent Prestress	ing for Bridge B
PP-A-1030	Permanent Prestressing for Bridge A (AA9-AA13)	23	23	20-May-17*	16-Jun-17	C					Permaner	t Prestressing fo
PP-B-1010	Permanent Prestressing for Bridge B (AB1-AB6)	27	27	22-May-17	22-Jun-17	2	2			-	F	Permanent Prest
PP-A-1020	Permanent Prestressing for Bridge A (AA5-AA9)	26	26	09-Jun-17	10-Jul-17	10						
PP-A-1010	Permanent Prestressing for Bridge A (AA1-AA5)	27	27	24-Jun-17	26-Jul-17	11						<u> </u>
Parapet Installa										· · · · · · · · · · · · · · · · · · ·		
PI-D-1030	Parapet Installation for Bridge D (AD8W-AD10W)	59	59	07-Apr-17	21-Jun-17	86		-			Para	apet Installation f
		· · · · ·					•					
1	Act	ual Work				С	EDD Contract No. C	V/2012	/09		Programme updated to 2017-	
	Rer	maining V	Vork								vision Checked	Approved
	Sur	mmary Ba	ar		Liantang	/ H	eung Yuen Wai BCP	- Site F	Formation &	21-Mar-17 Rev.1	SL	
	□ 建 築 工 程 有 限 公 司	tical Rema		Nork	-	Int	frastructure Works,	Contra	ct 3			
CHUN V	WO CONSTRUCTION & ENGINEERING CO., LTD.	estone										
		estone oject Base	line Ba	ar			3-Month Rolling Prog	gramm	e			
					ogramme IF)• 31	MPR044 (Data Date: 20-I	Mar-17)	Page 9 of 10			
	I				ogramme IL	. JI	11 1.044 (Dala Dale. 20-1	nai-17)_	raye 3 01 10	1		

Activity ID	Activity Name	OD	RD	Start	Finish	TF	201	7		
							b Mar Apr	Мау	Jun	Jul
PI-C-1040	Parapet Installation for Bridge C (AC11-AD10E)	59	59	10-Apr-17	23-Jun-17	74			Pa	arapet Installation
PI-C-1020	Parapet Installation for Bridge C (AC5-AC8)	77	77	20-Mar-17	24-Jun-17	73			P	arapet Installatio
PI-D-1010	Parapet Installation for Bridge D (AD1-AD5)	77	77	21-Apr-17	24-Jul-17	59				
PI-A-1050	Parapet Installation for Bridge A (AA18-AB10E)	59	59	23-May-17	01-Aug-17	102				
PI-B-1020	Parapet Installation for Bridge B (AB6-AB10W)	59	59	07-Jun-17	15-Aug-17	63				
PI-D-1020	Parapet Installation for Bridge D (AD5-AD8W)	100	100	20-Apr-17	18-Aug-17	37				
PI-C-1030	Parapet Installation for Bridge C (AC8-AC11)	107	107	24-Apr-17	30-Aug-17	17				
PI-C-1010	Parapet Installation for Bridge C (AC1-AC5)	102	102	02-May-17	31-Aug-17	16				
PI-A-1040	Parapet Installation for Bridge A (AA13-AA18)	108	108	28-Apr-17	05-Sep-17	72				
PI-B-1010	Parapet Installation for Bridge B (AB1-AB6)	106	106	23-Jun-17	27-Oct-17	2				
PI-A-1020	Parapet Installation for Bridge A (AA5-AA9)	111	111	11-Jul-17	20-Nov-17	10				1
PI-A-1030	Parapet Installation for Bridge A (AA9-AA13)	140	140	17-Jun-17	01-Dec-17	C				
Roadworks,	Road Facilities and Miscellaneous inside Viaduct Internal Voids									
RS-1030		120	120	21-Apr-17	12-Sep-17	77				
RS-1020	Movement Joints and Road Furniture incl. Deck Drainage, Lightings, Steel Rails,NB, Water Main for Bridge C (AC1 to AD10)	150	150	02-May-17	30-Oct-17	39				
RS-1010	Movement Joints and Road Furniture incl. Deck Drainage, Lightings, Steel Rails,NB, Water Main for Bridge B (AB1 to AB12)	120	120	23-Jun-17	14-Nov-17	26				
RS-1000	Movement Joints and Road Furniture incl. Deck Drainage, Lightings, Steel Rails,NB, Water Main for Bridge A (AA1 to AB12)	150	150	02-Jun-17	28-Nov-17	14				
Section VI - W	Vorks in Portion FH9 (KD-6A)									
Major Works										
S6-2000*	Construction of Abutment AB12/AD14 (including Piling, Pile Cap & Abutment construction)	276	0	06-Feb-15						
S6-4010	Falsework Erection for Installation of Bridge Deck at Abutment AB12	30	30	08-Apr-17	18-May-17	-95		Falsework Erection for	Installation of Bridge	Deck at Abutmer
S6-6010	Removal of Falsework near Abutment AB12	12	12	22-Jun-17	06-Jul-17	-28				Ren
S6-4000	Falsework Erection for Installation of Bridge Deck at Abutment AD14	30	30	16-Jun-17	21-Jul-17	-124				
	& Establishment Works (KD-4, 4A, 5, 5A, 6)									
Secton III - Re S3-1020	emainder of Landscaping Softworks Not Included in Secton IIIA Remaining Drainage Works and Land Formation at FH3, FH4, FH5	70	70	20 Mor 17	16 lup 17	7				
		70		20-Mar-17					R	emaining Draina
S3-1010	Transplanting along Fanling High way	140	140	30-Mar-17		78				
S3-1030	Transplanting near FH3, FH4, FH5	120	120	17-Jun-17	08-Nov-17	7				
	Actua	l Work				С	EDD Contract No. CV/2012/09	3-Month Rolling Programme	<u> </u>	
	Rema	aining V	Vork					Date Revision	Checked	Approved
		nary Ba			Liantang	/ H	eung Yuen Wai BCP - Site Formation &	21-Mar-17 Rev.1	SL	
	和 建 築 工 程 有 限 公 司 🛛 👘 🔤 Critica	-	aining V	Vork	•		rastructure Works, Contract 3			
CHUN	Wo Construction & Engineering Co., Ltd.		-							
			line Ba	r		:	B-Month Rolling Programme			
					orogramme ID	- 3M	PR044 (Data Date: 20-Mar-17)Page 10 of 10			
					- agramme ID					



Appendix B Project Organization Structure



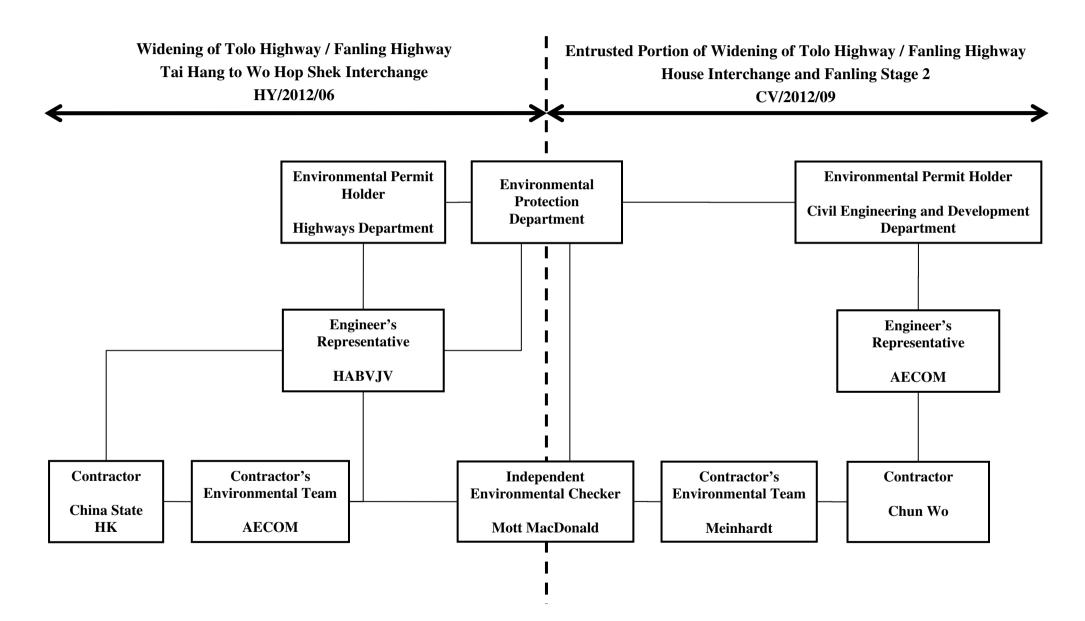



Appendix C Calibration Certificates of Monitoring Equipment



TISCH ENVIRONMENTAL, INC. 145 SOUTH MIAMI AVE VILLAGE OF CLEVES, OH 45002 513.467.9000 877.263.7610 TOLL FREE 513.467.9009 FAX

9

ORIFICE TRANSFER STANDARD CERTIFICATION WORKSHEET TE-5025A

Date - Ma Operator		6 Rootsmeter Orifice I.I		438320 1612	Ta (K) - Pa (mm) -	295 745.49
PLATE OR Run #	VOLUME START (m3)	VOLUME STOP (m3)	DIFF VOLUME (m3)	DIFF TIME (min)	METER DIFF Hg (mm)	ORFICE DIFF H2O (in.)
1 2 3 4 5	NA NA NA NA	NA NA NA NA	1.00 1.00 1.00 1.00 1.00	1.3770 0.9710 0.8710 0.8310 0.6860	3.2 6.4 7.8 8.7 12.6	2.00 4.00 5.00 5.50 8.00

DATA TABULATION

Vstd	(x axis) Qstd	(y axis)		Va	(x axis) Qa	(y axis)
0.9866 0.9824 0.9804 0.9793 0.9741	0.7165 1.0117 1.1256 1.1785 1.4200	1.4078 1.9909 2.2259 2.3345 2.8155		0.9957 0.9914 0.9894 0.9883 0.9830	0.7231 1.0210 1.1360 1.1893 1.4330	0.8896 1.2581 1.4066 1.4753 1.7792
Qstd slop intercept coefficie	(b) = ent (r) =	2.00411 -0.03059 0.99995	n e n	Qa slope intercept coefficie	t (b) = ent (r) =	1.25494 -0.01933 0.99995
y axis =	SQRT [H20 (B	Pa/760) (298/5	Γa)]	y axis =	SQRT [H2O ([a/Pa)]

CALCULATIONS

Vstd = Diff. Vol[(Pa-Diff. Hg)/760](298/Ta)
Qstd = Vstd/Time

Va = Diff Vol [(Pa-Diff Hg)/Pa] Qa = Va/Time

For subsequent flow rate calculations:

Qstd = $1/m\{[SQRT(H2O(Pa/760)(298/Ta))] - b\}$ Qa = $1/m\{[SQRT H2O(Ta/Pa)] - b\}$

TSP Sampler Calibration

te: March 6, 2017 ch: Sam Wong

		С	ONDITIONS		
Barometric Pressure	(in Hg):	39.92	Corrected Pressure	(mm Hg):	1014
Temperature	(deg F):	70	Temperature	(deg K):	294
Average Press.	(in Hg):	39.92	Corrected Average	(mm Hg):	1014
Average Temp.	(deg F):	70	Average Temp.	(deg K):	294

		CALIBRATION ORIFICE		
Make:	Tisch	Qstd Slope:	2.00411	
Model:	TE-5025A	Qstd Intercept:	-0.03059	
Serial#:	1612	Date Certified:	March 14, 2016	


CALIBRATIONS						
Plate or Test #	H2O (in)	Qstd (m3/min)	I (chart)	IC (corrected)	LINEAR REGRESSION	
1	12.00	2.025	56.0	65.11	Slope =	31.4853
2	10.00	1.850	52.0	60.46	Intercept =	2.0729
3	8.20	1.677	48.0	55.81	Corr. coeff.=	0.9987
4	5.20	1.338	38.0	44.18		
5	3.20	1.053	30.0	34.88	<pre># of Observations:</pre>	5

Calculations

IC = I[Sqrt(Pa/Pstd)(Tstd/Ta)]
Qstd = standard flow rate
IC = corrected chart response
I = actual chart response
m = calibrator Qstd slope
b = calibrator Qstd intercept
Ta = actual temperature during calibration (deg K)
Pa = actual pressure during calibration (mm Hg)
Tstd = 298 deg K
Pstd = 760 mm Hg
For subsequent calculation of sampler flow:
1/m((I)[Sqrt(298/Tav)(Pav/760)]-b)

Qstd = 1/m[Sqrt(H2O(Pa/Pstd)(Tstd/Ta))-b]

m = sampler slope b = sampler intercept I = chart response Tav = daily average temperature Pav = daily average pressure

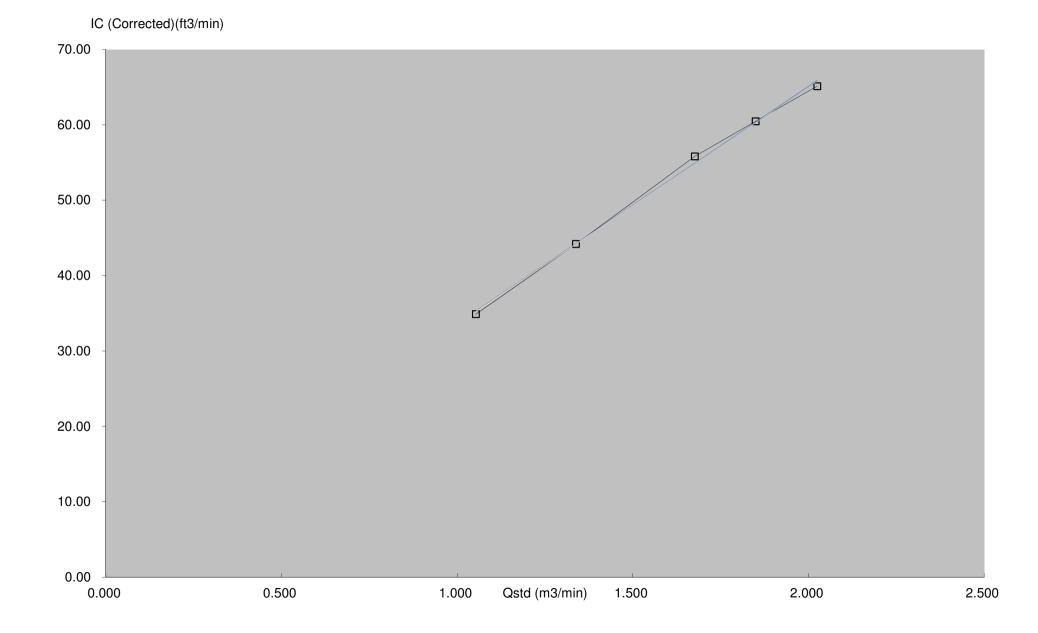



Hong Kong Calibration Ltd. 香港校正有限公司

Calibration Certificate

Certificate No.	607984		Page	1 of 2 Pages
Customer :	Enovative Environmental Service	Limited		
Address :	Flat 6, 3/F, Block E, Wah Lok Inc	lustrial Centre, 31-3	35 Shan Mei Stree	et, Shatin, N.T., Hong Kong.
Order No. :	Q63261		Date of receipt	: 6-Sep-16
Item Tested				
Description :	Sound Level Calibrator			
Manufacturer :	Rion		I.D.	: 215901
Model :	NC-74		Serial No.	: 34857296
Test Conditi	ons			
Date of Test :	23-Sep-16		Supply Voltage	:
Ambient Temp			Relative Humid	ity: (50 ± 25) %
Test Specifi	cations			
Calibration chee	ak			
	/Procedure : F21, Z02, IEC 60942			
Her. Boodinent	11000dulo : 1 2 1, 202, 120 000 -			
Test Results	5			
All results were	within the IEC 60942 Class 1 spe	ecification.		
	shown in the attached page(s).			
Main Test equi	pment used:			
Equipment No.	Description	Cert. No.		Traceable to
S014	Spectrum Analyzer	605758		NIM-PRC & SCL-HKSAR
S240	Sound Level Calibrator	601604		NIM-PRC & SCL-HKSAR
S041	Universal Counter	607883		SCL-HKSAR
S206	Sound Level Meter	605757		SCL-HKSAR
will not include allo overloading, mis-h for any loss or dan The test equipmer	n this Calibration Certificate only relate to owance for the equipment long term drift, andling, or the capability of any other labor nage resulting from the use of the equipm at used for calibration are traceable to Inter oply to the above Unit-Under-Test only	variations with environm pratory to repeat the me lent.	iental changes, vibrati asurement. Hong Kor	on and shock during transportation, ng Calibration Ltd. shall not be liable
	(Λο
Calibrated by		Ар	proved by :	Hen
This Certificate is issued Hong Kong Calibration I		Dat	e: 23-Sep-16	Alan Unu

Unit 8B, 24/F., Well Fung Industrial Centre, No. 58-76, Ta Chuen Ping Street,Kwai Chung, NT,Hong Kong. Tel: 2425 8801 Fax: 2425 8646



Calibration Certificate

Certificate No. 607984

Page 2 of 2 Pages

Results :

1. Generated Sound Pressure Level

UUT Nominal Value (dB)	Measured Value (dB)	IEC 60942 Class 1 Spec.
94	94.1	± 0.4 dB

Uncertainty : $\pm 0.1 \text{ dB}$

2. Short-term Level Fluctuation : 0.0 dB IEC 60942 Class 1 Spec. : ± 0.1 dB Uncertainty : ± 0.01 dB

3. Frequency

UUT Nominal Value (kHz)	Measured Value (kHz)	IEC 60942 Class 1 Spec.
1	1.002 1	± 1 %

Uncertainty : \pm 3.6 x 10 ⁻⁶

4. Total Distortion : < 1.3 % IEC 60942 Class 1 Spec. : < 3 % Uncertainty : ± 2.3 % of reading

Remark : 1. UUT : Unit-Under-Test

- 2. The uncertainty claimed is for a confidence probability of not less than 95%.
- 3. Atmospheric Pressure : 1018 hPa.

----- END -----



Hong Kong Calibration Ltd. 香港校正有限公司

Calibration Certificate

Certificate No.	608737		Page	1 of 3 Pages
Customer :	Enovative Environmental Serv	ice Limited		
Address :	Flat 6, 3/F, Block E, Wah Lok	Industrial Centre, 31-	35 Shan Mei Stre	eet, Shatin, N.T., Hong Kong.
Order No. :	Q63459		Date of receipt	t : 22-Sep-16
Item Tested				
Description :	Sound Level Meter			
Manufacturer :	B&K		I.D.	:
Model :	2238		Serial No.	: 2694908
Test Conditi	ons			
Date of Test :	3-Oct-16		Supply Voltag	e :
Ambient Temp	erature : (23 ± 3)°C			dity: (50 ± 25) %
Test Specifi	cations			
Calibration chec Ref. Document/	ck. /Procedure: Z01, IEC 651 and	IEC 804.		
Test Results	6			
	within the IEC 651 Type1 and I shown in the attached page(s).		ication.	
Main Test equip	oment used:			
Equipment No.	Description	Cert. No.		Traceable to
S017	Multi-Function Generator	C147450		SCL-HKSAR
S240	Sound Level Calibrator	601604		NIM-PRC & SCL-HKSAR
will not include allow	this Calibration Certificate only relate wance for the equipment long term drift andling, or the capability of any other la	t, variations with environme	ental changes, vibrati	on and shock during transportation

for any loss or damage resulting from the use of the equipment. The test equipment used for calibration are traceable to International System of Units (SI), or by reference to a natural constant.

The test results apply to the above Unit-Under-Test only				
Calibrated by :	Appro	ved by :	Alan Chu	-
This Certificate is issued by: Hong Kong Calibration Ltd. Unit 8B, 24/F., Well Fung Industrial Centre, No. 58-76, Ta Chuen Ping Street,Kwai Chu Tel: 2425 8801 Fax: 2425 8646	Date:	3-Oct-16		

The copyright of this certificate is owned by Hong Kong Calibration Ltd.. It may not be reproduced except in full.



Calibration Certificate

Certificate No. 608737

Page 2 of 3 Pages

Results :

1. SPL Accuracy

UUT Setting		Applied Value	UUT		
Range	Freq. Wgt.	Bandwith	Center Freq.	(dB)	Reading (dB)
$20 \sim 100$	A	BB/F		94.0	94.0
	A	BB/S			94.0
	C BB/F			94.0	
$40 \sim 120$	A	BB/F		94.0	94.0
	A	BB/F		114.0	114.2

IEC 60651 Type 1 Spec. : \pm 0.7 dB Uncertainty : \pm 0.1 dB

Level Stability : 0.0 dB
 IEC 60651 Type 1 Spec. : ± 0.3 dB
 Uncertainty : ± 0.1 dB

3. Linearity

3.1 Level Linearity

UUT Range (dB)	Applied Value (dB)	UUT Reading (dB)	Variation (dB)	IEC 60651 Type 1 Spec. (Primary Indicator Range)
140	114.0	114.0	0.0	± 0.7 dB
130	104.0	104.0	0.0	
120	94.0	94.0 (Ref.)		
110	84.0	84.0	0.0	
100	74.0	74.0	0.0	
90	64.0	64.0	0.0	
80	54.0	54.0	0.0	

Uncertainty : $\pm 0.1 \text{ dB}$

3.2 Differential level linearity

UUT Range (dB)	Applied Value (dB)	UUT Reading (dB)	Variation (dB)	IEC 60651 Type 1 Spec.
120	84.0	84.1	+0.1	± 0.4 dB
	94.0	93.9 (Ref.)		
	95.0	95.0	0.0	± 0.2 dB

Uncertainty : $\pm 0.1 \text{ dB}$



Calibration Certificate

Certificate No. 608737

Page 3 of 3 Pages

4. Frequency Weighting

A weighting

Frequency	Attenuation (dB)	IEC 60651 Type 1 Spec.
31.5 Hz	-39.3	- 39.4 dB, ± 1.5 dB
63 Hz	-26.2	- 26.2 dB, ± 1.5 dB
125 Hz	-16.2	- 16.1 dB, ± 1 dB
250 Hz	-8.7	- $8.6 dB, \pm 1 dB$
500 Hz	-3.2	$- 3.2 \text{ dB}, \pm 1 \text{ dB}$
1 kHz	0.0 (Ref)	$0 \text{ dB}, \pm 1 \text{ dB}$
2 kHz	+1.2	$+ 1.2 \text{ dB}, \pm 1 \text{ dB}$
4 kHz	+1.0	$+ 1.0 \text{ dB}, \pm 1 \text{ dB}$
8 kHz	-1.2	- 1.1 dB, + 1.5 dB ~ -3 dB
16 kHz	-6.7	- 6.6 dB, + 3 dB ~ - ∞

Uncertainty : $\pm 0.1 \text{ dB}$

5. Time Averaging

Applied Burst duty Factor	Applied Leq Value (dB)	UUT Reading (dB)	IEC 60804 Type 1 Spec.
continuous	40.0	40.0	
1/10	40.0	39.9	± 0.5 dB
$1/10^{2}$	40.0	39.9	-
$1/10^{3}$	40.0	39.9	± 1.0 dB
$1/10^{4}$	40.0	39.5	

Uncertainty : $\pm 0.1 \text{ dB}$

Remarks: 1. UUT : Unit-Under-Test

- 2. The uncertainty claimed is for a confidence probability of not less than 95%.
- 3. Atmospheric Pressure : 1013 hPa
- 4. The UUT was adjusted with the laboratory's sound calibrator at the reference sound pressure level before the calibration.

----- END -----

The copyright of this certificate is owned by Hong Kong Calibration Ltd., It may not be reproduced except in full.



CALIBRATION REPORT

Test Report No.	:	AG030104
Date of Issue	:	March 17, 2017
Page No.	:	1 of 1

PART A – CUSTOMER INFORMATION

Enovative Environmental Service Ltd. Rm 811, Hin Pui House, Hin Keng Estate, Tai Wai New Territories, Hong Kong Attn: Mr. Thomas Wong

PART B – SAMPLE INFORMATION

Description of Samples	:	HACH 2100Q Protable Turbidimeter
Brand Name	:	HACH
Model Number	:	2100Q
Serial Number	:	13120C004242
Equipment Number	:	
Date of Received	:	Mar 16, 2017
Date of Calibration	:	Mar 16, 2017
Date of Next Calibration(a)	1	Jun 16, 2017

PART C - CALIBRATION REQUESTED

<u>Parameter</u>	Reference Method	
Turbidity	APHA 21e 2130 B	

PART D - RESULT(bc)

Turbidity

Expected Reading (NTU)	Displayed Reading ^(d) (NTU)	Tolerance ^(e) (%)	Results
0	0		Satisfactory
4	4.05	+1.3	Satisfactory
20	20.9	+4.5	Satisfactory
100	107	+7.0	Satisfactory
800	783	-2.1	Satisfactory

Tolerance limit of turbidity should be less than ± 10.0 (%)

~ END OF REPORT ~

Remark(s)

(a) The "Date of Next Calibration" is recommended according to best practice principals as practiced by Quality Pro Test-Consult Ltd. or quoted form relevant international standards.

(b) The results relate only to the tested sample as received

(e) the performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source.

(a) "Displayed Reading" presents the figures shown on item under calibration/ checking regardless of equipment precision or significant figures.
 (b) The "Tolerance Limit" mentioned is the acceptance criteria applicable for similar equipment used by Quality Pro Test-Consult Ltd. or quoted form relevant

^(e) The "Tolerance Limit" mentioned is the acceptance criteria applicable for similar equipment used by Quality Pro Test-Consult Ltd. or quoted form relevant international standards.

APPROVED SIGNATORY :

FUNG Yuen-ching Aries Laboratory Manager



CALIBRATION REPORT

Report No.	:	AG030101
Date of Issue	1	March 17, 2017
Page No.	:	1 of 2

PART A – CUSTOMER INFORMATION

Enovative Environmental Service Ltd. Rm 811, Hin Pui House, Hin Keng Estate, Tai Wai New Territories, Hong Kong Attn: Mr. Thomas WONG

PART B – DESCRIPTION

Name of Equipment	:	YSI Pro Plus (Multi-Parameters)
Manufacturer	:	YSI (a xylem brand)
Serial Number	:	IOD101566
Date of Received	:	Mar 16, 2017
Date of Calibration	:	Mar 16, 2017
Date of Next Calibration(a)	:	Jun 16, 2017

PART C - REFERENCE METHODS/ DOCUMENTS FOR THE CALIBRATION

<u>Parameter</u>	Reference Method
pH at 25°C	APHA 21e 4500-H ⁺ B
Dissolved Oxygen	APHA 21e 4500-O G
Conductivity at 25°C	APHA 21e 2510 B
Salinity	APHA 21e 2520 B
Temperature	Section 6 of international Accreditation New Zealand Technical
	Guide no. 3 Second edition March 2008: Working Thermometer Calibration Procedure.

PART D - CALIBRATION RESULTS^(b,c)

(1) pH at 25°C

Target (pH unit)	Displayed Reading ^(d) (pH Unit)	Tolerance ^(e) (pH Unit)	Results
4.00	4.09	+0.09	Satisfactory
7.42	7.45	+0.03	Satisfactory
10.01	10.08	+0.07	Satisfactory

Tolerance of pH should be less than ±0.10 (pH unit)

(2) Temperature

Reading of Ref. thermometer (oC)	Displayed Reading (oC)	Tolerance (oC)	Results
10.0	9.9	-0.1	Satisfactory
22.0	21.7	-0.3	Satisfactory
35.0	37.30	+2.3	Satisfactory

Tolerance limit of temperature should be less than ± 2.0 (°C)

~ CONTINUED ON NEXT PAGE ~

<u>Remark(s): -</u>

- The "Date of Next Calibration" is recommended according to best practice principals as practiced by QPT or quoted form relevant international standards.
- (b) The results relate only to the calibrated equipment as received
- The performance of the equipment stated in this report is checked with independent reference material and results compared against a calibrated secondary source. (c)
- (d) "Displayed Reading" denotes the figure shown on item under calibration/ checking regardless of equipment precision or significant figures.
 (e) The "Tolerance Limit" mentioned is the acceptance criteria applicable for similar equipment used by QPT or quoted form relevant international standards.

APPROVED SIGNATORY :

FUNG Yuen-ching Aries Laboratory Manager



業化驗有限公司 **QUALITY PRO TEST-CONSULT LIMITED**

Unit 10, 14/F, Wah Wai Centre, 38-40 Au Pui Wan St., Fotan, Hong Kong Email: info@qualityprotest.com; Website: www.qualityprotest.com Tel: (852) 3956 8717; Fax: (852) 3956 3928

CALIBRATION REPORT

Report No.		AG030101
Date of Issue		March 17, 2017
Page No.	:	2 of 2

PART D - CALIBRATION RESULTS (Cont'd)

(3) Dissolved Oxygen

專

Expected Reading (mg/L)	Displayed Reading (mg/L)	Tolerance (mg/L)	Results
0.16	0.19	+0.03	Satisfactory
4.38	4.31	-0.07	Satisfactory
8.51	8.56	+0.05	Satisfactory

Tolerance limit of dissolved oxygen should be less than ±0.20 (mg/L)

(4) Conductivity at 25°C

Expected Reading (µS/cm)	Displayed Reading (µS/cm)	Tolerance (%)	Results
146.9	149.8	+2.0	Satisfactory
1412	1431	+1.3	Satisfactory
12890	12286	-4.7	Satisfactory
58670	57728	-1.6	Satisfactory
111900	109852	-1.8	Satisfactory

Tolerance limit of conductivity should be less than ± 10.0 (%)

(5) Salinity

Expected Reading (g/L)	Displayed Reading (g/L)	Tolerance (%)	Results		
10	9.92	-0.8	Satisfactory		
20	19.88	-0.6	Satisfactory		
30	29.81	-0.6	Satisfactory		

Tolerance limit of salinity should be less than ± 10.0 (%)

~ END OF REPORT ~



Appendix D EM&A Monitoring Schedules

Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2 Impact Monitoring & Site Auditing Schedule for March 2017

			March 2017			
Sun	Mon	Tue	Wed	Thu	Fri	Sat
			1 Water (I5, C3a, C3b)	2 24-hour TSP + 3 x 1-hour TSP, Noise (SR77)	3 Water (I5, C3a, C3b)	4
5	6 ET Site Walk(09:30am – 11:00am) Water (I5, C3a, C3b)	7	8 24-hour TSP + 3 x 1-hour TSP, Noise (SR77), Water (I5, C3a, C3b)	9	10 Water (I5, C3a, C3b)	11
12	13 Water (15, C3a, C3b)	14 24-hour TSP + 3 x 1-hour TSP, Noise (SR77)	15 ET Site Walk(09:30 am – 11:00 am) with Liantang Project-wide ET and IEC + SSEMC Water (I5, C3a, C3b)	16	17 Water (I5, C3a, C3b)	18
19	20 ET Site Walk(09:30am – 11:00am) 24-hour TSP + 3 x 1-hour TSP, Noise (SR77), Water (I5, C3a, C3b)	21	22 Water (I5, C3a, C3b)	23	24 24-hour TSP + 3 x 1-hour TSP, Water (I5, C3a, C3b)	25
26	27 ET Site Walk(09:30am – 11:00 am) with Fanling Stage 2 IEC & Liantang Project-wide ET and IEC Water (15, C3a, C3b)	28	29 Water (I5, C3a, C3b)	30 24-hour TSP + 3 x 1-hour TSP, Noise (SR77)	31 Water (I5, C3a, C3b)	

Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2 Impact Monitoring & Site Auditing Schedule for April 2017

			April 2017			
Sun	Mon	Tue	Wed	Thu	Fri	Sat
2	3 ET Site Walk(09:30am – 11:00am) Water (I5, C3a, C3b)	4 Ching Ming Festival	5 24-hour TSP + 3 x 1-hour TSP, Noise (SR77), Water (I5, C3a, C3b)	6	7 Water (I5, C3a, C3b)	8
9	10 ET Site Walk(09:30am – 11:00am) 24-hour TSP + 3 x 1-hour TSP, Noise (SR77), Water (I5, C3a, C3b)	11	12 Water (I5, C3a, C3b)	13 24-hour TSP + 3 x 1-hour TSP	14 Good Friday	15 The day following Good Friday
16	17 Easter Monday	18 Water (I5, C3a, C3b)	19 ET Site Walk(09:30 am – 11:00 am) with Liantang Project-wide ET and IEC + SSEMC (To be confirmed) 24-hour TSP + 3 x 1-hour TSP, Noise (SR77)	20 Water (I5, C3a, C3b)	21	22 Water (I5, C3a, C3b)
23	24 ET Site Walk(09:30am – 11:00 am) with Fanling Stage 2 IEC & Liantang Project-wide ET and IEC (To be confirmed) Water (I5, C3a, C3b)	25 24-hour TSP + 3 x 1-hour TSP, Noise (SR77)	26 Water (I5, C3a, C3b)	27	28 24-hour TSP + 3 x 1-hour TSP, Water (I5, C3a, C3b)	29
30		·	·		·	



Appendix E Meteorological Data Extracted from Hong Kong Observatory

Daily Extract of Meteorological Observations , March 2017

			King's Park	Waglan Is	Waglan Island^						
Day	Mean Pressure (hPa)	Air T Absolute Daily Max (deg. C)	empera Mean (deg. C)	ature Absolute Daily Min (deg. C)	Mean Dew Point (deg. C)	Mean Relative Humidity (%)	Mean Amount of Cloud (%)	Total Rainfall (mm)	Total Bright Sunshine (hours)	Prevailing Wind Direction (degrees)	Mean Wind Speed (km/h)
01	1019.5	22.9	18.8	15.9	12.3	67	72	0.0	4.2		-
02	1019.2	23.9	19.4	17.2	6.5	45	12	0.0	10.6		
03	1017.0	20.1	17.4	15.7	11.0	67	43	0.0	7.6		
04	1014.1	21.8	18.7	16.8	13.7	73	76	0.0	6.5		
05	1012.4	24.0	20.7	18.7	17.7	83	80	0.0	1.9	m	
06	1013.7	23.5	20.3	17.9	16.6	80	76	Trace	2.1		
07	1016.5	20.7	18.0	17.1	13.5	75	87	Trace	2.9		
08	1017.5	17.3	16.3	15.0	13.9	86	89	2.8	0.0		
09	1015.7	19.6	17.0	16.0	12.2	74	88	Trace	0.8		
10	1012.5	19.2 17.8		16.4	16.1	90	89	Trace	0.8		
11	1015.1	18.4	17.5	16.7	15.5	88	91	Trace	0.0		
12	1014.3	19.5	18.4	17.0	16.8	90	92	1.0	0.0		
13	1011.8	24.4	21.7	19.4	20.3	92	86	0.0	2.1		
14	1015.8	22.0	19.1	16.8	18.2	94	93	8.5	0.0		
15	1018.2	17.9	16.8	16.2	12.4	75	88	Trace	1.4		
16	1016.4	19.0	17.8	16.8	13.8	78	88	Trace	0.5		
17	1017.2	20.4	18.1	17.0	15.8	86	88	Trace	1.0		
18	1017.8	20.1	18.9	17.4	17.2	90	91	0.3	0.0		
19	1017.3	20.6	19.8	18.9	18.9	94	99	10.7	0.0		
20	1015.1	27.1	21.9	18.6	19.4	86	61	Trace	8.5		
21	1015.0	27.6	22.9	19.1	20.2	85	69	0.6	10.4		-
22	1014.1	19.7	18.8	17.6	16.8	88	88	0.9	0.0		
23	1015.0	24.6	21.2	19.0	18.3	84	83	0.0	4.0		
24	1016.3	22.4	20.8	18.9	17.9	83	85	Trace	3.4		
25	1017.2	23.4	20.2	16.5	17.4	84	82	Trace	0.9		
26	1022.0	16.9	15.8	13.8	11.6	76	86	1.0	0.1		
27	1022.7	21.5	18.9	16.3	9.5	55	73	0.0	4.3		
28	1019.2	24.9	20.6	18.1	14.9	70	60	0.0	9.4		
29	1018.3	23.7	21.7	20.4	18.8	84	88	0.3	0.7		
30	1017.3	23.1	21.9	21.0	19.9	89	88	Trace	0.4		
31	1015.3	23.7	20.1	15.5	18.8	92	85	21.9	0.7		
Mean/Total	1016.4	21.7	19.3	17.3	15.7	81	80	48.0	85.2		
Normal [§]	1016.0	21.4	19.1	17.2	15.7	82	79	82.2	90.8	060	23.0

*** unavailable

^ Information of wind direction and wind speed for Waglan Island are based on automatic weather station data since January 1989

Trace means rainfall less than 0.05 mm

§ 1981-2010 Climatological Normal, unless otherwise specified




Appendix F Air Quality Monitoring Results and their Graphical Presentation


Sampling Weather Date Condition		Starting Time	Paper No.	Wt. of paper (g)			Elapse Time		Flow Rate (CFM)			Flow Rate (m ³ /min)			Total Volume	TSP Concentration	Action Level	Limit Level	Wind speed	Wind direction	NOE	IR	
	Time		Initial Wt.	Final Wt.	Wt. of Dust	Initial	Final	Sampling Hour	Initial	Final	Avg Flow Rate	Initial	Final	Avg Flow Rate	(m³)	(µg/m³)	(µg/m3)	(µg/m3)	m/s				
2-Mar-17	Sunny	12:10	CC16	2.8606	3.1194	0.2588	6115.67	6139.67	24.00	51	51	51.0	1.44	1.44	1.44	2079.59	124.4	170.3	260.0	<5	N		
8-Mar-17	Fine	12:09	CC18	2.8936	3.1055	0.2119	6142.67	6166.67	24.00	51	51	51.0	1.44	1.44	1.44	2079.59	101.9	170.3	260.0	<5	N		
14-Mar-17	Cloudy	12:11	CC20	2.9093	2.9976	0.0883	6169.67	6193.67	24.00	51	51	51.0	1.44	1.44	1.44	2079.59	42.5	170.3	260.0	<5	N		
20-Mar-17	Sunny	12:10	CC22	2.9181	3.0841	0.1660	6196.67	6220.67	24.00	51	51	51.0	1.44	1.44	1.44	2079.59	79.8	170.3	260.0	<5	N		
24-Mar-17	Sunny	12:10	CC24	2.9002	3.0277	0.1275	6223.67	6247.67	24.00	51	51	51.0	1.44	1.44	1.44	2079.59	61.3	170.3	260.0	<5	N		
30-Mar-17	Sunny	12:11	CC26	2.9595	3.0698	0.1103	6250.67	6274.67	24.00	51	51	51.0	1.44	1.44	1.44	2079.59	53.0	170.3	260.0	<5	N		
																Average	77.2						
																Min	42.5						
																Max	124.4						

24-Hour TSP Monitoring Result at Station: SR77

Note:

No major dust source observed during the monitoring period Data in **Bold** denotes exceedanece of respective Action Level Data in **Bold Underline** denotes exceedance of respective Limit Level

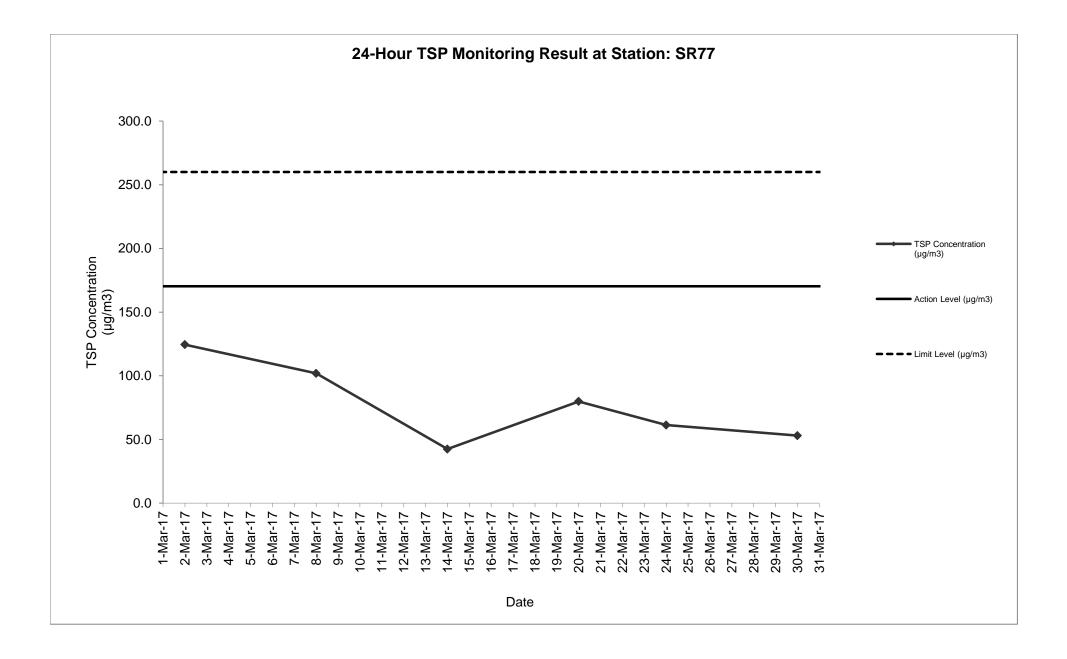


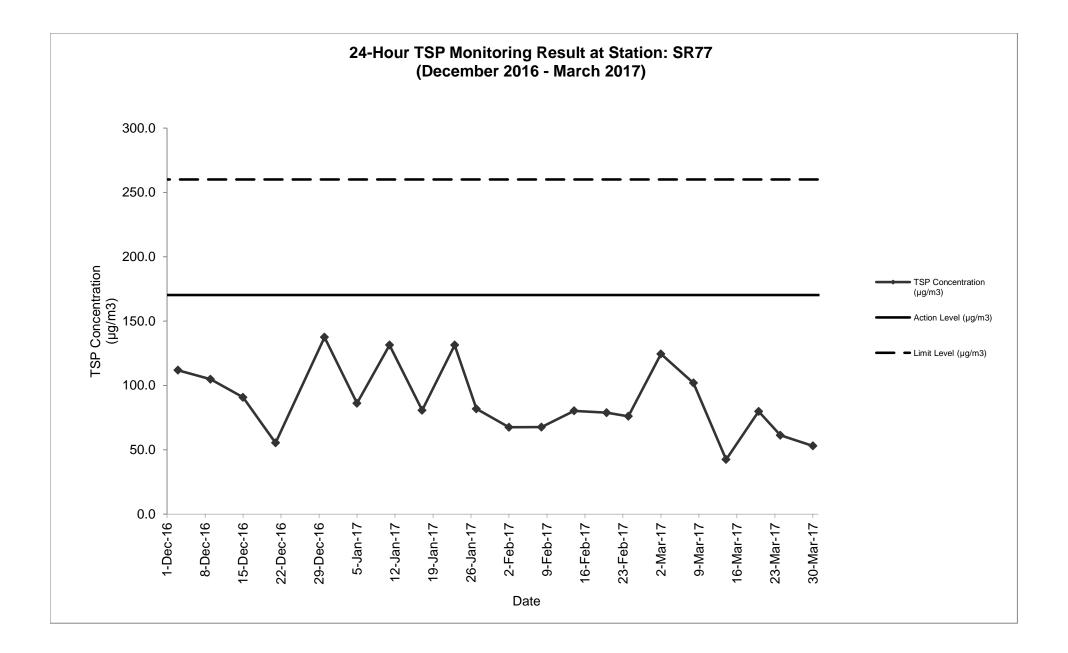


Sampling Date	Weather Condition	Starting Time	Paper No.	Wt. of paper (g)			Elapse Time			Flow Rate (CFM)			Flow Rate (m ³ /min)			Total Volume	TSP Concentratio n	Action Level	Limit Level	Wind speed	Wind direction
Date				Initial Wt.	Final Wt.	Wt. of Dust	Initial	Final	Sampling Hour	Initial	Final	Avg Flow Rate	Initial	Final	Avg Flow Rate	(m³)	 (μg/m³)	(µg/m3)	(µg/m3)	m/s	unection
2-Mar-17	Sunny	09:00	CC17A	2.8712	2.8879	0.0167	6112.67	6113.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	192.7	292.7	500.0	<5	N
	Sunny	10:02	CC17B	2.8683	2.8853	0.0170	6113.67	6114.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	196.2	292.7	500.0	<5	N
	Sunny	11:08	CC17C	2.8592	2.8756	0.0164	6114.67	6115.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	189.3	292.7	500.0	<5	N
8-Mar-17	Fine	09:00	CC19A	2.8530	2.8638	0.0108	6139.67	6140.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	124.6	292.7	500.0	<5	N
	Fine	10:03	CC19B	2.8176	2.8281	0.0105	6140.67	6141.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	121.2	292.7	500.0	<5	N
	Fine	11:06	CC19C	2.8119	2.8229	0.0110	6141.67	6142.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	126.9	292.7	500.0	<5	N
14-Mar-17	Cloudy	09:00	CC21A	2.9154	2.9291	0.0137	6166.67	6167.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	158.1	292.7	500.0	<5	N
	Cloudy	10:04	CC21B	2.8769	2.8902	0.0133	6167.67	6168.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	153.5	292.7	500.0	<5	N
	Cloudy	11:08	CC21C	2.9011	2.9141	0.0130	6168.67	6169.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	150.0	292.7	500.0	<5	N
20-Mar-17	Sunny	09:00	CC23A	2.8942	2.9107	0.0165	6193.67	6194.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	190.4	292.7	500.0	<5	N
	Sunny	10:03	CC23B	2.8691	2.8861	0.0170	6194.67	6195.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	196.2	292.7	500.0	<5	N
	Sunny	11:06	CC23C	2.8955	2.9121	0.0166	6195.67	6196.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	191.6	292.7	500.0	<5	N
24-Mar-17	Sunny	09:00	CC25A	2.8785	2.8936	0.0151	6220.67	6221.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	174.3	292.7	500.0	<5	N
	Sunny	10:02	CC25B	2.8715	2.8864	0.0149	6221.67	6222.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	172.0	292.7	500.0	<5	N
	Sunny	11:08	CC25C	2.8665	2.8812	0.0147	6222.67	6223.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	169.6	292.7	500.0	<5	N
30-Mar-17	Sunny	09:00	CC27A	2.8888	2.9085	0.0197	6247.67	6248.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	227.4	292.7	500.0	<5	N
	Sunny	10:03	CC27B	2.8441	2.8629	0.0188	6248.67	6249.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	217.0	292.7	500.0	<5	N
	Sunny	11:06	CC27C	2.8563	2.8743	0.0180	6249.67	6250.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	207.7	292.7	500.0	<5	N
																Average	175.5				
																Min	121.2				
																Max	227.4				

Detailed Calculation of 1-Hour TSP Monitoring Result at Station: SR77

Note:No major dust source observed during the monitoring periodData in Bold denotes exceedanece of respective Action LevelData in Bold Underlinedenotes exceedance of respective Limit Level

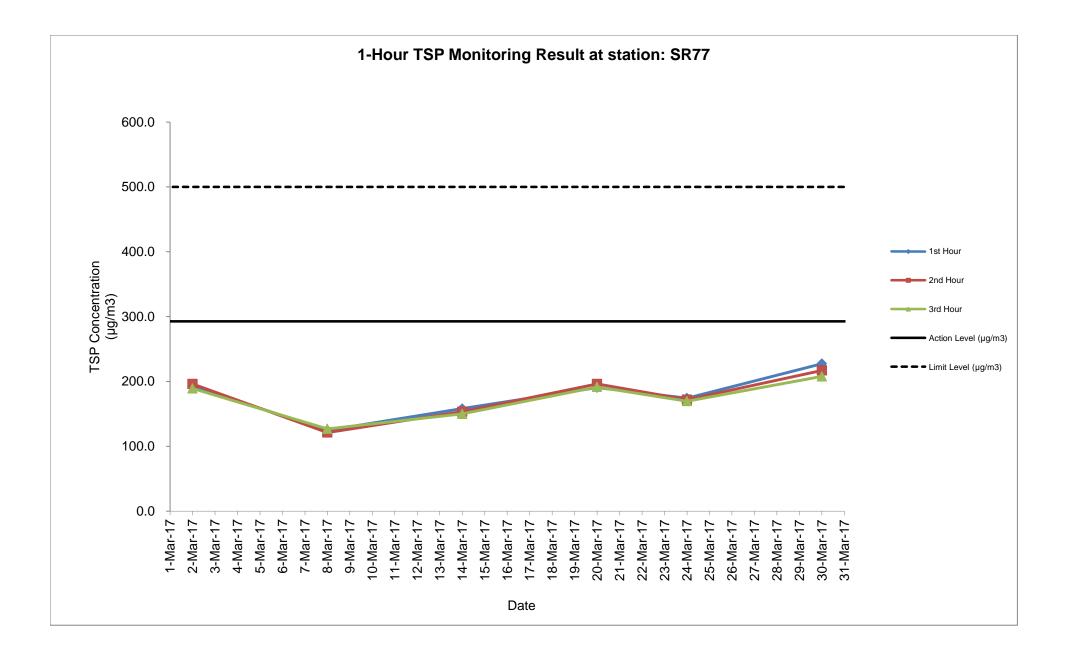

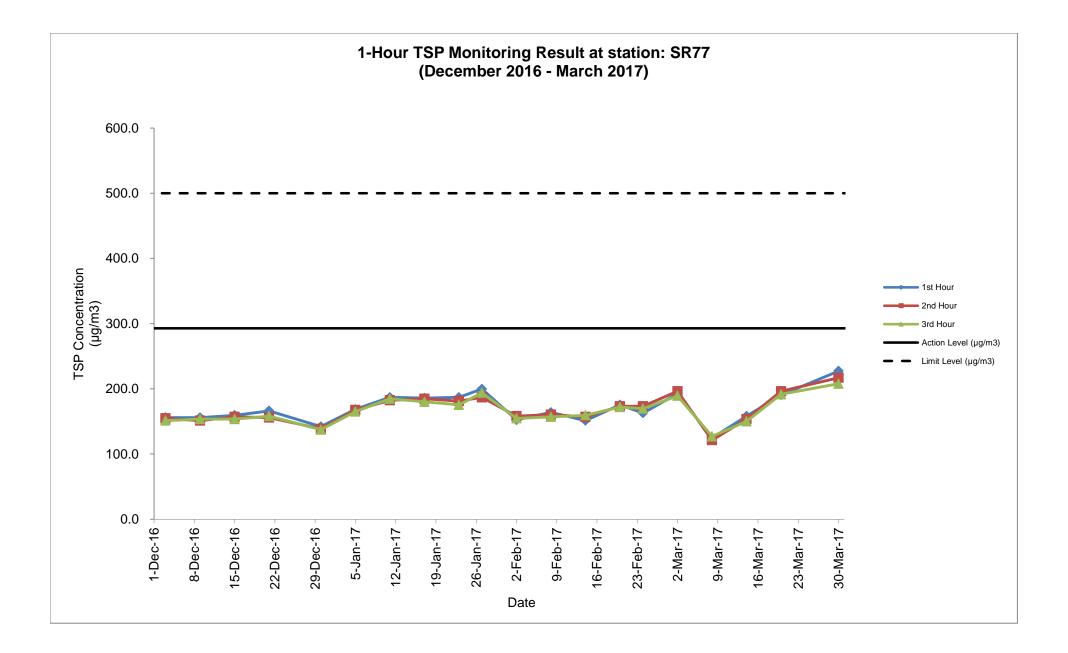



Appendix G Summary of Event and Action Plan



Event and Action Plan for Air Quality

Event	Action												
	ET Leader	IEC	ER	Contractor									
Action level being exceeded by one sampling day	 Identify source; Inform IEC and ER; 	 Check monitoring data submitted by ET; 	1. Notify Contractor.	1. Rectify any unacceptable practice;									
Sampling day	 Repeat measurement to confirm finding; 	2. Check Contractor's working method.		2. Amend working methods if appropriate.									
	 Increase monitoring frequency to daily. 												
Action level being	1. Identify source;	1. Check monitoring data submitted	1. Confirm receipt of notification of	1. Submit proposals for remedial									
exceeded by two or more consecutive	2. Inform IEC and ER;	by ET;	failure in writing;	actions to IEC within 3 working									
sampling days	 Repeat measurements to confirm findings; 	 Check Contractor's working method; 	 Notify Contractor; Ensure remedial measures 	days of notification;2. Implement the agreed proposals;									
	 Increase monitoring frequency to daily; 	 Discuss with ET and Contractor on possible remedial measures; 	properly implemented.	3. Amend proposal if appropriate.									
	 Discuss with IEC and Contractor on remedial actions required; 	 Advise the ER on the effectiveness of the proposed remedial measures; 											
	 If exceedance continues, arrange meeting with IEC and ER; 	 Supervise Implementation of remedial measures. 											
	 If exceedance stops, cease additional monitoring. 												

Event	Action											
	ET Leader	IEC	ER	Contractor								
Limit level being exceeded by one sampling day	 Identify source; Inform IEC, ER, Contractor and EPD; Repeat measurement to confirm 	 Check monitoring data submitted by ET; Check Contractor's working method; 	 Confirm receipt of notification of exceedance in writing; Notify Contractor; Ensure remedial measures 	 Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC within 3 working days of netification; 								
	 finding; Increase monitoring frequency to daily; Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results. 	 Discuss with ET and Contractor on possible remedial measures; Advise ER on the effectiveness of the proposed remedial measures; Supervise implementation of remedial measures. 	properly implemented.	days of notification;3. Implement the agreed proposals;4. Amend proposal if appropriate.								
Limit level being exceeded by two or more consecutive sampling days	 Notify IEC, ER, Contractor, and EPD; Identify source; Repeat measurement to confirm findings; Increase frequency to daily; Analyse Contractor's working procedures to determine possible mitigation to be; Arrange meeting with IEC and ER to discuss the remedial actions to be taken; Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; If exceedance stops, cease additional monitoring. 	 Discus amongst ER, ET, and Contractor on the potential remedial actions; Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise ER accordingly; Supervise the implementation of remedial measures. 	 Confirm receipt of notification of exceedance in writing; Notify Contractor; In consultation with the IEC, agree with the Contractor on the remedial measures to be implemented; Ensure remedial measures properly implemented; If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated. 	 Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC within 3 working days of notification; Implement the agreed proposals; Resubmit proposals if problem still not under control; Stop the relevant portion of works as determined by ER until the exceedance is abated. 								

Event and Action Plan for Noise

Event	Action											
	ET Leader	IEC	ER	Contractor								
Action Level	 Notify IEC and the Contractor. Carry out investigation. 	1. Review with analysed results submitted by ET.	1. Confirm receipt of notification of failure in writing.	1. Submit noise mitigation proposals to IEC.								
	 Carry out investigation. Report the results of investigation to IEC and the Contractor. Discuss with the Contractor and formulate remedial measures. Increase monitoring frequency to check mitigation effectiveness. 	 Review the proposed remedial measures by the Contractor and advise ER accordingly. Supervise the implement of remedial measures. 	 Notify the Contractor. Require the Contractor to propose remedial measures for the analysed noise problem. Ensure remedial measures are properly implemented. 	2. Implement noise mitigation proposals.								
Limit Level	 Notify IEC, ER, EPD and the Contractor. Identify the source. Repeat measurement to confirm findings. Increase monitoring frequency. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented. Inform IEC, ER, and EPD the causes & actions taken for the exceedances. Assess effectiveness of the Contractor's remedial actions and keep IEC, EPD and ER informed of the results. If exceedance stops, cease 	 Discuss amongst ER, ET Leader and the Contractor on the potential remedial actions. Review the Contractor's remedial actions whenever necessary to assure their effectiveness and advise ER accordingly. Supervise the implementation of remedial measures. 	 Confirm receipt of notification of failure in writing. Notify the Contractor. Require the Contractor to propose remedial measures for the analysed noise problem. Ensure remedial measures are properly implemented. If exceedance continues, consider what activity of the work is responsible and instruct the Contractor to stop that activity of work until the exceedance is abated. 	 Take immediate action to avoid further exceedance. Submit proposals for remedial actions to IEC within 3 working days of notification. Implement the agreed proposals. Resubmit proposals if problem still not under control. Stop the relevant activity of works as determined by the ER until the exceedance is abated. 								



Event and Action Plan for Water Quality

Event	Action											
	ET Leader	IEC	ER	Contractor								
Action level being exceeded by one sampling day	 Repeat in-situ measurement on next day of exceedance to confirm findings; 		1. Confirm receipt of notification of failure in writing; Notify, Contractor	 Inform the ER & confirm notification of the non-compliance in writing; 								
	2. Identify source(s) of impact;			2. Rectify unacceptable practice;								
	3. Inform IEC, Contractor & ER;			3. Amend working methods if								
	 Check monitoring data, all plant, equipment & contractor's working methods; 			appropriate.								
Action level being exceeded by two or more consecutive sampling days	 Repeat measurement on next day of exceedance to confirm findings; 	 Checking monitoring data submitted by ET & Contractor's working method; 	 Discuss with IEC on the proposed mitigation measures; Ensure mitigation measures 	 Inform the Engineer & confirm notification of the non-compliance in writing; 								
sampling days	Identify source(s) of impact;	2. Discuss with ET & Contractor on	properly implemented;	2. Rectify unacceptable practice;								
	3. Inform IEC, Contractor, ER & EPD;	3. Review the proposed mitigation	3. Assess the effectiveness of the implemented mitigation	3. Check all plant & equipment & consider changes of working								
	 Check monitoring data, all plant, equipment & Contractor's working methods; 	accordingly;	measures.	 methods; 4. Submit proposal of mitigation measures to ER within 3 working down of patitionation 2 discuss with 								
	5. Discuss mitigation measures with IEC, ER & Contractor;	4. Supervise the implementation of mitigation measures.		days of notification & discuss with ET, IEC & ER;								
	 Ensure mitigation measures are implemented; 			 Implement the agreed mitigation measures. 								
	 Increase monitoring to daily until no exceedance of Action level. 											

Event	Action											
	ET Leader	IEC	ER	Contractor								
Limit level being exceeded by one sampling day	 Repeat measurement on next day of exceedance to confirm findings; Identify source(s) of impact; Inform IEC, contractor, ER & EPD; Check monitoring data, all plant, equipment & contractor's working methods; Discuss mitigation measures with IEC, Contractor & ER. 	 Checking monitoring data submitted by ET & Contractor's working method; Discuss with ET & Contractor on the possible mitigation measures; Review the proposed mitigation measures submitted by Contractor & advise the ER accordingly. 	 Confirm receipt of notification of failure in writing; Discuss with IEC, ET & Contractor on the proposed mitigation measures; Request Contractor to review the working methods. 	 Inform the ER & confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant & equipment & consider changes of working methods; Submit proposal of mitigation measures to ER within 3 working days of notification & discuss with ET, IEC & ER. 								
Limit level being exceeded by two or more consecutive sampling days	 Repeat measurement on the next day of exceedance to confirm findings; Identify source(s) of impact; Inform IEC, Contractor, ER & EPD; Check monitoring data, all plant, equipment & Contractor's working methods; Discuss mitigation measures within IEC, Contractor & ER; Ensure mitigation measures are implemented; Increase the monitoring frequency to daily until no exceedance of Limit level for two consecutive days. 	 Checking monitoring data submitted by ET & Contractor's working method; Discuss with ET & Contractor on potential remedial actions; Review Contractor's mitigation measures whenever necessary to assure their effectiveness & advise the ER accordingly; Supervise the implementation of mitigation measures. 	review the working methods;	 measures; 4. Resubmit proposals of mitigation measures if problem still not under control; 								



Appendix H Noise Monitoring Results and their Graphical Presentation

Appendix H Noise Monitoring Results and their Graphical Presentation


Noise Monitoring Result at SR77


Date	Weather	Start	End	Measure	ed Noise Level	(dB(A))*	Baseline Corrected	Baseline Noise Level	Limit Level	Exceedance
	Condition	Time	Time	L10(30min)	L90(30min)	Leq(30min)	Level, dB(A)**	(dB(A)), Leq(30min)	dB(A)	(Y / N)
2017/03/02	Sunny	11:30	12:00	93.0	61.0	69.0	-	67.8	75.0	Ν
2017/03/08	Fine	11:30	12:00	97.0	65.0	70.0	-	67.8	75.0	Ν
2017/03/14	Cloudy	11:30	12:00	95.0	62.0	66.0	-	67.8	75.0	Ν
2017/03/20	Sunny	11:03	11:33	99.0	62.5	67.5	-	67.8	75.0	Ν
2017/03/30	Sunny	11:30	12:00	97.0	58.0	65.5	-	67.8	75.0	Ν
					Average	67.6				
					Minimum	65.5				
					Maximum	70.0				

Remarks

* +3dB(A) Façade effect correction included

** Baseline corrected level is only calculated when measured noise level (Leq) > limit level.

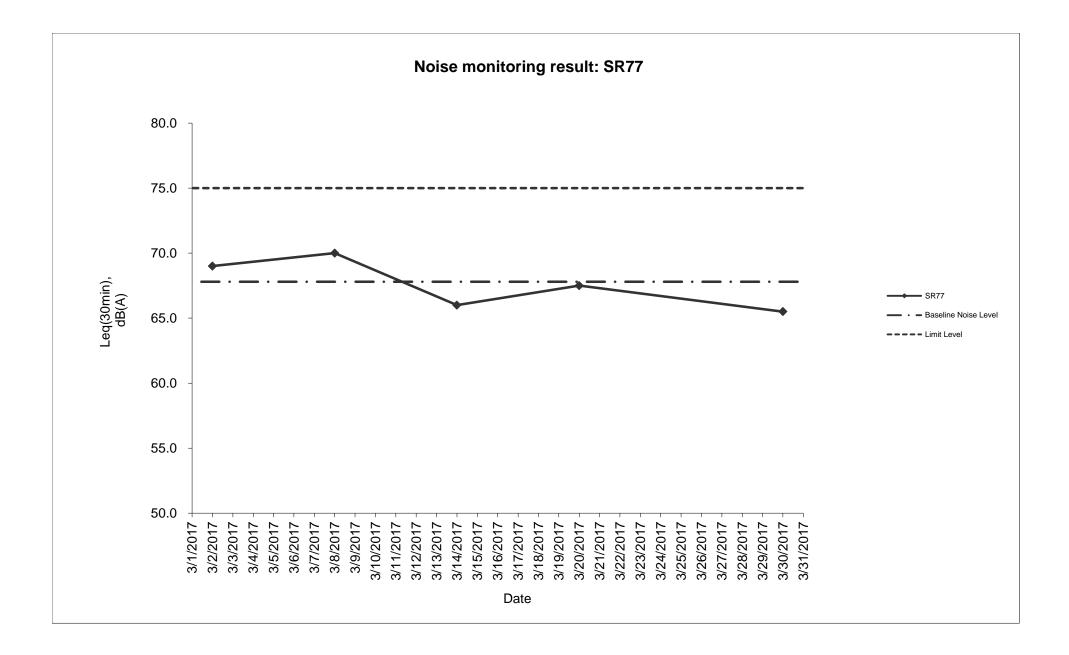

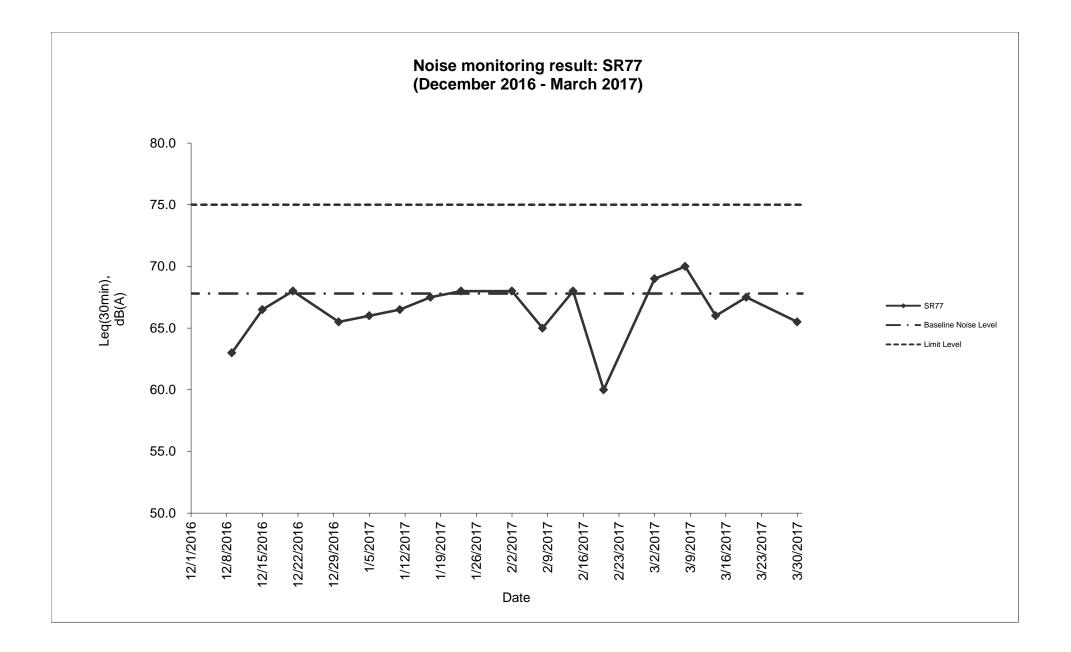



Appendix I Laboratory Results for Water Quality



Rm. 510 & 611-612, Hong Leong Plaza, 33 Lok Yip Rd., Fanling, N.T., H.K. Tel: (852) 2676 2983 Fax: (852) 2676 2860 e-mail: <u>ell@envirolabs.com.hk</u> website: <u>http://www.envirolabs.com.hk</u>

TEST REPORT

JOB NO.	;	N17030045	Ū.			
DATE OF ISSUE	:	03 March 2017		PAGE	3	Page 1 of 1

1. Customer

Enovative Environmental Service Limited Room 811, Hin Pui House, Hin Keng Estate, Tai Wai, Shatin, N.T., Hong Kong Attn.: Mr. Thomas Wong

2. Sample Identification

Sample Description	;	Six batch(es) of water samples said to be discharge water were submitted by the customer and received at the laboratory in ambient condition.
Sampling		Conducted by the customer.
Sampling Date ^a		01 Mar 2017
Received Date	t.	01 Mar 2017, 17:45
Testing Period	2	01 Mar 2017, 18:00 to 03 Mar 2017

3. Test Methods

Parameters	Reference Methods	Limits of Reporting
Total Suspended Solids dried at 103-105°C	APHA ^b 17e 2540 D	2.5 mg/L

4. Test Results^c

Sample I.D. marked by the customer	Sample No.	Parameters	Test Results	Units
LT3 I5-1 1/3/2017	001	Total Suspended Solids	8.9	mg/L
LT3 I5-2 1/3/2017	002	Total Suspended Solids	8.2	mg/L
LT3 C3a-1 1/3/2017	003	Total Suspended Solids	21	mg/L
LT3 C3a-2 1/3/2017	004	Total Suspended Solids	21	mg/L
LT3 C3b-1 1/3/2017	005	Total Suspended Solids	7.7	mg/L
LT3 C3b-2 1/3/2017	006	Total Suspended Solids	11	mg/L

--- END OF REPORT ---

APPROVED SIGNATORY:

John Chi-wai YAU

John Chi-wai YAU Assistant Lab. Manager

^a Information is provided by the customer

^b APHA Standard Methods for the Examination of Water and Wastewater, AWWA

[°] Test results relate only to the items received



Rm. 510 & 611-612, Hong Leong Plaza, 33 Lok Yip Rd., Fanling, N.T., H.K. Tel: (852) 2676 2983 Fax: (852) 2676 2860 e-mail: <u>ell@envirolabs.com.hk</u> website: <u>http://www.envirolabs.com.hk</u>

TEST REPORT

JOB NO.	:	N17030122	67. 51		
DATE OF ISSUE	:	07 March 2017	PAGE	:	Page 1 of 1

1. Customer

Enovative Environmental Service Limited Room 811, Hin Pui House, Hin Keng Estate, Tai Wai, Shatin, N.T., Hong Kong

Attn.: Mr. Thomas Wong

2. Sample Identification

customer and received at the laboratory in ambient condition.	
Sampling : Conducted by the customer.	
Sampling Date ^a 03 Mar 2017	
Received Date : 03 Mar 2017	
Testing Period : 03 Mar 2017 to 07 Mar 2017	

3. Test Methods

Parameters	Reference Methods	Limits of Reporting	
Total Suspended Solids dried at 103-105°C	APHA ^b 17e 2540 D	2.5 mg/L	

4. Test Results^c

Sample I.D. marked by the customer	Sample No.	Parameters	Test Results	Units
LT3 I5-1 3/3/2017	001	Total Suspended Solids	15	mg/L
LT3 I5-2 3/3/2017	002	Total Suspended Solids	16	mg/L
LT3 C3a-1 3/3/2017	003	Total Suspended Solids	15	mg/L
LT3 C3a-2 3/3/2017	004	Total Suspended Solids	19	mg/L
LT3 C3b-1 3/3/2017	005	Total Suspended Solids	7.5	mg/L
LT3 C3b-2 3/3/2017	006	Total Suspended Solids	7.3	mg/L

--- END OF REPORT ---

^a Information is provided by the customer

° Test results relate only to the items received

APPROVED SIGNATORY:

^b APHA Standard Methods for the Examination of Water and Wastewater, AWWA



Rm. 510 & 611-612, Hong Leong Plaza, 33 Lok Yip Rd., Fanling, N.T., H.K. Tel: (852) 2676 2983 Fax: (852) 2676 2860 e-mail: ell@envirolabs.com.hk website: http://www.envirolabs.com.hk

TEST REPORT

JOB NO.		N17030165			
DATE OF ISSUE	;	08 March 2017	PAGE	1	Page 1 of 1

1. Customer

Enovative Environmental Service Limited Room 811, Hin Pui House, Hin Keng Estate, Tai Wai, Shatin, N.T., Hong Kong Attn.: Mr. Thomas Wong

2. Sample Identification

Sample Description	1	Six batch(es) of water samples said to be discharge water were submitted by the customer and received at the laboratory in ambient condition.
Sampling	:	Conducted by the customer.
Sampling Date ^a		06 Mar 2017
Received Date	:	06 Mar 2017
Testing Period		06 Mar 2017 to 08 Mar 2017

3. Test Methods

Parameters	Reference Methods	Limits of Reporting		
Total Suspended Solids dried at 103-105°C	APHA ^b 17e 2540 D	2.5 mg/L		

4. Test Results^c

Sample I.D. marked by the customer	Sample No.	Parameters	Test Results	Units
LT3 I5-1 6/3/2017	001	Total Suspended Solids	11	mg/L
LT3 15-2 6/3/2017	002	Total Suspended Solids	11	mg/L
LT3 C3a-1 6/3/2017	003	Total Suspended Solids	7.3	mg/L
LT3 C3a-2 6/3/2017	004	Total Suspended Solids	12	mg/L
LT3 C3b-1 6/3/2017	005	Total Suspended Solids	4.0	mg/L
LT3 C3b-2 6/3/2017	006	Total Suspended Solids	3.9	mg/L

--- END OF REPORT ---

^a Information is provided by the customer

^b APHA Standard Methods for the Examination of Water and Wastewater, AWWA

° Test results relate only to the items received

APPROVED SIGNATORY:

0



Rm. 510 & 611-612, Hong Leong Plaza, 33 Lok Yip Rd., Fanling, N.T., H.K. Tel: (852) 2676 2983 Fax: (852) 2676 2860 e-mail: <u>ell@envirolabs.com.hk</u> website: <u>http://www.envirolabs.com.hk</u>

TEST REPORT

JOB NO.	•	N17030228			
DATE OF ISSUE	:	10 March 2017	PAGE	•	Page 1 of 1

1. Customer

Enovative Environmental Service Limited Room 811, Hin Pui House,

Hin Keng Estate,

Tai Wai, Shatin, N.T., Hong Kong

Attn.: Mr. Thomas Wong

2. Sample Identification

Sample Description	:	Six batch(es) of water samples said to be discharge water were submitted by the customer and received at the laboratory in ambient condition.
Sampling	:	Conducted by the customer.
Sampling Date*		08 Mar 2017
Received Date	:	08 Mar 2017
Testing Period	:	08 Mar 2017 to 10 Mar 2017

3. Test Methods

Parameters	Reference Methods	Limits of Reporting
Total Suspended Solids dried at 103-105°C	APHA ^b 17e 2540 D	2.5 mg/L

4. Test Results°

Sample I.D. marked by the customer	Sample No.	Parameters	Test Results	Units
LT3 I5-1 8/3/2017	001	Total Suspended Solids	33	mg/L
LT3 15-2 8/3/2017	002	Total Suspended Solids	34	mg/L
LT3 C3a-1 8/3/2017	003	Total Suspended Solids	29	mg/L
LT3 C3a-2 8/3/2017	004	Total Suspended Solids	27	mg/L
LT3 C3b-1 8/3/2017	005	Total Suspended Solids	12	mg/L
LT3 C3b-2 8/3/2017	006	Total Suspended Solids	12	mg/L

--- END OF REPORT ---

* Information is provided by the customer

APPROVED SIGNATORY:

0

^b APHA Standard Methods for the Examination of Water and Wastewater, AWWA

^e Test results relate only to the items received



Rm. 510 & 611-612, Hong Leong Plaza, 33 Lok Yip Rd., Fanling, N.T., H.K. Tel: (852) 2676 2983 Fax: (852) 2676 2860 e-mail: <u>ell@envirolabs.com.hk</u> website: <u>http://www.envirolabs.com.hk</u>

TEST REPORT

JOB NO.	:	N17030296			
DATE OF ISSUE	3	14 March 2017	PAGE	:	Page 1 of 1

1. Customer

Enovative Environmental Service Limited Room 811, Hin Pui House, Hin Keng Estate, Tai Wai, Shatin, N.T., Hong Kong Attn.: Mr. Thomas Wong

2. Sample Identification

Sample Description	ł	Six batch(es) of water samples said to be discharge water were submitted by the customer and received at the laboratory in ambient condition.
Sampling	:	Conducted by the customer.
Sampling Date ^a		10 Mar 2017
Received Date	:	10 Mar 2017
Testing Period		10 Mar 2017 to 14 Mar 2017

3. Test Methods

Parameters	Reference Methods	Limits of Reporting
Total Suspended Solids dried at 103-105°C	APHA ^b 17e 2540 D	2.5 mg/L

4. Test Results^c

Sample I.D. marked by the customer	Sample No.	Parameters	Test Results	Units
LT3 I5-1 10/3/2017	001	Total Suspended Solids	15	mg/L
LT3 I5-2 10/3/2017	002	Total Suspended Solids	16	mg/L
LT3 C3a-1 10/3/2017	003	Total Suspended Solids	16	mg/L
LT3 C3a-2 10/3/2017	004	Total Suspended Solids	16	mg/L
LT3 C3b-1 10/3/2017	005	Total Suspended Solids	4.7	mg/L
LT3 C3b-2 10/3/2017	006	Total Suspended Solids	5.6	mg/L

--- END OF REPORT ---

APPROVED SIGNATORY:

Susan, Wai-shan Ko Senior Chemist

^a Information is provided by the customer

^b APHA Standard Methods for the Examination of Water and Wastewater, AWWA

[°] Test results relate only to the items received



Rm. 510 & 611-612, Hong Leong Plaza, 33 Lok Yip Rd., Fanling, N.T., H.K. Tel: (852) 2676 2983 Fax: (852) 2676 2860 e-mail: <u>ell@envirolabs.com.hk</u> website: <u>http://www.envirolabs.com.hk</u>

TEST REPORT

JOB NO.	:	N17030330			
DATE OF ISSUE	:	15 March 2017	PAGE	:	Page 1 of 1

1. Customer

Enovative Environmental Service Limited Room 811, Hin Pui House, Hin Keng Estate, Tai Wai, Shatin, N.T., Hong Kong Attn.: Mr. Thomas Wong

2. Sample Identification

Sample Description	ĩ	Six batch(es) of water samples said to be discharge water were submitted by the customer and received at the laboratory in ambient condition.
Sampling	:	Conducted by the customer.
Sampling Date ^a		13 Mar 2017
Received Date	1	13 Mar 2017
Testing Period	1	13 Mar 2017 to 15 Mar 2017

3. Test Methods

Parameters	Reference Methods	Limits of Reporting
Total Suspended Solids dried at 103-105°C	APHA ^b 17e 2540 D	2.5 mg/L

4. Test Results^c

Sample I.D. marked by the customer	Sample No.	Parameters	Test Results	Units
LT3 I5-1 13/3/2017	001	Total Suspended Solids	16	mg/L
LT3 I5-2 13/3/2017	002	Total Suspended Solids	17	mg/L
LT3 C3a-1 13/3/2017	003	Total Suspended Solids	19	mg/L
LT3 C3a-2 13/3/2017	004	Total Suspended Solids	18	mg/L
LT3 C3b-1 13/3/2017	005	Total Suspended Solids	3.6	mg/L
LT3 C3b-2 13/3/2017	006	Total Suspended Solids	5.7	mg/L

--- END OF REPORT ----

APPROVED SIGNATORY:

^a Information is provided by the customer

^b APHA Standard Methods for the Examination of Water and Wastewater, AWWA

[°] Test results relate only to the items received



Rm. 510 & 611-612, Hong Leong Plaza, 33 Lok Yip Rd., Fanling, N.T., H.K. Tel: (852) 2676 2983 Fax: (852) 2676 2860 e-mail: <u>ell@envirolabs.com.hk</u> website: <u>http://www.envirolabs.com.hk</u>

TEST REPORT

JOB NO.	: N17030400		
DATE OF ISSUE	: 17 March 2017	PAGE	: Page 1 of 1

1. Customer

Enovative Environmental Service Limited Room 811, Hin Pui House, Hin Keng Estate, Tai Wai, Shatin, N.T., Hong Kong Attn.: Mr. Thomas Wong

2. Sample Identification

Sample Description	:	Six batch(es) of water samples said to be discharge water were submitted by the customer and received at the laboratory in ambient condition.
Sampling		Conducted by the customer.
Sampling Date ^a		15 Mar 2017
Received Date		15 Mar 2017
Testing Period	:	15 Mar 2017 to 17 Mar 2017

3. Test Methods

Parameters	Reference Methods	Limits of Reporting	
Total Suspended Solids dried at 103-105°C	APHA ^b 17e 2540 D	2.5 mg/L	

4. Test Results°

Sample I.D. marked by the customer	Sample No.	Parameters	Test Results	Units
LT3 I5-1 15/3/2017	001	Total Suspended Solids	5.0	mg/L
LT3 15-2 15/3/2017	002	Total Suspended Solids	5.3	mg/L
LT3 C3a-1 15/3/2017	003	Total Suspended Solids	5.8	mg/L
LT3 C3a-2 15/3/2017	004	Total Suspended Solids	8.8	mg/L
LT3 C3b-1 15/3/2017	005	Total Suspended Solids	4.1	mg/L
LT3 C3b-2 15/3/2017	006	Total Suspended Solids	3.7	mg/L

--- END OF REPORT ---

APPROVED SIGNATORY:

Susan, Wai-shan Ko Senior Chemist

^a Information is provided by the customer

^b APHA Standard Methods for the Examination of Water and Wastewater, AWWA

[°] Test results relate only to the items received



Rm. 510 & 611-612, Hong Leong Plaza, 33 Lok Yip Rd., Fanling, N.T., H.K. Tel: (852) 2676 2983 Fax: (852) 2676 2860 e-mail: <u>ell@envirolabs.com.hk</u> website: <u>http://www.envirolabs.com.hk</u>

TEST REPORT

JOB NO.	: N17030474			
DATE OF ISSUE	: 21 March 2017	PAGE	:	Page 1 of 1

1. Customer

Enovative Environmental Service Limited Room 811, Hin Pui House, Hin Keng Estate, Tai Wai, Shatin, N.T., Hong Kong Attn.: Mr. Thomas Wong

2. Sample Identification

Sample Description	¢	Six batch(es) of water samples said to be discharge water were submitted by the customer and received at the laboratory in ambient condition.
Sampling	2	Conducted by the customer.
Sampling Date ^a		17 Mar 2017
Received Date	1	17 Mar 2017
Testing Period	:	17 Mar 2017 to 21 Mar 2017

3. Test Methods

Parameters	Reference Methods	Limits of Reporting
Total Suspended Solids dried at 103-105°C	APHA ^b 17e 2540 D	2.5 mg/L

4. Test Results^c

Sample I.D. marked by the customer	Sample No.	Parameters	Test Results	Units
LT3 I5-1 17/3/2017	001	Total Suspended Solids	3.2	mg/L
LT3 I5-2 17/3/2017	002	Total Suspended Solids	2.9	mg/L
LT3 C3a-1 17/3/2017	003	Total Suspended Solids	32	mg/L
LT3 C3a-2 17/3/2017	004	Total Suspended Solids	27	mg/L
LT3 C3b-1 17/3/2017	005	Total Suspended Solids	4.9	mg/L
LT3 C3b-2 17/3/2017	006	Total Suspended Solids	5.8	mg/L

--- END OF REPORT ---

APPROVED SIGNATORY:

^a Information is provided by the customer

^b APHA Standard Methods for the Examination of Water and Wastewater, AWWA

[°] Test results relate only to the items received



Rm. 510 & 611-612, Hong Leong Plaza, 33 Lok Yip Rd., Fanling, N.T., H.K. Tel: (852) 2676 2983 Fax: (852) 2676 2860 e-mail: <u>ell@envirolabs.com.hk</u> website: <u>http://www.envirolabs.com.hk</u>

TEST REPORT

JOB NO.	: N17030523			
DATE OF ISSUE	: 22 March 2017	PAGE	1	Page 1 of 1

1. Customer

Enovative Environmental Service Limited Room 811, Hin Pui House, Hin Keng Estate, Tai Wai, Shatin, N.T., Hong Kong Attn.: Mr. Thomas Wong

2. Sample Identification

Six batch(es) of water samples said to be discharge water were submitted by the customer and received at the laboratory in ambient condition.	L
Conducted by the customer.	
20 Mar 2017	
20 Mar 2017	
20 Mar 2017 to 22 Mar 2017	
	Conducted by the customer. 20 Mar 2017 20 Mar 2017

3. Test Methods

Parameters	Reference Methods	Limits of Reporting
Total Suspended Solids dried at 103-105°C	APHA ^b 17e 2540 D	2.5 mg/L

4. Test Results^c

Sample I.D. marked by the customer	Sample No.	Parameters	Test Results	Units
LT3 I5-1 20/3/2017	001	Total Suspended Solids	3.9	mg/L
LT3 I5-2 20/3/2017	002	Total Suspended Solids	3.1	mg/L
LT3 C3a-1 20/3/2017	003	Total Suspended Solids	20	mg/L
LT3 C3a-2 20/3/2017	004	Total Suspended Solids	24	mg/L
LT3 C3b-1 20/3/2017	005	Total Suspended Solids	5.3	mg/L
LT3 C3b-2 20/3/2017	006	Total Suspended Solids	4.6	mg/L

---- END OF REPORT ----

° Test results relate only to the items received

Qü

^a Information is provided by the customer

^b APHA Standard Methods for the Examination of Water and Wastewater, AWWA

Kenneth, Kar-kin LAM Senior Lab. Manager



Rm. 510 & 611-612, Hong Leong Plaza, 33 Lok Yip Rd., Fanling, N.T., H.K. Tel: (852) 2676 2983 Fax: (852) 2676 2860 e-mail: ell@envirolabs.com.hk website: http://www.envirolabs.com.hk

TEST REPORT

JOB NO.	: N17030609			
DATE OF ISSUE	: 24 March 2017	PAGE	;	Page 1 of 1

1. Customer

Enovative Environmental Service Limited Room 811, Hin Pui House, Hin Keng Estate, Tai Wai, Shatin, N.T., Hong Kong Attn.: Mr. Thomas Wong

2. Sample Identification

Sample Description	:	Six batch(es) of water samples said to be discharge water were submitted by the customer and received at the laboratory in ambient condition.
Sampling	:	Conducted by the customer.
Sampling Date ^a		22 Mar 2017
Received Date	:	22 Mar 2017
Testing Period	:	22 Mar 2017 to 24 Mar 2017

3. Test Methods

Parameters	Reference Methods	Limits of Reporting
Total Suspended Solids dried at 103-105°C	APHA ^b 17e 2540 D	2.5 mg/L

4. Test Results^c

Sample I.D. marked by the customer	Sample No.	Parameters	Test Results	Units
LT3 15-1 22/3/2017	001	Total Suspended Solids	3.2	mg/L
LT3 15-2 22/3/2017	002	Total Suspended Solids	3.1	mg/L
LT3 C3a-1 22/3/2017	003	Total Suspended Solids	30	mg/L
LT3 C3a-2 22/3/2017	004	Total Suspended Solids	38	mg/L
LT3 C3b-1 22/3/2017	005	Total Suspended Solids	4.2	mg/L
LT3 C3b-2 22/3/2017	006	Total Suspended Solids	4.7	mg/L

--- END OF REPORT ----

John Chi-wai YAU Assistant Lab. Manager

^a Information is provided by the customer

^b APHA Standard Methods for the Examination of Water and Wastewater, AWWA

[°] Test results relate only to the items received



Rm. 510 & 611-612, Hong Leong Plaza, 33 Lok Yip Rd., Fanling, N.T., H.K. Tel: (852) 2676 2983 Fax: (852) 2676 2860 e-mail: <u>ell@envirolabs.com.hk</u> website: <u>http://www.envirolabs.com.hk</u>

TEST REPORT

JOB NO.	:	N17030674			
DATE OF ISSUE	•	28 March 2017	PAGE	;	Page 1 of 1

1. Customer

Enovative Environmental Service Limited Room 811, Hin Pui House, Hin Keng Estate, Tai Wai, Shatin, N.T., Hong Kong Attn.: Mr. Thomas Wong

2. Sample Identification

Sample Description		Six batch(es) of water samples said to be discharge water were submitted by the customer and received at the laboratory in ambient condition.	
Sampling		Conducted by the customer.	
Sampling Date ^a		24 Mar 2017	
Received Date	1	24 Mar 2017	
Testing Period	:	24 Mar 2017 to 28 Mar 2017	

3. Test Methods

Parameters	Reference Methods	Limits of Reporting
Total Suspended Solids dried at 103-105°C	APHA ^b 17e 2540 D	2.5 mg/L

4. Test Results^c

Sample I.D. marked by the customer	Sample No.	Parameters	Test Results	Units
LT3 I5-1 24/3/2017	001	Total Suspended Solids	4.2	mg/L
LT3 I5-2 24/3/2017	002	Total Suspended Solids	4.0	mg/L
LT3 C3a-1 24/3/2017	003	Total Suspended Solids	11	mg/L
LT3 C3a-2 24/3/2017	004	Total Suspended Solids	20	mg/L
LT3 C3b-1 24/3/2017	005	Total Suspended Solids	4.1	mg/L
LT3 C3b-2 24/3/2017	006	Total Suspended Solids	4.3	mg/L

--- END OF REPORT ---

° Test results relate only to the items received

126

a Information is provided by the customer

^b APHA Standard Methods for the Examination of Water and Wastewater, AWWA

Kenneth, Kar-kin LAM Senior Lab. Manager



Rm. 510 & 611-612, Hong Leong Plaza, 33 Lok Yip Rd., Fanling, N.T., H.K. Tel: (852) 2676 2983 Fax: (852) 2676 2860 e-mail: <u>ell@envirolabs.com.hk</u> website: <u>http://www.envirolabs.com.hk</u>

TEST REPORT

JOB NO.	:	N17030702			
DATE OF ISSUE	:	29 March 2017	PAGE	4	Page 1 of 1

1. Customer

Enovative Environmental Service Limited Room 811, Hin Pui House, Hin Keng Estate, Tai Wai, Shatin, N.T., Hong Kong Attn.: Mr. Thomas Wong

2. Sample Identification

Sample Description	:	Six batch(es) of water samples said to be discharge water were submitted by the customer and received at the laboratory in ambient condition.
Sampling	1	Conducted by the customer.
Sampling Date ^a		27 Mar 2017
Received Date	:	27 Mar 2017
Testing Period	:	27 Mar 2017 to 29 Mar 2017

3. Test Methods

Parameters	Reference Methods	Limits of Reporting	
Total Suspended Solids dried at 103-105°C	APHA ^b 17e 2540 D	2.5 mg/L	

4. Test Results^c

Sample I.D. marked by the customer	Sample No.	Parameters	Test Results	Units
LT3 I5-1 27/3/2017	001	Total Suspended Solids	3.3	mg/L
LT3 I5-2 27/3/2017	002	Total Suspended Solids	4.3	mg/L
LT3 C3a-1 27/3/2017	003	Total Suspended Solids	9.4	mg/L
LT3 C3a-2 27/3/2017	004	Total Suspended Solids	13	mg/L
LT3 C3b-1 27/3/2017	005	Total Suspended Solids	6.2	mg/L
LT3 C3b-2 27/3/2017	006	Total Suspended Solids	7.5	mg/L

--- END OF REPORT ---

^a Information is provided by the customer

APPROVED SIGNATORY:

Qh

^b APHA Standard Methods for the Examination of Water and Wastewater, AWWA

[°] Test results relate only to the items received



Rm. 510 & 611-612, Hong Leong Plaza, 33 Lok Yip Rd., Fanling, N.T., H.K. Tel: (852) 2676 2983 Fax: (852) 2676 2860 e-mail: <u>ell@envirolabs.com.hk</u> website: <u>http://www.envirolabs.com.hk</u>

TEST REPORT

JOB NO.	: N17030753		
DATE OF ISSUE	: 31 March 2017	PAGE	: Page 1 of 1

1. Customer

Enovative Environmental Service Limited Room 811, Hin Pui House, Hin Keng Estate, Tai Wai, Shatin, N.T., Hong Kong Attn.: Mr. Thomas Wong

2. Sample Identification

Sample Description	l	Six batch(es) of water samples said to be discharge water were submitted by the customer and received at the laboratory in ambient condition.
Sampling		Conducted by the customer.
Sampling Date ^a		29 Mar 2017
Received Date	:	29 Mar 2017
Testing Period	:	29 Mar 2017 to 31 Mar 2017

3. Test Methods

Parameters	Reference Methods	Limits of Reporting	
Total Suspended Solids dried at 103-105°C	APHA ^b 17e 2540 D	2.5 mg/L	

4. Test Results^c

Sample I.D. marked by the customer	Sample No.	Parameters	Test Results	Units
LT3 I5-1 29/3/2017	001	Total Suspended Solids	16	mg/L
LT3 I5-2 29/3/2017	002	Total Suspended Solids	15	mg/L
LT3 C3a-1 29/3/2017	003	Total Suspended Solids	24	mg/L
LT3 C3a-2 29/3/2017	004	Total Suspended Solids	27	mg/L
LT3 C3b-1 29/3/2017	005	Total Suspended Solids	9.5	mg/L
LT3 C3b-2 29/3/2017	006	Total Suspended Solids	8.8	mg/L

--- END OF REPORT ---

Susan, Wai-shan Ko Senior Chemist

^a Information is provided by the customer

^b APHA Standard Methods for the Examination of Water and Wastewater, AWWA

[°] Test results relate only to the items received



Rm. 510 & 611-612, Hong Leong Plaza, 33 Lok Yip Rd., Fanling, N.T., H.K. Tel: (852) 2676 2983 Fax: (852) 2676 2860 e-mail: <u>ell@envirolabs.com.hk</u> website: <u>http://www.envirolabs.com.hk</u>

TEST REPORT

JOB NO.	:	N17030838			
DATE OF ISSUE	:	05 April 2017	PAGE	:	Page 1 of 1

1. Customer

Enovative Environmental Service Limited Room 811, Hin Pui House, Hin Keng Estate, Tai Wai, Shatin, N.T., Hong Kong Attn.: Mr. Thomas Wong

2. Sample Identification

:	Six batch(es) of water samples said to be discharge water were submitted by the customer and received at the laboratory in ambient condition.
:	Conducted by the customer.
	31 Mar 2017
3	31 Mar 2017
4	31 Mar 2017 to 05 Apr 2017
	:

3. Test Methods

Parameters	Reference Methods	Limits of Reporting
Total Suspended Solids dried at 103-105°C	APHA ^b 17e 2540 D	2.5 mg/L

4. Test Results^c

Sample I.D. marked by the customer	Sample No.	Parameters	Test Results	Units
LT3 I5-1 31/3/2017	001	Total Suspended Solids	41	mg/L
LT3 I5-2 31/3/2017	002	Total Suspended Solids	40	mg/L
LT3 C3a-1 31/3/2017	003	Total Suspended Solids	20	mg/L
LT3 C3a-2 31/3/2017	004	Total Suspended Solids	40	mg/L
LT3 C3b-1 31/3/2017	005	Total Suspended Solids	13	mg/L
LT3 C3b-2 31/3/2017	006	Total Suspended Solids	14	mg/L

--- END OF REPORT ---

APPROVED SIGNATORY:

^a Information is provided by the customer

^bAPHA Standard Methods for the Examination of Water and Wastewater, AWWA

[°] Test results relate only to the items received



Appendix J Water Quality Monitoring Results and their Graphical Presentation

Project Name:Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and
Infrastructure works - Contract 3
Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange
and Fanling - Stage 2

Date of Monitoring:	3/1/2017	Weather: Cloudy
---------------------	----------	-----------------

Monitoring	Time	Water	Temper	ature (oC)	r	эΗ	DO	(mg/L)	DO (% s	aturation)	Turbic	dity (NTU)	Salir	nity (g/L)	SS	(mg/L)
Location		Depth (m)	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	11:19	<0.5	20.3	20.3	6.5	6.5	8.0	8.3	88.3	91.2	21.5	21.5	<0.1	<0.1	21.0	21.0
CJa	11.19	~0.5	20.3	20.5	6.5	0.5	8.5	0.5	94.0	91.2	21.5	21.5	<0.1	<0.1	21.0	21.0
C3b	11:43	<0.5	19.4	19.4	6.9	6.9	8.6	8.6	94.1	93.9	10.1	10.1	<0.1	<0.1	7.7	9.4
030	11.43	<0.5	19.4	19.4	6.9	0.9	8.6	0.0	93.7	93.9	10.1	10.1	<0.1	<0.1	11.0	9.4
IE	11.50	<0 F	19.9	10.0	7.1	7.1	7.9	0.1	87.3	90.0	15.2	15.0	<0.1	-0.1	8.9	9.6
GI	11:59	<0.5	19.9	19.9	7.1	7.1	8.2	8.1	90.7	89.0	15.2	15.2	<0.1	<0.1	8.2	8.6

Date of Monitoring: 3/3/2017

Weather : Sunny

Monitoring	Time	Water	Temper	ature (oC)	p	Н	DO	(mg/L)	DO (% s	aturation)	Turbio	dity (NTU)	Salir	nity (g/L)	SS	(mg/L)
Location		Depth (m)	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	12:08	<0.5	21.6	21.6	6.7	6.7	7.9	8.2	89.6	92.7	25.5	25.5	<0.1	<0.1	15	17.0
CSa	12.00	<0.5	21.6	21.0	6.7	0.7	8.4	0.2	95.8	92.7	25.5	25.5	<0.1	<0.1	19	17.0
C3b	12:30	<0.5	19.8	19.8	6.9	6.9	8.2	8.5	90.2	93.0	7.6	7.6	<0.1	<0.1	7.5	7.4
030	12.30	<0.5	19.8	19.0	6.9	0.9	8.7	0.5	95.7	93.0	7.6	7.0	<0.1	<0.1	7.3	7.4
15	12:41	<0.5	21.3	21.2	7.1	7 1	7.4	7.8	83.9	88.0	22.5	22.5	<0.1	<0.1	15	15.5
GI	12.41	<0.5	21.3	21.5	7.1	7.1	8.1	1.0	92.1	88.0	22.5	22.5	<0.1	<0.1	16	15.5

Date of Monitoring:

3/6/2017

3/8/2017

Weather : Sunny

Monitoring	Time	Water	Temper	ature (oC)	p	Н	DO	(mg/L)	DO (% s	aturation)	Turbic	dity (NTU)	Salir	nity (g/L)	SS	(mg/L)
Location		Depth (m)	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	15:11	<0.5	24.4	24.4	6.7	67	8.0	8.0	91.1	91.5	20.4	20.4	<0.1	<0.1	7.3	9.7
UJa	10.11	~0.5	24.4	24.4	6.7	0.7	8.0	0.0	91.8	91.5	20.4	20.4	<0.1	<0.1	12	9.7
C3b	15:32	<0.5	21.9	21.9	6.9	6.9	8.1	8.1	92.6	92.9	9.1	9.1	<0.1	<0.1	4	4.0
030	10.52	×0.5	21.9	21.9	6.9	0.9	8.1	0.1	93.1	92.9	9.1	9.1	<0.1	<0.1	3.9	4.0
15	15:45	<0.5	23.3	23.3	7.1	7 1	7.9	7 0	88.6	88.2	16.4	16.4	<0.1	-0.1	11	11.0
G	15.45	~0.5	23.3	23.3	7.1	1.1	7.9	7.9	87.8	00.2	16.4	10.4	<0.1	<0.1	11	11.0

Date of Monitoring:

Weather: Rainy

Monitoring	Time	Water	Temper	ature (oC)	p	H	DO	(mg/L)	DO (% s	aturation)	Turbic	lity (NTU)	Salir	nity (g/L)	SS	(mg/L)
Location		Depth (m)	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	11:34	<0.5	18.2	18.2	6.8	6.8	8.6	9.0	91.1	95.3	43.5	43.5	<0.1	<0.1	29	28.0
UJa	11.54	~0.5	18.2	10.2	6.8	0.0	9.4	9.0	99.5	90.0	43.5	43.5	<0.1	V 0.1	27	20.0
C3b	11:55	<0.5	18.2	18.2	6.9	6.9	9.0	8.8	95.7	93.7	20.4	20.4	<0.1	<0.1	12	12.0
030	11.55	NO.5	18.2	10.2	6.9	0.9	8.6	0.0	91.7	93.7	20.4	20.4	<0.1	V 0.1	12	12.0
15	12:10	<0.5	18.3	18.3	7.1	7 1	8.3	8.3	89.3	89.3	40.9	40.9	<0.1	<0.1	33	33.5
15	12.10	~0.5	18.3	10.5	7.1	7.1	8.3	0.3	89.3	09.3	40.9	40.9	<0.1	V 0.1	34	55.5

Date of Monitoring: 3/10/2017

Weather : Cloudy

Monitoring	Time	Water	Tempe	rature (°C)	Ŗ	эΗ	DO	(mg/L)	DO (% s	aturation)	Turbio	dity (NTU)	Salir	nity (g/L)	SS	(mg/L)
Location		Depth (m)	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	11.18	<0.5	19.6	19.6	6.4	6.4	8.9	8.8	102.1	100.2	22.1	22.1	<0.1	<0.1	16	16.0
054	11.10	~0.5	19.6	19.0	6.4	6.4	8.6	0.0	98.3	100.2	22.1	22.1	<0.1	V0.1	16	10.0
C3b	11.12	<0.5	19.4	19.4	6.8	6 9	8.5	8.5	96.1	95.9	12.6	12.6	<0.1	<0.1	4.7	5.2
030	11:43	<0.5	19.4	19.4	6.8	6.8	8.5	0.0	95.6	95.9	12.6	12.0	<0.1	<0.1	5.6	5.2
15	11.50	<0.5	19.3	10.2	7.1	7 1	8.2	82	89.7	90.0	10.3	10.2	<0.1	-0.1	15	15 5
GI	11:58	<0.5	19.3	19.3	7.1	1.1	8.2	8.2	90.1	89.9	10.3	10.3	<0.1	<0.1	16	15.5

Date of Monitoring: 3/13/2017

Weather : Sunny

Monitoring	Time	Water	Tempe	rature (°C)	ĥ	Н	DO	(mg/L)	DO (% s	aturation)	Turbic	dity (NTU)	Salir	nity (g/L)	SS	(mg/L)
Location		Depth (m)	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	11:08	<0.5	22.7	22.7	6.4	6.4	8.8	8.8	102.3	102.1	30.9	30.9	<0.1	<0.1	19	18.5
004	11.00	~0.5	22.7	22.1	6.4	6.4	8.8	0.0	101.9	102.1	30.9	50.9	<0.1	<0.1	18	10.5
C3b	11:34	<0.5	22.5	22.5	6.8	6.8	8.6	8.6	98.9	98.5	9.0	9.0	<0.1	-0.1	3.6	4.7
030	11.34	<0.5	22.5	22.5	6.8	0.0	8.6	0.0	98.1	90.0	9.0	9.0	<0.1	<0.1	5.7	4.7
15	11.17	<0 F	22.2	22.2	6.9	6.9	8.2	8.2	88.4	88.7	11.5	11.5	<0.1	-0.1	16	16.5
IJ	11:47	<0.5	22.2	22.2	6.9	0.9	8.2	0.2	88.9	00.7	11.5	11.5	<0.1	<0.1	17	10.5

Date of Monitoring:

3/15/2017

3/17/2017

3/20/2017

Weather : Cloudy

Monitoring	Time	Water	Temper	ature (°C)	p	H	DO	(mg/L)	DO (% s	aturation)	Turbio	dity (NTU)	Salir	nity (g/L)	SS	(mg/L)
Location		Depth (m)	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	11:56	<0.5	19.0	19.0	7.9	7.9	6.9	6.9	73.9	73.9	38.4	38.4	<0.1	<0.1	5.8	7.3
0Ja	11.00	N 0.5	19.0	19.0	7.9	7.9	6.9	0.9	73.9	73.9	38.4	50.4	<0.1	<0.1	8.8	7.5
C3b	12:17	<0.5	18.4	18.4	7.7	77	7.1	7 1	75.8	75.8	8.4	0 /	<0.1	-0.1	4.1	3.9
030	12.17	NO.5	18.4	10.4	7.7	1.1	7.1	7.1	75.8	75.0	8.4	8.4	<0.1	<0.1	3.7	5.9
15	12:28	<0 F	19.3	19.3	7.8	7.8	7.1	7 1	77.5	77.5	9.0	9.0	<0.1	-0.1	5.0	5.2
GI	12.20	<0.5	19.3	19.5	7.8	1.0	7.1	7.1	77.5	77.5	9.0	9.0	<0.1	<0.1	5.3	5.2

Date of Monitoring:

Weather : Cloudy

Monitoring	Time	Water	Tempe	rature (°C)	p	рН		DO (mg/L)		DO (% saturation)		dity (NTU)	Salinity (g/L)		SS (mg/L)	
Location		Depth (m)	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	11./1	<0.5	19.4	19.4	7.0	7.0	8.1	8.0	88.0	87.0	29.5	29.5	<0.1	<0.1	32.0	29.5
UJa	11.41	<0.5	19.4	19.4	7.0	7.0	7.9	0.0	86.0	07.0	29.5	29.5	<0.1	V0.1	27.0	29.5
C3b	12:04	<0.5	19.3	19.3	7.3	7.3	8.8	8.8	95.7	95.3	3.6	3.6	<0.1	<0.1	4.9	5.4
030	12.04	NO.5	19.3	19.5	7.3	7.5	8.7	0.0	94.8	95.5	3.6	5.0	<0.1	<0.1	5.8	5.4
15	12:15	<0.5	19.4	19.4	7.6	7.6	8.8	8.4	96.2	92.1	2.0	2.0	<0.1	<0.1	3.2	3.1
GI	12.10	NU.5	19.4	19.4	7.6	1.0	8.0	0.4	87.9	92.1	2.0	2.0	<0.1	<0.1	2.9	3.1

Date of Monitoring:

Weather : Sunny

Monitoring	Time	Water	Tempe	rature (°C)	Ŗ	Н	DO	(mg/L)	DO (% s	aturation)	Turbio	dity (NTU)	Salir	nity (g/L)	SS	(mg/L)
Location		Depth (m)	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	10:49	<0.5	23.7	23.7	7.3	73	6.8	6.8	80.8	80.8	27.7	27.7	<0.1	<0.1	20.0	22.0
CJa	10.49	<0.5	23.7	23.7	7.3	7.5	6.8	0.0	80.8	00.0	27.7	21.1	<0.1	V0.1	24.0	22.0
C3b	11:15	<0.5	23.0	23.0	7.3	7 2	6.3	6.3	73.8	73.8	5.5	5 5	<0.1	<0.1	5.3	5.0
030	11.15	<0.5	23.0	23.0	7.3	7.3	6.3	0.5	73.8	73.0	5.5	5.5	<0.1	V0.1	4.6	5.0
15	11:26	<0.5	24.6	24.6	7.4	7 /	7.9	7.0	95.3	95.3	5.0	5.0	<0.1	<0.1	3.9	3.5
G	11.20	~0.5	24.6	24.0	7.4	7.4	7.9	7.9	95.3	93.3	5.0	5.0	<0.1	VU. 1	3.1	5.5



NOTE:

Data in **Bold** denotes exceedanece of respective Action Level Data in **Bold Underline** denotes exceedance of respective Limit Level Project Name:Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and
Infrastructure works - Contract 3
Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange
and Fanling - Stage 2

Monitoring	Time	Water	Tempe	rature (°C)	ĥ	Н	DO	(mg/L)	DO (% s	aturation)	Turbio	dity (NTU)	Salir	nity (g/L)	SS	(mg/L)
Location		Depth (m)	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	11:54	<0.5	19.9	19.9	7.3	7.3	5.5	55	60.1	60.1	27.7	27.7	<0.1	<0.1	30.0	34.0
03a	11.54	<0.5	19.9	19.9	7.3	7.5	5.5	5.5	60.1	00.1	27.7	21.1	<0.1	<0.1	38.0	34.0
C3b	12:13	<0.5	19.9	19.9	7.3	7.3	6.5	65	71.4	71.4	4.2	4.2	<0.1	-0 1	4.2	4.5
030	12.15	<0.5	19.9	19.9	7.3	7.5	6.5	6.5	71.4	71.4	4.2	4.2	<0.1	<0.1	4.7	4.5
15	12:22	<0.5	20.4	20.4	7.6	7.6	6.4	6.4	71.2	71.2	3.8	3.8	<0.1	-0.1	3.2	3.2
GI	12.22	<0.5	20.4	20.4	7.6	1.0	6.4	0.4	71.2	11.2	3.8	3.0	<0.1	<0.1	3.1	3.2

Date of Monitoring: 3/24/2017

Weather : Sunny

Monitoring	Time	Water	Tempe	rature (°C)	ĥ	эΗ	DO	(mg/L)	DO (% s	aturation)	Turbic	lity (NTU)	Salir	nity (g/L)	SS	(mg/L)
Location		Depth (m)	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	11:37	<0.5	26.1	26.1	7.1	7 1	6.6	6.6	81.6	81.6	24.2	24.2	<0.1	<0.1	11.0	15.5
USa	11.37	<0.5	26.1	20.1	7.1	7.1	6.6	0.0	81.6	01.0	24.2	24.2	<0.1	<0.1	20.0	15.5
C3b	12:01	<0.5	23.4	23.4	7.0	7.0	6.5	6.5	76.2	76.0	5.2	52	<0.1	<0.1	4.1	4.2
030	12.01	<0.5	23.4	23.4	7.0	7.0	6.5	0.5	76.2	76.2	5.2	5.2	<0.1	<0.1	4.3	4.2
16	12:12	<0 F	26.9	26.9	7.3	7.2	10.2	10.2	128.0	128.0	3.9	3.9	<0.1	<0.1	4.2	11
CI	12.12	<0.5	26.9	20.9	7.3	7.3	10.2	10.2	128.0	120.0	3.9	5.9	<0.1	<0.1	4.0	4.1

Date of Monitoring:

3/27/2017

3/29/2017

Weather : Sunny

Monitoring	Time	Water	Tempe	rature (°C)	r	эΗ	DO	(mg/L)	DO (% s	aturation)	Turbio	dity (NTU)	Salir	nity (g/L)	SS	(mg/L)
Location		Depth (m)	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	13:34	<0.5	23.7	23.7	6.5	6.5	7.2	7 2	84.9	84.9	15.8	15.8	<0.1	<0.1	9.4	11.2
UJa	15.54	<0.5	23.7	23.7	6.5	0.5	7.2	1.2	84.9	04.9	15.8	15.0	<0.1	<0.1	13.0	11.2
C2h	12.50	<0.5	20.8	20.8	6.9	6.9	6.8	6.8	76.4	76.4	6.8	6.8	<0.1	-0.1	6.2	6.9
C3b	13:50	<0.5	20.8	20.0	6.9	0.9	6.8	0.0	76.4	70.4	6.8	0.0	<0.1	<0.1	7.5	0.9
IE	14.00	<0.5	21.9	21.0	7.2	7.0	7.7	77	87.9	87.9	2.2	2.2	<0.1	-0.1	3.3	2.0
CI	14:00	<0.5	21.9	21.9	7.2	1.2	7.7	1.1	87.9	07.9	2.2	2.2	<0.1	<0.1	4.3	3.8

Date of Monitoring:

Weather: Rainy

Monitoring	Time	Water	Tempe	rature (°C)	r	эΗ	DO	(mg/L)	DO (% s	aturation)	Turbic	dity (NTU)	Salir	nity (g/L)	SS	(mg/L)
Location		Depth (m)	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	11:16	<0.5	21.9	21.9	6.2	6.2	5.9	5.9	66.8	66.8	28.6	28.6	<0.1	<0.1	24.0	25.5
0.5a	11.10	NO.5	21.9	21.9	6.2	0.2	5.9	5.9	66.8	00.0	28.6	20.0	<0.1	<0.1	27.0	25.5
C3b	11:28	<0.5	21.4	21.4	6.6	6.6	6.6	6.6	74.8	74.8	19.1	19.1	<0.1	<0.1	9.5	9.2
030	11.20	<0.5	21.4	21.4	6.6	0.0	6.6	0.0	74.8	74.0	19.1	19.1	<0.1	<0.1	8.8	9.2
IF	11.2/	<0.5	21.8	21.8	6.9	6.9	6.3	6.3	71.5	71.5	18.4	18.4	<0.1	<0.1	16.0	15.5
GI	15 11:34	11:34 <0.5	21.8	21.0	6.9	0.9	6.3	0.5	71.5	71.5	18.4	10.4	<0.1	<0.1	15.0	15.5

Date of Monitoring: 3/31/2017


Weather: Rainy

Monitoring	Time	Water	Tempe	rature (°C)	Ŕ	эΗ	DO	(mg/L)	DO (% s	aturation)	Turbic	dity (NTU)	Salir	nity (g/L)	SS	(mg/L)
Location		Depth (m)	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average	Value	Average
C3a	12:06	<0.5	22.2	22.2	6.3	6.3	5.5	5.5	63.4	63.4	78.7	78.7	<0.1	<0.1	20.0	30.0
USa	12.00	~0.5	22.2	22.2	6.3	0.5	5.5	5.5	63.4	03.4	78.7	70.7	<0.1	20.1	40.0	30.0
C3b	12:32	<0.5	22.2	22.2	6.4	6.4	6.4	6.4	73.1	73.1	34.6	34.6	<0.1	<0.1	13.0	13.5
030	12.32	<0.5	22.2	22.2	6.4	0.4	6.4	0.4	73.1	73.1	34.6	34.0	<0.1	<0.1	14.0	13.5
IE	10.10	<0.5	22.2	22.2	6.7	6.7	6.7	67	76.6	76.6	66.1	66.1	<0.1	-0.1	41.0	40 E
G	12:42	<0.5	22.2	22.2	6.7	— 6/ ·	6.7	, 6./	76.6	/h h		66.1	<0.1	<0.1	40.0	<u>40.5</u>


NOTE:


Data in **Bold** denotes exceedanece of respective Action Level Data in **Bold Underline** denotes exceedance of respective Limit Level

Dissolved Oxygen

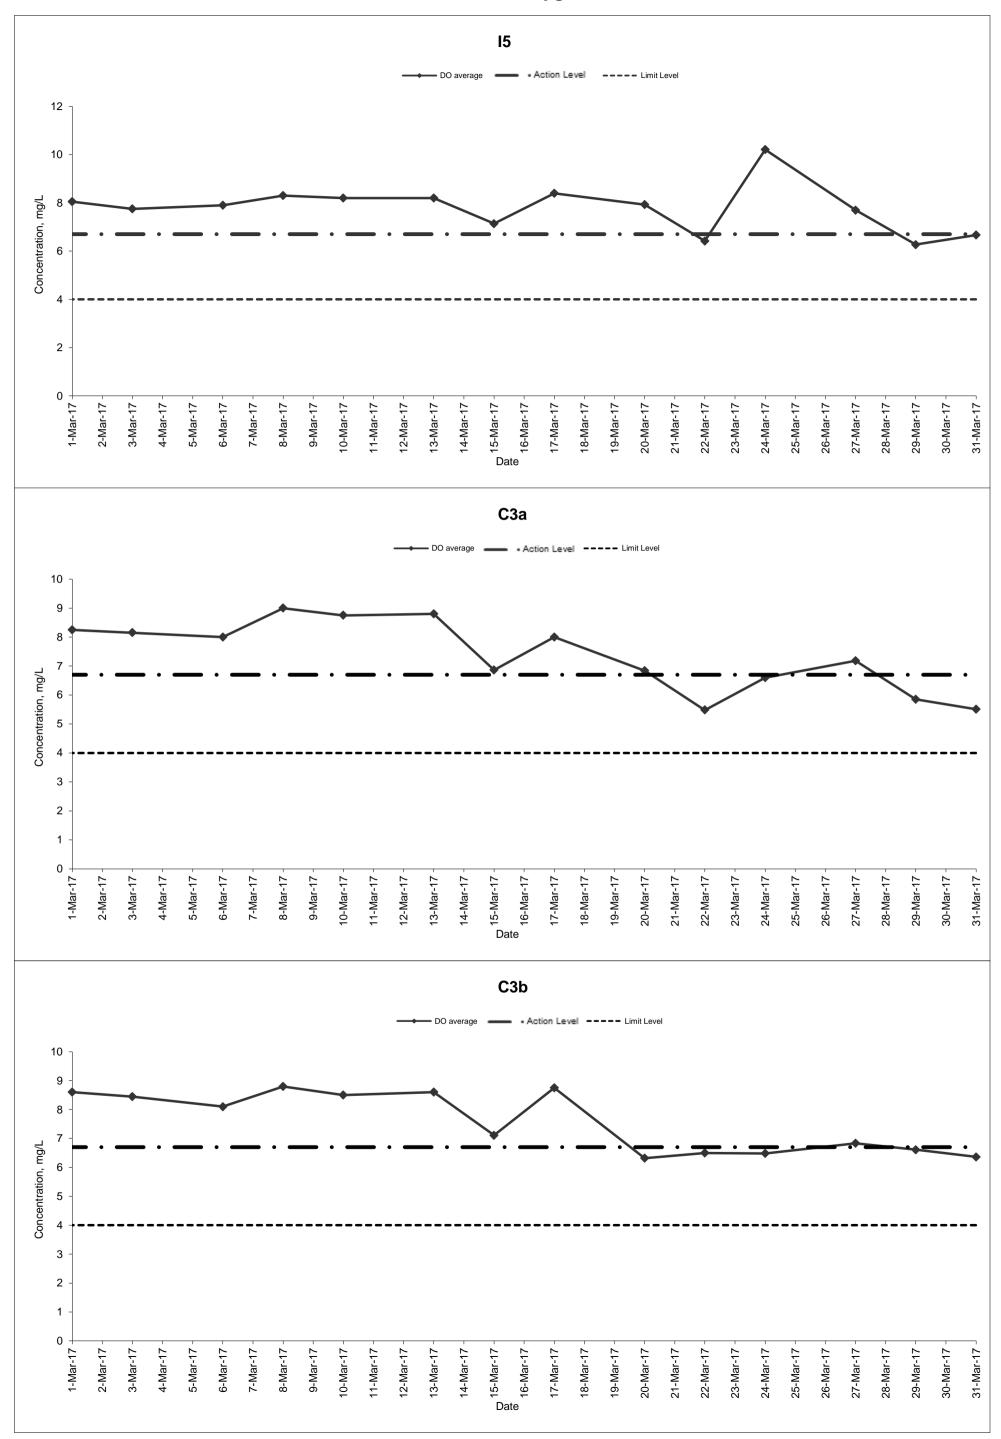





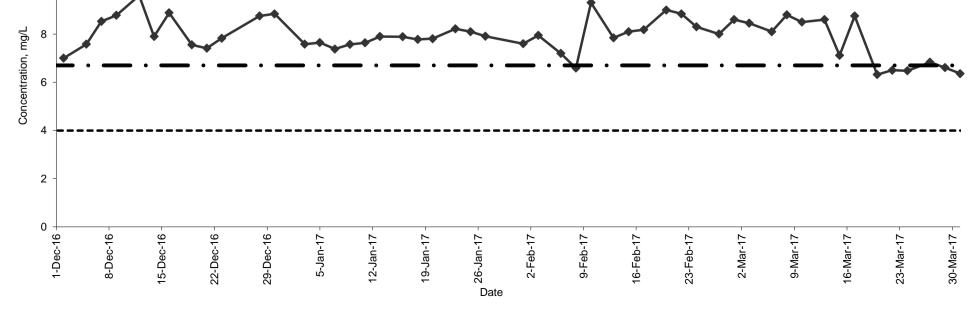

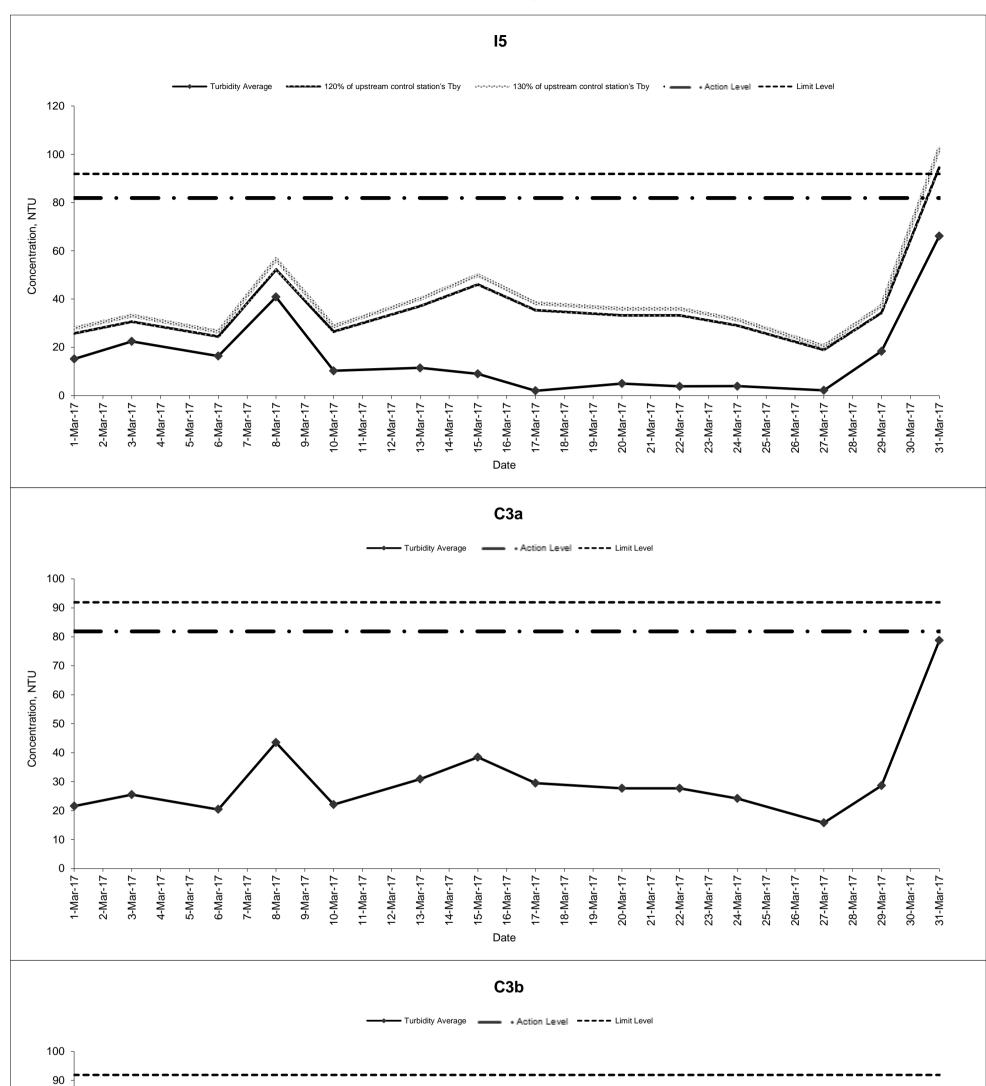


Turbidity

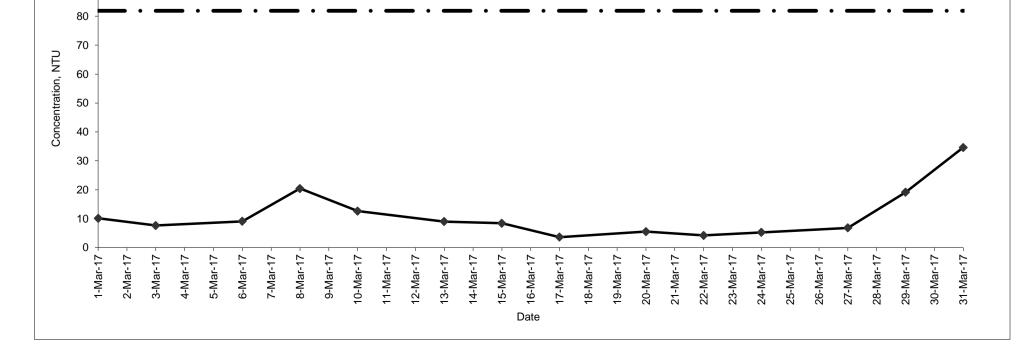

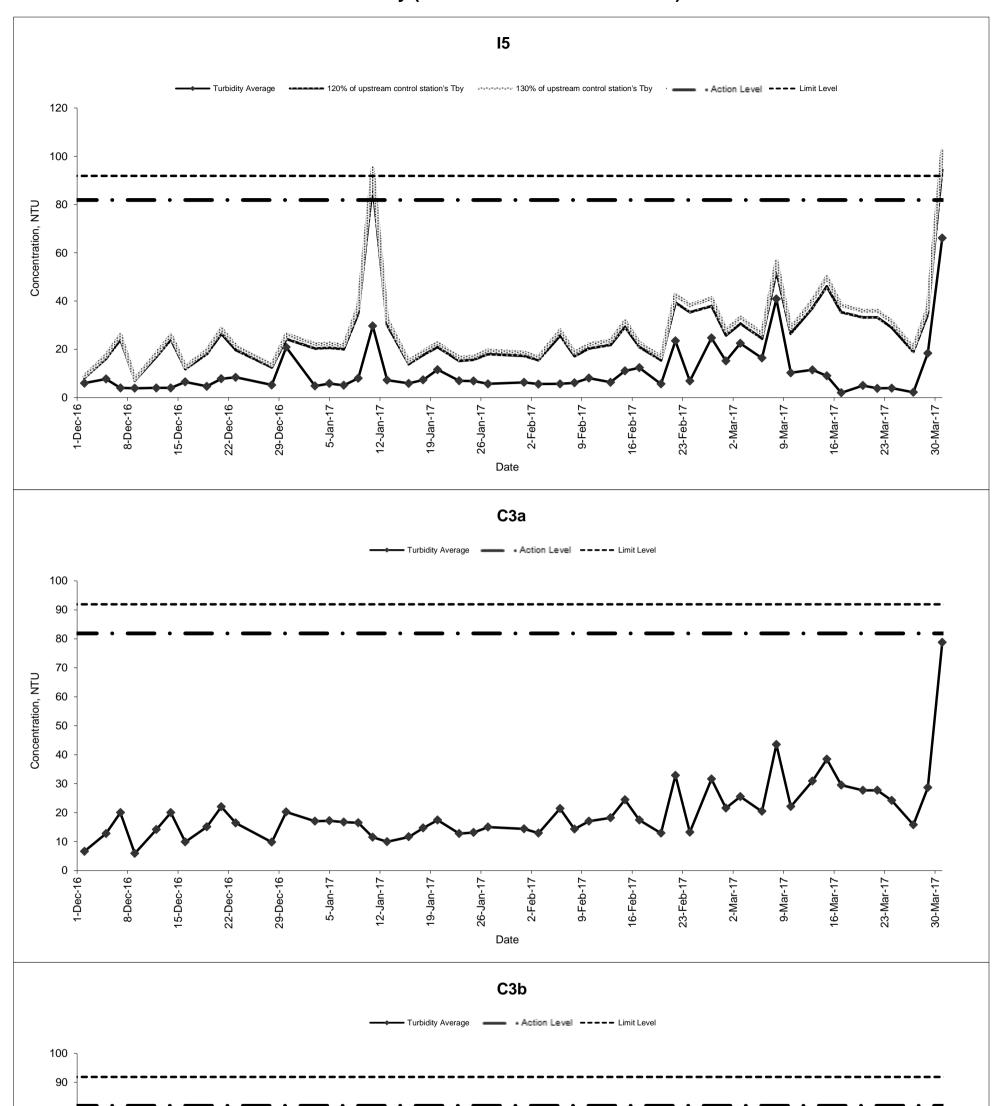



Turbidity (December 2016 - March 2017)

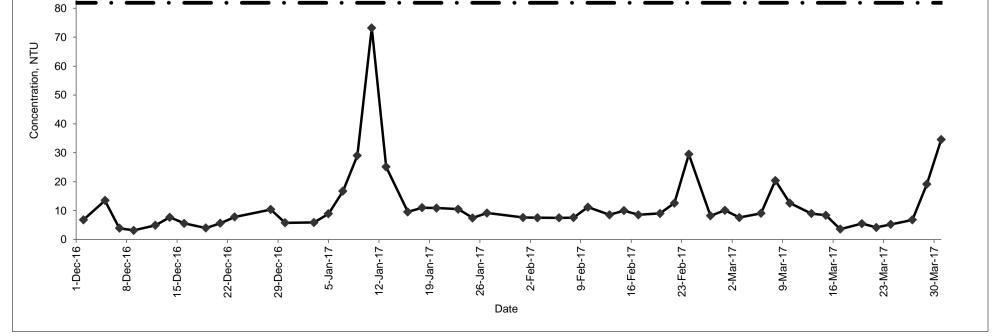



Suspended Solid

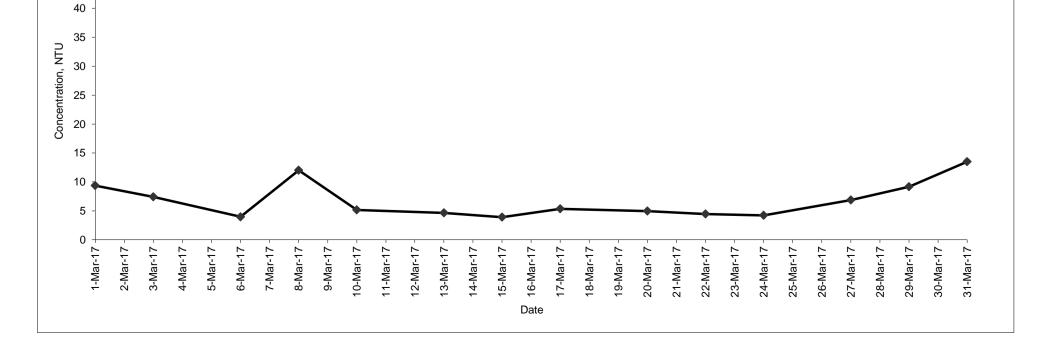

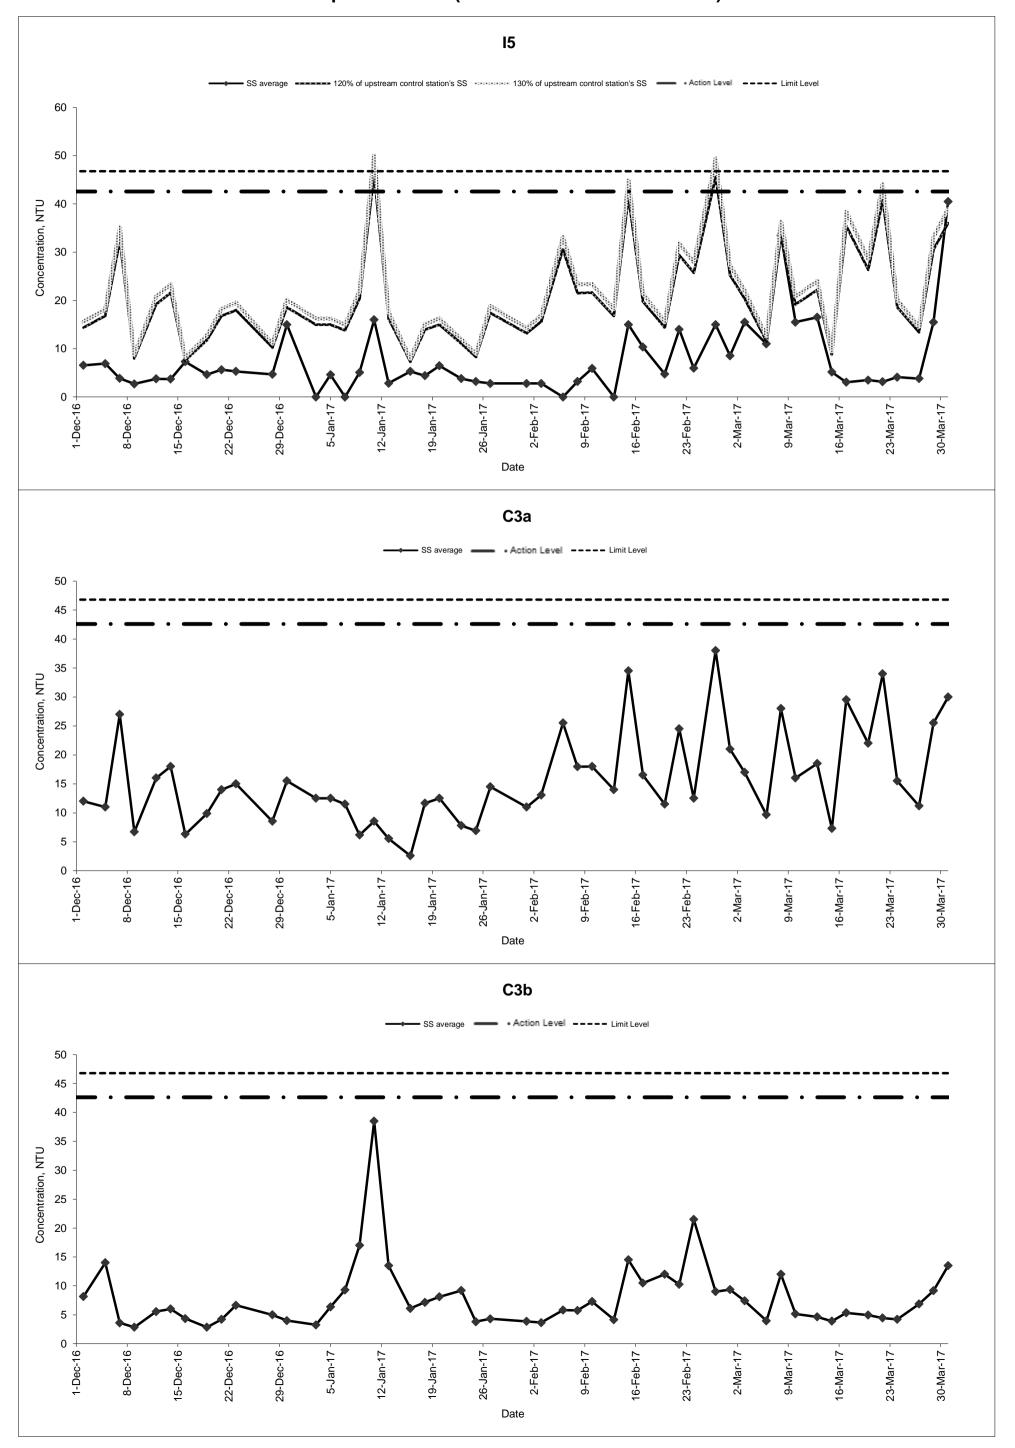

Suspended Solid (December 2016 - March 2017)



Appendix K Waste Flow Table

Monthly Summary Waste Flow Table

		Actual C	Quantities of In-	ert C&D Materi	als Generated	Monthly		Actual	Quantities of	C&D Wastes	Generated M	Ionthly
		Hard Rock							Paper/			
	Total	and Large		Soil Reused	Soil Reused				cardboard			General
	Quantity	Broken		in the	in other	Soil Disposed			packaging		Chemical	Refuse
Month	Generated	Concrete	Soil	Contract	Projects	as Public Fill	Imported Fill	Metals	(Note 3)	Plastics	Waste	(Note 2)
Unit	(in '000m ³)	(in m ³)	(in '000m ³)									
Jan-17	1.150	0.204	0.946	0.150	-	0.796	1.150	-	-	0.001	-	0.170
Feb-17	1.160	0.308	0.852	0.192	-	0.660	0.926	-	-	0.001	-	0.140
Mar-17	2.287	0.565	1.722	0.060	-	1.662	1.055	-	-	-	-	0.115
Apr-17	-		-									
May-17	-		-									
Jun-17	-		-									
Sub-Total	4.597	1.077	3.520	0.402	-	3.118	3.131	-	-	0.002	-	0.425
Jul-17	-		-									
Aug-17	-		-									
Sep-17	-		-									
Oct-17	-		-									
Nov-17	-		-									
Dec-17	-		-									
Total	4.597	1.077	3.520	0.402	-	3.118	3.131	-	-	0.002	-	0.425

Note: 1. Assume the density of soil fill is 2 ton/m^3 .

2. Assume the density of rock and broken concrete is 2.5 ton/m³.

3. Assume each truck of C&D wastes is $5m^3$.

4. The inert C&D materials except slurry and bentonite are disposed at Tuen Mun 38.

5. The slurry and bentonite are disposed at Tseung Kwun O 137.

6. The non-inert C&D wastes are disposed at NENT.

7. Assume the density of metal is $7,850 \text{ kg/m}^3$.



Appendix L Implementation Schedule of Environmental Mitigation Measures (EMIS)



Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status [#]
Air Quality	·	·		·
Air Quality during Construction	• Restricting heights from which materials are dropped, as far as practicable to minimize the fugitive dust arising from unloading/loading.	During Construction	Contractor	V
	• All stockpiles of excavated materials or spoil of more than 50m ³ shall be enclosed, covered or dampened during dry or windy conditions.			✓
	• Effective water sprays shall be used to control potential dust emission sources such as unpaved haul roads and active construction areas.			✓
	• All spraying of materials and surfaces shall avoid excessive water usage.			~
	• Vehicles that have the potential to create dust while transporting materials shall be covered, with the cover properly secured and extended over the edges of the side and tail boards.			✓
	Materials shall be dampened, if necessary, before transportation.			\checkmark
	• Travelling speeds shall be controlled to reduce traffic induced dust dispersion and re-suspension within the site from the operating haul trucks.			✓
	• Vehicle washing facilities shall be provided to minimise the quantity of material deposited on public roads.			✓
Air Quality during Operation	Not required	N/A	N/A	N/A
Noise				L
Noise during Construction	• Use of silenced plant or plant equipped with mufflers or dampers in substitute of ordinary plant.	During Construction	Contractor	✓
	Reduce the number of equipment and their percentage on-time.			~
Noise during Operation	Not required	N/A	N/A	N/A
Water Quality		·		•
Water Quality during	Road Widening Works, Earthworks and Culvert Extension Works			
Construction	• Wastewater generated from any concrete batching washdown of equipment or similar activities should be discharged into foul sewers, after the removal of settable solids, and pH adjustment as necessary. All sewage discharges from the study area should meet the TM standards and approval from EPD through the licensing process is required.	During Construction	Contractor	~

Notes ([#]): ✓ – Compliance; Rem – Reminder; Obs – Observation; N/C – Non Compliance; N/A – Not Applicable



Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status [#]
	• Sand traps, oil interceptors and other pollution prevention installations should be provided, properly cleaned and maintained.			✓
	• Runoff from exposed working areas, unfinished slopes and from unlined temporary channels should be directed to stilling basins and/or silt traps before discharging to the drainage outfalls.			Rem
	• Regular inspections of stilling basins and/or silt traps is required to ensure that sediment is not conveyed into the existing drainage system.			V
	Open stockpiles should be covered with a tarpaulin cover.			\checkmark
	• During the wet season, any exposed top soils should be covered with a tarpaulin, shotcreted or hydroseeded.			✓
	• Sand and silt from wash-water from vehicle washing should be settled out before discharging into storm drains.			✓
	• Fuels should be stored in bunded areas such that spillage can be easily collected.			✓
Water Quality during Operation	Not required	N/A	N/A	N/A
Waste Management			I	
Waste Management during	<u>General Waste</u>			
Construction	 Transport of wastes off site as soon as possible. 	During Construction	Contractor	\checkmark
	Maintenance of accurate waste records.			\checkmark
	• Minimisation of waste generation for disposal (via reduction/recycling/re-use).			✓
	• No on-site burning will be permitted.			\checkmark
	Use of re-useable metal hoardings/signboards.			\checkmark
	Vegetation from site clearance			
	Segregation of materials to facilitate disposal.	During Construction	Contractor	\checkmark



Impact	Environmental Protection Measures	Timing	Responsibility	Implementatio Status [#]
	• Mulching to reduce bulk and where possible review opportunities for the possible beneficial use within landscaping areas.			√
	Demolition Wastes			
	Segregation of materials to facilitate disposal.	During Construction	Contractor	~
	Appropriate stockpile management.			~
	Excavated Materials			
	Segregation of materials to facilitate disposal / reuse.	During Construction	Contractor	✓
	Appropriate stockpile management.			✓
	• Re-use of excavated material on or off site (where possible).			~
	• Special handling and disposal procedures in the event that contaminated materials are excavated.			N/A
	Construction Wastes			
	• Segregation of materials to facilitate recycling/reuse (within designated area in appropriate containers/stockpiles).	During Construction	Contractor	V
	Appropriate stockpile management.			✓
	Planning to reduce over ordering and waste generation.			✓
	 Recycling and re-use of materials where possible (e.g. metal, wood from formwork) 			×
	• For material which cannot be re-used/recycled, collection should be carried out by an approved waste contractor for landfill disposal.			×
	Bentonite Slurries			
	Bentonite slurries should be reused as far as possible.	During Construction	Contractor	N/A
	• Disposal in accordance with Practice Note For Professional Persons ProPECC PN 1/94.			N/A
	Chemical Wastes			
	• Storage within locked, covered and bunded area.	During Construction	Contractor	✓

Notes ([#]): ✓ – Compliance; Rem – Reminder; Obs – Observation; N/C – Non Compliance; N/A – Not Applicable



Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status [#]
	• The storage area shall not be located adjacent to sensitive receivers e.g. drains.			✓
	Minimise waste production and recycle oils/solvents where possible.			✓
	• A spill response procedure shall be in place and absorption material available for minor spillages.			✓
	 Use appropriate and labelled containers. 			\checkmark
	Educate site workers on site cleanliness/waste management procedures.			\checkmark
	• If chemical wastes are to be generated, the contractor must register with EPD as a chemical waste producer.			✓
	• The chemical wastes shall be collected by a licensed chemical waste collector.			✓
	Municipal Wastes			
	• Waste shall be stored within a temporary refuse collection facility, in appropriate containers prior to collection and disposal.	During Construction	Contractor	✓
	Regular, daily collections are required by an approved waste collector.			\checkmark
Waste Management during Operation	Not required.	N/A	N/A	N/A
Ecology				
Ecology during Construction	Accurate Delineation of Works Area			
	• Boundaries of proposed works areas shall be clearly identified and separated from external areas by a physical barrier to prevent encroachment of adjacent habitats.	During Construction	Contractor	✓
	• Individual trees which fall within the works areas but which work plans show do not require removal are to be retained and fenced off to maximise protection.			✓



Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status [#]
	Dust generation			
	There are a number of measures which shall be taken as specified in the Air Pollution Control (Construction Dust) Regulation on 'Dust Control Requirements, including the following key measures to be applied during construction:			
	 vehicle washing facilities to be provided at every discernible or designated vehicle exit point; 	During Construction	Contractor	✓
	• all temporary site access roads shall be sprayed with water to suppress dust as necessary;			✓ ✓
	• all dusty materials should be sprayed with water immediately prior to any handling; and			✓
	• all debris should be covered entirely by impervious sheeting or stored in a sheltered debris collection area.			✓
	Surface Run-off			
	In general, mitigation measures shall be in accordance with ProPECC PN1/94 on 'Construction Site Drainage'. Key measures include:			
	 Bund and cover stockpiles to avoid run-off; 	During Construction	Contractor	\checkmark
	 Channel any run-off through a system of oil, grease and sediment / silt traps and reuse water on site where ever practical; 			✓
	 All vehicle maintenance to be undertaken within a bunded area; and 			✓
	• Maximise vegetation retention on-site to maximise absorption (minimise transport).			✓



Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status [#]
Ecology during Operation	 To conduct compensatory ecological planting as specified in the latest landscape plans approved by EPD (Clause 2.6 of the Environmental Permit refers). 	During Construction and operation	Contractor (during construction) / LCSD* (during operation) (Note: * The division of vegetation planting and maintenance responsibilities shall follow the guidelines stipulated in ETWB TCW No. 2/2004.)	N/A
Landscape and Visual		ſ	T	Γ
Landscape and Visual during Construction	 Preservation of Existing Vegetation Trees identified for retention within the project limit would be protected during the works 	During Construction	Contractor	~
	• The tree transplanting and planting works shall be implemented by approved Landscape Contractors			*
	<u>Temporary Works Areas</u> Where feasible the works areas would be screened using hoarding and existing vegetation would be retained where possible to reduce the landscape and visual impacts arising from the construction activity. The landscape of these works areas would be restored following the completion of the construction phase.	During Construction	Contractor	~
	Hoarding			
	A hoarding would be erected where practicable in the most visually sensitive locations to screen the temporary construction works from the local VSRs.	During Construction	Contractor	1
	Top Soils			
	The works will result in disturbance to extensive areas of topsoil. Topsoil worthy of retention should be stockpiled for use following completion of the civil engineering works. It should either be temporarily vegetated with hydroseeded grass or turned over on a regular basis.	During Construction	Contractor	N/A



Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status [#]
	Protection of Important Landscape Features Important features such as temples, Island House and kilns within the study area, although remote from the proposed works retained and adequately protected.	During Construction	Contractor	N/A
Landscape and Visual during Operation	Not required.	N/A	N/A	N/A



Appendix M Investigation Report for Exceedances

Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2

Investigation Report of Environmental Quality Exceedance(s) Ref. No.: W170322_DO

Date	22 March 2017
Time	12:22 PM
Monitoring Location	15 - downstream of Ma Wat River at Yuen Leng
Parameter	Dissolved Oxygen
Action / Limit Levels	Action Level: 6.7 mg/L Limit Level: 4 mg/L or 40% saturation at 15 degree Celsius
Measured Level	6.4mg/L (Action level being exceeded)
Possible reason for the exceedance	The exceedance has been investigated and was considered not related to the project works as DO levels were low among all monitoring stations, including the control stations. No abnormal condition was observed during the monitoring. As such, the natural variation of water quality has been considered attributed to the low DO level.
Action taken / to be taken	As the non-compliance was non-project related, no further investigation and remedial measure(s) would be required.
Remarks	-

Site photos during water sampling (Date: 22 March 2017)





(At 15)

Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2

Investigation Report of Environmental Quality Exceedance(s) Ref. No.: W170329_DO

Data	
Date	29 March 2017
Time	11:34 AM
Monitoring Location	15 - downstream of Ma Wat River at Yuen Leng
Parameter	Dissolved Oxygen
Action / Limit Levels	Action Level: 6.7 mg/L Limit Level: 4 mg/L or 40% saturation at 15 degree Celsius
Measured Level	6.3mg/L (Action level being exceeded)
Possible reason for the exceedance	The exceedance has been investigated and was considered not related to the project works as DO levels were low among all monitoring stations, including the control stations. No abnormal condition was observed during the monitoring. As such, the natural variation of water quality has been considered attributed to the low DO level.
Action taken / to be taken	As the non-compliance was non-project related, no further investigation and remedial measure(s) would be required.
Remarks	-

Site photos during water sampling (Date: 29 March 2017)



(At C3a)



(At 15)

Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2

Investigation Report of Environmental Quality Exceedance(s) Ref. No.: W170331_SS

Date	31 March 2017
Time	12:42 PM
Monitoring Location	I5 - downstream of Ma Wat River at Yuen Leng
Parameter	Suspended Solid
Action / Limit Levels	Action Level: 42.6 mg/L or 120% of upstream control station's SS of the same day (i.e. 36mg/L) Limit Level: 46.8 mg/L or 130% of upstream control station's SS of the same day (i.e. 39mg/L)
Measured Level	40.5mg/L (Limit level being exceeded)
Possible reason for the exceedance	There was rain and the river was muddy due to vigorous water flow. The disturbed riverbed caused an elevation of suspended solids level. Control station C3a also showed elevated suspended solids level due to the adverse weather condition.
	During the water sampling, the box culvert works had been completed and post monitoring had begun. There was no works being carried out.
	It is therefore considered that elevation of suspended solids level would be due to natural fluctuation.
Action taken / to be taken	As the non-compliance was non-project related, no further investigation and remedial measure(s) would be required.
Remarks	-

Site photos during water sampling (Date: 31 March 2017)



(At C3a)



(At I5)



Appendix N Cumulative Statistics on Complaints, Notifications of Summons and Successful Prosecutions



Cumulative Complaint Log

Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
C131126	26, November, 2013	Mr. Tony Hung from WWF	Mat Wat River (works sites for box culvert extension)	Suspected unauthorised discharge of water from a construction site to Ma Wat River, Tai Wo Service Road East, Tai Po	It was found that the water leaving the end of the steel pipes was the diverted water from the upstream of the existing box culverts, instead of being discharged from the construction works sites. An EM&A Programme is being undertaken to monitoring the environmental performance of the construction works, and the Contractor has also implemented appropriate mitigation measures to avoid silt-laden runoff discharging from the works sites into the river. The complaint is considered an invalid complaint under this Project.	Completed



Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
C141120	20 November, 2014	EPD	Ng Tung River and Ma Wat River nearby the site of the Liantang/ Heung Yuen Wai BCP Project (Contract Number CV/2012/09)	At Bridge NF426 in Fanling, the whole Ng Tung River showed milky and suspected illegal discharge by nearby factory has undertaken. (粉嶺近天橋編號 NF426 梧桐河整條河 河水呈奶白色懷疑附 近有工廠非法排放污 水)	 Water Supplies Department (WSD) conducted a washout procedure on 20 November 2014 at about 9:30am to flush the newly installed water pipe of diameter of 1400mm which has recently finished disinfection. It is understood that the procedure has lasted for about 1 hour and large amount of freshwater has been discharged into the Ma Wat River through a washout port. Although water was observed seeping from the gantry switch and flew into the works sites, the area is a sump pit and the water was unlikely to run off and entered the river directly. As such, it is anticipated that only freshwater has been discharged into Ma Wat River through the washout port. Both site inspections conducted by the ET before the complaint (19 November 2014), and after the complaint (24 November 2014) did not identify any deficiencies on environmental mitigation measures. Also, there were no rains during the period and the risk of construction site run-off is considered minimal. 	Completed



Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
					The water from the Ma Wat Channel adjoins the Ng Tung River before passing through the complaint location, so other pollution sources may also occur at upstream of Ng Tung River	
					The complaint is considered unlikely due to the construction works of this project.	



Meinhardt Infrastructure and Environment Ltd 邁進基建環保工程顧問有限公司

10/F Genesis 33-35 Wong Chuk Hang Road Hong Kong 香港黃竹坑道33-35號 創協坊10樓

Tel 電話: +852 2858 0738 Fax 傳真: +852 2540 1580

mail@meinhardt.com.hk www.meinhardt-china.com www.meinhardtgroup.com