

Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2

Monthly EM&A Report February 2019

Submitted to

Prepared By

Environmental Protection Department

Meinhardt Infrastructure and Environment Ltd

Meinhardt Infrastructure and Environment Limited

Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2

Monthly EM&A Report

(February 2019)

Certified by:	Fredrick Leong
Position:	Environmental Team Leader
Date:	11 March 2019



Hyder-Arup-Black & Veatch Joint Venture c/o Arcadis 17/F, Two Harbour Square, 180 Wai Yip Street, Kwun Tong, Hong Kong Attn: Mr. James Penny

Your Reference

Our Reference JFP/EC/ST/cy/T329380/2 2.05/L-0253

3/F Mapletree Bay Point 348 Kwun Tong Road Kowloon Hong Kong

T +852 2828 5757 F +852 2827 1823 mottmac.hk Environmental Monitoring and Audit (EM&A) for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling Stage 2 (between Tai Hang to Wo Hop Shek Interchange) – Entrusted Works Environmental Permit No. EP-324/2008/E Condition 3.3 – Submission of Monthly EM&A Report – February 2019 for the portion of Stage 2 works entrusted to Civil Engineering and Development Department (CEDD) under Contract No. CV/2012/09

08 March 2019 By Fax (2805 5028) & Hand

We refer to the revised Monthly EM&A Report – February 2019 received on 06 March 2019 submitted by the Environmental Team via email. Pursuant to Environmental Permit Condition 3.3, I hereby verify the Monthly EM&A Report – February 2019 (Rev. 0) for the portion of works under Stage 2 of the captioned Project which is entrusted to CEDD under Contract No. CV/2012/09.

Yours faithfully for MOTT MACDONALD HONG KONG LIMITED

Steven Tang Independent Environmental Checker

c.c. HyD CEDD/BCP AECOM Meinhardt

Mr. Chung Lok Chin Mr. Lu Pei Yu Mr. Alan Lee Mr. Fredrick Leong By Fax (2714 5198) By Fax (3547 1659) By Fax (3922 9797) By Fax (2559 1613)



Date	Revision	Prepared By	Checked By	Approved By
11 Mar 2019	0	WK CHIU BoBo HUI	Fredrick EONG	Helen COCHRANE
		fr Hi		IN
				V



Contents

			Page
EXE	CUTIVE	SUMMARY	i
1	INTRO	DUCTION	1
	1.2	Purpose of the Report	1
	1.3	Report Structure	1
2	PROJE	CT INFORMATION	2
	2.1	Background	2
	2.2	Site Description	3
	2.3	Construction Programme and Activities	3
	2.4	Project Organisation	3
3	STATU	S OF ENVIRONMENTAL LICENSES, NOTIFICATION AND PERMITS	5
4	AIR QU	JALITY MONITORING	7
	4.1	Monitoring Requirement	7
	4.2	Monitoring Equipment	7
	4.3	Monitoring Location	7
	4.4	Monitoring Parameters, Frequency and Duration	7
	4.5	Monitoring Methodology	8
	4.6	Monitoring Schedule for the Reporting month	8
	4.7	Monitoring Results	9
5	NOISE	MONITORING	10
	5.1	Monitoring Requirements	10
	5.2	Monitoring Equipment	10
	5.3	Monitoring Locations	10
	5.4	Monitoring Parameters, Frequency and Duration	10
	5.5	Monitoring Methodology	11
	5.6	Monitoring Schedule for the Reporting Month	11
	5.7	Monitoring Results	11
6	WATE	R MONITORING	13
7	WASTE	EMANAGEMENT	14
8	ENVIR	ONMENTAL SITE INSPECTION AND AUDIT	15
	8.1	Site Inspection	15
9	IMPLE	MENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES	16
10	SUMM	ARY OF EP SUBMISSION IN THE REPORTING MONTH	17
11	ENVIR	ONMENTAL NON-CONFORMANCE	18
	11.1	Summary of Monitoring Exceedances	18



	11.2	Summary of Environmental Non-Compliance	18
	11.3	Summary of Environmental Complaints	18
	11.4	Summary of Environmental Summon and Successful Prosecutions	18
2	FUTUR	E KEY ISSUES	19
	12.1	Construction Programme for the Next Month	19
	12.2	Key Issues for the Coming Month	19
	12.3	Monitoring Schedule for the Next Month	19
3	CONCL	USIONS AND RECOMMENDATIONS	20
	13.1	Conclusions	20
	13.2	Recommendations	20

List of Tables

1

1

- Table 2.1
 Contact Information of Key Personnel
- Table 3.1 Status of Environmental Licenses, Notifications and Permits
- Table 4.1 Air Quality Monitoring Equipment
- Table 4.2
 Location of Air Quality Monitoring
- Table 4.3
 Air Quality Monitoring Parameters, Frequency and Duration
- Table 4.4 Summary of 1-hr TSP Monitoring Results
- Table 4.5 Summary of 24-hr TSP Monitoring Results
- Table 5.1 Noise Monitoring Equipment
- Table 5.2 Location of Noise Monitoring
- Table 5.3
 Noise Monitoring Parameters, Frequency and Duration
- Table 5.4 Summary of Noise Monitoring Results
- Table 8.1 Observations and Recommendations of Site Audit
- Table 10.1 Status of Required Submission under Environmental Permit

List of Figures

- Figure 1 Demarcation of Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2
- Figure 2 Air and Noise Monitoring Locations

List of Appendices

Appendix A Construction Programme

- Appendix B Project Organization Structure
- Appendix C Calibration Certificates of Monitoring Equipment
- Appendix D EM&A Monitoring Schedules
- Appendix E Meteorological Data Extracted from Hong Kong Observatory
- Appendix F Air Quality Monitoring Results and their Graphical Presentation
- Appendix G Summary of Event and Action Plan
- Appendix H Noise Monitoring Results and their Graphical Presentation
- Appendix I Not Used
- Appendix J Not Used
- Appendix K Waste Flow Table
- Appendix L Implementation Schedule of Environmental Mitigation Measures (EMIS)
- Appendix M Not Used
- Appendix N Statistics on Complaints, Notifications of Summons and Successful Prosecutions



EXECUTIVE SUMMARY

The Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2 (hereafter called "the Project") covers part of the construction of the widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling which aimed to widen Tolo Highway and Fanling Highway to dual 4-lane carriageway in order to alleviate the current traffic congestion problems and to cope with the increasing transport demands to and from the urban areas and also cross boundary traffic. The Project covers construction activities at Yuen Leng along the existing Fanling Highway.

The impact EM&A for the Project includes air quality, noise and water quality monitoring. The EM&A programme commenced on 5 November 2013.

This report documents the findings of EM&A works conducted in February 2019. As informed by the Contractor, the major activities in the reporting month were:

- Road Pavement Works;
- Water Main Laying Works;
- Road Drainage Works;
- Construction of Police Observation Platform on the Northbound Fanling Highway; and
- Remaining Works of Kiu Tau Footbridge.

Breach of Action and Limit Levels for Air Quality

No exceedance of Action and Limit Level was recorded for 24-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.

No exceedance of Action and Limit Level was recorded for 1-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.

Breach of Action and Limit Levels for Noise

No noise complaint was received in the reporting month, so no Action Level exceedance was recorded. Also, no Limit Level exceedance of noise monitoring was recorded in the reporting month.

Breach of Action and Limit Levels for Water Quality

The box culvert works have been completed in the end of March 2017. The 4-week post construction water quality monitoring has been completed in the end of April 2017 in the same manner as the impact monitoring.

Complaint, Notification of Summons and Successful Prosecution

No complaint, notification of summons and successful prosecution was received in the reporting month.

Future Key Issues

The remaining construction works in the coming reporting month are anticipated to include:



- Road pavement works;
- Water main laying works;
- Road Drainage Works;
- Construction of Police Observation Platform on the Northbound Fanling Highway; and
- Remaining works of Kiu Tau footbridge.

Potential environmental impacts arising from the above construction activities are anticipated to be mainly associated with construction dust, noise, water quality and waste management.



1 INTRODUCTION

1.1.1 Chun Wo Construction & Engineering Co Ltd (Chun Wo) was commissioned by the Civil Engineering and Development Department (CEDD) as the Civil Contractor for the Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2. Meinhardt Infrastructure & Environment Ltd (MIEL) has been appointed by Chun Wo as the Environmental Team (ET) to fulfill the corresponding EM&A requirements pursuant to Environmental Permit No. EP-324/2008/E in accordance with the Updated EM&A Manual (dated October 2013) for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling Stage 2. The EM&A programme commenced on 5 November 2013.

1.2 Purpose of the Report

1.2.1 This is the monthly EM&A Report which summaries the impact monitoring results and audit findings for the Project during the reporting month of February 2019.

1.3 Report Structure

1.3.1 This monthly EM&A Report comprises the following sections:

Section 1: Introduction

Section 2: Project Information

Section 3: Status of Environmental Licenses, Notifications and Permits

Section 4: Air Quality Monitoring

Section 5: Noise Monitoring

Section 6: Water Monitoring

- Section 7: Waste Management
- Section 8: Environmental Site Inspection and Audit
- Section 9: Implementation Status of Environmental Mitigation Measures

Section 10: Summary of EP Submission in the Reporting Month

Section 11: Environmental Non-Conformance

Section 12: Future Key Issues

Section 13: Conclusions and Recommendations



2 **PROJECT INFORMATION**

2.1 Background

- 2.1.1 Tolo Highway and Fanling Highway are expressways in the North East New Territories connecting Sha Tin, Tai Po and Fanling. These highways form a vital part of the strategic Route 1, which links Hong Kong Island to Shenzhen. At present, this section of Route 1 is a dual 3-lane carriageway. However, at several major interchanges along this section of Route 1, the highway is only dual-2 lane. Severe congestion is a frequent occurrence during peak periods, particularly in the Kowloon bound direction.
- 2.1.2 The objective of the Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling is to widen Tolo Highway and Fanling Highway to dual 4-lane carriageway in order to alleviate the current traffic congestion problems and to cope with the increasing transport demands to and from the urban areas and also cross boundary traffic.
- 2.1.3 The construction works for the Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling are to be delivered in 2 stages:

Stage 1 – Construction works between Island House Interchange and Tai Hang; and

Stage 2 – Construction works between Tai Hang and Wo Hop Shek Interchange.

- 2.1.4 The construction works of Stage 1 under the EP commenced in November 2009 and was planned to be completed in December 2013 tentatively. The works of Stage 2 was planned to commence in November 2013 and complete by end of 2016. Hyder-Arup-Black and Veatch Joint Venture (HABVJV) was appointed by the Highways Department (HyD) as the consultants for the design and construction assignment for the Project. Mott MacDonald Hong Kong Ltd is the Independent Environmental Checker (IEC) of both Stage 1 and Stage 2 works.
- 2.1.5 A portion of Stage 2 works of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling (hereafter called "the Project") is entrusted to the contractor of Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure Works Contract 3, i.e. Chun Wo. AECOM Asia Co Ltd was appointed by the CEDD as the consultant for the design and construction assignment for the Liantang development.
- 2.1.6 The Project is a Designated Project under the Environmental Impact Assessment Ordinance (EIAO) (Cap. 499). An Environmental Impact Assessment (EIA) Report together with an Environmental Monitoring and Audit (EM&A) Manual were approved on 14 July 2000 (Register Number: EIA-043/2000). The Project is governed by an Environmental Permit (EP) (EP-324/2008) which was granted on 23 December 2008. A variation of EP (VEP) was applied and the VEP (EP-324/2008/A) was subsequently granted on 31 January 2012. An additional VEP has been applied on 24 February 2014 and the VEP (EP-324/2008/B) was subsequently granted on 17 March 2014. Furthermore, an additional VEP has been applied on 9 March 2015 and the VEP (EP-324/2008/C) was subsequently granted on 27 March 2015. The previous VEP (EP-324/2008/D) was granted on 27 August 2015. The current VEP (EP-324/2008/E) was granted on 26 January 2017.



2.2 Site Description

2.2.1 The major construction activities under the Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2 include:

At-Grade Road Works – Temporary and permanent road formation, pipe laying, road drainage, footpath and noise barrier construction;

Demolition of existing Kiu Tau Footbridge and Footbridge Reprovision; and

Box Culvert Extension – Flow diversion of existing stream, excavation, sub-base and blinding, base, wall and top slab construction.

2.2.2 **Figure 1** shows the works areas for the Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2.

2.3 Construction Programme and Activities

- 2.3.1 The major construction activities undertaken in the reporting month are summarized below:
 - Road Pavement Works;
 - Water Main Laying Works ;
 - Road Drainage Works;
 - Construction of the Police Observation Platform on the Northbound Fanling Highway; and
 - Remaining Works of Kiu Tau Footbridge.
- 2.3.2 The construction programme is presented in **Appendix A**.

2.4 **Project Organisation**

2.4.1 The project organization structure is shown in **Appendix B**. The key personnel contact names and numbers for the Project are summarised in **Table 2.1**.



Party	Role	Position	Name	Telephone	Fax	
	Engineer's	Senior Resident Engineer	Mr. Alan Lee	2171 3303	2171 2409	
	Representative	Resident Engineer (Environmental)	Mr. Perry Yam	2171 3350	2171 3498	
Mott MacDonald	Independent Environmental Checker (IEC)	IEC	Mr. Steven Tang	2828 5920	2827 1823	
Chun Wo Contractor		Site Agent	Mr. Daniel Ho	2638 6144		
	Environmental Officer	Mr. Yang Ran	2638 6147	2638 7077		
		Environmental Supervisor	Mr. Franki Leung	2638 7005		
Meinhardt	Environmental Team (ET)	ET Leader	Mr. Fredrick Leong	2859 1739	2540 1580	

Table 2.1 Contact Information of Key Personnel

3 STATUS OF ENVIRONMENTAL LICENSES, NOTIFICATION AND PERMITS

3.1.1 The relevant environmental licenses, permits and/or notifications on environmental protection for this Project and valid in the reporting month are summarized in **Table 3.1**.

Permit / License	Valid Period						
No. / Notification / Reference No.	From	То	Status	Remarks			
Environmental Permit							
EP-324/2008/E	26 Jan 2017		Granted on 26 Jan 2017				
Construction Noise	Permit			F			
GW-RN0388-18	25 Aug 2018	24 Feb 2019	Valid until	For general works at the northward of site office			
GW-RN0424-18	01 Sep 2018	21 Feb 2019	Valid	Parapet installation works and remedial works on Tai Wo Service Road East, Fanling Highway.			
GW-RN0425-18	22 Aug 2018	21 Feb 2019	Valid	For traverse stitch joints and installation of longitudinal stitch panel over Fanling Highway and MTRC's East Rail line.			
GW-RN0454-18	06 Sep 2018	05 Mar 2019	Valid	For general works at the southward of site office.			
GW-RN0566-18	29 Oct 2018	4 Apr 2019	Valid	For sampling works Fanling Highway bothbound.			
GW-RN0693-18	18 Dec 2018	25 May 2019	Valid	For lane shifting work of Fanling Highway bothbound.			
GW-RN0694-18	19 Dec 2018	25 May 2019	Valid	For loading and unloading along Fanling Highway both bounds.			
				For connection of			

DN600 Watermain near

Kau Lung Hang.

25 May 2019

Valid

19 Dec 2018

GW-RN0696-18



Permit / License No. / Notification /	Valid Period		Status	Remarks
Reference No.	From	То	Status	Remarks
GW-RN0699-18	18 Dec 2018	25 May 2019	Valid	For road diversion and maintenance of Fanling Highway bothbound.
GW-RN0058-19	25 Feb 2019	24 Aug 2019	Valid	For general works at the northward of site office.
GW-RN0064-19	6 March 2019	5 Sep 2019	Valid	For general works at the southward of site office.
GW-RN0067-19	22 Feb 2019	21 Aug 2019	Valid	Parapet installation works and remedial works on Tai Wo Service Road East, Fanling Highway and MTRC's East Rail Line.
Wastewater Dischar	rge License		1	
WT00032188-2018	20 Sep 2018	31 Aug 2023	Valid	
Chemical Waste Pro	oducer Registra	tion	I	
5113-634-C3817- 01	7 Oct 2013		Valid	
Billing Account for Construction Waste Disposal				
7017914	2 Aug 2013		Account Active	
Notification Under	Air Pollution Co	ntrol (Construct	ion Dust) Regula	ntion
	31 Jul 2013	30 Jul 2019	Notified	



4 AIR QUALITY MONITORING

4.1 Monitoring Requirement

4.1.1 In accordance with the Updated EM&A Manual, 1-hr and 24-hr total suspended particulate (TSP) levels at the designated air quality monitoring station are required. Impact 24-hour TSP monitoring should be carried out for at least once every 6 days. For the 1-hr TSP impact monitoring, the sampling frequency of at least three times in every 6 days should be undertaken when the highest dust impact occurs.

4.2 Monitoring Equipment

4.2.1 The 1hr- TSP and 24-hr TSP air quality monitoring were performed using a High Volume Sampler (HVS), of which its location and operation satisfy, as far as practicable, all the requirements as specified in the Updated EM&A Manual. The brand and model of the equipment are given in **Table 4.1**.

 Table 4.1
 Air Quality Monitoring Equipment

Equipment	Brand and Model	Quantity	Serial Number
High Volume	Tisch Total Suspended Particulate		
Sampler	Mass Flow Controlled High Volume	1	2359
(1-hr TSP and	Air Sampler (Model No. TE-5170	I	2509
24-hr TSP)	MFC)		

- 4.2.2 The HVS and its accessories were maintained in good working condition, such as replacing motor brushes routinely and checking electrical wiring to ensure a continuous power supply.
- 4.2.3 Calibration of the HVS (five point calibration) using Calibration Kit was carried out every two months. The HVS calibration orifice will be calibrated annually. Calibration certificate of the TE-5025A Calibration Kit and the HVS are provided in **Appendix C**.

4.3 Monitoring Location

4.3.1 Air quality monitoring was conducted at the location specified in the Updated EM&A Manual. **Table 4.2** describes the details of the air quality monitoring station with its location as shown in **Figure 2**.

 Table 4.2
 Location of Air Quality Monitoring

Air Monitoring Station ID	Monitoring Location	Description
AM1(SR77) *	Yuen Leng 2 *	Residential, Ground floor

Remark:

Location and Station / ASR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

4.4 Monitoring Parameters, Frequency and Duration

4.4.1 **Table 4.3** summarizes the monitoring parameters, frequency and duration of impact TSP monitoring.



Parameter	Frequency and Duration
1-hour TSP	At least three times in every 6 days should be undertaken when the highest dust impact occur
24-hour TSP	Once every 6 days

4.5 Monitoring Methodology

1-hr and 24-hr TSP Monitoring

- 4.5.1 With the consideration of criteria stated in the Updated EM&A Manual, the HVS was installed in the vicinity of the air sensitive receivers.
- 4.5.2 The relevant data including temperature, pressure, weather conditions, elapsed-time meter reading for the start and stop of the sampler, identification and weight of the filter paper, and any special phenomena observed were recorded. The weather information was referenced from Hong Kong Observatory (http://www.weather.gov.hk/wxinfo/pastwx/extractc.htm).
- 4.5.3 A HOKLAS accredited laboratory with constant temperature and humidity control, and equipped with necessary measuring and conditioning instruments, to handle the 24-hr TSP samples, was employed for sample analysis.
- 4.5.4 Filter papers of size 8"x10" were labelled before sampling. They were inspected to be clean with no pin holes and conditioned in a humidity controlled chamber for over 24-hr and were pre-weighed before use for the sampling.
- 4.5.5 The 24-hr TSP levels were measured by following the standard high volume sampling method for TSP as set out in the Title 40 of the United States Code of Federal Regulations, Chapter 1 (Part 50), Appendix B. TSP was sampled by drawing air through a conditioned, pre-weighted filter paper inside the HVS at a controlled air flow rate. After 24-hr sampling, the filter papers loaded with dust were kept in a clean and tightly sealed plastic bag, and then returned to the laboratory for reconditioning in the humidity controlled chamber followed by accurate weighing by an electronic balance with a readout down to 0.1 mg.
- 4.5.6 All the collected samples were kept in a good condition for 6 months before disposal.
- 4.5.7 For 1-hr TSP monitoring, monitoring methodology is the same as 24-hr TSP monitoring which has been presented in **Section 4.5.1** to **Section 4.5.6**, but with sampling period changed to 1 hour.

4.6 Monitoring Schedule for the Reporting month

4.6.1 As informed by the contractor, all major construction activities of the Entrusted Portion Project of Section 1A and 1B were substantially completed on 28 September 2018 and 3 October 2018 respectively. In such regard, the EM&A Programme of the captioned project, including monthly EM&A reporting and the corresponding environmental monitoring and audit works, is no longer required and we proposed to cease it by the end of December 2018 and we have submitted the termination proposal to EPD on 24 December 2018. And EPD are replied the EM&A monitoring shall only be terminated when insignificant environmental impacts of the remaining outstanding construction



works are expected and agreement of EPD. The tentative schedule for environmental monitoring for the reporting month is provided in **Appendix D**. Meteorological data extracted from Hong Kong Observatory for the reporting month is provided in **Appendix E**.

4.7 Monitoring Results

4.7.1 The monitoring results for 1-hr and 24-hr TSP are summarised in **Table 4.4** and **Table 4.5** respectively. Detailed air quality monitoring results and the graphical presentation of air quality monitoring data for the current and past three reporting months are presented in **Appendix F**.

ASR ID	Average (μg/m³)	Range (μg/m³)	Action Level (μg/m³)	Limit Level (µg/m ³)
AM1(SR77) *	145.9	96.9-177.7	292.7	500

Remark:

Station / ASR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

Table 4.5	Summary	y of 24-hr TSP Monitoring Results

ASR ID	Average (μg/m³)	Range (µg/m³)	Action Level (μg/m³)	Limit Level (µg/m³)
AM1(SR77) *	49.5	43.8-57.2	170.3	260

Remark:

Station / ASR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

- 4.7.2 No exceedance of Action and Limit Level was recorded for 24-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.
- 4.7.3 No exceedance of Action and Limit Level was recorded for 1-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.
- 4.7.4 The Event and Action Plan for the occurrence of non-compliance of the air quality criteria is annexed in **Appendix G**.
- 4.7.5 No exceedance of Action and Limit Level was recorded for 1-hour TSP monitoring the monitoring location AM1(SR77) in the reporting month.

- 9 -



5 NOISE MONITORING

5.1 Monitoring Requirements

5.1.1 In accordance with the Updated EM&A Manual, the impact noise monitoring frequency shall depend on the scale of the construction activities. An initial guide on the regular monitoring frequency should be at least once per week when noise generating activities are underway.

5.2 Monitoring Equipment

5.2.1 Noise monitoring was performed using a sound level meter at the monitoring station. The sound level meter deployed complies with the International Electrotechnical Commission Publications 651:1979 (Type 1) and 804:1985 (Type 1) specifications. An acoustic calibrator was deployed to check the sound level meter at a known sound pressure level. The brand and model of the equipment is given in **Table 5.1**.

 Table 5.1
 Noise Monitoring Equipment

Equipment	Brand and Model	Quantity	Serial Number
Sound Level Calibrator	Rion (Model No. NC-74)	1	34678506
Sound Level Meter	Rion (Model No. NL-52)	1	01143484

5.2.2 The sound level calibrator and sound level meter were verified by a certified laboratory every year. Calibration certificates of the sound level meter and acoustic calibrator are provided in **Appendix C**.

5.3 Monitoring Locations

5.3.1 Impact noise monitoring was conducted at the location specified in the Updated EM&A Manual. **Table 5.2** describes the details of the noise monitoring station with its location as shown in **Figure 2**.

NSR ID	Monitoring Location	Description
M1(SR77) *	Yuen Leng 2 *	Residential, Ground floor

Remark:

Location and Station / NSR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

5.4 Monitoring Parameters, Frequency and Duration

5.4.1 **Table 5.3** summarizes the monitoring parameters, frequency and duration of impact noise monitoring.



Table 5.3 Noise Monitoring Parameters, Frequency and Duration

Parameter and Duration	Frequency
30-mins measurement at between 0700 and 1900 on normal weekdays. Leq, L10 and L90 would be recorded.	At least once per week

5.5 Monitoring Methodology

- 5.5.1 The monitoring procedures are summarised as follows:
 - The sound level meter was set on a tripod at a height of 1.2 m above the ground for free-field measurements at monitoring station SR77;
 - The battery condition was checked to ensure good functioning of the meter;
 - Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:
 - Frequency weighting: A
 - Time weighting: Fast
 - Parameters: Leq, L10 and L90
 - Time measurement: Leq(30-minutes) during non-restricted hours i.e. 07:00 19:00 hrs on normal weekdays
 - Prior to and after each noise measurement, the meter was calibrated using the acoustic calibrator for 94dB(A) at 1000 Hz. If the difference in the calibration level before and after measurement was more than 1dB(A), the measurement would be considered invalid and repeat of noise measurement would be required after recalibration or repair of the equipment.
 - At the end of the monitoring period, the Leq, L10 and L90 were recorded. In addition, site conditions and noise sources were recorded on a standard record sheet.
 - A façade correction of +3dB (A) shall be made to the noise parameter obtained by free field measurement.

5.6 Monitoring Schedule for the Reporting Month

5.6.1 The schedule for environmental monitoring for the reporting month is provided in **Appendix D**. Meteorological data extracted from Hong Kong Observatory for the reporting month is provided in **Appendix E**.

5.7 Monitoring Results

5.7.1 The monitoring results for noise are summarized in **Table 5.4** and the monitoring results and the graphical presentation of noise level for the current and past three reporting months are presented in **Appendix H**.



Table 5.4	Summary of Noise	Monitoring Results
-----------	------------------	---------------------------

Noise Monitoring Station ID	Average, dB(A), Leq (30min) ⁽²⁾	Range, dB(A), Leq (30min) ⁽²⁾	Action Level	Limit Level, dB(A)
M1(SR77) ⁽¹⁾	65.9	63.5 – 68.0	When one documented valid complaint is received	75

Remark:

(1) Station / NSR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

(2) +3dB(A) façade correction included

- 5.7.2 Major noise sources during the noise monitoring included construction activities of the Project and that along Tai Wo Service Road East, and nearby traffic noise.
- 5.7.3 No noise complaint was received in the reporting month, so no Action Level exceedance was recorded. Also, no Limit Level exceedance of noise monitoring was recorded in the reporting month.
- 5.7.4 The Event and Action Plan for the occurrence of non-compliance of the noise criteria is annexed in **Appendix G**.



6 WATER MONITORING

6.1.1 The box culvert works had been completed in March 2017. The 4-week postconstruction water quality monitoring at I5 was completed in 28 April 2017.



7 WASTE MANAGEMENT

- 7.1.1 The Contractor has registered as a chemical waste producer of the Project. The C&D materials and waste sorting were carried out on-site. Receptacles were provided for general refuse collection.
- 7.1.2 As advised by the Contractor, a total of 4659m³ of excavated material has been generated. 3818m³ of inert C&D materials was disposed of at public fill to Tuen Mun Area 38. 0m³ of inert C&D materials were reused on site. 75m³ of general refuse was disposed of at North East New Territories (NENT) Landfill. No plastic was collected by recycling contractor in the reporting month. No paper/cardboard packaging was collected by recycling contractor in the reporting month. No metal was collected by recycling contractor in the reporting month. No metal was collected by licensed contractor in the reporting period. Details of the waste management data are presented in **Appendix K**.



8 ENVIRONMENTAL SITE INSPECTION AND AUDIT

8.1 Site Inspection

- 8.1.1 Site inspections were carried out on a weekly basis to monitor the implementation of proper environmental pollution control and mitigation measures for the Project. A summary of the site inspection is provided in **Appendix L**.
- 8.1.2 In the reporting month, 4 site inspections were carried out on 8, 14, 20 and 28 February 2019. The one held on 28 February 2019 was a joint inspection with the IEC, ER, ET and Contractor. No site inspection was conducted by the EPD during the reporting month. No non-compliance was recorded during the site inspection. A summary of the reminders and observations recorded during the site inspections are presented in **Table 8.1**.

Parameters	Date	Observations and Recommendations	Follow-up	
	N/A	N/A	N/A	
Air Quality				
	N/A	N/A	N/A	
Noise				
	N/A	N/A	N/A	
Water Quality				
Waste/ Chemical Management	N/A	N/A	N/A	
Landscape & Visual	N/A	N/A	N/A	
Permits / Licenses	N/A	N/A	N/A	

Table 8.1 Observations and Recommendations of Site Audit



9 IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES

9.1.1 The Contractor has implemented the relevant environmental mitigation measures as specified in the EIA Reports, EPs and updated EM&A Manual. The implementation status of environmental mitigation measures during the reporting period is summarized in **Appendix L**.



10 SUMMARY OF EP SUBMISSION IN THE REPORTING MONTH

10.1.1 The status of the required submission under the EP during the reporting period is summarized in **Table 10.1**.

Table 10.1 Status of Required Submission under Environmental Permit

EP Condition	Submission	Submission Date
Condition 3.3	Monthly EM&A Report for Jan 2019	12 Feb 2019

Mar 2019



11 ENVIRONMENTAL NON-CONFORMANCE

11.1 Summary of Monitoring Exceedances

- 11.1.1 No exceedance of Action and Limit Level were recorded for 24-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.
- 11.1.2 No exceedance of Action and Limit Level was recorded for 1-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.
- 11.1.3 No noise complaint was received in the reporting month, so no Action Level exceedance was recorded. Also, no Limit Level exceedance of noise monitoring was recorded in the reporting month.
- 11.1.4 The 4-week post-construction water quality monitoring at I5 was completed in April 2017.

11.2 Summary of Environmental Non-Compliance

11.2.1 No environmental non-compliance was recorded in the reporting month. The cumulative statistics are provided in **Appendix N**.

11.3 Summary of Environmental Complaints

11.3.1 No environmental complaints were received in the reporting month. The cumulative statistics are provided in **Appendix N**.

11.4 Summary of Environmental Summon and Successful Prosecutions

11.4.1 No environmental related prosecution or notification of summons was received in the reporting month. The cumulative statistics are provided in **Appendix N**.



12 FUTURE KEY ISSUES

12.1 Construction Programme for the Next Month

- 12.1.1 The remaining construction works in the coming reporting month are anticipated to include:
 - Road Pavement Works;
 - Water Main Laying Works;
 - Road Drainage Works;
 - Construction of the Police Observation Platform on the Northbound Fanling Highway;and
 - Remaining works of Kiu Tau Footbridge.

12.2 Key Issues for the Coming Month

- 12.2.1 Key issues to be considered in the coming month are anticipated to include:
 - Properly maintain all drainage facilities and wheel washing facilities on site;
 - Expose slopes and dusty stockpile should be covered up properly if no work will be conducted;
 - Good housekeeping should be maintained and general refuse should be removed regularly; and
 - Watering shall be enhanced over the construction site.

12.3 Monitoring Schedule for the Next Month

12.3.1 The tentative schedule for environmental monitoring for the coming month is provided in **Appendix D**.



13 CONCLUSIONS AND RECOMMENDATIONS

13.1 Conclusions


- 13.1.1 The construction phase EM&A programme of the Project commenced on 5 November 2013.
- 13.1.2 The 1-hr TSP, 24-hr TSP, noise and water quality monitoring were carried out in the reporting period.
- 13.1.3 No exceedance of Action and Limit Level was recorded for 24-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.
- 13.1.4 No exceedance of Action and Limit Level was recorded for 1-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.
- 13.1.5 No noise complaint was received in the reporting month, so no Action Level exceedance was recorded. Also, no Limit Level exceedance of noise monitoring was recorded in the reporting month.
- 13.1.6 The 4-week post-construction water quality monitoring at I5 was completed in April 2017.
- 13.1.7 Four (4) environmental site inspections were carried out in the reporting month. Recommendations on remedial actions were given to the Contractors for the deficiencies identified during the site audit.

13.2 Recommendations

13.2.1 According to the environmental site inspections performed in the reporting month, no recommendation was provided.




Figure

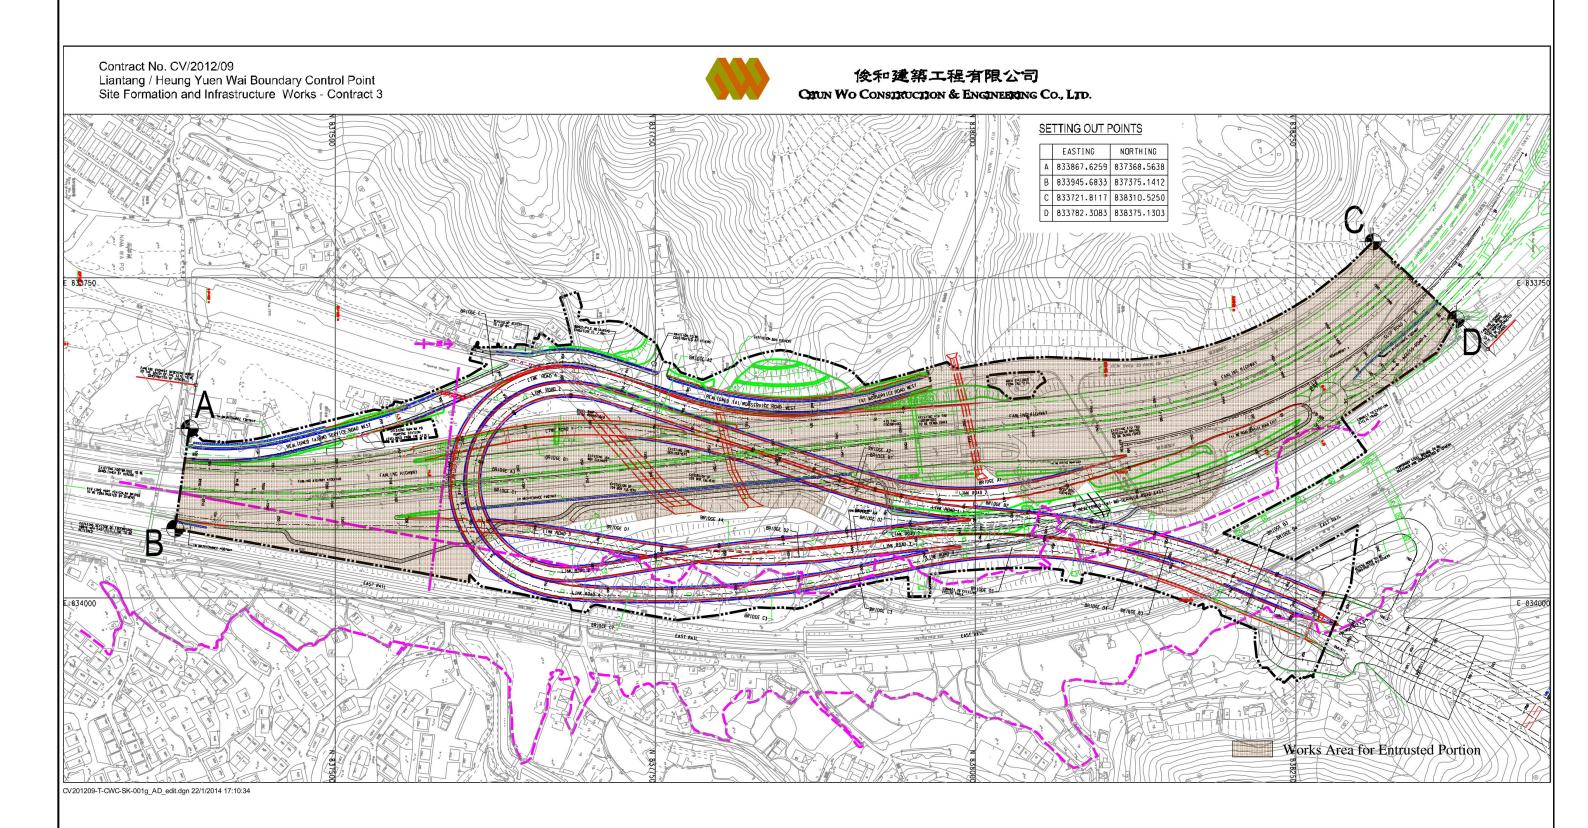



Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2

Figure 1: Demarcation of Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling – Stage 2

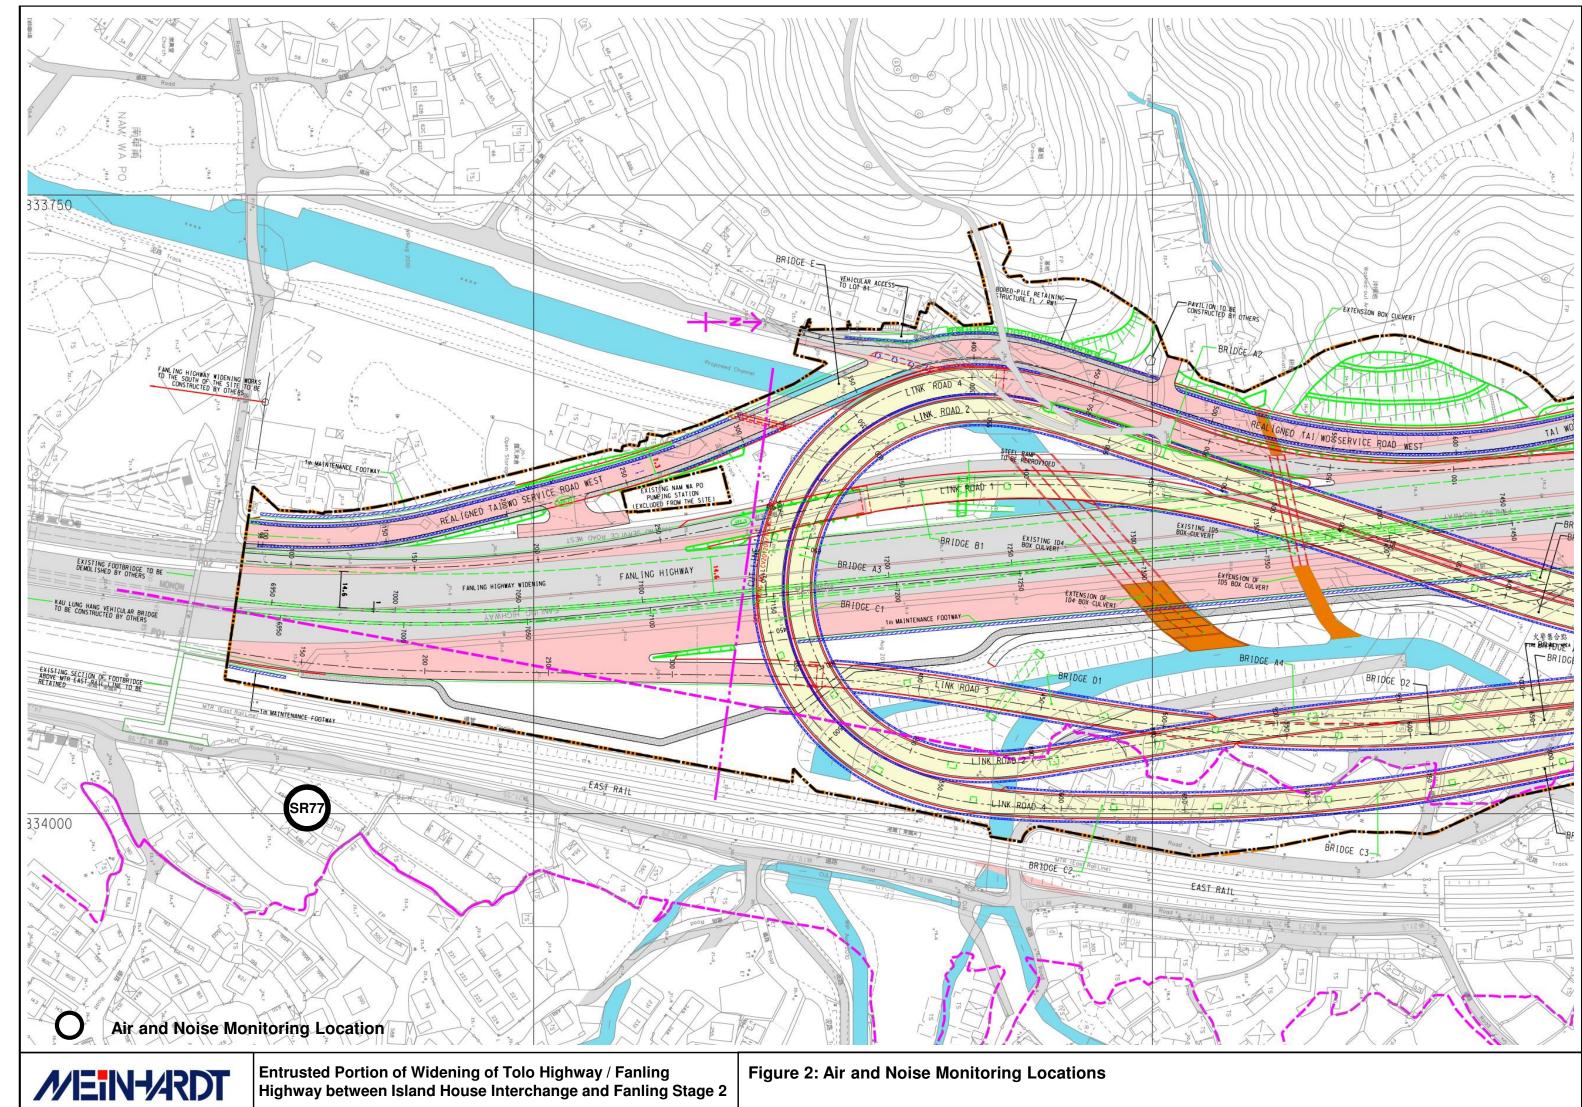



Appendix A Construction Programme

Activity ID	Activity Name	OD	RD	Start	Finish	TF	2018			2019		
							Dec Jan		Feb	Mar	Apr	May
3-Month Rollin	g Programme 2018-12-21 (Based on (UMP06C)											
Key Dates (Co	ntractual)											
KD-0100b	KD1: Section 1A - all HyD's works in Zone3 & SBZ2 excl. Landscape Works (Potential EOT by Claim 63 & Inclement Weather)	0	0		20-Jan-19*	-94		KD1: Section	1A - all HyD's works in Zone3 & SBZ2 excl	Landscape Works (Potential EOT by Clain	63 & Inclement Weather)	
KD-0400a	KD4: Section 3 - Remainder of Landscape Softworks not included in Section 3A (Piel. EOT by Claim 56, 58)	0	0		20-Jan-19*	-93		KD4: Section	3 - Remainder of Landscape Softworks no	t included in Section 3A (Prel. EOT by Claim	56, 58)	
KD-0500	KD4A: Section 3A - Landscape Softworks in NBZ1 (Potential EOT by Inclement	0	0		20-Jan-19*	-93		KD4A: Sectio	n 3A - Landscape Softworks in NBZ1 (Pote	ential EOT by Inclement Weather)		
Section IA & IB	Weather) - Fanling Highway Widening (KD-1 & KD-2)											
	y South Portion between CH6935 and CH7470											
Fanling Highw	ay Zone 1 between CH6935 and CH7130 (within SBZ2)											
Noise Barriel												
FHW-1110b	Noise Barrier NB6 and NB7 - Remaining Stem Wall (28m, maintain access for extensioin of NB 70, VO199)	30	177	16-Aug-18 A	30-Aug-19	-255						
FHW-1140c	Noise Barrier NB70 - Footing (extended 10m under VO199)	153	153	21-Jan-19*	02-Aug-19	-237						······
At-Grade Ro.	adworks (195m)											
EHW-1350b	Road Pavement (FLH NB 1st lane and Hard Shoulder)	138	138	21-Mar-19*	06-Sep-19	-261						
		100	100	2111101-13	00.000-13	201						
	ay Zone 2 between CH7130 and CH7290											
Noise Barriel												
FHW-2340b	Noise Barrier NB67-2 - Cap ID4-1A_1 and Cap ID4-1A_2 head beam (affected by Tau Pass, VO 191)	27	27	06-Apr-19*	11-May-19	-209						
FHW-2370c	Access Ramp at Tau Pass - Additional Mini-Piling (3 nos.) (under VO191)	34	34	19-Feb-19*	29-Mar-19	-236					Access Ramp at Tau Pass - Additional	Mini-Piling (3 nos.)
FHW-2370d	Access Ramp at Tau Pass - Pile caps and other structures (under VO191)	105	105	30-Mar-19*	08-Aug-19	-236						
	adworks (160m)				, in the second							
					00 E 1 10							
FHW-2240	Permanent Street Light Installation (due to Claim No. 63)	21	21	20-Jun-18 A	20-Feb-19	-110			Permaner	at Street Light Installation (due to Claim No.	68), Permanent Street Light Installation	1 (due to Claim No. 6
FHW-2250	Road Pavement on FLH SB 4th lane after Removal of Temp. Street Light (due to Claim No. 63)	11	11	21-Feb-19*	05-Mar-19	-110					ne after Removal of Temp. Street Light	(due to Claim No.6
FHW-2350a	Road Drainage and Pavement (near NB67-2, MN7.9 to MN7.11)	58	33	29-Mar-18 A	06-Mar-19	-111				Road Drainage and Pavement (n	ear NB67-2, MN7.9 to MN7.11), Road	Drainage and Paver
FHW-2350b	Installation of Drain pipe and Manholes (MN7.12 & MN7.12A) (affected by Tau Pass	29	157	26-Nov-18 A	07-Aug-19	-235						
Fanling Highw	under VO191) ay Zone 3 between CH7290 and CH7380											
Noise Barrier												
	Noise Barrier NB69 - Pile cap/ Footing and Stern Wall adjacent to NB lane (108m)	77	- 25	10 Oct 17 A	00 Mar 10	-131				Neire Desire ND00, Die een ((100m) No.
		77	35	16-Oct-17 A	08-Mar-19	-131				Noise Barrier NB69 - Pile cap/	Footing and Stem Wall adjacent to NB	iane (108m), Noise
At-Grade Ro	adworks (130m)											
FHW-3240	Road Pavement on FLH SB 4th lane after Removal of Temp. Street Light (due to Claim No. 63)	10	10	31-Aug-18 A	31-Jan-19	-88			Road Pavement on FLH SB 4th lane at	ter Removal of Temp. Street Light (due to C	aim No.63), Road Pavementon FLH \$	SB4th lane after R
FHW-3350a	Road Drainage (FLH NB hard shoulder, next to NB69)	61	50	26-Feb-18 A	26-Mar-19	-153		-		Roa	d Drainage (FLH NB hard shoulder, ne	xt to NB69), Road I
FHW-3350b	Road Formation and Pavement (FLH NB 1st lane and HS next to NB69, due to Tau	25	25	27-Mar-19*	29-Apr-19	-153						Road Forma
Fanling Highwa	Pass under VO191) y North Portion between CH7470 and CH7925											
	ay Zone 4 between CH7380 and CH7470											
	adworks (90m)											
FHW-4150	Road Pavement (FLH SB 1st lane) by re-surfacing (due to Claim No. 63)	15	33	10-Sep-18 A	06-Mar-19	-111				Road Pavement (FLH SB 1st lan	e) by re-surfacing (due to Claim No. 63)	, Road Pavement (F
	·	1				1	4	•		1	1	
			Ac	ctual Work			CEDD Contract No.	CV/201	2/09		Programme updated to 2019-1-2	
			Re	emaining Work			Liantang / Heung Yuen Wai Bo			Date Revisi	on Checked	Approved
				ummary Bar								
				ritical Remaining	a Work		Infrastructure Works					
				ilestone			3-Month Rolling P	-				
				roject Baseline B	Por		3MPR066Page 1	of 6	20-Jan-19			
			r1	ojevi daseline B	i cu							

Activity ID	Activity Name	OD	RD S	tart	Finish	TF	2018			2019	•	
FHW-41	50a Road Drainage and Road Pavement (FLH H.S., Merging Lane)(due to Claim No. 63)	48	48 10-S	p-18 A	23-Mar-19	-126	Dec Jan		Feb	Mar Boad Dra	Apr anage and Road Pavement (FLH H.S.	May Merging Lane)(du
	330c Construction of FL/RW2 (mass concrete wall, VO not yet received)	38		ig-18 A	12-Mar-19	-121					(mass concrete wall, VO not yet receive	
				-		-121						
	830d Remaining Gullies and Road Pavement after Construction of FL/RW2 (VO not yet received)	25		eb-19*	18-Mar-19			<u>.</u>			es and Road Pavement after Construct	tion of FL/HW2 (VC
FHW-43	330e Road Drainage MN9.1 - MN9.3	24	0 23-A	ig-18 A	21-Jan-19	-78		Road Drai	nage MN9.1 - MN9.3, Road Drainage MN9	1 - MN9.3		
Fanling Hi	ghway Zone 5 between CH7470 and CH7600 (Provision of Kiu Tau Footbridge)											
Kiu Tau I	Footbridge Reprovision (East)											
FHW-50	170 Installation of Lighting Facilities (affect by design change which is under VO)	21	46 20-Ji	n-18 A	21-Mar-19	-124				Installation	of Lighting Facilities (affect by design o	hange which is und
FHW-50	80 Fabrication of Pillar Box (affect by design change which is under VO)	32	8 15-Ju	n-18 A	29-Jan-19	341			Rabrication of Pillar Box (affect by design	change which is under VO), Fabrication of P	illar Box (affect by design change whi	ch is under VO)
FHW-50	90 Erection of Pillar Box (affect by design change which is under VO)	30	30 30-J	an-19*	12-Mar-19	341					fect by design change which is under V	/O)
FHW-51	00 Power Cable Laying Works (affect by design change which is under VO)	36	36 21-J	an-19*	09-Mar-19	-135				Power Cable Laying Works (affect by design change which is under	VO)
FHW-51	10 Permanent Power Supply Connection (affect by design change which is under VO)	10	10 11-1	lar-19	21-Mar-19	-124				Permanent	Power Supply Connection (affect by d	esign change whicl
	10a Installation of Drainage Pipe	32	38 10-S	p-18A	12-Mar-19	-116					ipe, Installation of Drainage Pipe	
	10b Laying of Floor Tiles (affect by design change which is under VO)	72		n-18 A	10-Apr-19	-140					Laying of Floor Tiles	(affect by design a
		_									\perp	
	110c Installation of Suspended Ceiling (affect by design change which is under VO)	104	55 21-M	ay-18 A	01-Apr-19	-133					Installation of Suspended Ceiling	(affect by design c
	on of BFA Facilities (Lift)											
FHW-L	-103I Lift Delivery and Installation	70	0 08-Ja	n-18 A	23-Nov-18 A		/ and Installation					
FHW-L	-104 Permanent Power Supply (affect by design change which is under VO)	10	10 11-N	ar-19*	21-Mar-19	-135				Permanent	Power Supply (affect by design chang	e which is under V
FHW-L	-106 Testing & Commissioning (affect by design change which is under VO)	11	11 22-N	ar-19*	03-Apr-19	-135					Testing & Commissioning (affe	ct by design chang
Works a	t existing TWSRE]							
FHW-54	180e Noise Barrier NB73 Footing Bay 8 & 9 (after completion of Bay 1-3 of FR32, due to	30	0 31-0	ct-18 A	20-Nov-18 A		Noise Barrier NB73 Footing Bay 8	9 (after comple	ation of Bay 1-3 of FR32, due to claim no. 6	2)		
FHW-54	claim no. 62) 181 Noise Barrier NB72 Bay 5 - 9 (after water shutdown for twin DN1400 WM, due to claim)	73	51 26-F	b-18 A	27-Mar-19	-145				Noi	se Barrier NB72 Bay 5 - 9 (after water s	shutdown for twin [
FHW-54	190 Road Drainage, Pavement and TCSS duct laying (Merging lane next to NB72)(due to	2	2 28-N	ar-19*	29-Mar-19	-131					Road Drainage, Pavement and TCSS	duct laving (Mergin
FHW-55	claim)			or-18 A	19-Mar-19	-122					(MS10.1-10.3A), Road Pavement an	
	next to NB73) Road Works (130m)	0.			To ma To					ribad brainage	Noro. 1-10.049, fibad f avenuit an	
				10.1	1051.40							
	Road Pavement (FLH SB 1st lane) by re-surfacing (due to claim 63)	15	18 10-S	ер-18 A	16-Feb-19	-96			Road Pavemer	t (FLH SB 1st lane) by re-surfacing (due to cl	aim 63), Road Pavement (FLH SB 1st	lane) by re-surfacir
FHW-53	Boad Drainage (MN10.1-10.3A, gullies affected by Slope F18)	60	15 16-D	xc-17 A	13-Feb-19	-93				810.1-10.3A, gullies affected by Slope F18), F	oad Drainage (MN10.1-10.3A, gullies	
FHW-53	B30c Fill Replacement Works 3SW-D/F18 next to FLH NB (further modified by VO not yet received)	73	24 01-A	ig-18 A	23-Feb-19	-141				eplacement Works 3SW-D/F18 next to FLH N		
FHW-53	330d Remaining Gullies, road formation and TCSS duct laying (log on effect by Sbpe F18 under VO)	25	25 25-1	eb-19	25-Mar-19	-141			-	Rema	ining Gullies, road formation and TCS	S duct laying (log
FHW-53	330e Road Pavement (log on effect by Slope F18 under VO)	14	14 26-N	ar-19*	11-Apr-19	-141					Road Pavement (lo	g on effect by Slo
Fanling H	ghway Zone 6 between CH7600 and CH7660 (Existing Vehicular Bridge)											
At-Grade	Roadworks (60m)											
FHW-63	330a Road Drainage and Road Formation (FLH NB hard shoulder)	60	18 16-D	xc-17 A	16-Feb-19	-96			Road Drainage	and Road Formation (FLH NB hard shoulde), Road Drainage and Road Formation	n (FLH:NB hard sh
Fanling H	ghway Zone 7 between CH7660 and CH7925 at NBZ (Section 1B)								· ·			
	Roadworks (265m)											
			Actual W	ork				01/00-	10/00	3-Month Rolling F	Programme updated to 2019-1-2	20
							CEDD Contract No.			Date Revisio		Approved
		Summary Bar					Liantang / Heung Yuen Wai B					
					n Work		Infrastructure Work					
			Critical R	-	J VVOIK		3-Month Rolling P	rogram	me			
		▼					3MPR066Page 2	of 6	20-Jan-19			
1			Project Ba	iseline Ba	ar		-					

y ID Activity Name	00	nu	Sidil	Finish		Dec Jan Feb	2019 Mar		Apr	May
FHW-7330 Road Pavement (FLH NB 3rd lane at NBZ joint with CSHK) by re-surfacing	24	35	20-Aug-18 A	08-Mar-19	34			nt (FLH NB 3rd lane at NBZ join	P.	
FHW-7340 Road Pavement, Central Barrier (FLH NB 4th lane) by re-surfacing	24	24	20-Aug-18 A	23-Feb-19	35		Road Pavement, Central Barrier (F	LH NB 4th lane) by re-surfacing	g, Road Pavement, Cent	ral Barrier (FLH
emaining Works for Noise Barrier along widened Fanling Highway										
FHW-NB-110a Installation of Steelworks & Panel for NB70 (25m, and extended 10m under VO199),	6	6	03-Aug-19*	09-Aug-19	-23					
adjacent to FLH SB lanes at Zone 1 FHW-NB-150 Installation of Steelworks & Panel for NB72 & NB73 (248m), adjacent to FLH SB lanes		-	28-Mar-19							
at Zones 4, 5 & 6		16	28-Mar-19	16-Apr-19	-14					f Steelworks &
FHW-NB-320 Installation of Steelworks & Panel for NB67-2 (85m), adjacent to FLH NB lanes at Zones 2 & 3	14	14	21-Jan-19*	12-Feb-19	-11(Installation of S	eelworks & Panel for NB67-2 (85	m), adjacent to FLH NB lanes a	t Zones 2 & 3	
FHW-NB-330 Installation of Steelworks & Panel for NB69 (109m), adjacent to FLH NB lanes near LR1 at Zone 3	18	18	09-Mar-19*	29-Mar-19	-13			Installation of	Steelworks & Panel for N	IB69 (109m),
ection II - Remainder of the Works (KD-3)										
At Grade Link Road at Fanling Highway Interchange										
Link Road 1 (near Abutment AB1)										
FHI-LR1-1020 Backfilling works of abutment, Gully and Profile Barrier at Abutment AB1	20	34	28-May-18 A	07-Mar-19	34		Backfilling works	of abutment, Gully and Profile	Barrier at Abutment AB1	I, Backfilling v
FHI-LR1-1110 Road Formation and Pavement (CH 240 - CH 340, nr AB1)	15	15	19-Sep-18 A	13-Feb-19	364	Road Formati	n and Pavement (CH 240 - CH 34	40, nr AB1), Road Formation ar	nd Pavement (CH 240 -)	CH340, nr AE
FHI-LR1-1120 Road Formation, Road Drainage, TCSS ducting, Profile Barrier and Pavement (CH 80		49	07-Feb-18 A	25-Mar-19	330			Road Formation, Road		
CH 240, nr NB66 & 67-1) Noise Barrier	10	1		2010101-10	0.00				u prainago, 1000 duci	
		·		1						
FHI-LR1-109 Noise Barrier NB67-1 - Remaining ground beam of Bay 3 (allow access from TWSRW)			21-Jan-19*	28-Jan-19	372	Ndise Barrier NB67-1 - Remaining gro	nd beam of Bay 3 (allow access	rom TWSRW)		
Link Road 2 (near Abutment AA1)										
FHI-LR2-2020 Construction of Fill slope FL/F10 and Road Formation of Link Road nr Abutment AA1	78	55	25-Apr-18 A	01-Apr-19	324			Construction	on of Fill slope FL/F10 ar	nd Road Forr
FHI-LR2-2020 TCSS Duct Laying along Link Road next to FL/F10	52	52	28-Jul-18 A	28-Mar-19	32			TCSS Duct Layir	ng along Link Road next	to FL/F10, T
FHI-LR2-2030 3SW-D/FR32 Bay 3207 (including temporary works)	43	37	19-Jul-18 A	11-Mar-19	342		3SW-D/FF	132 Bay 3207 (including tempo	rary works), 3SW-D/FR3	2 Bay 3207
FHI-LR2-2030 3SW-D/FR32 Bay 3208 (including temporary works)	46	46	27-Aug-18 A	21-Mar-19	333			3SW-D/FR32 Bay 3208 (in	cluding temporary works	s), 3SW-D/FF
FHI-LR2-2030 3SW-D/FR32 Bay 3209 (including temporary works)	46	20	15-Aug-18 A	19-Feb-19	359	3SW	D/FR32 Bay 3209 (including temp	orary works), 3SW-D/FR32 Bay	y 3209 (including tempo	rary works)
FHI-LR2-2030 3SW-D/FR32 Bay 3210 (including temporary works)	45	45	30-Jun-18 A	20-Mar-19	298			3SW-D/FR32 Bay 3210 (inc	luding temporary works).	. 3SW-D/FR3
FHI-LR2-2040 3SW-D/FR32 Bay 3212 (including temporary works)	37	37	21-Jan-19*	11-Mar-19	34		3SW-D/FF			
FHI-LR2-2040 3SW-D/FR32 Bay 3213 (including temporary works)	35	35	14-Mar-19	27-Apr-19	298			DE Day DE IE (including tampo	ally none)	3SW-D/FI
				· · · ·	_					35W-D/FI
FHI-LR2-2040 3SW-D/FR32 Bay 3214 (including temporary works)	36	36	21-Mar-19	07-May-19	298					
FHI-LR2-2050 Road Pavement and Drainage next to Abutment (after completion of NB73 Bay 12&13 Stern Wall)	20	20	21-Jan-19	19-Feb-19	359	Road	Pavement and Drainage next to A	butment (after completion of N	B73 Bay 12&13 Stem W	/all)
FHI-LR2-2050 Road Formation, Road Drainage and Pavement (SMH1302 - 1303 & MY2.4 - 2.5) at grade	72	72	01-Mar-18 A	25-Apr-19	30					Road Forma
FHW-SG-103(Fabrication and Delivery of Sign Gantry DS11	99	26	28-Dec-17 A	26-Feb-19	338		Fabrication and Delivery of Si	gn Gantry DS11, Fabrication ar	nd Delivery of Sign Gantr	y DS11
FHW-SG-103(Erection of Sign Gantry DS11 (include On-site Fabrication)	15	15	27-Feb-19	15-Mar-19	338		Erec	tion of Sign Gantry DS11 (inclu	de On-site Fabrication)	
FHW-SG-104(Fabrication and Delivery of Sign Gantry FADS11 and DS64	99	34	02-Feb-18 A	07-Mar-19	330		Fabrication and	Delivery of Sign Gantry FADS1	I and DS64, Fabrication	and Delivery
FHW-SG-104(Erection of Sign Gantry FADS11 and DS64 (include On site Fabrication)	15	15	08-Mar-19	25-Mar-19	330			Erection of Sign Gan	try FADS11 and DS64 (i	nclude On-sit
Link Road 3 (near Abutment AD1)										
FHI-LR3-3020 Permanent Fill Slope, Construction of Gullies and Profile Barriers	48	35	25-Apr-18 A	08-Mar-19	319		Permanent Fill	Slope, Construction of Gullies a	and Profile Barriers, Perm	anent Fill Slo
FHI-LR3-3030 Road Pavement	1		09-Mar-19*	09-Mar-19	319		Boad Pavem		and i foliic Damas, i an	
FHI-LK3-3030 Hoad Pavement			09-Mar-19"	09-Mar-19	315		Hoad Pavem	ent		
		A					3-Mc	nth Rolling Programme ı	updated to 2019-1-2	0
	Actual Work					CEDD Contract No. CV/2012/09	Date	Revision	Checked	Approver
	Remaining Work Summary Bar					iantang / Heung Yuen Wai BCP - Site Formation &				
						Infrastructure Works, Contract 3				
			cal Remainir	ng Work		3-Month Rolling Programme				
	♦		stone			3MPR066 Page 3 of 6 20-Jan-19				
		Proje	ect Baseline B	Bar						

/ity ID	Activity Name		RD	Start	Finish	TF	2018	2019			
·							Dec Jan Feb	Mar	Apr		May
FHI-LR3-3040	Other Civil Works for TCSS duct laying - along Link Road 3	25	25	09-Mar-19	08-Apr-19	319			Other Civil W	orks for TCS	S duct laying -
Link Road 4 (r	ear Abutment AC1)										
	Road Formation, Road Drainage, TCSS ducting and Pavement	55	35	27-Nov-17 A	08-Mar-19	300		Road Formation, Road Drainag	e, TCSS ducting and Pave	ement, Road I	Formation, Ro
FHI-LR4-404(Remaining Section of Carriageway connect to FLH	44	44	09-Mar-19*	04-May-19	300					Re
Viaduct - Pave	nent, Street Furnitures, Lighting inside Internal Voids and Others										
		00	10	00 14 40 4	05 Mar 40	0.00					
RS-1010d	Installation of Lighting	96	49	09-Mar-18 A	25-Mar-19	330			ation of Lighting, Installatio	in of Lighting	
RS-1010e	Cable Connection	31	23	22-Oct-18 A	22-Feb-19	356	Cabl	Connection, Cable Connection			
RS-1020a	Allow Access for Street Lighting Installation	132	23	11-Jan-18 A	22-Feb-19	356	Allov	Access for Street Lighting Installation, Allow Ac	ccess for Street Lighting Ins	stallation	
RS-1020b	Other Street Fumiture including Sign Gantry, NB, Handrail, traffic signs, etc, for Bridge A, B, C and D	112	49	26-Feb-18 A	25-Mar-19	330		Other	Street Furniture including S	ign Gantry, N	B, Handrail, tra
RS-1040b	Watermains Laying at PierAC4 on Viaduct (under VO171)	45	42	21-May-18 A	16-Mar-19	294		Watermains Laying	at Pier AC4 on Viaduct (u	nder VO171),	Watermains L
RS-1040c	Watermains Laying at Pier AD9 on Viaduct (under VO171)	36	36	18-Mar-19*	03-May-19	301					wa
RS-1040d	Watermains Laying at Pier AB7 on Viaduct (under VO171)	43	43	18-Mar-19*	11-May-19	294					
RS-1040e	Watermains Laying at PierAA12 on Viaduct (under VO171)	52	42	21-May-18 A	16-Mar-19	301		Watemaina Lavina	at Diar A 410 an Maduat (under VO171	Wetermeine
									at Pier AA12 on Viaduct (<u></u>
RS-1040f	Watermains Laying at Pier AA7 on Viaduct (under VO171)	36	36	18-Mar-19*	03-May-19	301					Wat
RS-1070c	Road Pavement AA1 - AA18 (base coarse only)	6	10	28-May-18 A	31-Jan-19	369	Road Pavement AA1 - AA18 (base c	arse only), Road Pavement AA1 - AA18 (base	coarse only)		
RS-1080e	Waterproofing on Walkway AB6 - AB12	18	18	21-Jan-19*	16-Feb-19	361	Waterproofin	on Walkway AB6 - AB12			
RS-1090c	Waterproofing on Walkway (AD8-AD1 4 West and East Sides)	20	20	21-Jan-19*	19-Feb-19	359	Waterpro	ofing on Walkway (AD8-AD14 West and East	Sides)		
RS-1110	Final Pavement and Road Marking	12	12	21-Jan-19*	02-Feb-19	367	Final Pavement and Road Markin				
WSD Works											
DN450 Fire Ma	a ins (CHA) Pipe Laying - CHA 38 - 113 (DN450) near Ext. TWSRW, 20m	11	102	16-Apr-18 A	01-Jun-19	-278					
WA-1020	Pipe Laying - CHA 11 3 - 135 (DN450) near Ext. TWSRW, 20m	102	102	21-Jan-19*	01-Jun-19	-193					
WA-1030	Pipe Laying - CHA 135 - 160 (DN450) near Ext. TW SRW, 25m	19	102	18-Apr-18 A	01-Jun-19*	-180					
WA-1110a	Pipe Laying - CHA 185 - 228 (DN450) near Ext. TW SRW, 43m	24	24	21-Jan-19*	23-Feb-19	-102		Laying - CHA 185 - 228 (DN450) near Ext. TV			
WA-1130b	Pipe Laying - CHA 373 - 380 (DN450) near Ext. TW SRW, 7m	18	18	21-Jan-19*	16-Feb-19	-109	Pipe Laying -	CHA 373 - 380 (DN450) near Ext. TWSRW, 7n	n		
WA-1130c	Pipe Laying - CHA 380 - 388 (DN450) near Ext. TW SRW, 8m	12	12	21-Jan-19*	02-Feb-19	-103	Pipe Laying - CHA 380 - 388 (DN4	50) near Ext. TW SRW, 8m			
WA-2080	Pipe Laying - CHA 624 - 663 (DN450) along Ext. TWSRW SB, 39m	75	0	30-Nov-18 A	19-Jan-19 A						- Pipe Lay
WA-3040	Pipe Laying - CHA 810 - 835 (DN450) along Ext. TWSRW SB, 25m (NBZ)	74	74	20-Feb-19*	23-May-19	-172					
WA-3050	Pipe Laying - CHA 835 - 880 (DN450) along Ext. TWSRW SB, 45m (NBZ)	74	74	20-Feb-19*	23-May-19	-172					
WA-3060	Pipe Laying - CHA 880 - 925 (DN450) along Ext. TWSRW SB, 45m (NBZ)	68	68	27-Feb-19*	23-May-19	-274					
		00	00	2710013	20 Way 10	214					
DN1200 Water											
WC-1030	Construction of IT inspection tee chamber(s) near the Jacking Pits	47	47	10-May-18 A	22-Mar-19	332		Constructio	on of IT inspection tee char	nber(s) near ti	ne Jacking Pit
DN2200 Water	Mains (CHF)										
WF-4000	Modification of Existing DN2200 DAV Chamber at FLH NB near Kiu Tau Footbridge (covered by VO no.50)	35	35	21-Jan-19*	08-Mar-19	344		Modification of Existing DN2200	0 DAV Chamber at FLH NE	8 near Kiu Tau	I Footbridge (
			Δctu	al Work			CERD Contract No. CV/2012/00	3-Month Rolling P	Programme updated to	2019-1-20)
		Remaining Work				CEDD Contract No. CV/2012/09 Date Revision Checked					
	l r						tang / Heung Yuen Wai BCP - Site Formation &				
				Der							
			Sum	imary Bar			Infrastructure Works, Contract 3				
			Sum	cal Remainin	ıg Work		-				
		•	Sum Critic	-			Infrastructure Works, Contract 3 3-Month Rolling Programme PR066Page 4 of 620-Jan-19				

vity ID	Activity Name	OD	RD	Start	Finish	T	2018			2019		
Existing Nam	Va Po Trunk Sewage Pumping Station (PST3)						Dec Jan	-	Feb	Mar	Apr	Мау
PS-1010	Construction of New Boundary Wall for Pumping Station (PST3)	80	74	25-Nov-16 A	27-Apr-19	30						Construction
		00	/4	20100107	2770113	00						
-	lignment of Tai Wo Service Road West (KD-7)											
NSRW Zone	5 betweeen CH376 and CH520											
Construction	of Retaining Structures											
TWSRW-512	Remaining works incl. railing, u-channel on top of Bored Pile Wall (wait for VO)	22	22	25-Jun-18 A	21-Feb-19	-10			Remaining	g works incl. railing, u-channel on top of Bor	ed Pile Wall (wait for VO), Remaining wor	rks incl. railing,
TWSRW-515	(Slope Works and Retaining Wall of FL-C2 (covered by VO183)	60	25	01-Dec-17 A	25-Feb-19	-10			Slóp	oe Works and Retaining Wall of FL-C2 (cove	red by VO183), Slope Works and Retain	ing Wall of FL
At-Grade Roa	dworks											
TWSRW-511	Retaining Wall RW9 - Bay 9002 & 9003 (covered by VO No. 116)	45	26	05-Feb-16 A	26-Feb-19	-10			Re	ataining Wall RW9 - Bay 9002 & 9003 (cove	red by VO No. 116), Retaining Wall RW9	- Bay 9002 &
TWSRW-512	(Filling Works between Retaining Wall RW7 and RW8	192	39	07-Jun-16 A	13-Mar-19	-11				Filling Works between Re	taining Wall RW7 and RW8, Filling Wor	rksbetween Re
TWSBW-51	(Road Pavement and remaining works of Vehicular Access to Lot 81	27	27	12-Jul-18 A	27-Feb-19	-12				Road Pavement and remaining works of Vehi		
			48			-12						
	(Construction of Extended Podium near RW7 incl. filling works & slope protection (covered by VO No.100)	85	-	27-Oct-16 A	23-Mar-19						on of Extended Podium near RW7 incl.	
	(Construction of Pavilion (covered by VO No.137)	49	49	10-Aug-18 A	25-Mar-19	-12				Constri	uction of Pavilion (covered by VO No.137	7), Construction
WSRW Zone	7 betweeen CH530 and CH640											
At-Grade Roa	dworks											
TWSRW-719	(Remaining Road Drainage, Road Formation, Road Pavement and Footpath (incl. Zone 6 & Zone 7)	44	44	21-Jan-19*	19-Mar-19	-12				Remaining Road	d Drainage, Road Formation, Road Pave	ement and Foo
WSRW Zone	8 betweeen CH640 and CH695											
At-Grade Roa	dworks											
TWSRW-812	Remaining Road Drainage, Road Formation, Road Pavement and Footpath	60	60	21-Jan-19*	08-Apr-19	31					Remaining Road Drainage,	, Rolad Formati
emainder of t												
	Filling Works to the abandoned section of TWSRW and modify existing sewerage	76	75	21-Jan-19*	20 Apr 10	30						
	manhole	75	/5	21-Jan-19	29-Apr-19	30						Filling Work
Utilities Laying												
UU-1010A	Utilities Duct Laying in Area 1, Phase 2, CLP - 132kV(150mVA), approx.30m at interface section	9 16	12	10-Jan-18 A	02-Feb-19	-18			Utilities Duct Laying in Area 1, Phase	2, CLP - 132kV(150mVA), approx.30m at in	terface section, Utilities Duct Laying in Are	ea 1, Phase 2,
UU-1010B	Utilities Duct Laying in Area 1, Phase 2, Towngas - DN600, approx.20m at interface section	58	58	29-Mar-19	12-Jun-19	-18				_		
UU-1030	Utilities Duct Laying in Area 3, Phase 1 (along existing TWSRW, Approx. 150m) (by utilities undertakers)	7	7	20-Jan-19*	26-Jan-19	-10		U 💻	tilities Duct Laying in Area 3, Phase 1 (along e	xisting TWSRW, Approx. 150m) (by utilities i	undertakers)	
UU-1030A	Utilities Duct Laying in Area 3, Phase 2, CLP - 132kV(150mVA), approx. 30m	27	49	10-Jan-18 A	25-Mar-19	-12				Utilities	Duct Laying in Area 3, Phase 2, CLP - 1	32KV(150mVA
UU-1040A	Utilities Duct Laying in Area 4, Phase 2, Towngas - DN600 & DN400, approx. 50m (by	121	50	15-Sep-16 A	26-Mar-19	-16				Utilitie	s Duct Laying in Area 4, Phase 2, Towng	gas-DN600 & ſ
UU-1040B	their own TTA) Utilities Duct Laying in Area 4, Phase 2, CLP - 132kV(150mVA), approx. 50m (by their	33	33	27-Mar-19	09-May-19	-16						
Switch-Over	own TTA) of Existing Utilitiess											
	Switch-over Works (CLP 11 kV)	16	16	20-Jan-19*	04-Feb-19	44			Switch-over Works (CLP 11 kV)			
			-						Switch-over works (GEP 11 kV)			
	Switch-over Works (Towngas, DN400)	30	30	27-Mar-19*	25-Apr-19	36					Sv	witch-over Work
Remaining Wo	ks for Noise Barrier along realigned TWSRW							1				
TWSRW-NB-1	Noise Barrier Steelworks & Panel for NB2 at Zone 5	15	15	28-Feb-19*	16-Mar-19	-12				Noise Barrier Steelwo	orks & Panel for NB2 at Zone 5	
tage N4A & N	4B - Realignment of Tai Wo Service Road East (KD-13 & KD-14)											
								-				
			Act	tual Work			CEDD Contract No	CV/20	12/09	3-Month Rolling Pr	rogramme updated to 2019-1-20	
				maining Work						Date Revisio	n Checked	Approved
				mmary Bar			Liantang / Heung Yuen Wai B					
				tical Remainin	na Work		Infrastructure Work					
				lestone	gront		3-Month Rolling F	-				
		-		oject Baseline E	Bar		3MPR066Page S	of 6	20-Jan-19			
			FIC	JOUL DASEILLE E	Jai					├ ─── ├ ───		

TWSRE-1190 Drainag			4 1	Otan	Finish	11	2018	201			
TWSRE-1180 Road Fo TWSRE-1190 Drainag TWSRE-1200 Road Pa							Dec Jan	Feb	Mar	Apr	May
TWSRE-1180 Road Fo TWSRE-1190 Drainag TWSRE-1200 Road Pa											
TWSRE-1190 Drainag		24	42	11-Oct-17 A	16-Mar-19	337			Deed Fermation //	erb and Pavement (Incl. FL/F8A, FL/I	O) Dedd Ferr
TWSRE-1200 Road Pa						291			noad ronnation, K		
	ige Works on Permanent Cycle Track (under VO159)	80	56	15-Jan-18 A	02-Apr-19					Drainage Works on Permanent	Cycle I rack (ur
WSRE Zone 2 between	Pavement on Permanent Cycle Track	32	32	03-Apr-19	16-May-19	291					
At-Grade Roadworks											
TWSRE-2100 Road Fo	Formation, Kerb and Pavement	20	22	23-Oct-17 A	16-Mar-19	337			Road Formation, K	erb and Pavement, Road Formation,	Kerb and Pav
TWSRE-2110 Drainage	ige Works on Permanent Cycle Track (under VO159)	80	55	26-Mar-18 A	01-Apr-19	291				Drainage Works on Permanent C	ycle Track (un
TWSRE-2120 Road Pa	Pavement on Permanent Cycle Track	33	33	02-Apr-19	16-May-19	291					
WSRE Zone 3 between	en CH380 and CH456										
At-Grade Roadworks											
TWSRE-3050 Drainag	ige Works on Permanent Cycle Track (under VO159)	45	45	03-Apr-18 A	20-Mar-19	294			Drainage Wo	rks on Permanent Cycle Track (under	VO159), Drair
TWSRE-3060 Road Pa	Pavement on Permanent Cycle Track	40	40	21-Mar-19	11-May-19	294					_
emaining Works for No	loise Barrier along realigned TWSR East										
WSRE-NB-12 Installati	ation of Steelwork & Transparent Panel - Noise Barrier NB3 (254m)	35	78	09-Jun-17 A	03-May-19	301					
age 1C - Viaduct Stru	ructure & TCSS Civil Provisions (KD-9)										
- aduct Bridge Segemer	ent Erection										
	n and Stitch Casting (Narrow-box Section)										
	ruction of longitudinal stitch at Bridge D3	35	19	11-May-18 A	18-Feb-19	360		Construction of longitu	dinal stitch at Bridge D3. Construct	ion of longitudinal stitch at Bridge D3	
	vishment Works (KD-4, 4A, 5, 5A, 6)										
ecton 3A - Landscapin											
						101					
	plant and Landscaping Softworks in NBZ1	50	50	21-Jan-19*	26-Mar-19	-164			Tran	splant and Landscaping Softworks in	NBZ1
	of Landscaping Softworks Not Included in Secton 3A										
S3-1000 Transpla	plant and Landscaping Softworks on At grade Road	131	75	26-Mar-18 A	29-Apr-19	-188					Trans
3-1010 Transpla	plant and Landscaping Softworks on Viaduct or other remaining area	48	48	21-Jan-19*	23-Mar-19	-125			Transpla	nt and Landscaping Softworks on Via	aductorother
ection 4A: Establishme	ent Works for Landscape Softworks under Section 3A										
64A-1000 Establis	ishment Works at NBZ1	365	365	27-Mar-19	25-Mar-20	-206					

3MPR066_


Page 6 of 6

_20-Jan-19

Project Baseline Bar



Appendix B Project Organization Structure

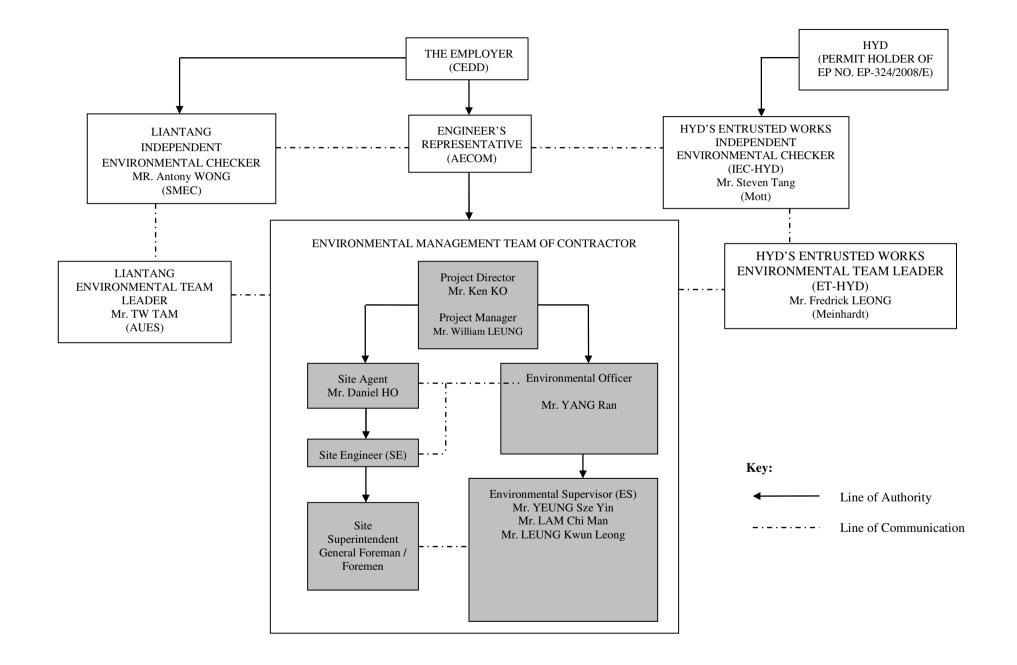



Appendix C Calibration Certificates of Monitoring Equipment



RECALIBRATION DUE DATE: February 13, 2019

Environmental Certificate of Calibration

			Calibration	Certificatio	on Informat	ion		
Cal. Date:	February 1	3, 2018	Roots	meter S/N:	438320	Ta:	293	°К
Operator:	Jim Tisch					Pa:	mm Hg	
Calibration	Model #:	TE-5025A	Calil	prator S/N:	1612			
			Mal Plant	A) (- 1	ATI	AD	A11	
	Run	Vol. Init (m3)	Vol. Final (m3)	ΔVol. (m3)	ΔTime (min)	ΔP (mm Hg)	∆H (in H2O)	
	1	1	2	(113)	1.3970	3.2	2.00	
	2	3	4	- 1	1.0000	6.3	4.00	
	3	5	6	1	0.8900	7.9	5.00	
	4	7	8	1	0.8440	8.7	5.50	
	5	9	10 1		0.7010	12.6	8.00	
				Data Tabula	tion			
	Vstd)(<u>Tstd</u>)		Qa	$\sqrt{\Delta H(Ta/Pa)}$	
	(m3)	(x-axis)	(y-axis)		Va	(x-axis)	(y-axis)	
	1.0172	0.7281	1.4293		0.9958	0.7128	0.8762	
	1.0130	1.0130			0.9917	0.9917	1.2392	
	1.0109	1.1358			0.9896	1.1120	1.3854	
	1.0098	1.1964	2.37	A PERSON NEW YORK OF THE PARTY	0.9886	1.1713	1.4530	
	1.0046	1.4331	2.85	586 0.9835 017		1.4030 m=	1.7524 1.26500	4
	QSTD	m= b=	-0.03		QA	b=	-0.02263	1
	QSID	r=	0.999		QA	r=	0.99988	
				Calculatio	ns			1
	Vstd=	∆Vol((Pa-∆P)/Pstd)(Tstd/T		1			
	Qstd=	Vstd/∆Time			Qa=	Va/∆Time]
			For subsequ	uent flow ra	te calculatio	ns:		-
	Qstd=	1/m ((Pa <u>Tstd</u>	-))-b)	Qa=	$1/m\left(\sqrt{\Delta H}\right)$	H(Ta/Pa))-b)	
	Standard	Conditions						
Tstd		CONTRACTOR AND A CONTRACTOR OF A DATA OF				RECA	LIBRATION	
Pstd	1	mm Hg			LIS FPA rec	ommends a	nnual recalibrati	on per 1999
AH: calibrat		Key ter reading (in H2O)				Regulations Part	
		eter reading			1), Reference Metl	
Ta: actual a	bsolute tem	perature (°K)				ended Particulat	
		ressure (mm	Hg)		1		ere, 9.2.17, page	
b: intercept	t							
m: slope								

Tisch Environmental, Inc.

145 South Miami Avenue

Village of Cleves, OH 45002

www.tisch-env.cor TOLL FREE: (877)263-761(FAX: (513)467-900

TSP Sampler Calibration

		SI	ſE		
Location: Lian	2			January 5,	2019
Sampler: TE-5	170 MFC (Serial	₩ : 23	Jy) Tech:	Sam Wong	

	CONDITIONS							
Barometric Pressure	(in Hg):	40.15	Corrected Pressure	(mm Hg):	1020			
Temperature	(deg F):	66	Temperature	(deg K):	292			
Average Press.	(in Hg):	40.15	Corrected Average	(mm Hg):	1020			
Average Temp.	(deg F):	66	Average Temp.	(deg K):	292			

CALIBRATION ORIFICE								
Make:	Tisch	Qstd Slope:	2.02017					
Model:	TE-5025A	Qstd Intercept:	-0.03691					
Serial#:	1612	Date Certified:	February 13, 2018					


CALIBRATIONS								
Plate or Test #	H2O (in)	Qstd (m3/min)	I (chart)	IC (corrected)	LINEAR REGRESSION			
1	12.00	2.025	56.0	65.55	Slope =	31.7376		
2	10.00	1.850	52.0	60.86	Intercept =	1.9907		
3	8.20	1.677	48.0	56.18	Corr. coeff.=	0.9987		
4	5.20	1.339	38.0	44.48				
5	3.20	1.055	30.0	35.11	<pre># of Observations:</pre>	5		

Calculations

IC = I[Sqrt(Pa/Pstd)(Tstd/Ta)]
Qstd = standard flow rate
IC = corrected chart response
I = actual chart response
m = calibrator Qstd slope
b = calibrator Qstd intercept
Ta = actual temperature during calibration (deg K)
Pa = actual pressure during calibration (mm Hg)
Tstd = 298 deg K
Pstd = 760 mm Hg
For subsequent calculation of sampler flow:
1/m((I)[Sqrt(298/Tav)(Pav/760)]-b)

Qstd = 1/m[Sqrt(H2O(Pa/Pstd)(Tstd/Ta))-b]

m = sampler slope b = sampler intercept I = chart response Tav = daily average temperature Pav = daily average pressure

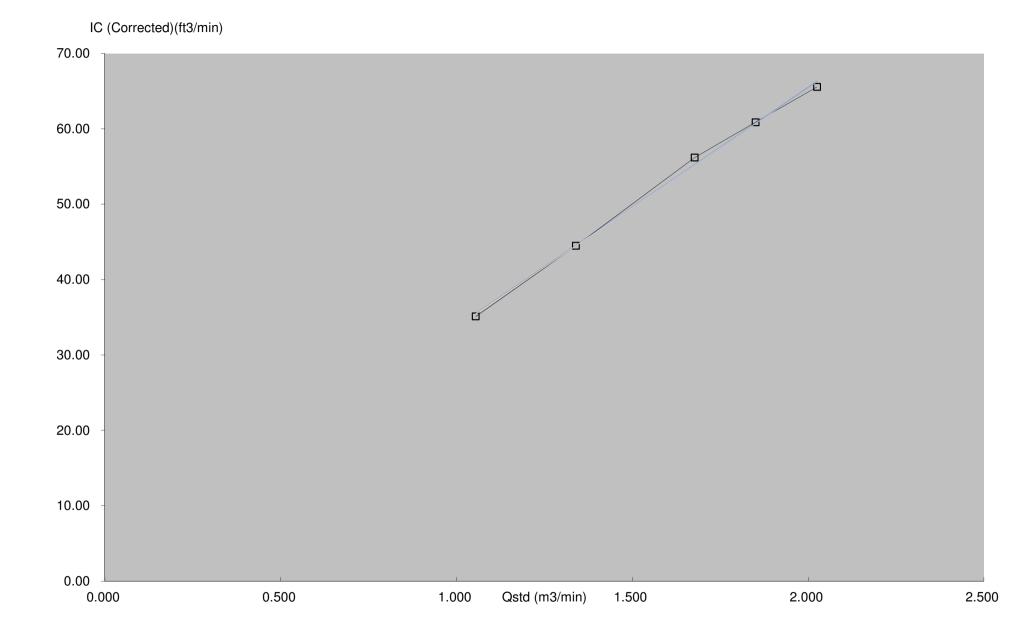



Certificate No	. 803615		Pa	ge 1 of 2 Pages
Customer :	Enovative Environmental Se	ervice Limited		
Address :	Flat 6, 3/F, Block E, Wah Lok I	Industrial Centre, 31-35	5 Shan Mei Street, S	Shatin, N.T., Hong Kong
Order No. :	Q81437		Date of rece	ipt : 13-Apr-18
Item Tested				
Description	: Sound Level Calibrator			
Manufacturer			I.D.	: 217656
Model	: NC-74		Serial No.	: 34678506
Test Condit	ions			
Date of Test :	20-Apr-18		Supply Volta	age :
Ambient Temp				midity: (50 ± 25) %
Test Specifi				
Calibration che	ck			
	/Procedure : F21, Z02.			
rton. D'obuintoni	111000daro : 1 2 1, 202.			
Test Result	S			
All				
	within the IEC 60942 Class 1			
The results are	shown in the attached page(S).		
Main Test equi	nment usod:			
Equipment No.		Cert. No.		Traceable to
S014	Spectrum Analyzer	707126		NIM-PRC & SCL-HKSAR
S240	Sound Level Calibrator	703741		NIM-PRC & SCL-HKSAR
S041	Universal Counter	802061		SCL-HKSAR
S206	Sound Level Meter	707129		SCL-HKSAR
0200		101123		JUL-INJAN
will not include allo overloading, mis-ha	n this Calibration Certificate only related wance for the equipment long term of andling, or the capability of any other hage resulting from the use of the equi	frift, variations with environ r laboratory to repeat the r	nmental changes, vibi	it and any uncertainties quoted ration and shock during transportation, Kong Calibration Ltd. shall not be liable
The test equipmen The test results ap	t used for calibration are traceable to ply to the above Unit-Under-Test only	o International System of U y	Jnits (SI), or by refere	nce to a natural constant.
	MAN			0
Calibrated ku	. X			(day
Calibrated by	Elva Chong	A	pproved by : _	Kin Wong
This Certificate is issued		D	ate: 20-Apr-18	NIT WONG
Hong Kong Calibration Lt	d.		a.o. 20-Api-10	
Jnit 8B, 24/F , Well Fung Fel: 2425 8801 - Fax: 242	Industrial Centre, No. 58-76, Ta Chuen Ping Str 25 8646	eet,Kwai Chung, NT,Hong Kong.		



Certificate No. 803615

Page 2 of 2 Pages

Results :

1. Generated Sound Pressure Level

UUT Nominal Value (dB)	Measured Value (dB)	IEC 60942 Class 1 Spec.
94.0	94.2	± 0.4 dB

Uncertainty : $\pm 0.2 \text{ dB}$

2. Short-term Level Fluctuation : 0.0 dB IEC 60942 Class 1 Spec. : ± 0.1 dB Uncertainty : ± 0.01 dB

3. Frequency

UUT Nominal Value (kHz)	Measured Value (kHz)	IEC 60942 Class 1 Spec.
1	0.999	± 1 %

Uncertainty : \pm 3.6 x 10 ⁻⁶

4. Total Distortion : < 1.1 % IEC 60942 Class 1 Spec. : < 4 % Uncertainty : ± 2.3 % of reading

Remark : 1. UUT : Unit-Under-Test

2. The uncertainty claimed is for a confidence probability of not less than 95%.

3. Atmospheric Pressure : 1 016 hPa.

----- END -----

The copyright of this certificate is owned by Hong Kong Calibration Ltd., It may not be reproduced except in full.



Certificate No.	804605		Page	1 of	3	Pages
Customer :	Enovative Environmental Servic	e Limited				
Address :	Flat 6, 3/F, Block E, Wah Lok Indus	strial Centre, 31-35 Sha	an Mei Street, Shati	n, N.T.,	Hong	Kong.
Order No. :	Q81807		Date of receipt	:		9-May-18
Item Tested						
Description :	Sound Level Meter					
Manufacturer :			I.D.	:		
	NL-52		Serial No.	: 01	14348	34
Test Conditi	ons					
Date of Test :	15-May-18		Supply Voltage	:		
Ambient Temp	erature : (23 ± 3)°C		Relative Humidi	ty : (50	± 25) %
Test Specifi	cations					
Calibration chec Ref. Document/	k. Procedure: Z01, IEC 61672.					
Test Results	•					
	within the IEC 61672 Type1 or n shown in the attached page(s).	nanufacturer's specif	ication.			
Main Test equip	ment used:					
Equipment No.		<u>Cert. No.</u>	-	Traceat	ole to	
S017	Multi-Function Generator	C170120		SCL-HK	SAR	
S240	Sound Level Calibrator	803357	1	NIM-PR	C & S	SCL-HKSAR
will not include allow overloading, mis-ha	this Calibration Certificate only relate to vance for the equipment long term drift, v ndling, or the capability of any other labc age resulting from the use of the equipm	variations with environmen pratory to repeat the meas	ntal changes, vibration	n and sho	ck duri	ing transportation,
	used for calibration are traceable to Inte ly to the above Unit-Under-Test only	rnational System of Units	(SI), or by reference t	to a natur	al cons	stant.

Calibrated by :	Appro	oved by :	Chri
Elva Chong			Kin Wong
This Certificate is issued by:	Date:	15-May-18	
Hong Kong Calibration Ltd.			
Holt OD 24/E Mall Euro Industrial Castra No 50 76 To Church Disc Obert Musi Church MT Hans M			



Certificate No. 804605

Page 2 of 3 Pages

Results :

1. Self-generated noise: 16.0 dBA (Mfr's Spec \leq 17 dBA)

2. Acoustical signal test

	UUT S	Setting			
	Frequency	Time	Octave	Applied	UUT
Range (dB)	Weighting	Weighting	Filter	Value (dB)	Reading (dB)
20-130	A	F	OFF	94.0	94.0
		S	OFF		94.0
	С	F	OFF		94.0
	Z	F	OFF		94.0
	А	F	OFF	114.0	114.1
		S	OFF	:	114.1
	С	F	OFF		114.1
	Z	F	OFF		114.1

IEC 61672 Type 1 Spec. : \pm 1.1 dB Uncertainty : \pm 0.1 dB

Attenuation (dB) IEC 61672 Type 1 Spec. Frequency 31.5 Hz -39.6 - 39.4 dB, ± 2 dB -26.2 - 26.2 dB, ± 1.5 dB 63 Hz -16.2 125 Hz - 16.1 dB, ± 1.5 dB -8.7 - 8.6 dB, ± 1 dB 250 Hz -3.2 500 Hz - $3.2 \text{ dB}, \pm 1.4 \text{ dB}$ 1 kHz 0.0 (Ref) $0 \, dB, \pm 1.1$ dB 2 kHz +1.0+ 1.2 dB, ± 1.6 dB +0.7+ $1.0 \text{ dB}, \pm 1.6 \text{ dB}$ 4 kHz - 1.1 dB, + $2.1 \text{ dB} \sim -3.1 \text{ dB}$ 8 kHz -1.26.6 dB, + 3.5 dB ~ - 17.0 dB 16 kHz -8.6 -

3 Electrical signal tests of frequency weightings (A weighting)

Uncertainty : $\pm 0.1 \text{ dB}$



Certificate No. 804605

Page 3 of 3 Pages

4. Frequency & Time weightings at 1 kHz

4.1 Frequency Weighting (Fast)

UUT	Applied	UUT	Difference	IEC 61672
Setting	Value (dB)	Reading (dB)	(dB)	Type 1 Spec.
Setting			(uD)	
A	94.0	94.0 (Ref.)		$\pm 0.4 \text{ dB}$
C	94.0	94.0	0.0	
Z	94.0	94.0	0.0	

4.2 Time Weighting (A-weighted)

UUT	Applied	UUT	Difference	IEC 61672
Setting	Value (dB)	Reading (dB)	(dB)	Type 1 Spec.
Fast	94.0	94.0 (Ref.)	·	$\pm 0.3 \text{ dB}$
Slow	94.0	94.0	0.0	
Time-averaging	94.0	94.0	0.0	

Uncertainty : $\pm 0.1 \text{ dB}$

Remarks : 1. UUT : Unit-Under-Test

- 2. The uncertainty claimed is for a confidence probability of not less than 95%.
- 3. Atmospheric Pressure : 1 009 hPa.
- 4. Preamplifier model : NH-25, S/N : 21113
- 5. Firmware Version: 1.8
- 6. Power Supply Check: OK
- 7. The UUT was adjusted with the laboratory's sound calibrator at the reference sound pressure level before the calibration.

----- END ------



Appendix D EM&A Monitoring Schedules

Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2 Impact Monitoring & Site Auditing Schedule for February 2019

			February 2019	9		
Sur	n Mon	Tue	Wed	Thu	Fri	Sat
					1	2
3	4 24-hour TSP + 3 x 1-hour TSP, Noise (SR77)	5 Lunar New Year's Day	6 The second day of Lunar New Year	7 The third day of Lunar New Year	8 24-hour TSP + 3 x 1-hour TSP ET Site Walk(09:30am – 11:00am)	9
10	11	12	13	14 24-hour TSP + 3 x 1-hour TSP, Noise (SR77) ET Site Walk(09:30am – 11:00am)	15	16
17	18	19	20 24-hour TSP + 3 x 1-hour TSP, Noise (SR77) ET Site Walk(09:30 am – 11:00 am) with Liantang Project- wide ET and IEC + SSEMC	21	22	23
24	25	26 24-hour TSP + 3 x 1-hour TSP, Noise (SR77)	27	28 ET Site Walk(09:30am – 11:00 am) with Fanling Stage 2 IEC & Liantang Project-wide ET and IEC		

Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2 Impact Monitoring & Site Auditing Schedule for March 2019

			March 2019			
Sun	Mon	Tue	Wed	Thu	Fri 1	Sat 2
3	4 24-hour TSP + 3 x 1-hour TSP, Noise (SR77)	5	6	7 ET Site Walk(09:30am – 11:00am)	8 24-hour TSP + 3 x 1-hour TSP	9
10	11	12	13	14 ET Site Walk(09:30am – 11:00am) 24-hour TSP + 3 x 1-hour TSP, Noise (SR77)	15	16
17	18	19	20 ET Site Walk(09:30 am – 11:00 am) with Liantang Project-wide ET and IEC + SSEMC (To be confirmed) 24-hour TSP + 3 x 1-hour TSP, Noise (SR77)	21	22	23
24 / 31	25	26 24-hour TSP + 3 x 1-hour TSP, Noise (SR77)	27	28 ET Site Walk(09:30am – 11:00 am) with Fanling Stage 2 IEC & Liantang Project-wide ET and IEC (To be confirmed)	29	30



Appendix E Meteorological Data Extracted from Hong Kong Observatory

				Hong Kong ()bservatory			
Day	Mean Pressure (hPa)	Absolute Daily Max	Tempera Mean (deg.	Absolute Daily Min	Mean Dew Point (deg. C)	Mean Relative Humidity (%)	Mean Amount of Cloud	Total Rainfall (mm)
04	4024.0	(deg. C)	C)	(deg. C)	42.4	70	(%)	
01	1021.6	22.0	18.8	17.6	13.1	70	84	0.0
02	1018.4	20.7	18.6	16.9	15.1	80	84	Trace
03	1017.2	25.3	21.8	19.6	18.7	83	70	Trace
04	1018.1	25.5	21.7	19.5	18.7	83	61	0.0
05	1017.4	22.3	20.1	18.2	17.3	84	84	0.0
06	1014.5	24.9	22.1	20.5	19.5	85	83	0.0
07	1014.8	25.8	23.0	21.3	19.9	83	57	Trace
08	1015.3	25.1	21.7	19.7	19.5	87	78	Trace
09	1017.9	20.1	19.3	18.4	17.6	90	99	0.8
10	1021.7	18.8	18.0	17.4	16.3	90	89	0.8
11	1024.3	19.4	18.4	17.3	15.9	85	94	Trace
12	1024.2	21.9	19.0	16.9	15.8	82	69	0.2
13	1021.8	25.1	21.1	19.0	17.6	80	68	0.0
14	1020.6	23.2	20.4	18.5	17.5	83	78	Trace
15	1019.9	22.4	20.4	18.8	17.5	84	84	0.2
16	1017.9	26.0	22.4	20.1	18.8	81	72	0.0
17	1017.8	20.2	18.8	18.0	16.4	86	91	0.1
18	1015.4	19.3	17.9	16.8	16.4	90	91	18.1
19	1016.8	23.8	20.3	18.5	18.8	91	79	31.0
20	1018.5	25.6	22.6	20.8	21.2	92	84	0.2
21	1017.4	23.2	21.4	20.4	20.2	93	88	Trace
22	1017.2	24.3	20.4	18.4	17.2	82	79	1.6
23	1015.8	20.5	18.1	15.6	15.9	87	95	12.3
24	1016.9	19.5	16.9	14.1	14.0	83	88	3.4
25	1017.5	18.9	18.0	16.7	15.4	85	92	Trace
26	1017.6	19.7	18.7	17.6	16.7	88	96	Trace
27	1015.5	23.6	20.7	18.6	18.0	85	82	Trace
28	1014.7	26.7	22.8	20.6	20.0	85	67	0.0
Mean/Total	1018.1	22.6	20.1	18.4	17.5	85	82	68.7
Normal§	1018.5	18.9	16.8	15.0	13.0	80	74	54.4

Daily Extract of Meteorological Observations , February 2019

Trace means rainfall less than 0.05 mm

§ 1981-2010 Climatological Normal





Appendix F Air Quality Monitoring Results and their Graphical Presentation

Sampling Date	Weather Condition	Starting Time	Paper No.		/t. of paper	(g)	E	Elapse Tim	e	Flo	w Rate (C	FM)	Flow	/ Rate (m ³	/min)	Total Volume	TSP Concentration	Action Level	Limit Level	Wind speed	Wind direction	NOE	IR
Date	Condition	Time		Initial Wt.	Final Wt.	Wt. of Dust	Initial	Final	Sampling Hour	Initial	Final	Avg Flow Rate	Initial	Final	Avg Flow Rate	(m³)	(µg/m³)	(µg/m3)	(µg/m3)	m/s	direction		
4-Feb-19	Fine	12:11	C226	2.6682	2.7872	0.1190	9576.67	9600.67	24.00	51	51	51.0	1.44	1.44	1.44	2079.59	57.2	170.3	260.0	<5	N		
8-Feb-19	Fine	12:14	C228	2.6745	2.7655	0.0910	9603.67	9627.67	24.00	51	51	51.0	1.44	1.44	1.44	2079.59	43.8	170.3	260.0	<5	N		
14-Feb-19	Sunny	12:12	C230	2.6557	2.7527	0.0970	9630.67	9654.67	24.00	51	51	51.0	1.44	1.44	1.44	2079.59	46.6	170.3	260.0	<5	N		
20-Feb-19	Cloudy	12:11	C232	2.6628	2.7546	0.0918	9657.67	9681.67	24.00	51	51	51.0	1.44	1.44	1.44	2079.59	44.1	170.3	260.0	<5	N		
26-Feb-19	Cloudy	12:12	C234	2.6655	2.7809	0.1154	9684.67	9708.67	24.00	51	51	51.0	1.44	1.44	1.44	2079.59	55.5	170.3	260.0	<5	N		
				-	-											Average	49.5		-				
																Min	43.8						
																Max	57.2						

24-Hour TSP Monitoring Result at Station: SR77

Note:No major dust source observed during the monitoring periodData in Bold denotes exceedanece of respective Action LevelData in Bold Underlinedenotes exceedance of respective Limit Level

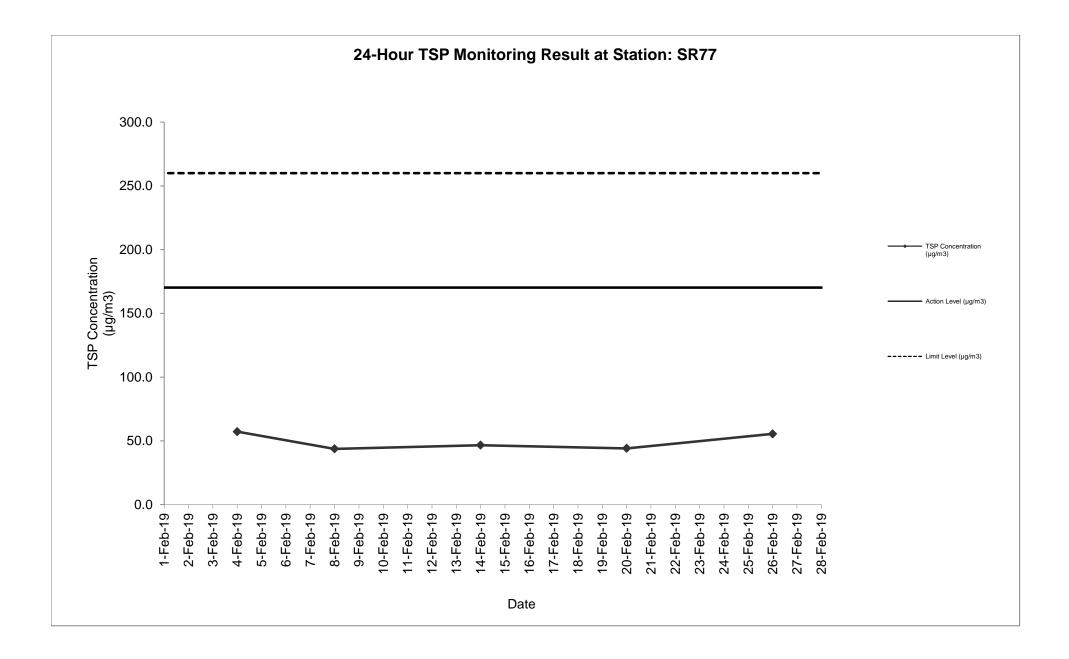

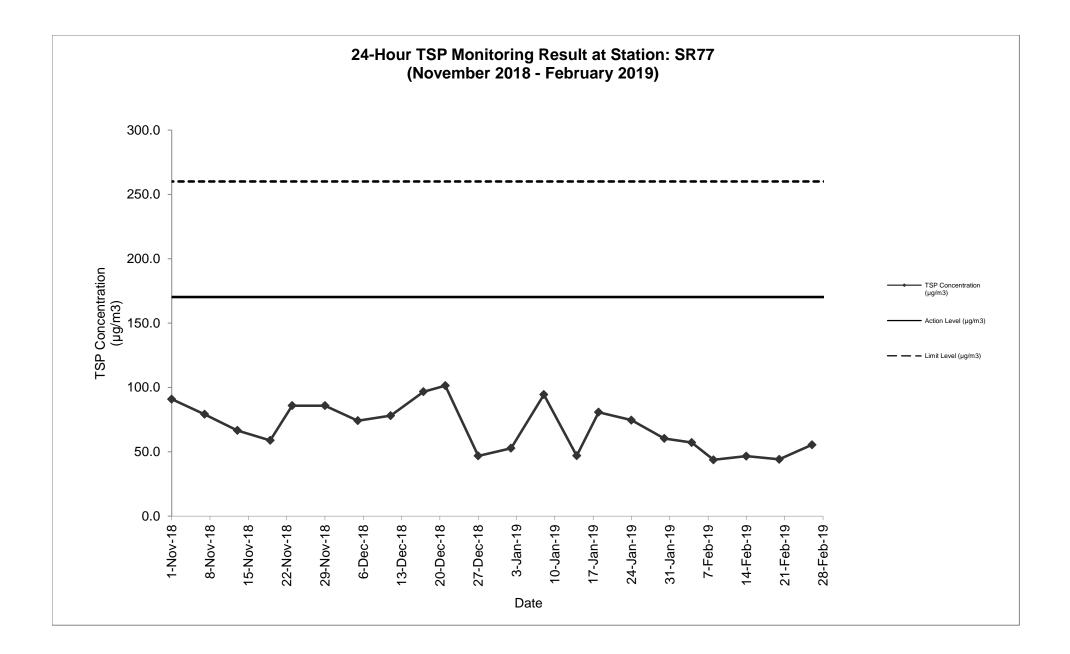



Sampling Date	Weather Condition	Starting Time	Paper No.	w	/t. of paper	(g)	EI	apse Time		Flo	w Rate (C	FM)	Flow	/ Rate (m ³ /	/min)	Total Volume	TSP Concentration	Action Level	Limit Level	Wind speed	Wind direction	NOE	IR
Date	Condition	Time		Initial Wt.	Final Wt.	Wt. of Dust	Initial	Final	Sampling Hour	Initial	Final	Avg Flow Rate	Initial	Final	Avg Flow Rate	(m³)	(µg/m ³)	(µg/m3)	(µg/m3)	m/s	uncetion		
4-Feb-19	Fine	09:00	C227A	2.6657	2.6741	0.0084	9411.67	9412.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	96.9	292.7	500.0	<5	N		
	Fine	10:04	C227B	2.6491	2.6583	0.0092	9412.67	9413.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	106.2	292.7	500.0	<5	N		
	Fine	11:08	C227C	2.6708	2.6801	0.0093	9413.67	9414.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	107.3	292.7	500.0	<5	N		
8-Feb-19	Fine	09:00	C229A	2.6714	2.6844	0.0130	9438.67	9439.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	150.0	292.7	500.0	<5	N		
	Fine	10:06	C229B	2.6551	2.6688	0.0137	9439.67	9440.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	158.1	292.7	500.0	<5	N		
	Fine	11:09	C229C	2.6646	2.6761	0.0115	9440.67	9441.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	132.7	292.7	500.0	<5	N		
14-Feb-19	Sunny	09:00	C231A	2.6647	2.6801	0.0154	9465.67	9466.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	177.7	292.7	500.0	<5	N		
	Sunny	10:02	C231B	2.6613	2.6762	0.0149	9466.67	9467.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	172.0	292.7	500.0	<5	N		
	Sunny	11:04	C231C	2.6391	2.6541	0.0150	9467.67	9468.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	173.1	292.7	500.0	<5	N		
20-Feb-19	Cloudy	09:00	C233A	2.6604	2.6724	0.0120	9492.67	9493.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	138.5	292.7	500.0	<5	N		
	Cloudy	10:03	C233B	2.6542	2.6667	0.0125	9493.67	9494.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	144.3	292.7	500.0	<5	N		
	Cloudy	11:07	C233C	2.6677	2.6791	0.0114	9494.67	9495.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	131.6	292.7	500.0	<5	N		
26-Feb-19	Cloudy	09:00	C235A	2.6647	2.6794	0.0147	9519.67	9520.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	169.6	292.7	500.0	<5	N		
	Cloudy	10:02	C235B	2.6588	2.6734	0.0146	9520.67	9521.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	168.5	292.7	500.0	<5	N		
	Cloudy	11:04	C235C	2.6711	2.6851	0.0140	9521.67	9522.67	1.00	51	51	51.0	1.44	1.44	1.44	86.65	161.6	292.7	500.0	<5	N		
																Average	145.9						
																Min	96.9						
																Мах	177.7						

Detailed Calculation of 1-Hour TSP Monitoring Result at Station: SR77

Note:

No major dust source observed during the monitoring period Data in **Bold** denotes exceedanece of respective Action Level Data in <u>Bold Underline</u> denotes exceedance of respective Limit Level

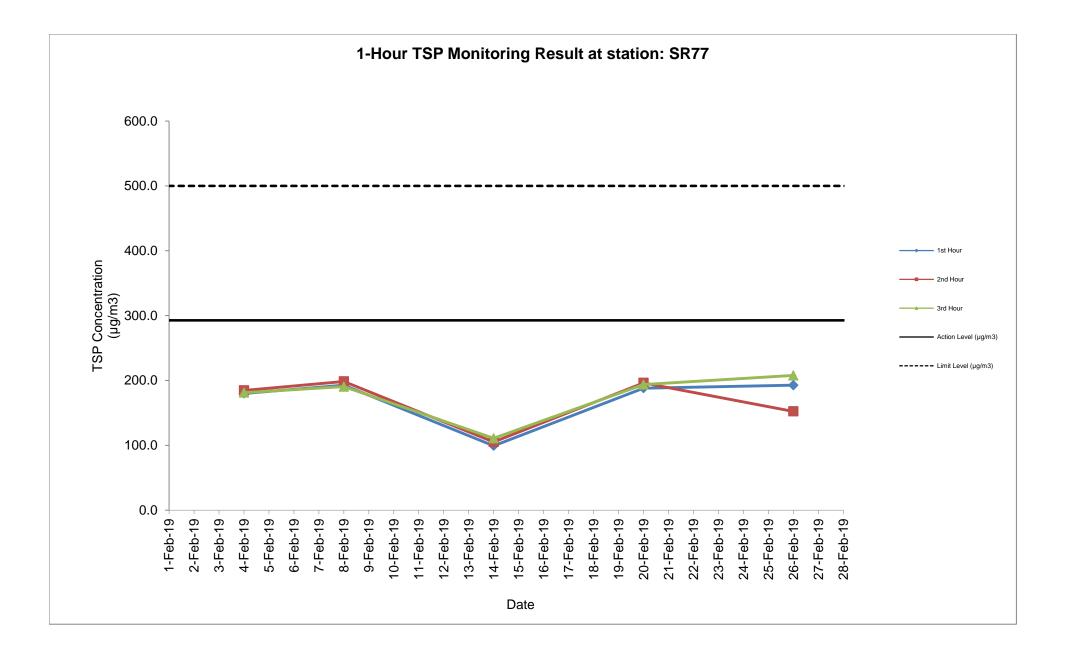

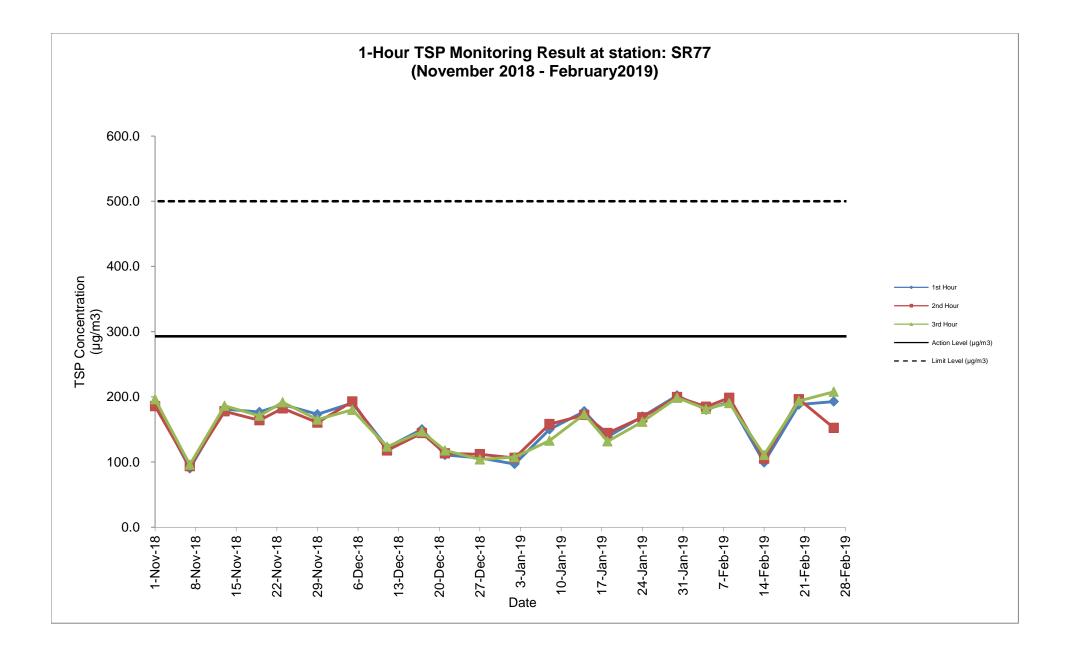



Appendix G Summary of Event and Action Plan



Event and Action Plan for Air Quality

Event	Action			
	ET Leader	IEC	ER	Contractor
Action level being exceeded by one sampling day	 Identify source; Inform IEC and ER; 	 Check monitoring data submitted by ET; 	1. Notify Contractor.	1. Rectify any unacceptable practice;
Sampling day	 Repeat measurement to confirm finding; 	2. Check Contractor's working method.		2. Amend working methods if appropriate.
	 Increase monitoring frequency to daily. 			
Action level being	1. Identify source;	1. Check monitoring data submitted	1. Confirm receipt of notification of	1. Submit proposals for remedial
exceeded by two or more consecutive	2. Inform IEC and ER;	by ET;	failure in writing;	actions to IEC within 3 working
sampling days	 Repeat measurements to confirm findings; 	 Check Contractor's working method; 	 Notify Contractor; Ensure remedial measures 	days of notification;2. Implement the agreed proposals;
	 Increase monitoring frequency to daily; 	 Discuss with ET and Contractor on possible remedial measures; 	properly implemented.	3. Amend proposal if appropriate.
	 Discuss with IEC and Contractor on remedial actions required; 	 Advise the ER on the effectiveness of the proposed remedial measures; 		
	 If exceedance continues, arrange meeting with IEC and ER; 	 Supervise Implementation of remedial measures. 		
	 If exceedance stops, cease additional monitoring. 			

Event	Action			
	ET Leader	IEC	ER	Contractor
Limit level being exceeded by one sampling day	 Identify source; Inform IEC, ER, Contractor and EPD; Repeat measurement to confirm 	 Check monitoring data submitted by ET; Check Contractor's working method; 	 Confirm receipt of notification of exceedance in writing; Notify Contractor; Ensure remedial measures 	 Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC within 3 working days of netification;
	 finding; Increase monitoring frequency to daily; Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results. 	 Discuss with ET and Contractor on possible remedial measures; Advise ER on the effectiveness of the proposed remedial measures; Supervise implementation of remedial measures. 	properly implemented.	days of notification;3. Implement the agreed proposals;4. Amend proposal if appropriate.
Limit level being exceeded by two or more consecutive sampling days	 Notify IEC, ER, Contractor, and EPD; Identify source; Repeat measurement to confirm findings; Increase frequency to daily; Analyse Contractor's working procedures to determine possible mitigation to be; Arrange meeting with IEC and ER to discuss the remedial actions to be taken; Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; If exceedance stops, cease additional monitoring. 	 Discus amongst ER, ET, and Contractor on the potential remedial actions; Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise ER accordingly; Supervise the implementation of remedial measures. 	 Confirm receipt of notification of exceedance in writing; Notify Contractor; In consultation with the IEC, agree with the Contractor on the remedial measures to be implemented; Ensure remedial measures properly implemented; If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated. 	 Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC within 3 working days of notification; Implement the agreed proposals; Resubmit proposals if problem still not under control; Stop the relevant portion of works as determined by ER until the exceedance is abated.

Event and Action Plan for Noise

Event	Action							
Action Level	ET Leader	IEC	ER	Contractor				
	 Notify IEC and the Contractor. Carry out investigation. 	1. Review with analysed results submitted by ET.	1. Confirm receipt of notification of failure in writing.	1. Submit noise mitigation proposals to IEC.				
	 Courry out investigation. Report the results of investigation to IEC and the Contractor. Discuss with the Contractor and formulate remedial measures. Increase monitoring frequency to check mitigation effectiveness. 	 Review the proposed remedial measures by the Contractor and advise ER accordingly. Supervise the implement of remedial measures. 	 Notify the Contractor. Require the Contractor to propose remedial measures for the analysed noise problem. Ensure remedial measures are properly implemented. 	2. Implement noise mitigation proposals.				
Limit Level	 Notify IEC, ER, EPD and the Contractor. Identify the source. Repeat measurement to confirm findings. Increase monitoring frequency. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented. Inform IEC, ER, and EPD the causes & actions taken for the exceedances. Assess effectiveness of the Contractor's remedial actions and keep IEC, EPD and ER informed of the results. If exceedance stops, cease 	and the Contractor on the potential remedial actions. 2. Review the Contractor's remedia actions whenever necessary to assure their effectiveness and advise ER accordingly. 3. Supervise the implementation of remedial measures.	 Confirm receipt of notification of failure in writing. Notify the Contractor. Require the Contractor to propose remedial measures for the analysed noise problem. Ensure remedial measures are properly implemented. If exceedance continues, consider what activity of the work is responsible and instruct the Contractor to stop that activity of work until the exceedance is abated. 	 Take immediate action to avoid further exceedance. Submit proposals for remedia actions to IEC within 3 working days of notification. Implement the agreed proposals. Resubmit proposals if problem still not under control. Stop the relevant activity of works as determined by the ER until the exceedance is abated. 				



Event and Action Plan for Water Quality

Event	Action							
	ET Leader	IEC	ER	Contractor				
Action level being exceeded by one sampling day	 Repeat in-situ measurement on next day of exceedance to confirm findings; 	 Check monitoring data submitted by ET & Contractor's working methods; 	1. Confirm receipt of notification of failure in writing; Notify, Contractor	 Inform the ER & confirm notification of the non-compliance in writing; 				
	2. Identify source(s) of impact;			2. Rectify unacceptable practice;				
	3. Inform IEC, Contractor & ER;			3. Amend working methods if				
	 Check monitoring data, all plant, equipment & contractor's working methods; 			appropriate.				
Action level being exceeded by two or more consecutive sampling days	 Repeat measurement on next day of exceedance to confirm findings; 	 Checking monitoring data submitted by ET & Contractor's working method; 	 Discuss with IEC on the proposed mitigation measures; Ensure mitigation measures 	 Inform the Engineer & confirm notification of the non-compliance in writing; 				
sampling days	Identify source(s) of impact;	2. Discuss with ET & Contractor on	properly implemented;	2. Rectify unacceptable practice;				
	3. Inform IEC, Contractor, ER & EPD;	3. Review the proposed mitigation	3. Assess the effectiveness of the implemented mitigation	3. Check all plant & equipment & consider changes of working				
	 Check monitoring data, all plant, equipment & Contractor's working methods; 	accordingly;	measures.	 methods; 4. Submit proposal of mitigation measures to ER within 3 working days of notification & discuss with 				
	 Discuss mitigation measures with IEC, ER & Contractor; 	4. Supervise the implementation of mitigation measures.		ET, IEC & ER;				
	 Ensure mitigation measures are implemented; 			5. Implement the agreed mitigation measures.				
	 Increase monitoring to daily until no exceedance of Action level. 							

Event	Action							
	ET Leader	IEC	ER	Contractor				
Limit level being exceeded by one sampling day	 Repeat measurement on next day of exceedance to confirm findings; Identify source(s) of impact; Inform IEC, contractor, ER & EPD; Check monitoring data, all plant, equipment & contractor's working methods; Discuss mitigation measures with IEC, Contractor & ER. 	 Checking monitoring data submitted by ET & Contractor's working method; Discuss with ET & Contractor on the possible mitigation measures; Review the proposed mitigation measures submitted by Contractor & advise the ER accordingly. 	 Confirm receipt of notification of failure in writing; Discuss with IEC, ET & Contractor on the proposed mitigation measures; Request Contractor to review the working methods. 	 Inform the ER & confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant & equipment & consider changes of working methods; Submit proposal of mitigation measures to ER within 3 working days of notification & discuss with ET, IEC & ER. 				
Limit level being exceeded by two or more consecutive sampling days	 Repeat measurement on the next day of exceedance to confirm findings; Identify source(s) of impact; Inform IEC, Contractor, ER & EPD; Check monitoring data, all plant, equipment & Contractor's working methods; Discuss mitigation measures within IEC, Contractor & ER; Ensure mitigation measures are implemented; Increase the monitoring frequency to daily until no exceedance of Limit level for two consecutive days. 	 potential remedial actions; Review Contractor's mitigation measures whenever necessary to assure their effectiveness & advice the EB accordingly; 	review the working methods;	 measures; 4. Resubmit proposals of mitigation measures if problem still not under control; 				



Appendix H Noise Monitoring Results and their Graphical Presentation

Appendix H Noise Monitoring Results and their Graphical Presentation

Noise Monitoring Result at SR77


Date	Weather	Start	End	Measured Noise Level (dB(A))*		Baseline Corrected	Baseline Noise Level	Limit Level	
	Condition	Time	Time	L10(30min)	L90(30min)	Leq(30min)	Level, dB(A)**	(dB(A)), Leq(30min)	dB(A)
2019-02-04	Fine	11:15	11:45	93.5	62.5	68.0	-	67.8	75.0
2019-02-14	Sunny	11:15	11:45	90.5	61.0	65.5	-	67.8	75.0
2019-02-20	Cloudy	11:15	11:45	86.5	61.5	66.5	-	67.8	75.0
2019-02-26	Cloudy	11:30	12:00	92.5	61.5	63.5	-	67.8	75.0
					Average	65.9			
					Minimum	63.5			
					Maximum	68.0			


Remarks

* +3dB(A) Façade effect correction included

** Baseline corrected level is only calculated when measured noise level (Leq) > limit level.

*** Data in **Bold Underline** denotes exceedance of respective Limit Level

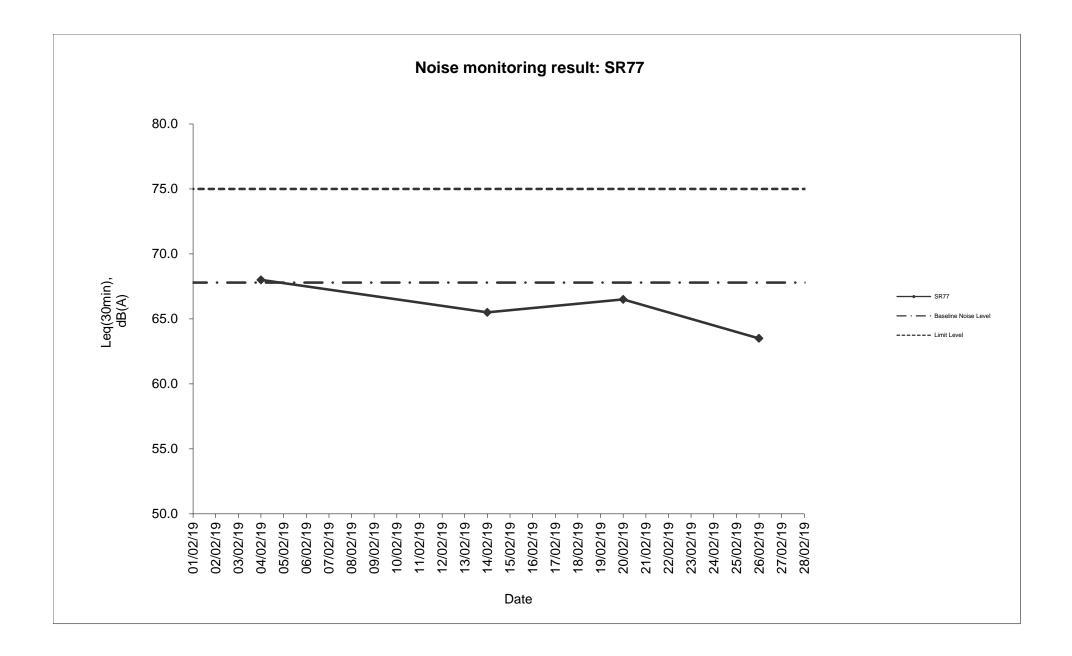

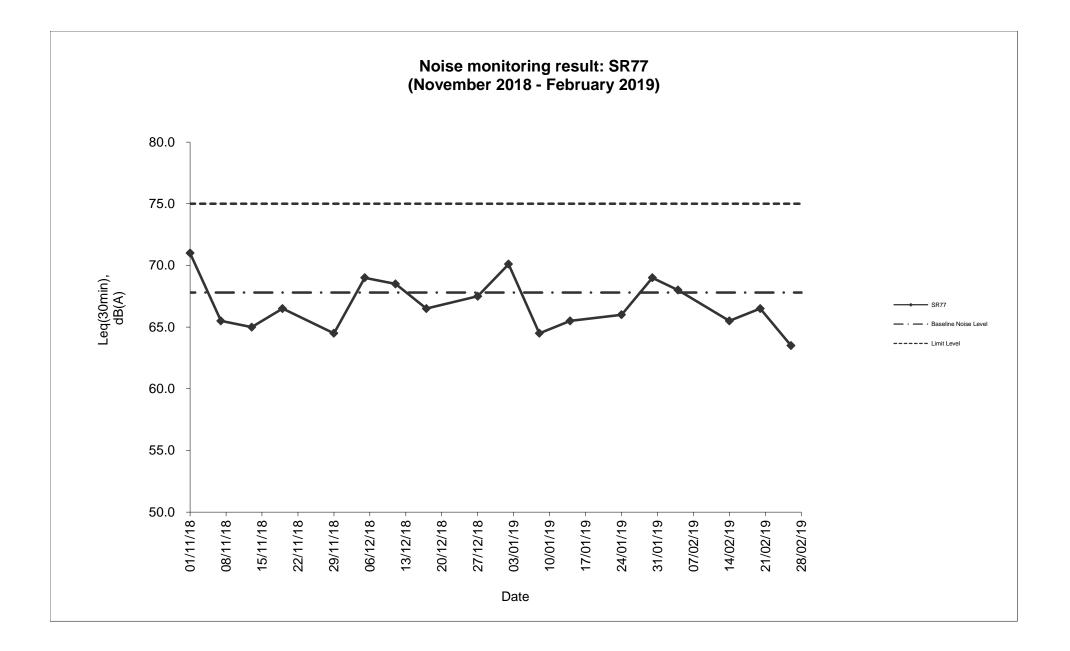



Appendix K Waste Flow Table

Monthly Summary Waste Flow Table

		Actual Quantities of Inert C&D Materials Generated Monthly								C&D Wastes	Generated M	lonthly
		Hard Rock							Paper/			
	Total	and Large		Soil Reused	Soil Reused				cardboard			General
	Quantity	Broken		in the	in other	Soil Disposed			packaging		Chemical	Refuse
Month	Generated	Concrete	Soil	Contract	Projects	as Public Fill	Imported Fill	Metals	(Note 3)	Plastics	Waste	(Note 2)
Unit	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in m ³)	(in '000m ³)
Jan-19	2.937	0.927	2.010	-	-	2.010	0.997	-	-	-	-	0.145
Feb-19	4.659	0.841	3.818	-	-	3.818	0.030	-	-	-	-	0.075
Mar-19												
Apr-19												
May-19												
Jun-19												
Sub-Total												
Jul-19												
Aug-19												
Sep-19												
Oct-19												
Nov-19												
Dec-19												
Total												

Note: 1. Assume the density of soil fill is 2 ton/m^3 .

2. Assume the density of rock and broken concrete is 2.5 ton/m^3 .

3. Assume each truck of C&D wastes is $5m^3$.

4. The inert C&D materials except slurry and bentonite are disposed at Tuen Mun 38.

5. The slurry and bentonite are disposed at Tseung Kwun O 137.

6. The non-inert C&D wastes are disposed at NENT.

7. Assume the density of metal is $7,850 \text{ kg/m}^3$.

8. Assume the density of plastic is 941 kg/m³.

9. Assume the density of paper is 800 kg/m^3 .



Appendix L Implementation Schedule of Environmental Mitigation Measures (EMIS)



Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status [#]
Air Quality				
Air Quality during Construction	• Restricting heights from which materials are dropped, as far as practicable to minimize the fugitive dust arising from unloading/loading.	During Construction	Contractor	\checkmark
	• All stockpiles of excavated materials or spoil of more than 50m ³ shall be enclosed, covered or dampened during dry or windy conditions.			~
	• Effective water sprays shall be used to control potential dust emission sources such as unpaved haul roads and active construction areas.			~
	All spraying of materials and surfaces shall avoid excessive water usage.			\checkmark
	• Vehicles that have the potential to create dust while transporting materials shall be covered, with the cover properly secured and extended over the edges of the side and tail boards.			✓
	Materials shall be dampened, if necessary, before transportation.			\checkmark
	• Travelling speeds shall be controlled to reduce traffic induced dust dispersion and re-suspension within the site from the operating haul trucks.			~
	• Vehicle washing facilities shall be provided to minimise the quantity of material deposited on public roads.			\checkmark
Air Quality during Operation	Not required	N/A	N/A	N/A
Noise				
Noise during Construction	• Use of silenced plant or plant equipped with mufflers or dampers in substitute of ordinary plant.	During Construction	Contractor	\checkmark
	 Reduce the number of equipment and their percentage on-time. 			\checkmark
Noise during Operation	Not required	N/A	N/A	N/A
Water Quality				
Water Quality during	Road Widening Works, Earthworks and Culvert Extension Works			
Construction	• Wastewater generated from any concrete batching washdown of equipment or similar activities should be discharged into foul sewers, after the removal of settable solids, and pH adjustment as necessary. All sewage discharges from the study area should meet the TM standards and approval from EPD through the licensing process is required.	During Construction	Contractor	~



Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status [#]
	• Sand traps, oil interceptors and other pollution prevention installations should be provided, properly cleaned and maintained.			√
	• Runoff from exposed working areas, unfinished slopes and from unlined temporary channels should be directed to stilling basins and/or silt traps before discharging to the drainage outfalls.			×
	• Regular inspections of stilling basins and/or silt traps is required to ensure that sediment is not conveyed into the existing drainage system.			✓
	Open stockpiles should be covered with a tarpaulin cover.			✓
	• During the wet season, any exposed top soils should be covered with a tarpaulin, shotcreted or hydroseeded.			✓
	• Sand and silt from wash-water from vehicle washing should be settled out before discharging into storm drains.			✓
	• Fuels should be stored in bunded areas such that spillage can be easily collected.			✓
Water Quality during Operation	Not required	N/A	N/A	N/A
Waste Management		1		
Waste Management during Construction	General Waste			
	• Transport of wastes off site as soon as possible.	During Construction	Contractor	\checkmark
	Maintenance of accurate waste records.			\checkmark
	• Minimisation of waste generation for disposal (via reduction/recycling/re-use).			\checkmark
	 No on-site burning will be permitted. 			\checkmark
	 Use of re-useable metal hoardings/signboards. 			✓
	Vegetation from site clearance			
	 Segregation of materials to facilitate disposal. 	During Construction	Contractor	✓
	• Mulching to reduce bulk and where possible review opportunities for the possible beneficial use within landscaping areas.			✓



Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status [#]
	Demolition Wastes			
	 Segregation of materials to facilitate disposal. 	During Construction	Contractor	\checkmark
	Appropriate stockpile management.			\checkmark
	Excavated Materials			
	Segregation of materials to facilitate disposal / reuse.	During Construction	Contractor	\checkmark
	Appropriate stockpile management.			\checkmark
	• Re-use of excavated material on or off site (where possible).			\checkmark
	• Special handling and disposal procedures in the event that contaminated materials are excavated.			N/A
	Construction Wastes			
	• Segregation of materials to facilitate recycling/reuse (within designated area in appropriate containers/stockpiles).	During Construction	Contractor	~
	Appropriate stockpile management.			\checkmark
	Planning to reduce over ordering and waste generation.			\checkmark
	 Recycling and re-use of materials where possible (e.g. metal, wood from formwork) 			~
	• For material which cannot be re-used/recycled, collection should be carried out by an approved waste contractor for landfill disposal.			✓
	Bentonite Slurries			
	Bentonite slurries should be reused as far as possible.	During Construction	Contractor	N/A
	• Disposal in accordance with Practice Note For Professional Persons ProPECC PN 1/94.			N/A
	Chemical Wastes			
	• Storage within locked, covered and bunded area.	During Construction	Contractor	\checkmark
	• The storage area shall not be located adjacent to sensitive receivers e.g. drains.			✓
	 Minimise waste production and recycle oils/solvents where possible. 			\checkmark

Notes ([#]): \checkmark – Compliance; Rem – Reminder; Obs – Observation; N/C – Non Compliance; N/A – Not Applicable



Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status [#]
	• A spill response procedure shall be in place and absorption material available for minor spillages.			~
	 Use appropriate and labelled containers. 			\checkmark
	• Educate site workers on site cleanliness/waste management procedures.			\checkmark
	• If chemical wastes are to be generated, the contractor must register with EPD as a chemical waste producer.			✓
	• The chemical wastes shall be collected by a licensed chemical waste collector.			✓
	Municipal Wastes			
	• Waste shall be stored within a temporary refuse collection facility, in appropriate containers prior to collection and disposal.	During Construction	Contractor	✓
	Regular, daily collections are required by an approved waste collector.			\checkmark
Waste Management during Operation	Not required.	N/A	N/A	N/A
Ecology				
Ecology during Construction	Accurate Delineation of Works Area			
	• Boundaries of proposed works areas shall be clearly identified and separated from external areas by a physical barrier to prevent encroachment of adjacent habitats.	During Construction	Contractor	*
	• Individual trees which fall within the works areas but which work plans show do not require removal are to be retained and fenced off to maximise protection.			*
	Dust generation			
	There are a number of measures which shall be taken as specified in the Air Pollution Control (Construction Dust) Regulation on 'Dust Control Requirements, including the following key measures to be applied during construction:			
	• vehicle washing facilities to be provided at every discernible or designated vehicle exit point;	During Construction	Contractor	✓



Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status [#]
	• all temporary site access roads shall be sprayed with water to suppress dust as necessary;			\checkmark
	• all dusty materials should be sprayed with water immediately prior to any handling; and			\checkmark
	• all debris should be covered entirely by impervious sheeting or stored in a sheltered debris collection area.			✓
	Surface Run-off			
	In general, mitigation measures shall be in accordance with ProPECC PN1/94 on 'Construction Site Drainage'. Key measures include:			
	 Bund and cover stockpiles to avoid run-off; 	During Construction	Contractor	~
	• Channel any run-off through a system of oil, grease and sediment / silt traps and reuse water on site where ever practical;			✓
	• All vehicle maintenance to be undertaken within a bunded area; and			~
	• Maximise vegetation retention on-site to maximise absorption (minimise transport).			✓
Ecology during Operation	• To conduct compensatory ecological planting as specified in the latest landscape plans approved by EPD (Clause 2.6 of the Environmental Permit refers).	During Construction and operation	Contractor (during construction) / LCSD* (during operation) (Note: * The division of vegetation planting and maintenance responsibilities shall follow the guidelines stipulated in ETWB TCW No. 2/2004.)	N/A
Landscape and Visual		1	I	
Landscape and Visual during Construction	 Preservation of Existing Vegetation Trees identified for retention within the project limit would be protected during the works 	During Construction	Contractor	✓
	 The tree transplanting and planting works shall be implemented by approved Landscape Contractors 			✓



Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status [#]
	Temporary Works Areas			
	Where feasible the works areas would be screened using hoarding and existing vegetation would be retained where possible to reduce the landscape and visual impacts arising from the construction activity. The landscape of these works areas would be restored following the completion of the construction phase.	During Construction	Contractor	*
	Hoarding			
	A hoarding would be erected where practicable in the most visually sensitive locations to screen the temporary construction works from the local VSRs.	During Construction	Contractor	\checkmark
	Top Soils			
	The works will result in disturbance to extensive areas of topsoil. Topsoil worthy of retention should be stockpiled for use following completion of the civil engineering works. It should either be temporarily vegetated with hydroseeded grass or turned over on a regular basis.	During Construction	Contractor	N/A
	Protection of Important Landscape Features			
	Important features such as temples, Island House and kilns within the study area, although remote from the proposed works retained and adequately protected.	During Construction	Contractor	N/A
Landscape and Visual during Operation	Not required.	N/A	N/A	N/A



Appendix N Cumulative Statistics on Complaints, Notifications of Summons and Successful Prosecutions



Cumulative Complaint Log

Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
C131126	26, November, 2013	Mr. Tony Hung from WWF	Mat Wat River (works sites for box culvert extension)	Suspected unauthorised discharge of water from a construction site to Ma Wat River, Tai Wo Service Road East, Tai Po	It was found that the water leaving the end of the steel pipes was the diverted water from the upstream of the existing box culverts, instead of being discharged from the construction works sites. An EM&A Programme is being undertaken to monitoring the environmental performance of the construction works, and the Contractor has also implemented appropriate mitigation measures to avoid silt-laden runoff discharging from the works sites into the river. The complaint is considered an invalid complaint under this Project.	Completed



Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
C141120	20 November, 2014	EPD	Ng Tung River and Ma Wat River nearby the site of the Liantang/ Heung Yuen Wai BCP Project (Contract Number CV/2012/09)	At Bridge NF426 in Fanling, the whole Ng Tung River showed milky and suspected illegal discharge by nearby factory has undertaken. (粉嶺近天橋編號 NF426 梧桐河整條河 河水呈奶白色懷疑附 近有工廠非法排放污 水)	 Water Supplies Department (WSD) conducted a washout procedure on 20 November 2014 at about 9:30am to flush the newly installed water pipe of diameter of 1400mm which has recently finished disinfection. It is understood that the procedure has lasted for about 1 hour and large amount of freshwater has been discharged into the Ma Wat River through a washout port. Although water was observed seeping from the gantry switch and flew into the works sites, the area is a sump pit and the water was unlikely to run off and entered the river directly. As such, it is anticipated that only freshwater has been discharged into Ma Wat River through the washout port. Both site inspections conducted by the ET before the complaint (19 November 2014), and after the complaint (24 November 2014) did not identify any deficiencies on environmental mitigation measures. Also, there were no rains during the period and the risk of construction site run-off is considered minimal. 	Completed



Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
					The water from the Ma Wat Channel adjoins the Ng Tung River before passing through the complaint location, so other pollution sources may also occur at upstream of Ng Tung River The complaint is considered unlikely due to the construction works of this	
C171228	28 December, 2017	1823	Kau Lung Hang and Hong Lok Yuen	Air quality issue nearby Kau Lung Hang and Hong Lok Yuen area. Stockpiling within the Project area was observed to be uncovered, causing dust dispersion within the area. (大埔 九龍坑附近的空氣污 染問題嚴重。吐露港 公路蓮塘口岸隧道工 程經常見到沙泥沒有 覆蓋,導致沙土飛揚 散佈九龍坑,康樂園 一帶,造成極大困擾 與明顯健康風險。要 求立即改善,懲罰相	 project. The Environmental Team (ET) was informed of the complaint through Chun Wo and CEDD via 1823 online-enquiry/ complaint form received on 28 December 2017 at 9:04am. Investigation was triggered in accordance with the procedures as specified in Section 7.3 of the EM&A Manual. A joint investigation by the ET and the IEC was conducted on 28 December 2017. As advised by the Contractor, no construction works were carried out during the public holiday. No exceedance of TSP level at the air monitoring station under this Contract was recorded in the past six months except 8 December 2017. 	



•	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
				關建築商。附圖是該 區狀況。昨日洗車, 一日已經沙塵滿佈。)	Exceedance on 8 December 2017 was considered not project related as no major excavation works located close to the monitoring location at SR77. Based on the routine environmental site inspection and information provided by the Contractor, it is considered that dust suppression measures have been implemented to minimize dust nuisance arising from the works areas. Nonetheless, the ET and IEC will continue the auditing and reviewing of the Contractor's implementation of mitigation measures during the construction period.	



Meinhardt Infrastructure and Environment Ltd 邁進基建環保工程顧問有限公司

10/F Genesis 33-35 Wong Chuk Hang Road Hong Kong 香港黃竹坑道33-35號 創協坊10樓

Tel 電話: +852 2858 0738 Fax 傳真: +852 2540 1580

mail@meinhardt.com.hk www.meinhardt-china.com www.meinhardtgroup.com