

Environmental Protection Department

Contract No. HY/2012/06

Widening of Fanling Highway - Tai Hang to Wo Hop Shek Interchange

Monthly EM&A Report For January 2020

[02/2020]

	Name	Signature
Prepared & Checked:	Alex Chan	Da
Reviewed & Approved:	Y W Fung	1/2.

Version: Rev. 0 Date: 12 February 2020

Disclaimer

This report is prepared for Environmental Protection Department and is given for its sole benefit in relation to and pursuant to Contract No. HY/2012/06 and may not be disclosed to, quoted to or relied upon by any person other than Environmental Protection Department without our prior written consent. No person (other than Environmental Protection Department) into whose possession a copy of this report comes may rely on this report without our express written consent and Environmental Protection Department may not rely on it for any purpose other than as described above.

AECOM Asia Co. Ltd.

13/F, Grand Central Plaza, Tower 2, 138 Shatin Rural Committee Road, Shatin, NT, Hong Kong Tel: (852) 3922 9000 Fax: (852) 2317 7609 www.aecom.com



Hyder-Arup-Black & Veatch Joint Venture c/o Arcadis 17/F, Two Harbour Square, 180 Wai Yip Street, Kwun Tong, Hong Kong Attn: Mr. James Penny

Your Reference

Our Reference AFK/EC/ST/cy/T329380/2 2.05/L-0306

3/F International Trade Tower 348 Kwun Tong Road Kowloon Hong Kong

T +852 2828 5757 F +852 2827 1823 mottmac.hk Environmental Monitoring and Audit (EM&A) for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling Stage 2 (between Tai Hang to Wo Hop Shek Interchange)
Environmental Permit No. EP-324/2008/E Condition 3.3 – Submission of Monthly EM&A Report – January 2020 for the portion of Stage 2 works under Contract No. HY/2012/06

12 Februray 2020 By Fax (2805 5028) & Hand

We refer to the Monthly EM&A Report – January 2020 received on 6 February 2020 submitted by the Environmental Team via email. Pursuant to Environmental Permit Condition 3.3, I hereby verify the Monthly EM&A Report – January 2020 (Rev. 1) for the portion of works under Stage 2 of the captioned Project which is managed under Contract No. HY/2012/06.

Yours faithfully for MOTT MACDONALD HONG KONG LIMITED



Steven Tang Independent Environmental Checker

c.c. HyD AECOM

Mr. Ricky Yeung Mr. Y W Fung By Fax (2714 5198) By Fax (3922 9797)

TABLE OF CONTENTS

			Page
EXI	CUTI	VE SUMMARY	3
1	INTF	RODUCTION	5
	1.1 1.2 1.3 1.4 1.5	Background Scope of Report Project Organization Summary of Construction Works Summary of EM&A Programme Requirements	5 6 6 7 7
2	AIR	QUALITY MONITORING	8
	2.1 2.2 2.3 2.4 2.5 2.6 2.7	Monitoring Requirements Monitoring Equipment Monitoring Locations Monitoring Parameters and Frequency Monitoring Methodology Monitoring Schedule for the Reporting period Results and Observations	8 8 8 9 10
3	NOIS	SE MONITORING	12
	3.1 3.2 3.3 3.4 3.5 3.6 3.7	Monitoring Requirements Monitoring Equipment Monitoring Locations Monitoring Parameters and Frequency Monitoring Methodology Monitoring Schedule for the Reporting period Monitoring Results	12 12 12 12 13 13
4	ENV	IRONMENTAL SITE INSPECTION AND AUDIT	15
	4.1 4.2 4.3 4.4 4.5 4.6	Site Inspection Advice on the Solid and Liquid Waste Management Status Environmental Licenses and Permits Implementation Status of Environmental Mitigation Measures Summary of Exceedances of the Environmental Quality Performance Limit Summary of Complaints, Notification of Summons and Successful Prosecutions	15 16 17 18 18
5	FUT	URE KEY ISSUES	19
	5.1 5.2 5.3	Construction Programme for the Coming Months Key Issues for the Coming Month Monitoring Schedule for the Coming Month	19 19 19
6	CON	ICLUSIONS AND RECOMMENDATIONS	20
	6.1 6.2	Conclusions Recommendations	20 20

AECOM Asia Co. Ltd.
P:\60307376\1.01\Deliverables\Monthly Monitoring Report\202001\Rev.0 (2001).doc February 2020 1

List of Tables

Table 1.1	Contact Information of Key Personnel
Table 2.1	Air Quality Monitoring Equipment
Table 2.2	Locations of Impact Air Quality Monitoring Station
Table 2.3	Air Quality Monitoring Parameters and Frequency
Table 2.4	Summary of 1-hour TSP Monitoring Results in the Reporting Period
Table 2.5	Summary of 24-hour TSP Monitoring Results in the Reporting Period
Table 3.1	Noise Monitoring Equipment
Table 3.2	Locations of Impact Noise Monitoring Stations
Table 3.3	Noise Monitoring Parameters, Frequency and Duration
Table 3.4	Summary of Construction Noise Monitoring Results in the Reporting Period
Table 4.1	Summary of Waste Flow Table for Contract No. HY/2012/06
Table 4.2	Summary of Environmental Licensing and Permit Status

Figures

Figure 1.1	General Project Layout Plan of Contract No. HY/2012/06
Figure 1.2	General Project Layout Plan of Contract No. 02/HY/2015 (Works Order Nos. CB128520-5
	and CB128519-0)
Figure 1.3a-b	Locations of Monitoring Station
Figure 4.1	Environmental Complaint Handling Procedures

List of Appendices

Appendix A	Project Organization Structure
Appendix B	Construction Programme
Appendix C	Implementation Schedule of Environmental Mitigation Measures (EMIS)
Appendix D	Summary of Action and Limit Levels
Appendix E	Calibration Certificates of Monitoring Equipments
Appendix F	EM&A Monitoring Schedules
Appendix G	Impact Air Quality Monitoring Results and their Graphical Presentation
Appendix H	Meteorological Data for the Reporting period
Appendix I	Impact Daytime Construction Noise Monitoring Results and their Graphical Presentation
Appendix J	Event Action Plan
Appendix K	Site Inspection Summaries
Appendix L	Statistics on Complaints, Notifications of Summons and Successful Prosecutions

EXECUTIVE SUMMARY

The proposed widening of Tolo Highway and Fanling Highway between Island House Interchange and Fanling (the Project) is a Designated Project under the Environmental Impact Assessment Ordinance (Cap. 499) (EIAO). An Environmental Impact Assessment (EIA) Report (the approved EIA Report) together with an Environmental Monitoring and Audit (EM&A) Manual (the approved EM&A Manual) were completed and approved under the EIAO on 14 July 2000 (Register Number: EIA-043/2000).

The objective of the Project "Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling" is to widen Tolo Highway and Fanling Highway to dual 4-lane carriageway in order to alleviate the current traffic congestion problems and to cope with the increasing transport demands to and from the urban areas and also cross boundary traffic.

The Project is a designated project and governed by an Environmental Permit (EP-324/2008) issued by the EPD on 23 December 2008. Subsequently, the EPD issued Variation of Environmental Permits of EP-324/2008/A, EP-324/2008/B, EP-324/2008/C and EP-324/2008/D on 31 January 2012, 17 March 2014, 27 March 2015 and 27 August 2015 respectively. The current valid VEP was applied on 29 December 2016 and the VEP (EP-324/2008/E) was subsequently granted on 26 January 2017.

The construction works for this Project are delivered in 2 stages i.e. Stage 1 (between Island House Interchange and Tai Hang) and Stage 2 (between Tai Hang and Wo Hop Shek Interchange). Stage 2 would be implemented under three works contracts. Contract No. HY/2012/06 "Widening of Fanling Highway – Tai Hang to Wo Hop Shek Interchange" and the entrusted portion to CEDD under Contract No. CV/2012/09 "Liantang/Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure Works – Contract 3". In addition, Contract No. "Provision of Bus-Bus Interchange on Fanling Highway Kowloon Bound" was carried out within the site boundary of Contract No. 02/HY/2015. This report focuses on Contract No. HY/2012/06 "Widening of Fanling Highway – Tai Hang to Wo Hop Shek Interchange" in Stage 2 of the Project and "Provision of Bus-Bus Interchange on Fanling Highway Kowloon Bound" under Works Order Nos. CB128520-5 and CB128519-0 in Contract No. 02/HY/2015 "Highway Department Term Contract (Management and Maintenance of Roads in Tai Po and North District excluding High Speed Roads 2016-2022)". The construction works of Works Order Nos. CB128520-5 and CB128519-0 under Contract No. 02/HY/2015 have been completed on 23 May 2018.

Pursuant to the EP (EP-324/2008/E) Condition 2.7, the Capture Survey Trip Report for Ma Wat River Northern Meander (Version 2) for the Project was submitted on 24 December 2013 by the Environmental Team (ET) and verified by the Independent Environmental Checker (IEC) on 6 January 2014.

The construction phase of the Contract under the EP and the Environmental Monitoring and Audit (EM&A) programme of the contract commenced on 21 November 2013. The impact environmental monitoring and audit includes air quality and noise monitoring.

This report documents the findings of EM&A works conducted in the period between 1 and 31 January 2020. As informed by the Contractor, construction activities of Contract No. HY/2012/06 in the reporting period were:

- Site clearance
- Excavation
- Backfilling
- Road resurfacing
- Landscape works

Reporting Change

There was no reporting change required in the reporting period.

Breaches of Action and Limit Levels for Air Quality

No exceedance of Action and Limit Level was recorded for 1-hour and 24-hour TSP monitoring in the reporting period.

Breaches of Action and Limit Levels for Noise

No Action or Limit Level exceedance of construction noise was recorded in the reporting month. No noise complaints related to 0700 – 1900 hours on normal weekdays was received and followed by Environmental Team in the reporting month.

Complaint, Notification of Summons and Successful Prosecution

No complaint, notification of summons and successful prosecution was received in the reporting period.

Future Key Issues

Key issues to be considered in the coming month include:

- Properly store and label oils and chemicals on site;
- Chemical, chemical waste and waste management;
- Collection of construction waste should be carried out regularly;
- Properly maintain all drainage facilities and wheel washing facilities on site;
- Exposed slopes should be covered up properly if no temporary work will be conducted;
- Quieter powered mechanical equipment should be used;
- Suppress dust generated from excavation activities and haul road traffic; and
- Tree protective measures for all retained trees should be well maintained.

1 INTRODUCTION

1.1 Background

- 1.1.1. Tolo Highway and Fanling Highway are the expressways in the North East New Territories (NENT) connecting Sha Tin, Tai Po and Fanling. These highways form a vital part of the strategic Route 9, which links Hong Kong Island to the boundary at Shenzhen. At present, this section of Route 9 is a dual 3-lane carriageway. However, at several major interchanges along this section of Route 9, the highway is a dual-2 lane carriageway only. Severe congestion is a frequent occurrence during the peak periods, particularly in the Kowloon-bound direction.
- 1.1.2. The objective of the Project "Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling" is to widen Tolo Highway and Fanling Highway to dual 4-lane carriageway in order to alleviate the current traffic congestion problems and to cope with the increasing transport demands to and from the urban areas and also cross boundary traffic.
- 1.1.3. The Project is a designated project and governed by an Environmental Permit (EP-324/2008) issued by the EPD on 23 December 2008. Subsequently, the EPD issued Variation of Environmental Permits of EP-324/2008/A, EP-324/2008/B, EP-324/2008/C and EP-324/2008/D on 31 January 2012, 17 March 2014, 27 March 2015 and 27 August 2015 respectively. The current valid VEP was applied on 29 December 2016 and the VEP (EP-324/2008/E) was subsequently granted on 26 January 2017.
- 1.1.4. The scope of the Project comprises mainly:
 - Widening of a 5.7 km section of Tolo Highway and 3.0 km section of Fanling Highway between Island House Interchange and Wo Hop Shek Interchange from the existing dual 3-lane to dual 4lane, including construction of new vehicular bridges;
 - (ii) Widening of interchange sections at Island House Interchange, Tai Po North Interchange, and Lam Kam Road Interchange from dual 2-lane to dual 3-lane, except Sha Tin bound carriageway at Tai Po North Interchange, which is widened from 3-lane to 4-lane, including realignment of various slip roads:
 - (iii) Modification and reconstruction of highways, vehicular bridges, underpasses and footbridges.
- 1.1.5. The construction works for this Project will be delivered in 2 stages i.e. Stage 1 (between Island House Interchange and Tai Hang) and Stage 2 (between Tai Hang and Wo Hop Shek Interchange). Stage 2 would be implemented under two works contracts. Contract No. HY/2012/06 "Widening of Fanling Highway Tai Hang to Wo Hop Shek Interchange" and the entrusted portion to CEDD under Contract No. CV/2012/09 "Liantang/Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure Works Contract 3". In addition, Contract No. "Provision of Bus-Bus Interchange on Fanling Highway Kowloon Bound" was carried out within the site boundary of Contract No. 02/HY/2015. This report focuses on Contract No. HY/2012/06 "Widening of Fanling Highway Tai Hang to Wo Hop Shek Interchange" in Stage 2 of the Project and "Provision of Bus-Bus Interchange on Fanling Highway Kowloon Bound" under Works Order Nos. CB128520-5 and CB128519-0 in Contract No. 02/HY/2015 "Highway Department Term Contract (Management and Maintenance of Roads in Tai Po and North District excluding High Speed Roads 2016-2022)".
- 1.1.6. Hyder-Arup-Black and Veatch Joint Venture (HABVJV) are appointed by Highways Department (HyD) as the consultants for the design and construction assignment for the Tolo project under Agreement No. CE 58/2000 Supplementary Agreement No. 3 (SA3) (i.e. the Engineer for Contract No. HY/2012/06).
- 1.1.7. China State Construction Engineering (Hong Kong) Ltd. (CSHK) was commissioned as the Contractor of Contract No. HY/2012/06. Chiu Hing Construction & Transportation Company Limited (Chiu Hing) was commissioned as the Contractor of Contract No. 02/HY/2015. The construction works of Works Order Nos. CB128520-5 and CB128519-0 under Contract No. 02/HY/2015 have been completed on 23 May 2018.

- 1.1.8. AECOM Asia Co. Ltd. was commissioned by China State Construction Engineering (Hong Kong) Limited as the Environmental Team (ET) to undertake the Environmental Monitoring and Audit (EM&A) works for the Contract and Mott MacDonald Hong Kong Ltd. acts as the Independent Environmental Checker (IEC) for the Contract.
- 1.1.9. The construction phase of the Contract under the EP commenced on 21 November 2013.
- 1.1.10. According to the updated EM&A Manual of Stage 2 of the Project, there is a need of an EM&A programme including air quality and noise monitoring. The EM&A programme for Stage 2 of the Project commenced on 21 November 2013.

1.2 Scope of Report

1.2.1 This is the seventy-sixth monthly EM&A Report under the Contract No. HY/2012/06 "Widening of Fanling Highway – Tai Hang to Wo Hop Shek Interchange. This report presents a summary of the environmental monitoring and audit works, list of activities and mitigation measures proposed by the ET for the Contract in January 2020.

1.3 Project Organization

1.3.1 The project organization structure is shown in Appendix A. The key personnel contact names and numbers are summarized in Table 1.1.

Table 1.1 Contact Information of Key Personnel

Party	Position	Name	Telephone	Fax
ER (Hyder-Arup-Black & Veatch Joint Venture)	Chief Resident Engineer	Edwin Chung	6115 0818	2638 0950
IEC (Mott MacDonald Hong Kong Limited)	Independent Environmental Checker	Steven Tang	2828 5920	2827 1823
Contractor of [HY/2012/06]		Michael Tsang	9277 4956	2672 2501
(China State Construction Engineering (Hong Kong) Limited)	Environmental Officer	C C Chow	9679 6315	2672 2501
Contractor of [02/HY/2015] (Chiu Hing Construction & Transportation Company Limited)	Safety Officer	Marty Tai	9106 5318	-

Party	Position	Name	Telephone	Fax
ET (AECOM Asia Company Limited)	ET Leader	Y W Fung	3922 9393	3922 9797

1.4 Summary of Construction Works

- 1.4.1 The construction phase for the Contract under the EP commenced on 21 November 2013.
- 1.4.2 Details of the construction works of Contract No. HY/2012/06 carried out by the Contractor in this reporting period are listed below:
 - Site clearance
 - Excavation
 - Backfilling
 - Road resurfacing
 - Landscape works
- 1.4.3 The Construction Programme is shown in Appendix B.
- 1.4.4 The general layout plan of the Project site of Contract No. HY/2012/06 and Works Order Nos. CB128520-5 and CB128519-0 under 02/HY/2015 showing the contract areas are shown in Figure 1.1 and Figure 1.2 respectively.
- 1.4.5 The environmental mitigation measures implementation schedule are presented in Appendix C.

1.5 Summary of EM&A Programme Requirements

- 1.5.1 The EM&A programme required environmental monitoring for air quality, noise and environmental site inspections for air quality, water quality, noise, waste management, ecology, and landscape and visual impact. The EM&A requirements for each parameter described in the following sections include:-
 - All monitoring parameters;
 - Monitoring schedules for the reporting period and forthcoming months;
 - Action and Limit levels for all environmental parameters;
 - Event / Action Plan;
 - Environmental mitigation measures, as recommended in the Project EIA study final report; and
 - Environmental requirement in contract documents.

2 AIR QUALITY MONITORING

2.1 Monitoring Requirements

2.1.1 In accordance with the updated EM&A Manual, baseline 1-hour and 24-hour TSP levels at one air quality monitoring station was established. Impact 1-hour TSP monitoring was conducted for at least three times every 6 days, while impact 24-hour TSP monitoring was carried out for at least once every 6 days. The Action and Limit level of the air quality monitoring is provided in Appendix D.

2.2 Monitoring Equipment

2.2.1 24-hour TSP air quality monitoring was performed using High Volume Sampler (HVS) located at each designated monitoring station. The HVS meets all the requirements of the updated EM&A Manual. Portable direct reading dust meters were used to carry out the 1-hour TSP monitoring. Brand and model of the equipment is given in Table 2.1.

Table 2.1 Air Quality Monitoring Equipment

Equipment	Brand and Model
Portable direct reading dust meter (1-hour TSP)	Sibata Digital Dust Monitor (Model No. LD-3)
High Volume Sampler (24-hour TSP)	Tisch Total Suspended Particulate Mass Flow Controlled High Volume Air Sampler (Model No. TE-5170)

2.3 Monitoring Locations

2.3.1 The monitoring station was set up at the proposed location in accordance with updated EM&A Manual. Table 2.2 describes details of the monitoring station. The locations are shown in Figure 1.3a.

Table 2.2 Locations of Impact Air Quality Monitoring Station

Location	Monitoring Station
AM2 (SR2)	Fanling Government Secondary School

2.4 Monitoring Parameters and Frequency

2.4.1 Table 2.3 summarizes the monitoring parameters, frequency and duration of impact TSP monitoring.

Table 2.3 Air Quality Monitoring Parameters and Frequency

Parameter	Frequency
24-hour TSP	Once every 6 days
1-hour TSP	3 times every 6 days while the highest dust impact was expected

2.5 Monitoring Methodology

2.5.1 24-hour TSP Monitoring

- (a) The HVS was installed in the vicinity of the air sensitive receivers. The following criteria were considered in the installation of the HVS.
 - (i) A horizontal platform with appropriate support to secure the sampler against gusty wind was provided.
 - (ii) The distance between the HVS and any obstacles, such as buildings, was at least twice the height that the obstacle protrudes above the HVS.
 - (iii) A minimum of 2 meters separation from walls, parapets and penthouse for rooftop sampler.
 - (iv) A minimum of 2 meters separation from any supporting structure, measured horizontally.
 - (v) No furnace or incinerator flues nearby.
 - (vi) Airflow around the sampler was unrestricted.
 - (vii) Permission was obtained to set up the samplers and access to the monitoring stations.
 - (viii) A secured supply of electricity was obtained to operate the samplers.
 - (ix) The sampler was located more than 20 meters from any dripline.
 - (x) Any wire fence and gate, required to protect the sampler, did not obstruct the monitoring process.
 - (xi) Flow control accuracy was kept within ±2.5% deviation over 24-hour sampling period.

(b) Preparation of Filter Papers

- (i) Glass fibre filters, G810 were labelled and sufficient filters that were clean and without pinholes were selected.
- (ii) All filters were equilibrated in the conditioning environment for 24 hours before weighing. The conditioning environment temperature was around 25 °C and not variable by more than ±3 °C; the relative humidity (RH) was < 50% and not variable by more than ±5%. A convenient working RH was 40%.
- (iii) All filter papers were prepared and analysed by ALS Technichem (HK) Pty Ltd., which is a HOKLAS accredited laboratory and has comprehensive quality assurance and quality control programmes.

(c) Field Monitoring

- (i) The power supply was checked to ensure the HVS works properly.
- (ii) The filter holder and the area surrounding the filter were cleaned.
- (iii) The filter holder was removed by loosening the four bolts and a new filter, with stamped number upward, on a supporting screen was aligned carefully.
- (iv) The filter was properly aligned on the screen so that the gasket formed an airtight seal on the outer edges of the filter.
- (v) The swing bolts were fastened to hold the filter holder down to the frame. The pressure applied was sufficient to avoid air leakage at the edges.
- (vi) Then the shelter lid was closed and was secured with the aluminum strip.
- (vii) The HVS was warmed-up for about 5 minutes to establish run-temperature conditions.
- (viii) A new flow rate record sheet was set into the flow recorder.
- On site temperature and atmospheric pressure readings were taken and the flow rate of the HVS was checked and adjusted at around 1.1 m³/min, and complied with the range specified in the updated EM&A Manual (i.e. 0.6-1.7 m³/min).
- (x) The programmable digital timer was set for a sampling period of 24 hrs, and the starting time, weather condition and the filter number were recorded.
- (xi) The initial elapsed time was recorded.
- (xii) At the end of sampling, on site temperature and atmospheric pressure readings were taken and the final flow rate of the HVS was checked and recorded.
- (xiii) The final elapsed time was recorded.

- (xiv) The sampled filter was removed carefully and folded in half length so that only surfaces with collected particulate matter were in contact.
- (xv) It was then placed in a clean plastic envelope and sealed.
- (xvi) All monitoring information was recorded on a standard data sheet.
- (xvii) Filters were then sent to ALS Technichem (HK) Pty Ltd. for analysis.

(d) Maintenance and Calibration

- (i) The HVS and its accessories were maintained in good working condition, such as replacing motor brushes routinely and checking electrical wiring to ensure a continuous power supply.
- (ii) 5-point calibration of the HVS was conducted using TE-5025A Calibration Kit prior to the commencement of baseline monitoring. Bi-monthly 5-point calibration of the HVS will be carried out during impact monitoring.
- (iii) Calibration certificate of the HVSs are provided in Appendix E.

2.5.2 1-hour TSP Monitoring

(a) Measuring Procedures

The measuring procedures of the 1-hour dust meter were in accordance with the Manufacturer's Instruction Manual as follows:

- (i) Turn the power on.
- (ii) Close the air collecting opening cover.
- (iii) Push the "TIME SETTING" switch to [BG].
- (iv) Push "START/STOP" switch to perform background measurement for 6 seconds.
- (v) Turn the knob at SENSI ADJ position to insert the light scattering plate.
- (vi) Leave the equipment for 1 minute upon "SPAN CHECK" is indicated in the display.
- (vii) Push "START/STOP" switch to perform automatic sensitivity adjustment. This measurement takes 1 minute.
- (viii) Pull out the knob and return it to MEASURE position.
- (ix) Push the "TIME SETTING" switch the time set in the display to 3 hours.
- (x) Lower down the air collection opening cover.
- (xi) Push "START/STOP" switch to start measurement.

(b) Maintenance and Calibration

- (i) The 1-hour TSP meter was calibrated at 1-year intervals against a continuous particulate TEOM Monitor, Series 1400ab. Calibration certificates of the Laser Dust Monitors are provided in Appendix E.
- (ii) 1-hour validation checking of the TSP meter against HVS is carried out yearly at the air quality monitoring locations.

2.6 Monitoring Schedule for the Reporting period

2.6.1 The schedule for environmental monitoring in January 2020 is provided in Appendix F.

2.7 Results and Observations

2.7.1 The monitoring results for 1-hour TSP and 24-hour TSP are summarized in Table 2.4 and 2.5 respectively. Detailed impact air quality monitoring results are presented in Appendix G.

Table 2.4 Summary of 1-hour TSP Monitoring Results in the Reporting Period

Location	Average (μg/m³)	Range (μg/m³)	Action Level (μg/m³)	Limit Level (µg/m³)
AM2 (Fanling Government Secondary School)	62.6	55.6 – 66.7	317.8	500

Table 2.5 Summary of 24-hour TSP Monitoring Results in the Reporting Period

Location	Average (μg/m³)	Range (μg/m³)	Action Level (μg/m³)	Limit Level (μg/m³)
AM2 (Fanling Government Secondary School)	33.6	19.8 – 46.6	200.7	260

- 2.7.2 The major dust source during the monitoring was mainly from nearby traffic emission.
- 2.7.3 All 1-hour and 24-hour TSP results were below the Action and Limit Level at all monitoring locations in the reporting period.
- 2.7.4 The event action plan is annexed in Appendix J.
- 2.7.5 Weather information including wind speed and wind direction is annexed in Appendix H. The information was obtained from the Hong Kong Observatory Tai Po and Tai Mei Tuk Automatic Weather Stations.

3 NOISE MONITORING

3.1 Monitoring Requirements

3.1.1 In accordance with the EM&A Manual, impact noise monitoring was conducted for at least once per week during the construction phase of the Contract. The Action and Limit level of the noise monitoring is provided in Appendix D.

3.2 Monitoring Equipment

3.2.1 Noise monitoring was performed using sound level meter at each designated monitoring station. The sound level meters deployed comply with the International Electrotechnical Commission Publications (IEC) 651:1979 (Type 1) and 804:1985 (Type 1) specifications. Acoustic calibrator was deployed to check the sound level meters at a known sound pressure level. Brand and model of the equipment is given in Table 3.1.

Table 3.1 Noise Monitoring Equipment

Equipment	Brand and Model
Integrated Sound Level Meter	B&K 2238
Acoustic Calibrator	B&K 4231

3.3 Monitoring Locations

3.3.1 Monitoring stations M2 and M3 were set up at the proposed locations in accordance with updated EM&A Manual. Figure 1.3a-b shows the locations of the monitoring stations. Table 3.2 describes the details of the monitoring stations.

Table 3.2 Locations of Impact Noise Monitoring Stations

Monitoring Station	Location	Description
M2	West Tai Wo	1.2m from the ground floor free-field of the Residential
M3	Fanling Government Secondary School	1m from the exterior of the roof top façade of the school

3.4 Monitoring Parameters and Frequency

3.4.1 Table 3.3 summarizes the monitoring parameters, frequency and duration of impact noise monitoring.

Table 3.3 Noise Monitoring Parameters, Frequency and Duration

Parameter	Frequency
30-mins measurement at each monitoring station between 0700 and 1900 on normal weekdays. Leq, L10 and L90 would be recorded.	At least once per week

3.5 Monitoring Methodology

3.5.1 Monitoring Procedure

- (a) Façade measurement was made at monitoring station M3, while free-field measurement was made at monitoring station M2.
- (b) The sound level meter was set on a tripod at a height of 1.2 m above the ground for free-field measurements at monitoring station M2.
- (c) The battery condition was checked to ensure the correct functioning of the meter.
- (d) Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:
 - (i) frequency weighting: A
 - (ii) time weighting: Fast
 - (iii) time measurement: $L_{eq(30-minutes)}$ during non-restricted hours i.e. 07:00-1900 on normal weekdays; $L_{eq(5-minutes)}$ during restricted hours i.e. 19:00-23:00 and 23:00-07:00 of normal weekdays, whole day of Sundays and Public Holidays
- (e) Prior to and after each noise measurement, the meter was calibrated using the acoustic calibrator for 94dB(A) at 1000 Hz. If the difference in the calibration level before and after measurement was more than 1 dB(A), the measurement would be considered invalid and repeat of noise measurement would be required after re-calibration or repair of the equipment.
- (f) During the monitoring period, the L_{eq}, L₁₀ and L₉₀ were recorded. In addition, site conditions and noise sources were recorded on a standard record sheet.
- (g) Noise measurement was paused during periods of high intrusive noise (e.g. dog barking, helicopter noise) if possible. Observations were recorded when intrusive noise was unavoidable.
- (h) Noise monitoring was cancelled in the presence of fog, rain, wind with a steady speed exceeding 5m/s, or wind with gusts exceeding 10m/s.

3.5.2 Maintenance and Calibration

- (a) The microphone head of the sound level meter was cleaned with soft cloth at regular intervals.
- (b) The meter and calibrator were sent to the supplier or HOKLAS laboratory to check and calibrate at yearly intervals.
- (c) Calibration certificates of the sound level meters and acoustic calibrators are provided in Appendix E.

3.6 Monitoring Schedule for the Reporting period

3.6.1 The schedule for environmental monitoring in January 2020 is provided in Appendix F.

3.7 Monitoring Results

3.7.1 The monitoring results for construction noise are summarized in Table 3.4 and the monitoring data is provided in Appendix I.

Table 3.4 Summary of Construction Noise Monitoring Results in the Reporting Period

Location	Location Average, dB(A),		Limit Level, dB(A),
	Leq (30 mins)	L _{eq (30 mins)}	Leq (30 mins)
M2* (West Tai Wo)	67.2	65.4 – 68.2	75
M3 [#] (Fanling Government Secondary School)	62.4	60.0 – 63.9	65/70

^{*+3}dB(A) Façade correction included

- 3.7.2 No Action or Limit Level exceedance of construction noise was recorded in the reporting month. No noise complaints related to 0700 1900 hours on normal weekdays was received and followed by Environmental Team in the reporting month.
- 3.7.3 Major noise sources during noise monitoring in the reporting period were mainly road traffic noise.
- 3.7.4 The event action plan is annexed in Appendix J.

[#] Limit Level of 70dB(A) applies to education institutes while 65dB(A) applies during school examination period.

4 ENVIRONMENTAL SITE INSPECTION AND AUDIT

4.1 Site Inspection

- 4.1.1 Site Inspections were carried out on a weekly basis to monitor the implementation of proper environmental pollution control and mitigation measures for the Contract. In the reporting period, 3 site inspections were carried out respectively on 7, 16 and 21 January 2020 for the Contract. While no specific observation was recorded, recommendations on remedial actions were given to the Contractor for precautionary purpose.
- 4.1.2 Since no construction work was carried between 27 and 31 January 2020, the environmental site inspection for this week was cancelled.
- 4.1.3 The environmental site inspections summaries are provided in Appendix K.
- 4.1.4 Particular observations during the site inspections are described below:

Contract No. HY/2012/06

Air Quality

- 4.1.5 The Contractor was reminded to cover the stockpile at SA340 entirely.
- 4.1.6 The Contractor was reminded to cover the stockpile at SA310 with imperious sheeting.

Noise

4.1.7 No adverse observation was identified in the reporting period.

Water Quality

4.1.8 No adverse observation was identified in the reporting period.

Chemical and Waste Management

4.1.9 Chemical waste stored without drip tray was observed at SA324. The Contractor was advised to provide drip tray to the chemical on for preventing potential leakage.

Landscape and Visual Impact

4.1.10 No adverse observation was identified in the reporting period.

Miscellaneous

4.1.11 No adverse observation was identified in the reporting period.

4.2 Advice on the Solid and Liquid Waste Management Status

- 4.2.1 Contract No. HY/2012/06 has registered as chemical waste producers for the Contract. C&D material sorting was carried out on site. Sufficient numbers of receptacles were available for general refuse collection.
- 4.2.2 As advised by the Contractor of Contract No. HY/2012/06, 178 m³ of inert C&D material was generated in the reporting month (47 m³ disposed of as public fill to Tuen Mun 38, 58 m³ of inert C&D materials was reused on site, 0 m³ of inert C&D materials was reused in other projects and 73 m³ was broken concrete). For C&D wastes, 155 m³ of general refuse was disposed of at NENT landfill, 0 kg of paper/cardboard packaging, 0 kg of plastics and 0 kg of metals were collected by recycling Contractors, and 0 kg of chemical wastes was collected by licensed Contractors in the reporting period.
- 4.2.3 The actual amounts of different types of waste generated by the activities of the Project in the reporting period are shown in Table 4.1.

Table 4.1 Summary of Waste Flow Table for Contract No. HY/2012/06

Waste Type	Actual Amount	Disposal/Reuse Locations
Inert C&D materials disposed as public fill	47 m ³	Tuen Mun 38
Broken concrete	73 m³	Tuen Mun 38
C&D wastes disposed as general refuse	155 m ³	NENT Landfill
Paper/cardboard packaging	0 kg	Recycling Facilities
Plastics	0 kg	Recycling Facilities
Metals	0 kg	Recycling Facilities
C&D materials reused on site	58 m ³	Site Area
C&D materials reused in other projects	0 m ³	Other projects
Chemical wastes	0 kg	Licensed Contractors

4.2.4 The Contractors were advised to maintain on-site waste sorting and recording system and maximize reuse / recycle of C&D wastes.

4.3 Environmental Licenses and Permits

4.3.1 The environmental licenses and permits for Stage 2 of the Project and valid in the reporting period is summarized in Table 4.2.

Table 4.2 Summary of Environmental Licensing and Permit Status

Statutory			Valid	Period	License / Permit	Remarks	
Reference	Permit	Permit No.	From To		Holder	rtemarks	
EIAO	Environment al Permit	EP-324/2008/E	26/01/2017	N/A	HyD		
WDCO	Discharge	WT-00031556- 2018	20/09/2018	30/09/2023	CSHK		
WPCO	License (Site)	WT00027968- 2017	22/05/2017	31/05/2022	Chiu Hing		
WDO	Chemical Waste Producer Registration	5213-722- C3822-01	05/09/2013	N/A	CSHK	Chemical waste produced in Contract HY/2012/06	
WDO	Billing Account for Disposal of	7017860	N/A	N/A	CSHK	Waste disposal in Contract HY/2012/06	
WDO	Construction Waste	7024392	N/A	N/A	Chiu Hing	Waste disposal in Contract 02/HY/2015	
	Notification Under Air Pollution	361991	15/07/2013	N/A	CSHK		
APCO	Control (Constructio n Dust) Regulation	414360	08/03/2017	N/A	Chiu Hing		
		GW-RN0806-19	12/11/2019	11/01/2020	CSHK	Both Bounds of Fanling Highway, Zone 4 Road Resurfacing	
	O a material and	GW-RN0829-19	23/11/2019	22/02/2020	CSHK	Zone 1 & 2 Road Resurfacing	
NCO	Construction Noise Permit	GW-RN0865-19	29/11/2019	28/01/2020	CSHK	Zone 2B Removal of Parapet Wall and Associated Concreting Works	
		GW-RN0875-19	09/12/2019	08/02/2020	CSHK	Zone 1 & 2 Sign Gantry Modification	

Statutory	License/	License or	Valid I	Period	License / Permit	Remarks
Reference	Permit	Permit No.	From	То	Holder	
		GW-RN0923-19	19/12/2019	21/01/2020	CSHK	Zone 4 Road Resurfacing at Pak Wo Road
		GW-RN0940-19	27/12/2019	14/02/2020	CSHK	Pak Wo Rd; Zone 4 Installation of Directional Sign
		GW-RN0954-19	31/12/2019	29/02/2020	CSHK	Zone 4 Installation of Sign Gantry Lighting
		GW-RN0955-19	03/01/2020	02/03/2020	CSHK	Zone 4 Road Stud & Profile Barrier

4.4 Implementation Status of Environmental Mitigation Measures

4.4.1 A summary of the Implementation Schedule of Environmental Mitigation Measures (EMIS) is presented in Appendix C.

4.5 Summary of Exceedances of the Environmental Quality Performance Limit

- 4.5.1 All 1-hour and 24-hour TSP monitoring results complied with the Action / Limit Levels in the reporting period.
- 4.5.2 No Action or Limit Level exceedance of construction noise was recorded in the reporting month. No noise complaints related to 0700 1900 hours on normal weekdays was received and followed by Environmental Team in the reporting month.

4.6 Summary of Complaints, Notification of Summons and Successful Prosecutions

- 4.6.1 The Environmental Complaint Handling Procedure is annexed in Figure 4.1.
- 4.6.2 No complaint, notification of summons and successful prosecution was received in the reporting period.
- 4.6.3 Statistics on complaints, notifications of summons and successful prosecutions are summarized in Appendix L.

February 2020

5 FUTURE KEY ISSUES

5.1 Construction Programme for the Coming Months

- 5.1.1 The major construction works for Contract No. HY/2012/06 in February 2020 will be:
 - Site clearance
 - Excavation
 - Backfilling
 - Road resurfacing
 - Landscape works

5.2 Key Issues for the Coming Month

- 5.2.1 Key issues to be considered in February 2020:
 - Properly store and label oils and chemicals on site;
 - Chemical, chemical waste and waste management;
 - Collection of construction waste should be carried out regularly;
 - Properly maintain all drainage facilities and wheel washing facilities on site;
 - Exposed slopes should be covered up properly if no temporary work will be conducted;
 - Quieter powered mechanical equipment should be used;
 - Suppress dust generated from excavation activities and haul road traffic; and
 - Tree protective measures for all retained trees should be well maintained.

5.3 Monitoring Schedule for the Coming Month

5.3.1 The tentative schedule for environmental monitoring in February 2020 is provided in Appendix F.

6 CONCLUSIONS AND RECOMMENDATIONS

6.1 Conclusions

- 6.1.1 The construction phase and EM&A programme of the Contract commenced on 21 November 2013.
- 6.1.2 All 1-hour and 24-hour TSP monitoring results complied with the Action / Limit Levels in the reporting period.
- 6.1.3 No Action or Limit Level exceedance of construction noise was recorded in the reporting month. No noise complaints related to 0700 1900 hours on normal weekdays was received and followed by Environmental Team in the reporting month.
- 6.1.4 3 environmental site inspections were carried out in January 2020. Recommendations on remedial actions were given to the Contractors for the deficiencies identified during the site audits.
- 6.1.5 Since no construction work was carried between 27 and 31 January 2020, the environmental site inspection for this week was cancelled.
- 6.1.6 No complaint, notification of summons and successful prosecution was received in the reporting period.

6.2 Recommendations

6.2.1 According to the environmental site inspections performed in the reporting period, the following recommendations on remedial actions were provided to the Contractor for precautionary purpose:

Contract No. HY/2012/06

Air Quality Impact

- The Contractor was reminded to cover the stockpile at entirely.
- The Contractor was reminded to cover the stockpile at with imperious sheeting.

Noise Impact

No adverse observation was identified in the reporting period.

Water Quality Impact

No adverse observation was identified in the reporting period.

Chemical and Waste Management

The Contractor was advised to provide drip tray to the chemical on for preventing potential leakage.


Landscape and Visual Impact

No adverse observation was identified in the reporting period.

Miscellaneous

No adverse observation was identified in the reporting period.

FIGURES

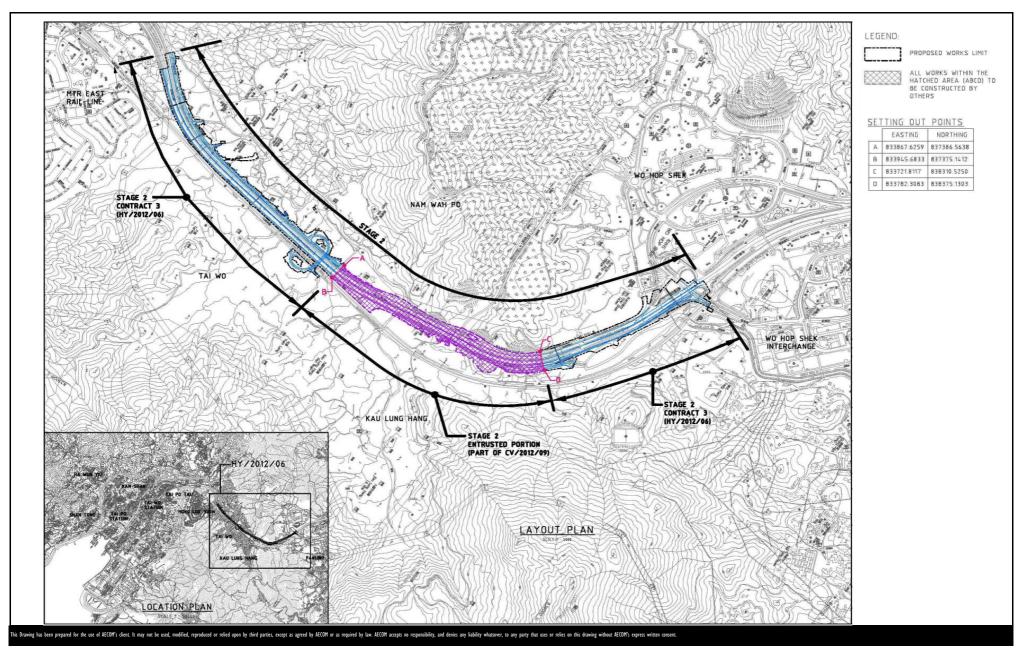

CONTRACT NO. HY/2012/06


WIDENING OF FANLING HIGHWAY

- TAI HANG TO WO HOP SHEK INTERCHANGE

AECOM

Layout Plan


Date: Dec 2013 Figure 1.1

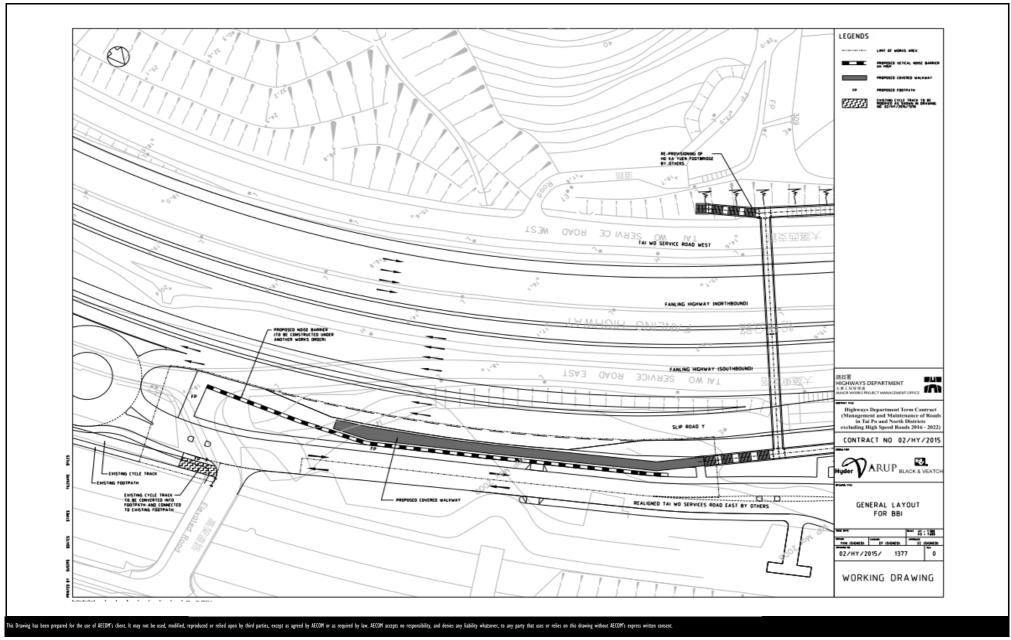

CONTRACT NO. 02/HY/2015

PROVISION OF BUS-BUS INTERCHANGE ON FANLING HIGHWAY KOWLOON BOUND




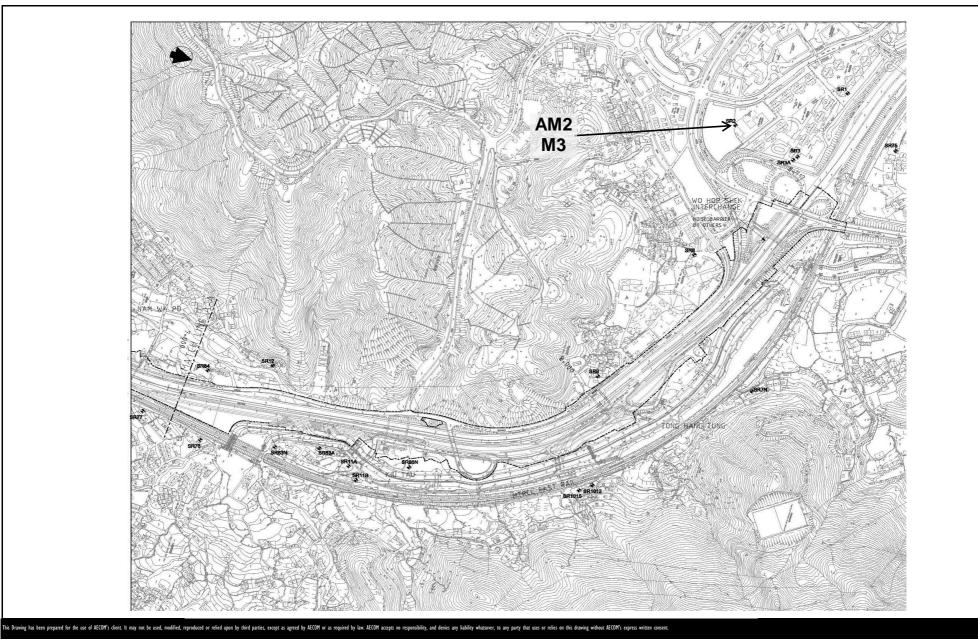

CONTRACT NO. HY/2012/06
WIDENING OF FANLING HIGHWAY

- TAI HANG TO WO HOP SHEK INTERCHANGE

AECOM

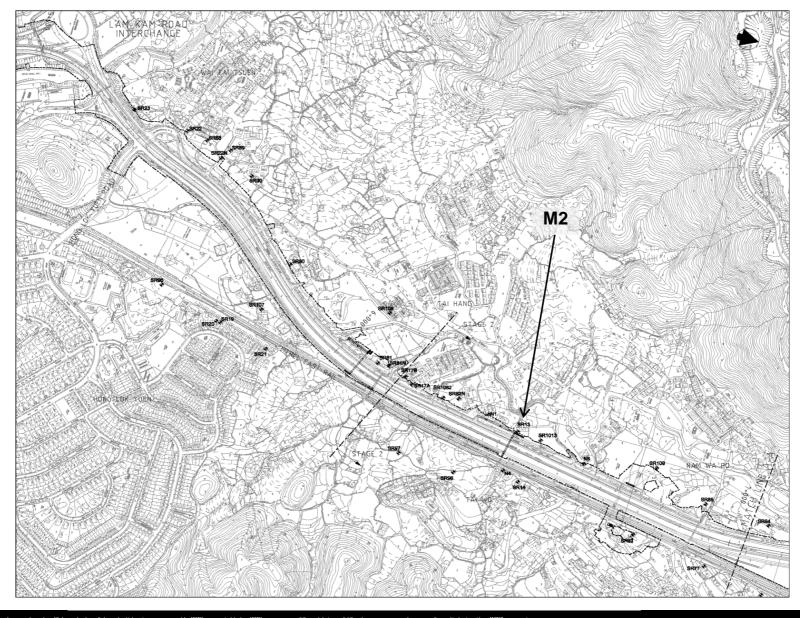

This Drawing has been prepared for the use of AECOM's circuit. It may not be used, modified, reproduced or relied upon by third parsies, except as agreed by AECOM or as required by law. AECOM accepts no responsibility, and denies any liability whatsover, to any party that uses or relies on this drawing without AECOM's express written consont.


WIDENING OF FANLING HIGHWAY

CONTRACT NO. HY/2012/06

- TAI HANG TO WO HOP SHEK INTERCHANGE



Date: Dec 2013 Figure 1.3b

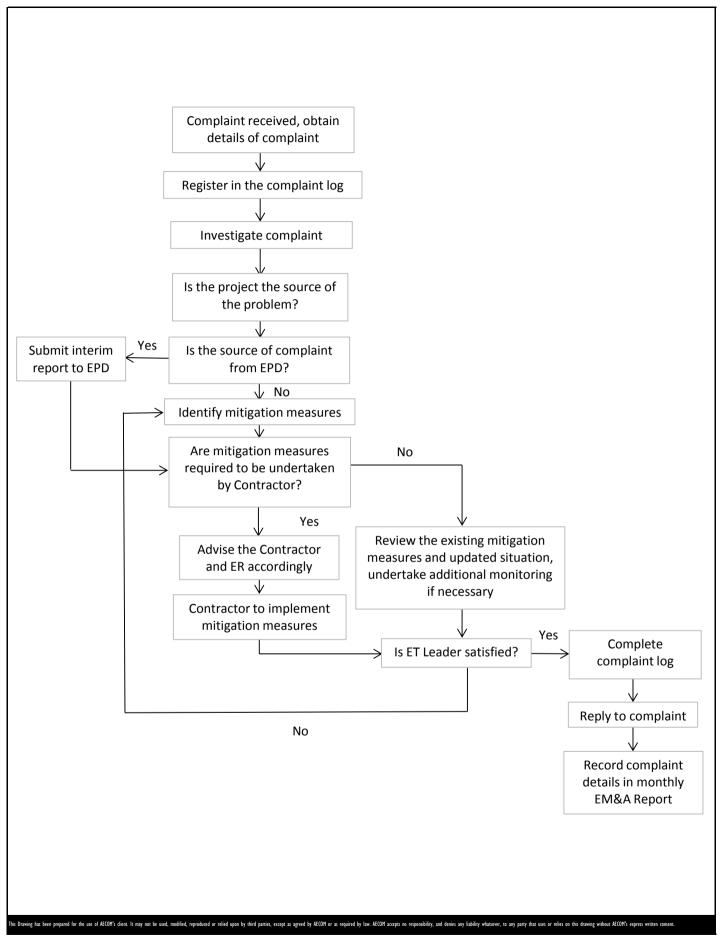


CONTRACT NO. HY/2012/06
WIDENING OF FANLING HIGHWAY

- TAI HANG TO WO HOP SHEK INTERCHANGE



Project No.: 60307376 Date: Dec 2013 Figure 4.1

APPENDIX A PROJECT ORGANIZATION STRUCTURE

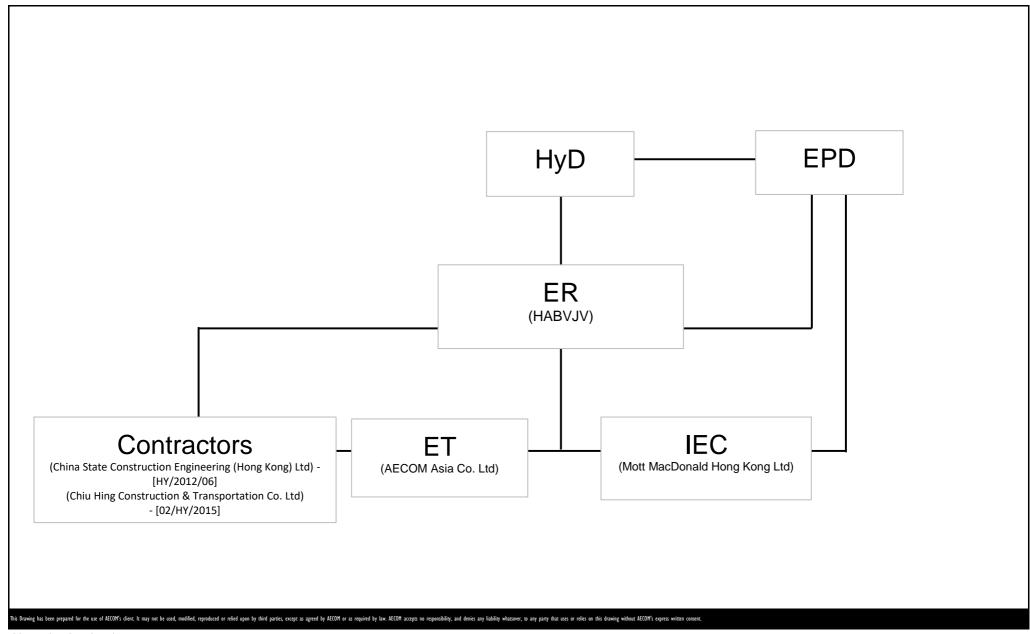

CONTRACT NO. HY/2012/06

WIDENING OF FANLING HIGHWAY

- TAI HANG TO WO HOP SHEK INTERCHANGE



Project No.: 60307376 Date: Apr 2017 Appendix A

APPENDIX B CONSTRUCTION PROGRAMMES

WP Rev. 8 (Progress L					Iling Program						Page 1 of 3 (22	2-Nov-19)
ctivity ID	Activity Name	Dur. % Complete	Rem. Duration	Original Duration	Start	Finish	Total Float		2019		2020	
									Nov	Dec	Jan	Feb
ZONE 1 (Ch. 5	640 to 5880)								1	[
Other Works									1	1 		
VO189 - Irrigatio	n System in Zone 1 and Zone 2								1	 		
	ion System in Zone 1 and Zone 2								1	1 1 1		+
IS0120	Irrigation system installation in Zone 1	0%	30	30	20-Nov-19*	24-Dec-19	252			i 		
		0,0			20 1101 10	2.500.10				1		
Establishment V	Vorks									I I		
Establishment	Works									1		
Z1.EW.1000	Establishment work Zone1	44.38%	203	365	11-Jun-19 A	09-Jun-20	0		· · · · · · · · · · · · · · · · · · ·			
ZONE O (Ch. E	(000 to 0000)								1	I I I		
ZONE 2 (Ch. 5	880 to 6930)								1			
General										1 1 1		
DRM Proposal									1	1		
DRM Proposal									1	1 1 1		+
ADVZ20300	TWSR-W lane 2 construction	0%	30	30	27-Dec-19	03-Feb-20	222			—		<u></u>
			• •						1	1 1		<u> </u>
Noise Barrier	Along Fanling Highway N/B								1 1 1	1 1 1		
NB43A (Ch.5880	9-6060)-FH N/B Side								1	I I		
Noise Barrier V	Vorks								1	i I I		
NB03340	Relocate Bus Shelter installation - VO86	0%	11	11	16-Dec-19*	30-Dec-19	249					
									1	1 1		
Underground Util	<u>*</u>								1	1 1 1		
Underground U	and the second s								1	 		
UU0110	Towngas duct laying and associated work before backfill in Zone 1 & 2	92.72%	41	563	20-Apr-18 A	30-Dec-19	187					
UU0130	TTA, duct laying and Road reinstatement by	0%	120	120	31-Dec-19	28-Apr-20	187			L		
	Towngas in Zone 1 & 2 (if required)	1.0	3	-					1	1 		
Bridge Constr	uction								1	1 1 1		
New Tai Hang Fo	ootbridge								1	 		
General									1	1		1
THBF0655	Tai Hang Footbridge Complete	0%	0	0		31-Dec-19	248			31-Dec-19	Tai Hang Footbridg	Complete
									1 1	1		+
	Highway S/B Side Section				la. a	1			<u> </u>	<u> </u>		
THBF0640	Finishes Work	0%	34	30	25-Sep-19 A	31-Dec-19	248			ı		
THBF0645	Bridge Structure complete (THFB-TWSR-E side)	0%	0	0		31-Dec-19	248		<u></u>	31-Dec-19	Bridge Structure co	omplete (TH
TUDEOSOO	ADM/F work	00/	24	20	25 Can 10 A	21 Dec 10	249			! ! 		
THBF0800	ABWF work	0%	34	30	25-Sep-19 A	31-Dec-19	248		1	I I		
Lift at TWSR-W	/ Side									1 1 1		
L1800	THFB Completion Date	0%	0	0		31-Dec-19	248			31-Dec-19 •	THFB Completion	Date
1 '' EL LIV O'									1	I I		╀
Lift at FLHY S/			1		1	1			ļ	; ; ;		
L1400	Roof cover for RC Platform	0%	33	30	25-Sep-19 A	30-Dec-19	249		1			
L1430	EMSD inspection & approval	60.71%	11	28	21-Oct-19A	30-Nov-19	292			<u> </u>		
L1440	E&M and Finishes work	0%	35	35	02-Dec-19	14-Jan-20	237		i 	i L		
L1440	E&M and Finishes work	0%	35	35	02-Dec-19	14-Jan-20	237					
L1460	Lift available - NF78	0%	0	0		14-Jan-20	237			14-	an-20 🔷 Liftavaila	able - NF78
L1490	THFB Completion Date	0%	0	0		31-Dec-19	248		1	31-Dec-19	THFB Completion	Date
	<u> </u>								1	1		<u> </u>
New Tai Wo Foo	tbridge								1	1 1 1		
General									1	1 1 1		
TWFB1110	Tai Wo Footbridge Complete	0%	0	0		30-Dec-19	235		i	30-Dec-19	Tai Wo Footbridge 0	Complete
Crossing Fauli	an Highway Continu								1	1		+
	ng Highway Section	00.000/		100		J 00 D 40			ļ	: }		
TWFB1460	Finishes Work	80.36%	33	168	06-Apr-19A	30-Dec-19	235					
TWFB1470	Bridge Structure complete (TWFB-Cross fanling	0%	0	0		30-Dec-19	235			30-Dec-19	Bridge Structure co	nplete (TW
Lift of TMCD M	highway)								1	1 1		
Lift at TWSR-W		74 4001	6	00	21 00: 10 1	97 Nov. 40	200		<u> </u>	; ; ;		
L1760	EMSD inspection & approval	71.43%	8	28	31-Oct-19A	27-Nov-19	322	<u>.</u>		 		1
L1770	E&M and Finishes work	93.33%	10	150	23-Apr-19A	30-Nov-19	258		1	,		
L1790	Lift available - NF116-Lift 1	0%	0	0		30-Nov-19	258		30-Nov-19	Lift available - NF1	 16-Lift 1	
] 		.]
L1810	New Tai Wo footbridge completion	0%	0	0		30-Dec-19	249			30-Dec-19	New Tai Wo footbrid	ige complet
Signalized Jur	nction								1	I I I		
New Tai Hang Fo									1	I		
	L Highway N/B Side Section								1 1 1	I. I.		+
THBF0630	Installation of Traffic Signal Poles at TWSR-W N/B	0%	24	21	18-Jan-20	13-Feb-20	192					<u></u>
IDDFU03U	(Tai hang Junction)	0%	21	Z 1	10-Jan-20	13-1-eb-20	192		i 1 1	! ! L		
THBF0650	Ducting & Cable Draw Installation (Tai hang Junction)	79.39%	27	131	08-May-19 A	20-Dec-19	192					
THBF0660	Installation of Traffic Signal Poles at TWSR-W S/B	0%	21	21	21-Dec-19	17-Jan-20	192		j		<u> </u>	
	(Tai hang Junction)							<u> </u>	<u> </u>	<u> </u>		
THBF0670	E-prom ordering by EMSD (Tai hang Junction)	82.93%	56	328	20-Nov-18 A	14-Jan-20	302		1	1		
THBF0680	Ducting & cable draw inspection by EMSD (Tai	0%	6	6	15-Jan-20	21-Jan-20	213]			
THBF0690	hang Junction) Ducting & cable draw rectification (Tai hang	0%	12	12	22-Jan-20	06-Feb-20	213				<u></u>	<u></u>
	Junction)									 		Π
THBF0692	PCCW cable installation & connection (Tai hang Junction)	0%	6	6	14-Feb-20	20-Feb-20	207			1		
THBF0694	EMSD cable & equipment installation (Tai hang	0%	21	21	14-Feb-20	09-Mar-20	192		1	L		
	Junction)	1.0	= 1						1	1		
TWSR-West C	onstruction							L	1	1 1 1		
Drainage & Road	d Works											
Ch 5880-6740									1	1 1 1		†
311 3000 01 40									i	<u>i</u>	<u> </u>	1
Remaining Leve	Project ID:WP Rev 08 (1911)			Cantra	ct No. UV/or	112/06					Date Revisi	sion CA
Actual Level of E		Mida=:	Earlie - III		ct No. HY/20		hole lee	امددا	angs	17	'-Aug-17 WP Re	
Actual Work	Program	vviaening of	•	-	Tai Hang to	•		erch	ange	28	B-Mar-18 WP Re	ev 6
Remaining Wor			3 Mon	ıtn Kolli	ing Program	(∠U-Nov-19)				'-Nov-18 WP Re	
Critical Remainin											5-Jan-19 WP Re	
	İ									31	-Oct-19 WP Re	v 8
◆ Milestone												
											'	

· -	Update)(20-Nov-19)	Dur 0/			Iling Program	Fining	T-4-1				Page 2 of 3 (22	2-INOV-1
ty ID	Activity Name	Dur. % Complete	Rem. Duration	Original Duration	Start	Finish	Total Float		2019		2020	
RDZ20140	Z2 (CH5880-6930) : New TWSR- West Road	0%	0	0		03-Feb-20	222		Nov	Dec	Jan 03-Feb-20	Feb
RDZ20170	works (2 lanes) complete Z2 : New TWSR-West road Works (lane 2)	0%	30	30	27-Dec-19	03-Feb-20	222					<u>_</u>
Other Works										i I I		
TCSS Works										 		
	n for TCSS Works							1		<u> </u>		
TCSS2140	M10 for CCTV	0%	14	14	31-Dec-19	16-Jan-20	235	;		<u>. </u>		
TCSS2180	Pillar box, isolator & associated duct work - PL204 for G30 & G55	0%	16	16	20-Nov-19	07-Dec-19	266					
TCSS2190	Pillar box, isolator & associated duct work - PL205 for G54 & M10	0%	16	16	20-Nov-19	07-Dec-19	266					
TCSS2200	Pillar box, isolator & associated duct work - PL206	0%	16	16	20-Nov-19	07-Dec-19	266					
TCSS2270	for G32 Civil Provision for TCSS works available (Zone 2)	0%	0	0		07-Dec-19	266		07-Dec-1	9 Civil Provision	for TCSS works avai	ilable (Z
VO184 - Irrigation	on System in SA328 and SA329									 		
	tion System in SA328 and SA329									 		
IS0140	Irrigation system installation in SA328 and SA329	34.69%	32	49	04-Sep-19 A	28-Dec-19	250					ļ
VO189 - Irrigation	on System in Zone 1 and Zone 2									 		
VO189 - Irriga	tion System in Zone 1 and Zone 2											
IS0130	Irrigation system installation in Zone 2	4.08%	47	49	04-Sep-19 A	16-Jan-20	235					
Landscape Soft										 		
Landscape Wo		201	47	00	05.0	140 1	005			 		
Z2.LW.1000	Landscape soft work Zone2	0%	47	32	25-Sep-19 A	16-Jan-20	235					
Establishment \										1		
Establishmen Z2.EW.1000	t Works Establishment work Zone2	4.66%	348	365	02-Nov-19 A	01-Nov-20	0			 		
			3.0			1. 20				1		
	Hang (VO126)									1 		
Pai Lau in Tai Pai Lau in Tai H	Hang (VO126)											
	Hang (VO126)									 		
PL01050	Pai Lau Superstructure	84.62%	10	65	07-Oct-19A	30-Nov-19	231			i 		
PL01080	Material Order & delivery on site	0%	45	45	20-Nov-19	14-Jan-20	196			, , , , , , , , , , , , , , , , , , , ,		
PL01090	Finishes works	0%	41	41	15-Jan-20	04-Mar-20	196			 		
	Zone 1 (SBZ1) (within Zone 2									, 	_	
	·		0.		201101 10	0. 200 .0				1		
KLH.1290	West Ramp - Planting	0%	34	34	20-Nov-19*	31-Dec-19	248]	
KLH Bridge - I	Deck 1 Deck 1 - Planting	0%	34	34	20-Nov-19	31-Dec-19	248			 		
KLH Bridge - I												
KLH.3500	Deck 3 - Planting	0%	34	34	20-Nov-19	31-Dec-19	248			l L	 	
KLH Bridge - I	Fast Ramn									1		
KLH.3590	East Ramp - Planting	0%	34	34	20-Nov-19	31-Dec-19	248			 		
KLH Bridge -	Staircase S1									! ! !		
Z2.KLH.1500	S1 - Roof steel frame installation	75.61%	10	41	11-Sep-19 A	30-Nov-19	242					
Z2.KLH.1750	S1 - Corrugated steel roof	0%	18	18	02-Dec-19	21-Dec-19	242					
Z2.KLH.1760	S1 - Handrail	0%	12	12	23-Dec-19	08-Jan-20	242					
Z2.KLH.1770	S1 - Lighting & finishes works	0%	12	12	23-Dec-19	08-Jan-20	242					
Bridge Road V	Vork									1		
Z2.KLH.2040	Landscape work of KLHVB	71.95%	46	164	23-Apr-19A	15-Jan-20	236					
Signalized Ju	nction									 		
	Vehicular Bridge									 		
KLH Bridge -				-	44.55	0.5						ļ
Z2.KLH.1032	Installation of Traffic Signal Poles at TWSR-W N/B (KLHVB)	0%	34	21	14-Nov-19 A	31-Dec-19	227	<u> </u>				
Z2.KLH.1082	Ducting & cable draw rectification (KLHVB)	0%	22	12	19-Oct-19A	14-Dec-19	248					
Z2.KLH.1092	PCCW cable installation & connection (KLHVB)	0%	6	6	02-Jan-20	08-Jan-20	236			 		
Z2.KLH.1102	EMSD cable & equipment installation (KLHVB)	0%	21	21	02-Jan-20	28-Jan-20	227					
Z2.KLH.1112	Traffic Signal Installation complete (KLHVB)	0%	0	0		28-Jan-20	227				28-Jan-20 ◆	Traffic
North Buffer	Zone 2 (NBZ2) (within Zone 4) (Ch. 79	25 to 8100	0)				1		 		
Bridge Const	ruction									 		
New Ho Ka Yue										 		
	L Highway N/B Side Section				00.11	44.2 =:	0.5	ļ	<u></u> -	 	<u> </u>	
HKY1520	VO11 - slope improvement work	0%	45	45	20-Nov-19	14-Jan-20	237					
	7925 to 8700)											
Bridge Const										1 		
	nek Pedstrian & Cycle Bridge									 		
General WHS1110	Wo Hop Shek Bridge Complete	0%	0	0		31-Dec-19	248			31-Dog 10 1	Wo Hop Shek Brid	
	· · · · ·	076	U	J		0. 200-19	270			31-Dec-19 •	vvo riop stiek Brid	ac com
I WSR-West/ F	L Highway N/B Side Section							l		 		
		91.37%	3/1	394	13-Jul-18 A	31-Dec-19	248					
WHS1420	Ramp Finishes Work	91.37%	34	394	13-Jul-18 A	31-Dec-19	248			04.5	Deld Or -	
		91.37% 0%	0		13-Jul-18 A	31-Dec-19 31-Dec-19	248			31-Dec-19 •	Bridge Structure co	mplete

Cycle Track WHS1560 R WHS1570 C WHS1580 C WHS1590 3 WHS1600 b WHS1610 C Footpath WHS2150	Retaining Wall in Zone 4 Near at Retaining Wall construction Concrete Footing for railing Concrete Footing for Expressway boundary fence 300 U-channel	Complete Grade Cycle		Duration	The second secon		Float		2019		2020	
Cycle Track WHS1560 R WHS1570 C WHS1580 C WHS1590 3 WHS1600 b WHS1610 C Footpath WHS2150	Retaining Wall construction Concrete Footing for railing Concrete Footing for Expressway boundary fence	Grade Cycle	Trools and I		ot WILIC Dried				Nov	Dec	Jan	Fe
WHS1560 R WHS1570 C WHS1580 C WHS1590 3 WHS1600 b WHS1610 C Footpath WHS2150 C	Concrete Footing for railing Concrete Footing for Expressway boundary fence		Track and I	-ootpatn	at WHS Brid	ge			, 	1 1 1		
WHS1580 C WHS1590 3 WHS1600 b WHS1610 C Footpath WHS2150 C	Concrete Footing for Expressway boundary fence	0%	34	24	14-Nov-19 A	31-Dec-19	101]	
WHS1580 C WHS1590 3 WHS1600 b WHS1610 C Footpath WHS2150 C	Concrete Footing for Expressway boundary fence	0%	10	10	02-Jan-20	13-Jan-20	101			i : !		
WHS1590 3 WHS1600 b WHS1610 C Footpath WHS2150 C		0%	10	10	14-Jan-20	24-Jan-20	101		! !	!		
WHS1600 b WHS1610 C Footpath WHS2150 C	500 O-channel	0%	12	12	28-Jan-20	10-Feb-20	149			· · · · · · · · · · · · · · · · · · ·		
WHS1610 C Footpath WHS2150 C									; ; ;	i ! !		
Footpath WHS2150	packfill	0%	3	3	11-Feb-20	13-Feb-20	149		 	 		
WHS2150 C	Cycle Track sub-base & wearing course	0%	6	6	14-Feb-20	20-Feb-20	149		' 	, 1 1 1		
									! !	 		
WHC0160	Concrete Footing for railing	0%	15	15	28-Jan-20	13-Feb-20	101		1 	1		
WH32100	Concrete Footing for Expressway boundary fence	0%	15	15	14-Feb-20	02-Mar-20	101		1 1 1 1	1 1 1		
WSR-West Cor	nstruction								 	1		
Drainage & Road V	Works								1 1 1 1	1 1 1		
	Highway N/B Side Section								 			
RDZ41180 T	TWSR -W Road Works rectification	0%	18	18	20-Nov-19	10-Dec-19	264			1		
Other Works									1	1 1 1		
TCSS Works									1 	1		
TCSS Pre-Consti				^	20 N: 12	20 N : 17	000					
	Sign Gantry Factory production - FVMS1 (Deleted)	0%	0	0	20-Nov-19	20-Nov-19	282			1 1 1 1		
Civil Provision for		221		4.4	02 15- 00*	17 ! 00	00.1		 			
	W12 for CCTV	0%	14	14	02-Jan-20*	17-Jan-20	234		 	 		
	P51 for VSLS	0%	14	14	02-Dec-19*	17-Dec-19	168		! !			
TCSS2170 P	P52 for VSLS	0%	14	14	02-Dec-19*	17-Dec-19	168					
	Pillar box, isolator & associated duct work - PL207 or G34 & G35	0%	30	30	18-Dec-19*	24-Jan-20	168	[,			T
TCSS2230 P	Pillar box, isolator & associated duct work - PL251 for G51	0%	30	30	28-Jan-20	02-Mar-20	168		;	ř		
DS50	0 001								 	1 1 1		
TCSS1850 S	Sign Gantry Erection - DS50 (Z4) (Deleted by Verbal instruction , VO is pending)	0%	0	0	20-Nov-19	20-Nov-19	282					-
TCSS Hub Room									1 1 1	1		
TCSS1920 T	TCSS Hub Room BS provision	24.44%	34	45	29-Oct-19 A	31-Dec-19	248			!]	-
VO190 - Irrigation	System near Ho Ka Yuen Footbrid	ge							1			
VO190 - Irrigation	n System near Ho Ka Yuen Foot	bridge							1	; ! !		
	rrigation system installation near Ho Ka Yuen Footbridge	73.91%	6	23	04-Sep-19 A	26-Nov-19	276		!	 		
Landscape Softwo	0								1 1 1	1		
Landscape Work	(S								 	1		
Z4.LW.1000 L	_andscape soft work Zone4	73.91%	6	23	04-Sep-19 A	26-Nov-19	276		1	1		1
Establishment Wo	orks								 	f 1 1		
									!			
Establishment W												
Z3.EW.1000 E	Establishment work Zone4	13.15%	317	365	02-Oct-19A	01-Oct-20	0					
z3.EW.1000 E	Establishmentwork Zone4 Traffic Sign at Pak Wo Road & Joc	key Club Ro	oad	365	02-Oct-19A	01-Oct-20	0					
Z3.EW.1000 E VO Relocation of T	Establishment work Zone4 Traffic Sign at Pak Wo Road & Joo o <mark>f Traffic Sign at Pak Wo Road &</mark>	ckey Club Ro Jockey Clul	oad b Road									
VO Relocation of TS01030	Establishment work Zone4 Traffic Sign at Pak Wo Road & Joc of Traffic Sign at Pak Wo Road & ITA submission & approval	key Club Ro Jockey Clul	b Road	34	02-Sep-19 A	08-Jan-20	125					
VO Relocation of TS01030	Establishment work Zone4 Traffic Sign at Pak Wo Road & Joo o <mark>f Traffic Sign at Pak Wo Road &</mark>	ckey Club Ro Jockey Clul	oad b Road								0	
Z3.EW.1000 E VO Relocation of TS01030 T TS01040 T	Establishment work Zone4 Traffic Sign at Pak Wo Road & Joc of Traffic Sign at Pak Wo Road & ITA submission & approval	key Club Ro Jockey Clul	b Road	34	02-Sep-19 A	08-Jan-20	125				0	
Z3.EW.1000 E VO Relocation of T VO Relocation of TS01030 T TS01040 T TS01050 S	Establishment work Zone4 Traffic Sign at Pak Wo Road & Joc of Traffic Sign at Pak Wo Road & ITA submission & approval	key Club Ro Jockey Clul 0%	b Road 40	34	02-Sep-19 A 09-Jan-20	08-Jan-20 10-Jan-20	125					
Z3.EW.1000 E VO Relocation of T VO Relocation of T TS01030 T TS01040 T TS01050 S TS01060 F	Establishment work Zone4 Traffic Sign at Pak Wo Road & Joo If Traffic Sign at Pak Wo Road & ITA submission & approval ITA Sheet piling & excavation	Jockey Club 0% 0%	b Road 40 2	34 2 18	02-Sep-19 A 09-Jan-20 11-Jan-20	08-Jan-20 10-Jan-20 03-Feb-20	125 125 125				0	
Z3.EW.1000 E VO Relocation of TOO Relocation of TS01030 T TS01040 T TS01050 S TS01060 F TS1160 X	Establishment work Zone4 Traffic Sign at Pak Wo Road & Joc of Traffic Sign at Pak Wo Road & ITA submission & approval ITTA Sheet piling & excavation Footing (FL02,ADS 52)	Jockey Club 0% 0% 0%	b Road 40 2 18	34 2 18 45	02-Sep-19 A 09-Jan-20 11-Jan-20 04-Feb-20	08-Jan-20 10-Jan-20 03-Feb-20 26-Mar-20	125 125 125 125					
Z3.EW.1000 E VO Relocation of T VO Relocation of TS01030 T TS01040 T TS01050 S TS01060 F TS1160 X TS1180 T	Establishment work Zone4 Traffic Sign at Pak Wo Road & Joc of Traffic Sign at Pak Wo Road & ITA submission & approval ITA Sheet piling & excavation Footing (FL02,ADS 52) KP application period - Jockey Club Road	okey Club Ro Jockey Clul 0% 0% 0% 0% 62.04%	b Road 40 2 18 45	34 2 18 45	02-Sep-19 A 09-Jan-20 11-Jan-20 04-Feb-20 08-Aug-19 A	08-Jan-20 10-Jan-20 03-Feb-20 26-Mar-20 30-Dec-19	125 125 125 125 125					
Z3.EW.1000 E VO Relocation of T VO Relocation of TS01030 T TS01040 T TS01050 S TS01060 F TS1160 X TS1180 T TS1190 S	Establishment work Zone4 Traffic Sign at Pak Wo Road & Joc of Traffic Sign at Pak Wo Road & ITA submission & approval ITTA Sheet piling & excavation Footing (FL02,ADS 52) KP application period - Jockey Club Road ITTA	Jockey Club Ro Jockey Clul 0% 0% 0% 62.04%	b Road 40 2 18 45 41	34 2 18 45 108 2	02-Sep-19 A 09-Jan-20 11-Jan-20 04-Feb-20 08-Aug-19 A 31-Dec-19	08-Jan-20 10-Jan-20 03-Feb-20 26-Mar-20 30-Dec-19 02-Jan-20	125 125 125 125 125 164					
Z3.EW.1000 E VO Relocation of TOO Relocation of TS01030 T TS01040 T TS01050 S TS01060 F TS1160 X TS1180 T TS1190 S TS1200 F	Establishment work Zone4 Traffic Sign at Pak Wo Road & Joc of Traffic Sign at Pak Wo Road & TTA Submission & approval TTA Sheet piling & excavation Footing (FL02,ADS 52) KP application period - Jockey Club Road TTA Sheet piling & excavation Footing (DS53, FL01)	0%	b Road 40 2 18 45 41 2	34 2 18 45 108 2	02-Sep-19 A 09-Jan-20 11-Jan-20 04-Feb-20 08-Aug-19 A 31-Dec-19 03-Jan-20	08-Jan-20 10-Jan-20 03-Feb-20 26-Mar-20 30-Dec-19 02-Jan-20 23-Jan-20	125 125 125 125 125 164 132					
Z3.EW.1000 E VO Relocation of TOO Relocation of TOO Relocation of TS01030 T TS01040 T TS01050 S TS01060 F TS1160 X TS1180 T TS1190 S TS1200 F	Traffic Sign at Pak Wo Road & Joc of Traffic Sign at Pak Wo Road & Of Traffic Signalized Junction at Pak Volume Traff	0%	b Road 40 2 18 45 41 2	34 2 18 45 108 2	02-Sep-19 A 09-Jan-20 11-Jan-20 04-Feb-20 08-Aug-19 A 31-Dec-19 03-Jan-20	08-Jan-20 10-Jan-20 03-Feb-20 26-Mar-20 30-Dec-19 02-Jan-20 23-Jan-20	125 125 125 125 125 164 132					
Z3.EW.1000 E VO Relocation of TS01030 T TS01040 T TS01050 S TS01060 F TS1160 X TS1190 S TS1200 F Ducting Works in T WHS Interchange	Traffic Sign at Pak Wo Road & Joc of Traffic Sign at Pak Wo Road & Of Traffic Signalized Junction at Pak Volume Traff	0%	b Road 40 2 18 45 41 2	34 2 18 45 108 2	02-Sep-19 A 09-Jan-20 11-Jan-20 04-Feb-20 08-Aug-19 A 31-Dec-19 03-Jan-20	08-Jan-20 10-Jan-20 03-Feb-20 26-Mar-20 30-Dec-19 02-Jan-20 23-Jan-20	125 125 125 125 125 164 132					
Z3.EW.1000 E VO Relocation of TOO Relocation of TS01030 T TS01040 T TS01050 S TS01060 F TS1180 T TS1190 S TS1200 F Ducting Works in T WHS Interchanger TSJ01050 D	Traffic Sign at Pak Wo Road & Joc of Traffic Sign at Pak Wo Road & Of Traffic Sign at Pak Wo Road Of Traffic Signalized Junction at Pak Of Traffic Signalized Junction	okey Club Ro Jockey Clul 0% 0% 0% 0% 62.04% 0% 0% 0%	b Road 40 2 18 45 41 2 18 45	34 2 18 45 108 2 18 45	02-Sep-19 A 09-Jan-20 11-Jan-20 04-Feb-20 08-Aug-19 A 31-Dec-19 03-Jan-20 24-Jan-20	08-Jan-20 10-Jan-20 03-Feb-20 26-Mar-20 30-Dec-19 02-Jan-20 23-Jan-20 18-Mar-20	125 125 125 125 164 132 132					
Z3.EW.1000 E VO Relocation of TOO Relocation of TS01030 T TS01040 T TS01050 S TS01060 F TS1160 X TS1180 T TS1200 F Ducting Works in T WHS Interchanger TSJ01050 D Pak Wo Road an	Traffic Sign at Pak Wo Road & Joo of Traffic Sign at Pak Wo Road & TTA Submission & approval TTA Sheet piling & excavation Footing (FL02,ADS 52) KP application period - Jockey Club Road TTA Sheet piling & excavation Footing (DS53, FL01) Traffic Signalized Junction at Pak No	okey Club Ro Jockey Clul 0% 0% 0% 0% 62.04% 0% 0% 0%	b Road 40 2 18 45 41 2 18 45	34 2 18 45 108 2 18 45	02-Sep-19 A 09-Jan-20 11-Jan-20 04-Feb-20 08-Aug-19 A 31-Dec-19 03-Jan-20 24-Jan-20	08-Jan-20 10-Jan-20 03-Feb-20 26-Mar-20 30-Dec-19 02-Jan-20 23-Jan-20 18-Mar-20	125 125 125 125 164 132 132					
Z3.EW.1000 E	Traffic Sign at Pak Wo Road & Jockey Club Road Traffic Sign at Pak Wo Road & Jockey Club Road TTA Submission & approval TTA Sheet piling & excavation Footing (FL02,ADS52) XP application period - Jockey Club Road TTA Sheet piling & excavation Footing (DS53, FL01) Traffic Signalized Junction at Pak Volume Duct Laying (Road Crossing) - Pak Wo Road and Jockey Club Road Junction	0% 0% 0% 0% 0% 0% 0% 0% 0% 0% 0% 0% 0% 0	b Road 40 2 18 45 41 2 18 45 42	34 2 18 45 108 2 18 45	02-Sep-19 A 09-Jan-20 11-Jan-20 04-Feb-20 08-Aug-19 A 31-Dec-19 03-Jan-20 24-Jan-20	08-Jan-20 10-Jan-20 03-Feb-20 26-Mar-20 30-Dec-19 02-Jan-20 23-Jan-20 18-Mar-20	125 125 125 125 125 164 132 132 132					
Z3.EW.1000	Establishment work Zone4 Traffic Sign at Pak Wo Road & Joc of Traffic Sign at Pak Wo Road & TTA submission & approval TTA Sheet piling & excavation Footing (FL02,ADS 52) KP application period - Jockey Club Road TTA Sheet piling & excavation Footing (DS53, FL01) Traffic Signalized Junction at Pak Ve Duct Laying (Road Crossing) - Pak Wo Road and Jockey Club Road Junction Existing MJ modified by HyD structure	0%	b Road 40 2 18 45 41 2 18 45 41 40 40	34 2 18 45 108 2 18 45	02-Sep-19 A 09-Jan-20 11-Jan-20 04-Feb-20 08-Aug-19 A 31-Dec-19 03-Jan-20 24-Jan-20	08-Jan-20 10-Jan-20 03-Feb-20 26-Mar-20 30-Dec-19 02-Jan-20 23-Jan-20 18-Mar-20	125 125 125 125 164 132 132 132					

APPENDIX C
IMPLEMENTATION SCHEDULE OF
ENVIRONMENTAL MITIGATION MEASURES
(EMIS)

Appendix C - Implementation Schedule of Environmental Mitigation Measures (EMIS)

Air Quality - Schedule of Recommended Mitigation Measures

Impact	Mitigation Measures	Timing	Implementation Status
Air Quality during construction	Restricting heights from which materials are dropped, as far as practicable to minimize the fugitive dust arising from unloading/loading.	During construction	V
	All stockpiles of excavated materials or spoil of more than 50m³ shall be enclosed, covered or dampened during dry or windy conditions.		@
	Effective water sprays shall be used to control potential dust emission sources such as unpaved haul roads and active construction areas.		V
	All spraying of materials and surfaces shall avoid excessive water usage.		V
	Vehicles that have the potential to create dust while transporting materials shall be covered, with the cover properly secured and extended over the edges of the side and tail boards.		V
	Materials shall be dampened, if necessary, before transportation.		V
	Travelling speeds shall be controlled to reduce traffic induced dust dispersion and re-suspension within the site from the operating haul trucks.		V
	Vehicle washing facilities shall be provided to minimize the quantity of material deposited on public roads.		V

Noise - Schedule of Recommended Mitigation Measures

Impact	Mitigation Measures	Timing	Implementation Status
Noise during construction	Use of silenced plant or plant equipped with mufflers or dampers in substitute of ordinary plant.	During construction	V
	Reduce the number of equipment and their percentage on-time.		V
	3.5 m and 5.5 m high temporary noise barrier at culvert construction work area (Figure 2a of the Environmental Permit).	_	V*
	3 m high temporary noise barrier along the northern edge of Bridge 12 at ground level (Figure 2b of the Environmental Permit).		V*
	2 m high temporary noise barrier along the northern edge of Bridge 12 at bridge level (Figure 2b of the Environmental Permit).		V*
	2.5 m high temporary noise barrier along Tai Wo Service Road West (Figure 2c of the Environmental Permit).		V*
	3.5m and 7m high temporary noise barrier along Tai Wo Services Road West near Tai Hang (Figure 2c of the Environmental Permit).		V*
	7 m high temporary noise barrier along Tai Wo Service Road West near Tai Wo Footbridge work area (Figure 2d of the Environmental Permit).		V*
	7 m high temporary noise barrier near Kiu Tau Footbridge work area (Figure 2d of the Environmental Permit).		V*
	2.5 m high temporary noise barrier near river diversion work area (Figure 2e of the Environmental Permit).		V*
Noise during operation	Noise Barrier built based on Figure 4a – Layout of Noise Barrier of Environmental Permit.	Review of required noise barrier layout	V*
	Noise Barrier built based on Figure 4b – Layout of Noise Barrier of Environmental Permit.	during the design stage	V*
	Noise Barrier built based on Figure 4c – Layout of Noise Barrier of Environmental Permit.		V*
	Noise Barrier built based on Figure 4d – Layout of Noise Barrier of Environmental Permit.		V*
	Noise Barrier built based on Figure 4d (i) – Layout of Noise Barrier of Environmental Permit.		V*

Noise Barrier built based on Figure 4e – Layout of Noise Barrier of Environmental Permit.	V*
Noise Barrier built based on Figure 4e (i) – Layout of Noise Barrier of Environmental Permit.	V*

^{*} Permanent noise barriers have been erected.

Water Quality – Schedule of Recommended Mitigation Measures

Waste - Schedule of Recommended Mitigation Measures

Impact	Mitigation Measures	Timing	Implementation Status
Waste management during construction	General Waste - Transport of wastes off site as soon as possible Maintenance of accurate waste records Minimisation of waste generation for disposal (via reduction/recycling/re-use) No on-site burning will be permitted Use of re-useable metal hoardings/signboards.	During construction	V
	Vegetation from site clearance Segregation of materials to facilitate disposal. Mulching to reduce bulk and where possible review opportunities for the possible beneficial use within landscaping areas.		V
	Demolition Wastes - Segregation of materials to facilitate disposal Appropriate stockpile management.		V
	Excavated Materials Segregation of materials to facilitate disposal / reuse. Appropriate stockpile management. Re-use of excavated material on or off site (where possible). Special handling and disposal procedures in the event that contaminated materials are excavated.		V
	 Construction Wastes Segregation of materials to facilitate recycling/reuse (within designated area in appropriate containers/stockpiles). Appropriate stockpile management. Planning to reduce over ordering and waste generation. Recycling and re-use of materials where possible (e.g. metal, wood from formwork) For material which cannot be re-used/recycled, collection should be carried out by an approved waste contractor for landfill disposal. 		V
	Bentonite Slurries - Bentonite slurries should be reused as far as possible. - Disposal in accordance with Practice Note For Professional Persons ProPECC PN 1/94.		#

 Chemical Wastes Storage within locked, covered and bunded area. The storage area shall not be located adjacent to sensitive receivers e.g. drains. Minimise waste production and recycle oils/solvents where possible. A spill response procedure shall be in place and absorption material available for minor spillages. Use appropriate and labelled containers. Educate site workers on site cleanliness/waste management procedures. If chemical wastes are to be generated, the contractor must register with EPD as a chemical waste producer. The chemical wastes shall be collected by a licensed chemical waste 	@
 The chemical wastes shall be collected by a licensed chemical waste collector. Municipal Wastes Waste shall be stored within a temporary refuse collection facility, in appropriate containers prior to collection and disposal. Regular, daily collections are required by an approved waste collector. 	V

Ecology – Schedule of Recommended Mitigation Measures

Impact	Mitigation Measures	Timing	Implementation Status
Ecology during construction	 Accurate Delineation of Works Area Boundaries of proposed works areas shall be clearly identified and separated from external areas by a physical barrier to prevent encroachment of adjacent habitats. Individual trees which fall within the works areas but which work plans do not require removal are to be retained and fenced off to maximize protection. 	During construction	V
	Vegetation Clearance No fires shall be lit within the works area for the purpose of burning cleared vegetation. The Contractor shall give consideration to mulching the cleared vegetation for recycling within the works area / adjacent land.		V
	 Dust generation There are a number of measures which shall be taken as specified in the Air Pollution Control (Construction Dust) Regulation on 'Dust Control Requirements, including the following key measures to be applied during construction: Vehicle washing facilities to be provided at every discernible or designated vehicle exit point; All temporary site access roads shall be sprayed with water to suppress dust as necessary; All dusty materials should be sprayed with water immediately prior to any handling; and All debris should be covered entirely by impervious sheeting or stored in a sheltered debris collection area. 		V
	Surface Run-off In general, mitigation measures shall be in accordance with ProPECC PN1/94 on 'Construction Site Drainage'. Key measures include: - Bund and cover stock piles to avoid run-off; - Channel any run-off through a system of oil, grease and sediment / silt traps and reuse water on site where ever practical; - All vehicle maintenance to be undertaken within a bunded area; and - Maximise vegetation retention on-site to maximise absorption (minimise transport).		V

Landscape and Visual Impact – Schedule of Recommended Mitigation Measures

Impact	Mitigation Measures	Timing	Responsibility
Landscape & Visual during construction	Preservation of Existing Vegetation Trees identified for retention within the project limit would be protected during the works; The tree transplanting and planting works shall be implemented by approved Landscape Contractors.	During construction	V
	Temporary Works Areas - Where feasible the works areas would be screened using hoarding and existing vegetation would be retained where possible to reduce the landscape and visual impacts arising from the construction activity. The landscape of these works areas would be restored following the completion of the construction phase.		V
	Hoarding - A hoarding would be erected where practicable in the most visually sensitive locations to screen the temporary construction works from the local VSRs.		V
	Top Soils The works will result in disturbance to extensive areas of topsoil. Topsoil worthy of retention should be stockpiled for use following completion of the civil engineering works. It should either be temporarily vegetated with hydroseeded grass or turned over on a regular basis.		#
	Protection of Important Landscape Features - Important features such as temples, Island House and kilns within the study area, although remote from the proposed works retained and adequately protected.		#

Legend:

V = implemented;

x = not implemented;

@ = partially implemented;

+ = recommended and immediately implemented during the site inspection by the Contractor;

N/A = not applicable - No such work was undertaken or no such material was used on site;

= to be implemented.

APPENDIX D SUMMARY OF ACTION AND LIMIT LEVELS

Appendix D - Summary of Action and Limit Levels

Table 1 – Action and Limit Levels for 1-hour TSP

Location	Action Level	Limit Level
AM2	317.8 μg/m3	500 μg/m3

Table 2 - Action and Limit Levels for 24-hour TSP

Location	Action Level	Limit Level
AM2	200.7 μg/m3	260 μg/m3

Table 3 – Action and Limit Levels for Construction Noise (0700-1900 hrs of normal weekdays)

Location	Action Level	Limit Level
M2	When one documented	75 dB(A)
	complaint, related to 0700 -	
	1900 hours on normal	
M3*	weekdays, is received	65/70 dB(A)
	from any one of the sensitive	
	receivers	

^{*}Daytime noise Limit Level of 70 dB(A) applies to education institutions, while 65dB(A) applies during school examination period

APPENDIX E
CALIBRATION CERTIFICATES OF
MONITORING EQUIPMENTS



RECALIBRATION
DUE DATE:

December 31, 2019

Certificate of Calibration

Calibration Certification Information

Cal. Date: December 31, 2018

Rootsmeter S/N: 438320

Ta: 293

°K

Operator: Jim Tisch

Calibration Model #: TE-5025A

Calibrator S/N: 0843

Pa: 741.7 mm Hg

Run	Vol. Init (m3)	Vol. Final (m3)	ΔVol. (m3)	ΔTime (min)	ΔP (mm Hg)	ΔH (in H2O)
1	1	2	1	1.3830	3.2	2.00
2	3	4	1	0.9820	6.4	4.00
3	5	6	1	0.8780	7.9	5.00
4	7	8	1	0.8360	8.7	5.50
5	9	10	1	0.6890	12.7	8.00

	Data Tabulation					
Vstd	Qstd	$\sqrt{\Delta H \left(\frac{Pa}{Pstd}\right) \left(\frac{Tstd}{Ta}\right)}$		Qa	√∆H(Ta/Pa)	
(m3)	(x-axis)	(y-axis)	Va	(x-axis)	(y-axis)	
0.9883	0.7146	1.4089	0.9957	0.7199	0.8889	
0.9840	1.0020	1.9925	0.9914	1.0095	1.2571	
0.9820	1.1184	2.2277	0.9893	1.1268	1.4054	
0.9809	1.1733	2.3365	0.9883	1.1821	1.4740	
0.9756	1.4159	2.8179	0.9829	1.4265	1.7777	
	m=	2.00999		m=	1.25862	
QSTD[b=	-0.02384	QA	b=	-0.01504	
	r=	0.99998		r=	0.99998	

	Calculation	s	
	ΔVol((Pa-ΔP)/Pstd)(Tstd/Ta)	Va=	ΔVol((Pa-ΔP)/Pa)
Qstd=	Vstd/ΔTime		Va/ΔTime
	For subsequent flow rate	e calculatio	ns:
Qstd=	$1/m\left(\left(\sqrt{\Delta H\left(\frac{Pa}{Pstd}\right)\left(\frac{Tstd}{Ta}\right)}\right)-b\right)$	Qa=	$1/m\left(\left(\sqrt{\Delta H\left(Ta/Pa\right)}\right)-b\right)$

Standard Conditions
298.15 °K
760 mm Hg
Key
manometer reading (in H2O)
er manometer reading (mm Hg)
olute temperature (°K)
ometric pressure (mm Hg)

RECALIBRATION

US EPA recommends annual recalibration per 1998 40 Code of Federal Regulations Part 50 to 51, Appendix B to Part 50, Reference Method for the Determination of Suspended Particulate Matter in the Atmosphere, 9.2.17, page 30

Total Suspended Particulates (TSP) Sampler Field Calibration Report

Station Fanling Government Secondary School (AM2)					Operator	: Choi Wir	ng Ho
Date:	8-Nov-19	_			Next Due Date		
Model No:	TE-5170				Verified Against	: O.T.S	988
Equipment No.:	A-001-74T				Expiration Date	:6-Jun-	-20
			Ambient C	Condition		_	
Tempera	ture, Ta	300.0	Kelvin	Pressu	ıre, Pa	754.0	mmHg
		Or	ifice Transfer Sta	ndard Informat	tion		
Equipme	ent No.:	988	Slope, mc	1.98		Intercept, bc	-0.02592
Last Calibra		6-Jun-19					0.02372
Next Calibr		6-Jun-20	n	nc x Qstd + bc =	= [H x (Pa/760)	$(298/Ta)]^{1/2}$	
	•					30.5	
	34 P 6 W	*	Calibration of	TSP Sampler			
Calibration Point	H in. of water	[H x (Pa/76	[H x (Pa/760) x (298/Ta)] ^{1/2}		W in. of oil	[ΔW x (Pa/760) Y-ax	` /-
1	7.1		2.65	1.35	5.5	2.33	3
2	5.6		2.35	1.20	4.4	2.08	3
3	4.4		2.08	1.06	3.3	1.80)
4	3.4		1.83	0.94	2.6	1.60)
5	2.5		1.57	0.80	1.7	1.29)
By Linear Regr	ession of Y on Y	K					
Slope, $mw =$	1.8817	_		Intercept, bw =		-0.19	35
Correlation C	Coefficient* =	0	.9988				
			Set Point C:				
			$td = 1.21 \text{ m}^3/\text{min} (4)$	13 CFM)			
From the Regres	sion Equation, th	ne "Y" value a	ecording to				
		m x	Qstd + b = [W x (I	Pa/760) x (298/I	$[a]^{1/2}$		
Therefore, S	Set Point W = (r	$m \times Qstd + b$	² x (760 / Pa) x (T	Ta / 298) =		4.40	
*If Correlation C	Coefficient < 0.99	0, check and	recalibrate again.	-			<u> </u>
		,	mguari.				
Remarks:							
				3/			
							,
QC Reviewer:	US CHA	N	Signature:			Date: 8/11/	19



RECALIBRATION
DUE DATE:

June 6, 2020

Certificate of Calibration

Calibration Certification Information

Cal. Date: June 6, 2019

Rootsmeter S/N: 438320

Ta: 295 Pa: 748.0 °K

Operator: Jim Tisch

Calibration Model #: TE-5025A

Calibrator S/N: 0988

mm Hg

Run	Vol. Init (m3)	Vol. Final (m3)	ΔVol. (m3)	ΔTime (min)	ΔP (mm Hg)	ΔH (in H2O)
1	1	2	1	1.3640	3.2	2.00
2	3	4	1	0.9680	6.3	4.00
3	5	6	1	0.8680	7.8	5.00
4	7	8	1	0.8250	8.7	5.50
5	9	10	1	0.6800	12.6	8.00

				12.0	8.00			
	Data Tabulation							
Vstd	Qstd	$\sqrt{\Delta H \left(\frac{Pa}{Pstd}\right) \left(\frac{Tstd}{Ta}\right)}$		Qa	√∆H(Ta/Pa)			
(m3)	(x-axis)	(y-axis)	Va	(x-axis)	(y-axis)			
0.9900	0.7258	1.4101	0.9957	0.7300	0.8881			
0.9859	1.0185	1.9943	0.9916	1.0244	1.2560			
0.9839	1.1335	2.2296	0.9896	1.1401	1.4042			
0.9827	1.1911	2.3385	0.9884	1.1980	1.4728			
0.9775	1.4375	2.8203	0.9832	1.4458	1.7762			
	m=	1.98356		m=	1.24207			
QSTD[b=	-0.02592	QA	b=	-0.01633			
	r=	0.99996	_~.	r=	0.99996			

	Calculatio	ns		
Vstd=	ΔVol((Pa-ΔP)/Pstd)(Tstd/Ta)	Va=	ΔVol((Pa-ΔP)/Pa)	
Qstd=	Vstd/∆Time	Qa= Va/ΔTime		
	For subsequent flow ra	te calculatio	ns:	
Qstd=	$1/m\left(\left(\sqrt{\Delta H\left(\frac{Pa}{Pstd}\right)\left(\frac{Tstd}{Ta}\right)}\right)-b\right)$	Qa=	$1/m\left(\left(\sqrt{\Delta H\left(Ta/Pa\right)}\right)-b\right)$	

Standard Conditions
298.15 °K
760 mm Hg
Key
manometer reading (in H2O)
er manometer reading (mm Hg)
olute temperature (°K)
ometric pressure (mm Hg)

RECALIBRATION

US EPA recommends annual recalibration per 1998 40 Code of Federal Regulations Part 50 to 51, Appendix B to Part 50, Reference Method for the Determination of Suspended Particulate Matter in the Atmosphere, 9.2.17, page 30

Tisch Environmental, Inc. 145 South Miami Avenue Village of Cleves, OH 45002

www.tisch-env.com

TOLL FREE: (877)263-7610

FAX: (513)467-9009

Total Suspended Particulates (TSP) Sampler Field Calibration Report

Station	Fanling Governm	nent Secondary	School (AM2)		Operator	:Choi Wing Ho
Date	:8-Jan-20	_				8-Mar-20
Model No	:TE-5170	i				O.T.S 988
Equipment No.	: <u>A-001-74T</u>	i				6-Jun-20
			Ambient C	Condition		
Tempera	ature, Ta	297.0	Kelvin	Press	ure, Pa	762.6 mmH
		Oı	rifice Transfer Sta	ndard Informa	tion	
Equipm	ent No.:	988	Slope, mc		3356	Intercept, bc -0.025
Last Calibr	ation Date:	6-Jun-19				
Next Calibr	ation Date:	6-Jun-20	n	nc x Qstd + bc =	$= [H \times (Pa/760)]$	$(298/Ta)]^{1/2}$
	T		Calibration of	CSP Sampler Qstd		
Calibration Point	H in. of water	[H x (Pa/70	[H x (Pa/760) x (298/Ta)] ^{1/2}		W in. of oil	[ΔW x (Pa/760) x (298/Ta Y-axis
1	7.2		2.69	1.37	5.6	2.37
2	5.5		2.35	1.20	4.4	2.10
3	4.4		2.10	1.07	3.3	1.82
4	3.5		1.88	0.96	2.6	1.62
5	2.4		1.55	0.80	1.7	1.31
By Linear Regr		X.			ja	
Slope, mw =		_	1	ntercept, bw =		-0.1868
Correlation C	oefficient* =	0.	9990			
				N		
			Set Point Ca			
			$td = 1.21 \text{ m}^3/\text{min } (4.2)$	3 CFM)		
From the Regress	sion Equation, th	e "Y" value ac	ecording to			
		m x (Qstd + b = [W x (Pstd + [W x (Pstd + b = [W x (Pstd + b = [W x (Pstd + b = [W x (Pstd + [a/760) x (298/T	(a)] ^{1/2}	
Therefore S	Set Point W = (=	a v Ootd L \2	x (760 / Pa) x (Ta	/200)		
Therefore, S	sectionic w – (n	1 x Qsta + b)	x (/60 / Pa) x (Ta	a / 298) = -	4.	33
*If Correlation C	oefficient < 0.99	0, check and r	ecalibrate again.			
Remarks:						
		7				
QC Reviewer:	WS CHA		Signature:	1		Date:08/01/20

EQUIPMENT CALIBRATION RECORD

Type: Manufacturer/Brand:			_	Laser Du SIBATA	ıst Moni	tor				
Model					LD-3					
Equipment No.:				A.005.07		20				
Sensitivity Adjustment Scale Setting:			_	557 CPI	И	1				
Opera	tor:			_	Mike She	k (MSKN	A)			
Standa	rd Equipment									
Equip	ment:	D.	nnroo	ht 9 Do	taahniak	TEOM®				
Venue					tashnick		abaal)			
Model				400AB	ing Seco	nuary 30	211001)			
Serial			ntrol:		DAB21989	20002	18.19			
Serial	NO.						V . 40	F00		
Last C	Calibration Date*:		nsor: <i>1ay 20</i>		00C14365	9803	K _o : _128	500		
							\$850			
*Remar	ks: Recommend	ed interva	al for h	nardwai	e calibra	tion is 1 y	/ear			
Calibra	tion Result					1000 10				
	ivity Adjustment ivity Adjustment						557 557	CPM CPM		
Hour	Date		Time		Ambient		Concentration		Total	Count/
	(dd-mm-yy)				Cond	dition	(mg/m ³)	(Count ²	Minute ³
					Temp	R.H.	Y-axis			X-axis
1	04-05-19	09:15	-	10:15	(°C) 23.7	(%) 81	0.04765		1914	31.90
2	04-05-19	10:15		11:15	23.7	82	0.05036		2025	33.75
3	04-05-19	11:15		12:15	23.8	82	0.05251		2103	35.05
4	04-05-19	12:15		13:15	23.8	82	0.05587		2231	37.18
Note:	Monitoring of 2. Total Count Count/minut	was logg	ed by	Laser [Rupprecl Dust Mon	itor	shnick TEOM®			
By Linea	ar Regression of	Y or X								
Slope	(K-factor):		0.0	0015						
Correl	ation coefficient:		0.9	9977						
Validit	y of Calibration F	Record:	41	May 202	20					
Remark	s:									
OC Re	eviewer: VW F	- -una		Signat	ure:	4/	Г)ate:	06 May	2010

EQUIPMENT CALIBRATION RECORD

Type: Manufacturer/Brand: Model No.: Equipment No.: Sensitivity Adjustment Scale Setting:			ting:	Laser Dust Monitor SIBATA LD-3 A.005.09a 797 CPM				
Opera	ator:		-	Mike She	ek (MSKI	M)		
Standa	rd Equipment	57						
Section of the sectio				Ying Seco 0AB21989 00C14369	99803 59803	K _o : <u>12500</u>		
Calibra	tion Result							
	tivity Adjustment tivity Adjustment					797 CP		
Hour	Date (dd-mm-yy)	Т	ime	1.00	dition	Concentration ¹ (mg/m³) Y-axis	Total Count ²	Count/ Minute ³ X-axis
1 2	04-05-19 04-05-19	09:45 10:45	- 10:45 - 11:45	23.7	(%) 81 82	0.04813 0.05032	1925 2022	32.08 33.70
3	04-05-19 04-05-19	11:45 12:45	- 12:45 - 13:45	23.8	82 82	0.05264	2118	35.30
Note:	Monitoring of 2. Total Count 3. Count/minut	lata was m was logge e was cald	neasured by ed by Laser	Rupprecl Dust Mon	nt & Pata itor	O.05515 ashnick TEOM®	2220	37.00
Slope	ar Regression of (K-factor): ation coefficient:	Y or X	0.0015 0.9976					
Validit	y of Calibration F	Record:	4 May 20	20				
Remark	s:							
OC Re	eviewer: YW F	- una	Signa	ture:	W	Date	o: 06 May	2010



香港黄竹坑道37號利達中心12樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com

Tel: (852) 2873 6860 Fax: (852) 2555 7533



CERTIFICATE OF CALIBRATION

Certificate No.:

19CA0327 01-02

Page:

to:

Item tested

Description:

Acoustical Calibrator (Class 1)

Manufacturer:

B&K

Type/Model No .: Serial/Equipment No.: 4231

3006428 / N004.03

Adaptors used:

Item submitted by

Curstomer:

AECOM ASIA CO LIMITED

Address of Customer:

Request No.: Date of receipt:

27-Mar-2019

(N.004.03)

Date of test:

27-Mar-2019

Reference equipment used in the calibration

Description:	Model:	Serial No.	Expiry Date:	Traceable t
Lab standard microphone	B&K 4180	2341427	20-Apr-2019	SCL
Preamplifier	B&K 2673	2743150	27-Apr-2019	CEPREI
Measuring amplifier	B&K 2610	2346941	08-May-2019	CEPREI
Signal generator	DS 360	33873	24-Apr-2019	CEPREI
Digital multi-meter	34401A	US36087050	23-Apr-2019	CEPREI
Audio analyzer	8903B	GB41300350	23-Apr-2019	CEPREI
Universal counter	53132A	MY40003662	24-Apr-2019	CEPREI

Ambient conditions

Temperature:

22 ± 1 °C

Relative humidity: Air pressure:

55 ± 10 % 1005 ± 5 hPa

Test specifications

- 1, The Sound Calibrator has been calibrated in accordance with the requirements as specified in IEC 60942 1997 Annex B and the lab calibration procedure SMTP004-CA-156.
- 2, The calibrator was tested with its axis vertical facing downwards at the specific frequency using insert voltage technique.
- 3. The results are rounded to the nearest 0.01 dB and 0.1 Hz and have not been corrected for variations from a reference pressure of 1013.25 hectoPascals as the maker's information indicates that the instrument is insensitive to pressure changes

Test results

This is to certify that the sound calibrator conforms to the requirements of annex B of IEC 60942: 1997 for the conditions under which the test was performed. This does not imply that the sound calibrator meets IEC 60942 under any other conditions.

Details of the performed measurements are presented on page 2 of this certificate

Feng Jung

Approved Signatory:

Date:

29-Mar-2019

Company Chop:

Comments: The results reported in this certificate refer to the condition of the instrument on the date of calibration and carry no implication regarding the long-term stability of the instrument.

© Soils & Materials Engineering Co., Ltd.

Form No.CARP156-1/Issue 1/Rev.D/01/03/2007



香港黄竹坑道37號利達中心12樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com

Tel: (852) 2873 6860 Fax: (852) 2555 7533



CERTIFICATE OF CALIBRATION

(Continuation Page)

Certificate No.:

19CA0327 01-02

Page:

2

1, Measured Sound Pressure Level

> The output Sound Pressure Level in the calibrator head was measured at the setting and frequency shown using a calibrated laboratory standard microphone and insert voltage technique. The results are given in below with the estimated uncertainties

(Output level in	dB re 20 µPa)
Estimated	Evpanded

Frequency	Output Sound Pressure	Measured Output	Estimated Expanded
Shown	Level Setting	Sound Pressure Level	Uncertainty
Hz	dB	dB	dB
1000	94.00	94.23	0.10

2. Sound Pressure Level Stability - Short Term Fluctuations

The Short Term Fluctuations was determined by measuring the maximum and minimum of the fast weighted DC output of the B&K 2610 measuring amplifier over a 20 second time interval as required in the standard. The Short Term Fluctuation was found to be:

At 1000 Hz

STF = 0.014 dB

Estimated expanded uncertainty

0 005 dB

3, **Actual Output Frequency**

The determination of actual output frequency was made using a B&K 4180 microphone together with a B&K 2673 preamplifier connected to a B&K 2610 measuring amplifier. The AC output of the B&K 2610 was taken to an universal counter which was used to determine the frequency averaged over 20 second of operation as required by the standard. The actual output frequency at 1 KHz was:

At 1000 Hz

Actual Frequency = 1000.0 Hz

Estimated expanded uncertainty

0.1 Hz

Coverage factor k = 2.2

4, Total Noise and Distortion

For the Total Noise and Distortion measurement, the unfiltered AC output of the B&K 2610 measuring amplifier was connected to an Agilent Type 8903 B distortion analyser. The TND result at 1 KHz was:

At 1000 Hz

TND = 0.3 %

Estimated expanded uncertainty

0.7 %

The expanded uncertainties have been calculated in accordance with the ISO Publication "Guide to the expression of uncertainty in measurement", and gives an interval estimated to have a level of confidence of 95%. A coverage factor of 2 is assumed unless explicitly stated.

End

Calibrated by:

Fung Chi Yip

Date: 27-Mar-2019

Date:

29-Mar-2019

The standard(s) and equipment used in the calibration are traceable to national or international recognised standards and are calibrated on a schedule to maintain the required accuracy level.

C Soils & Materials Engineering Co., Ltd.

Form No.CARP156-2/Issue 1/Rev.C/01/05/2005



香港 黄竹坑 道 3 7 號 利 達 中 心 1 2 樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com Tel: (852) 2873 6860 Fax: (852) 2555 7533



CERTIFICATE OF CALIBRATION

Certificate No.:

19CA0327 01-01

Page

of

2

Item tested

Description: Manufacturer: Sound Level Meter (Type 1) B & K Microphone B & K 4188

Type/Model No.: Serial/Equipment No.: 2238 2285692

2250455

Expiry Date:

Adaptors used:

_

_

Item submitted by

Customer Name:

AECOM ASIA CO., LTD.

Address of Customer:

Request No.:

27-Mar-2019

(N.009.04)

Date of test:

Date of receipt:

28-Mar-2019

Reference equipment used in the calibration

Description:

Signal generator

Multi function sound calibrator Signal generator

B&K 4226 DS 360 DS 360

Model:

Serial No.

2288444 23-Aug-2019 33873 24-Apr-2019 61227 26-Dec-2019 Traceable to:

CIGISMEC CEPREI CEPREI

Ambient conditions

Temperature:

22 ± 1 °C 55 ± 10 %

1005 ± 5 hPa

Relative humidity: Air pressure:

Test specifications

- The Sound Level Meter has been calibrated in accordance with the requirements as specified in BS 7580: Part 1: 1997 and the lab calibration procedure SMTP004-CA-152.
- 2, The electrical tests were performed using an electrical signal substituted for the microphone which was removed and replaced by an equivalent capacitance within a tolerance of ±20%.
- The acoustic calibration was performed using an B&K 4226 sound calibrator and corrections was applied for the difference between the free-field and pressure responsess of the Sound Level Meter.

Test results

This is to certify that the Sound Level Meter conforms to BS 7580: Part 1: 1997 for the conditions under which the test was performed.

Details of the performed measurements are presented on page 2 of this certificate.

Actual Measurement data are documented on worksheets

Feng Jung

Approved Signatory:

Date:

29-Mar-2019

Company Chop:

家ENGINEGA 综合試驗 COM 有限公司

Comments: The results reported in this certificate refer to the condition of the instrument on the date of calibration and carry no implication regarding the long-term stability of the instrument.

© Soils & Materials Engineering Co., Ltd

Form No CARP152-1/Issue 1/Rev.C/01/02/2007



香港黄竹坑道37號利達中心12樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. Website: www.cigismec.com E-mail: smec@cigismec.com

Tel: (852) 2873 6860 Fax: (852) 2555 7533



CERTIFICATE OF CALIBRATION

(Continuation Page)

Certificate No.:

19CA0327 01-01

1, **Electrical Tests**

> The electrical tests were performed using an equivalent capacitance substituted for the microphone. The results are given in below with test status and the estimated uncertainties. The "Pass" means the result of the test is inside the tolerances stated in the test specifications. The "-" means the result of test is outside these tolerances.

			Expanded	Coverage
Test:	Subtest:	Status:	Uncertanity (dB)	Factor
Self-generated noise	Α	Pass	0.3	
	C	Pass	1.0	2.1
	Lin	Pass	2.0	2.2
Linearity range for Leq	At reference range, Step 5 dB at 4 kHz	Pass	0.3	
	Reference SPL on all other ranges	Pass	0.3	
	2 dB below upper limit of each range	Pass	0.3	
	2 dB above lower limit of each range	Pass	0.3	
Linearity range for SPL	At reference range, Step 5 dB at 4 kHz	Pass	0.3	
Frequency weightings	A	Pass	0.3	
	C	Pass	0.3	
	Lin	Pass	0.3	
Time weightings	Single Burst Fast	Pass	0.3	
	Single Burst Slow	Pass	0.3	
Peak response	Single 100µs rectangular pulse	Pass	0.3	
R.M.S. accuracy	Crest factor of 3	Pass	0.3	
Time weighting I	Single burst 5 ms at 2000 Hz	Pass	0.3	
	Repeated at frequency of 100 Hz	Pass	0.3	
Time averaging	1 ms burst duty factor 1/103 at 4kHz	Pass	0.3	
	1 ms burst duty factor 1/104 at 4kHz	Pass	0.3	
Pulse range	Single burst 10 ms at 4 kHz	Pass	0.4	
Sound exposure level	Single burst 10 ms at 4 kHz	Pass	0.4	
Overload indication	SPL	Pass	0.3	
	Leq	Pass	0.4	

2, Acoustic tests

The complete sound level meter was calibrated on the reference range using a B&K 4226 acoustic calibrator with 1000Hz and SPL 94 dB. The sensitivity of the sound level meter was adjusted. The test result at 125 Hz and 8000 Hz are given in below with test status and the estimated uncertainties.

Test:	Subtest	Status	Expanded Uncertanity (dB)	Coverage Factor
Acoustic response	Weighting A at 125 Hz	Pass	0.3	
	Weighting A at 8000 Hz	Pass	0.5	

3, Response to associated sound calibrator

N/A

The expanded uncertainties have been calculated in accordance with the ISO Publication "Guide to the expression of uncertainty in measurement", and gives an interval estimated to have a level of confidence of 95%. A coverage factor of 2 is assumed unless explicitly stated.

4, Remark: This calibration certificate supersedes the last certificate 18CA0406 02-01

Calibrated by:

Checked by:

Fung Chi Yip

Date:

Fong Chun Wai 28-Mar-2019

29-Mar-2019

The standard(s) and equipment used in the calibration are traceable to national ∮r international recognised standards and are calibrated on a schedule to maintain the required accuracy level.

End

© Soils & Materials Engineering Co., Ltd.

Form No.CARP152-2/Issue 1/Rev.C/01/02/2007



港 黄 竹 坑 道 3 7 號 利 達 中 心 1 2 樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com

Tel: (852) 2873 6860 Fax: (852) 2555 7533



CERTIFICATE OF CALIBRATION

Certificate No.:

19CA0912 01

Page

Microphone

of

2

Item tested

Description: Manufacturer: Sound Level Meter (Type 1)

B&K 2238

B&K 4188 2791211

Type/Model No.: Serial/Equipment No.: Adaptors used:

2800927

Item submitted by

Customer Name:

AECOM ASIA CO., LTD.

Address of Customer:

Request No.

Date of receipt:

12-Sep-2019

Date of test:

16-Sep-2019

Reference equipment used in the calibration

Description:

Signal generator

Model:

DS 360

Serial No.

Expiry Date:

Traceable to:

Multi function sound calibrator

B&K 4226

2288444

61227

23-Aug-2020

CIGISMEC

26-Dec-2019

CEPREI

Ambient conditions

Temperature:

Relative humidity:

21 ± 1 °C 55 ± 10 %

Air pressure:

1000 ± 5 hPa

Test specifications

- The Sound Level Meter has been calibrated in accordance with the requirements as specified in BS 7580: Part 1: 1997 and the lab calibration procedure SMTP004-CA-152.
- 2, The electrical tests were performed using an electrical signal substituted for the microphone which was removed and replaced by an equivalent capacitance within a tolerance of +20%
- The acoustic calibration was performed using an B&K 4226 sound calibrator and corrections was applied for the difference 3, between the free-field and pressure responsess of the Sound Level Meter.

Test results

This is to certify that the Sound Level Meter conforms to BS 7580: Part 1: 1997 for the conditions under which the test was performed.

Details of the performed measurements are presented on page 2 of this certificate.

Feng Jungi

Actual Measurement data are documented on worksheets

Approved Signatory:

Date:

16-Sep-2019

Company Chop:

The results reported in this certificate refer to the condition of the instrument on the date of calibration and carry no implication regarding the long-term stability of the instrument.

Soils & Materials Engineering Co., Ltd.

Form No.CARP152-1/Issue 1/Rev.C/01/02/2007



香港 黄 竹 坑 道 3 7 號 利 達 中 心 1 2 樓 12/F., Leader Centre, 37 Wong Chuk Hang Road, Aberdeen, Hong Kong. E-mail: smec@cigismec.com Website: www.cigismec.com Tel: (852) 2873 6860 Fax: (852) 2555 7533



CERTIFICATE OF CALIBRATION

(Continuation Page)

Certificate No.:

19CA0912 01

Page

01

2

1, Electrical Tests

The electrical tests were performed using an equivalent capacitance substituted for the microphone. The results are given in below with test status and the estimated uncertainties. The "Pass" means the result of the test is inside the tolerances stated in the test specifications. The "-" means the result of test is outside these tolerances.

Test:	Subtest:	Status:	Expanded Uncertanity (dB)	Coverage Factor
	oubicot.	Otatas.	Gilocriainty (GB)	1 dotor
Self-generated noise	Α	Pass	0.3	
•	C	Pass	1.0	2.1
	Lin	Pass	2.0	2.2
Linearity range for Leq	At reference range, Step 5 dB at 4 kHz	Pass	0.3	
• • • • • • • • • • • • • • • • • • • •	Reference SPL on all other ranges	Pass	0.3	
	2 dB below upper limit of each range	Pass	0.3	
	2 dB above lower limit of each range	Pass	0.3	
Linearity range for SPL	At reference range, Step 5 dB at 4 kHz	Pass	0.3	
Frequency weightings	A	Pass	0.3	
	C	Pass	0.3	
	Lin	Pass	0.3	
Time weightings	Single Burst Fast	Pass	0.3	
	Single Burst Slow	Pass	0.3	
Peak response	Single 100µs rectangular pulse	Pass	0.3	
R.M.S. accuracy	Crest factor of 3	Pass	0.3	
Time weighting I	Single burst 5 ms at 2000 Hz	Pass	0.3	
	Repeated at frequency of 100 Hz	Pass	0.3	
Time averaging	1 ms burst duty factor 1/103 at 4kHz	Pass	0.3	
	1 ms burst duty factor 1/104 at 4kHz	Pass	0.3	
Pulse range	Single burst 10 ms at 4 kHz	Pass	0.4	
Sound exposure level	Single burst 10 ms at 4 kHz	Pass	0.4	
Overload indication	SPL	Pass	0.3	
	Leq	Pass	0.4	

2, Acoustic tests

The complete sound level meter was calibrated on the reference range using a B&K 4226 acoustic calibrator with 1000Hz and SPL 94 dB. The sensitivity of the sound level meter was adjusted. The test result at 125 Hz and 8000 Hz are given in below with test status and the estimated uncertainties.

Test:	Subtest	Status	Expanded Uncertanity (dB)	Coverage Factor
Acoustic response	Weighting A at 125 Hz	Pass	0.3	
	Weighting A at 8000 Hz	Pass	0.5	

3, Response to associated sound calibrator

N/A

The expanded uncertainties have been calculated in accordance with the ISO Publication "Guide to the expression of uncertainty in measurement", and gives an interval estimated to have a level of confidence of 95%. A coverage factor of 2 is assumed unless explicitly stated.

Calibrated by:

Date: Fung Chi Yip 16-Sep-2019

End

Checked by

Date: 16

16-Sep-2019

The standard(s) and equipment used in the calibration are traceable to national or international recognised standards and are calibrated on a schedule to maintain the required accuracy level.

© Soils & Materials Engineering Co., Ltd.

Form No.CARP152-2/Issue 1/Rev.C/01/02/2007

APPENDIX F EM&A MONITORING SCHEDULES

Contract No. HY/2012/06 Widening of Fanling Highway – Tai Hang to Wo Hop Shek Interchange Impact Monitoring and Audit Schedule for January 2020

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
			1-Jan	2-Jan	3-Jan	4-Jan
					1-hr TSP	
					24-hr TSP	
					Noise	
5-Jan	6-Jan	7-Jan	8-Jan	9-Jan	10-Jan	11-Jan
				1-hr TSP		
				24-hr TSP		
				Noise		
		Site Audit				
12-Jan	13-Jan	14-Jan	15-Jan	16-Jan	17-Jan	18-Jan
			1-hr TSP			
			24-hr TSP			
			Noise			
				Site Audit		
19-Jan	20-Jan	21-Jan	22-Jan	23-Jan	24-Jan	25-Jan
		1-hr TSP			1-hr TSP	
		24-hr TSP			24-hr TSP	
		Noise			Noise	
		Site Audit				
26-Jan	27-Jan	28-Jan	29-Jan	30-Jan	31-Jan	
				1-hr TSP		
				24-hr TSP		
				Noise		

Since no construction work was carried between 27 to 31 January 2020, so the site inspection work for this week was cancelled.

Contract No. HY/2012/06 Widening of Fanling Highway – Tai Hang to Wo Hop Shek Interchange Tentative Impact Monitoring and Audit Schedule for February 2020

Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday
						1-Feb
2-Feb	3-Feb		5-Feb	6-Feb	7-Feb	8-Feb
		1-hr TSP				
		24-hr TSP				
		Noise				
		Site Audit				
9-Feb	10-Feb	11-Feb	12-Feb	13-Feb	14-Feb	15-Feb
	1-hr TSP				1-hr TSP	
	24-hr TSP				24-hr TSP	
	Noise				Noise	
		Site Audit				
16-Feb	17-Feb	18-Feb	19-Feb	20-Feb	21-Feb	22-Feb
				1-hr TSP		
				24-hr TSP		
				Noise		
				Site Audit		
23-Feb	24-Feb	25-Feb	26-Feb	27-Feb	28-Feb	29-Feb
			1-hr TSP			
			24-hr TSP			
			Noise			
		Site Audit				


The schedule is subject to change due to unforeseeable circumstances (e.g. adverse weather, etc)

APPENDIX G
IMPACT AIR QUALITY MONITORING
RESULTS AND THEIR GRAPHICAL
PRESENTATION

Appendix G Impact Air Quality Monitoring Results

1-hour TSP Monitoring Results at Station AM2 (Fanling Government Secondary School)

	Start	1st Hour	2nd Hour	3rd Hour
	Time	Conc.	Conc.	Conc.
Date	(hh:mm)	(µg/m³)	(µg/m³)	(µg/m³)
3-Jan-20	14:15	56.7	55.6	57.8
8-Jan-20	14:14	60.7	61.6	62.2
15-Jan-20	14:05	66.7	65.1	62.7
21-Jan-20	14:50	65.5	66.3	63.9
24-Jan-20	14:00	64.1	64.5	63.9
30-Jan-20	14:00	61.6	63.7	64.2
		_	Average	62.6
			Min	55.6
			Max	66.7

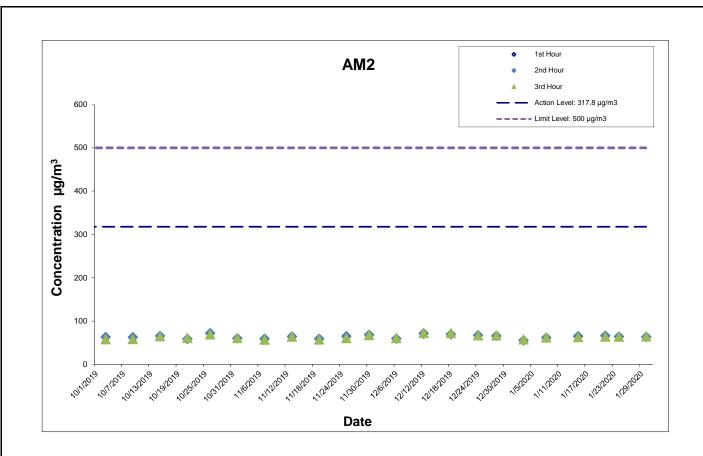

This Drawing has been prepared for the use of AECOM's client. It may not be used, modified, reproduced or relied upon by third parties, except as agreed by AECOM or as required by law. AECOM accepts no responsibility, and denies any liability whatsover, to any party that uses or relies on this drawing without AECOM's express written consent.

CONTRACT NO. HY/2012/06
WIDENING OF FANLING HIGHWAY
- TAI HANG TO WO HOP SHEK INTERCHANGE




Project No.: 60307376 Date: Feb-20 Appendix G

Appendix G Impact Air Quality Monitoring Results

24-hour TSP Monitoring Results at Station AM2 (Fanling Government Secondary School)

Date	Weather	Air	Atmospheric		e (m³/min.)	Av. flow	Total vol.	Filter W	/eight (g)	Particulate	Elapse	e Time	Sampling	Conc.	Action Level	Limit Level
	Condition	Temp. (°C	Pressure(hPa)	Initial	Final	(m³/min)	(m³)	Initial	Final	weight(g)	Initial	Final	Time(hrs.)	(µg/m³)	(µg/m ³)	(µg/m ³)
3-Jan-20	Sunny	18.9	1023.0	1.331	1.331	1.331	1916.6	2.6136	2.7023	0.0887	12870.02	12894.02	24.00	46.3	200.7	260
8-Jan-20	Sunny	21.9	1018.5	1.331	1.331	1.331	1916.6	2.6919	2.7312	0.0393	12894.02	12918.02	24.00	20.5	200.7	260
15-Jan-20	Sunny	19.5	1018.3	1.331	1.331	1.331	1916.6	2.6944	2.7555	0.0611	12918.02	12942.02	24.00	31.9	200.7	260
21-Jan-20	Fine	18.8	1022.4	1.331	1.331	1.331	1916.6	2.6909	2.7610	0.0701	12942.02	12966.02	24.00	36.6	200.7	260
24-Jan-20	Sunny	21.5	1018.1	1.331	1.331	1.331	1916.6	2.6738	2.7631	0.0893	12966.02	12990.02	24.00	46.6	200.7	260
30-Jan-20	Sunny	14.4	1021.5	1.331	1.331	1.331	1916.6	2.6871	2.7251	0.0380	12990.02	13014.02	24.00	19.8	200.7	260

Average 33.6 Min 19.8 Max 46.6

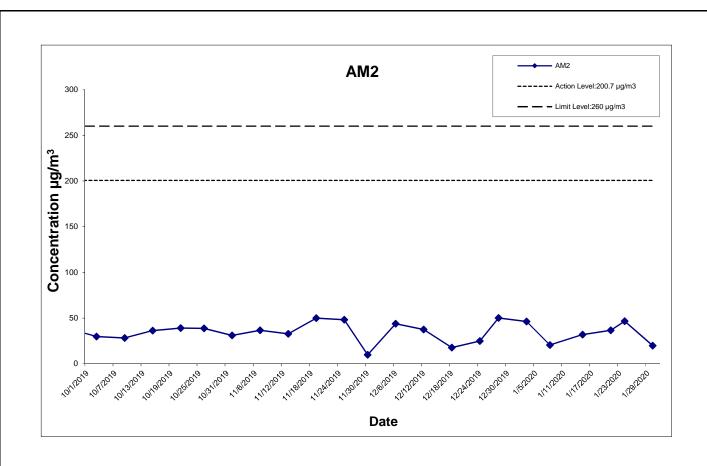

is Drawing has been prepared for the use of ACCOM's client. It may not be used, modified, reproduced or relied upon by third parties, except as agreed by AECOM or as required by Jaw, AECOM accepts no responsibility, and denies any liability whatsover, to any party that uses or relies on this drawing without AECOM's express written consent.

AECOM

Project No.: 60307376 Date: Feb-20 Appendix G

APPENDIX H
METEOROLOGICAL DATA FOR THE
REPORTING MONTH

2/5/2020 Daily Extract



் > Climate > Climate Information Service > Daily Extract

Daily Extract

			Н	long Kong C	bservato	ory			King's Park	Waglan Island^		
		Air	Tempera	ture	Mean		Mean					
Day	Mean Pressure (hPa)	Absolute Daily Max (deg. C)	Mean (deg. C)	Absolute Daily Min (deg. C)	Dew Point (deg. C)	Mean Relative Humidity (%)	Amount of Cloud (%)	Total Rainfall (mm)	Total Bright Sunshine (hours)	Prevailing Wind Direction (degrees)	Mea Win Spee (km/l	
01	1026.5	18.7	17.9	17.2	14.4	80	92	Trace	0.2	***	***	
02	1025.2	20.4	18.3	17.4	14.4	78	54	0.0	3.6	***	***	
03	1023.0	22.0	18.9	17.2	15.7	82	47	0.0	8.9	***	***	
04	1020.9	22.0	19.2	17.6	16.1	83	62	0.0	8.6	***	***	
05	1020.5	22.1	20.0	18.7	16.1	79	81	0.0	6.6	***	***	
06	1019.3	24.0	21.0	19.5	17.0	78	75	0.0	6.7	***	***	
07	1017.2	25.8	22.4	20.4	19.3	83	57	Trace	8.0	***	***	
08	1018.5	26.0	21.9	19.7	16.4	72	35	0.0	8.1	***	***	
09	1018.1	20.6	19.3	18.4	15.3	77	76	0.0	5.0	***	***	
10	1016.4	21.8	19.9	18.8	16.7	82	67	0.0	6.1	***	***	
11	1015.3	23.9	20.9	18.7	17.4	81	59	0.0	7.0	***	***	
12	1017.1	20.3	17.9	15.7	11.2	65	75	0.0	7.9	***	***	
13	1017.8	19.7	18.3	17.2	14.1	76	77	0.0	2.5	***	***	
14	1019.0	21.9	19.0	17.5	14.6	76	42	0.0	9.4	***	***	
15	1018.3	21.7	19.5	17.9	15.9	80	77	0.1	5.8	***	***	
16	1017.7	22.2	19.8	18.4	17.1	84	57	Trace	7.2	***	***	
17	1019.6	20.0	18.5	17.2	12.6	69	88	0.0	0.1	***	***	
18	1019.6	21.0	18.3	17.1	13.4	73	63	0.0	6.5	***	***	
19	1020.9	20.7	18.2	16.6	13.5	75	83	0.0	1.1	***	***	
20	1021.9	20.6	18.0	15.7	13.5	75	80	0.0	2.9	***	***	
21	1022.4	21.1	18.8	17.3	15.1	80	85	0.0	4.9	***	***	
22	1019.1	23.6	20.5	18.0	17.4	82	84	Trace	4.3	***	***	
23	1017.2	25.7	21.9	20.5	19.5	86	63	0.0	7.6	***	***	
24	1018.1	23.1	21.5	20.1	19.6	89	86	Trace	4.6	***	***	
25	1016.2	22.2	19.7	18.8	17.9	89	91	2.1	0.9	***	***	
26	1014.9	19.2	16.5	13.7	14.0	86	80	12.3	1.5	***	***	
27	1016.4	16.0	13.0	11.5	7.6	70	71	0.2	2.7	***	***	

2/5/2020 Daily Extract

28	1018.6	16.1	13.0	10.8	6.9	66	68	0.1	4.4	***	***
29	1020.6	17.1	13.8	11.0	4.7	55	42	0.0	7.2	***	***
30	1021.5	18.5	14.7	11.6	2.4	44	3	0.0	10.2	***	***
31	1022.4	18.9	14.8	11.8	5.0	52	4	0.0	10.2	***	***
Mean/Total	1019.4	21.2	18.6	16.8	14.0	76	65	14.8	170.7	***	***
Normal?	1020.3	18.6	16.3	14.5	11.4	74	61	24.7	143.0	060	25.3

^{***} unavailable

^{? 1981-2010} Climatological Normal, unless otherwise specified



[^] Information of wind direction and wind speed for Waglan Island are based on automatic weather station data since January 1989

Trace means rainfall less than 0.05 mm

APPENDIX I
IMPACT DAYTIME CONSTRUCTION NOISE
MONITORING RESULTS AND THEIR
GRAPHICAL PRESENTATION

Appendix I Impact Daytime Construction Noise Monitoring Results


Location : M2 (West Tai Wo - Free Field)Day time 07:00-19:00 hrs Normal Weekdays Impact Noise Monitoring Results


	Meas	ured Noise Le	vel for 30-min,	dB(A)	Limit Level,	Exceedance
Date	Start Time	Leq*	L10*	L90*	dB(A)	(Y/N)
3-Jan-20	13:30	66.4	67.5	64.0	75	N
9-Jan-20	15:05	66.8	67.5	65.0	75	N
15-Jan-20	14:55	67.5	68.5	64.0	75	N
21-Jan-20	15:20	68.2	69.6	65.4	75	N
24-Jan-20	13:30	68.1	68.8	67.3	75	N
30-Jan-20	15:00	65.4	66.5	62.0	75	N
	Min	65.4	66.5	62.0		
	Max	68.2	69.6	67.3		
	Average	67.2	68.2	64.9		

Location : M3 (Fanling Government Secondary School- Façade)Day time 07:00-19:00 hrs Normal Weekdays Impact Noise Monitoring Results

	Measured Noise Level for 30-min, dB(A)				Limit Level,	Exceedance
Date	Start Time	Leq	L10	L90	dB(A)^	(Y/N)
3-Jan-20	14:15	62.9	63.5	60.5	65	N
9-Jan-20	14:15	61.6	62.5	60.5	65	N
15-Jan-20	14:00	63.8	65.0	61.5	65	N
21-Jan-20	14:10	63.9	65.7	62.2	70	N
24-Jan-20	14:10	60.8	62.3	59.1	70	N
30-Jan-20	14:00	60.0	61.0	55.0	70	N
	Min	60.0	61.0	55.0		
	Max	63.9	65.7	62.2		
	Average	62.4	63.6	60.3		

^{* +3}dB(A) Façade effect correction included ^ Limit Level of 70dB(A) applies to education institutes while 65dB(A) applies during school examination period.

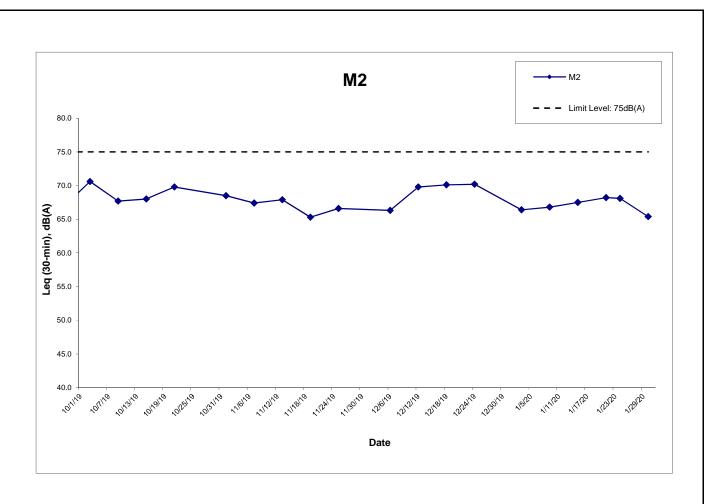

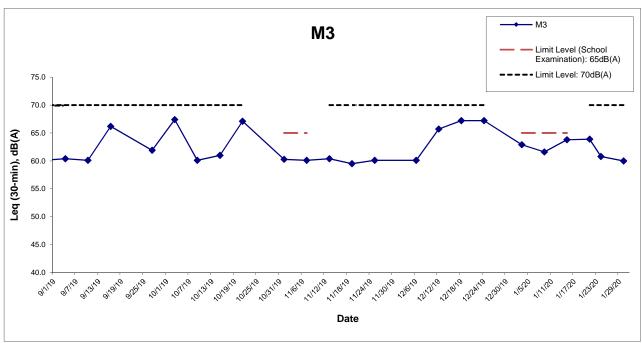

This Drawing has been prepared for the use of AECOMYs client. It may not be used, modified, reproduced or relied upon by third parties, except as agreed by AECOM or as required by law. AECOM accepts no responsibility, and denies any liability whatsover, to any party that uses or relies on this drawing without AECOMYs express written consent

CONTRACT NO. HY/2012/06 WIDENING OF FANLING HIGHWAY - TAI HANG TO WO HOP SHEK INTERCHANGE

AECOM

Appendix I

Graphical Presentation of Impact Daytime Construction Noise Monitoring Results

Project No.: 60307376 Date: Feb-20

APPENDIX J EVENT ACTION PLAN

Appendix J – Event Action Plan

Event / Action Plan for Air Quality

Event	Action					
	ET Leader	IEC	ER	Contractor		
Action Level						
Exceedance for one sample	Identify source; Inform IEC and ER; Repeat measurement to confirm finding; Increase monitoring frequency to dailv.	Check monitoring data submitted by ET; Check Contractor's working method.	1. Notify Contractor.	Rectify any unacceptable practice; Amend working methods if appropriate.		
Exceedance for two or more consecutive samples	 Identify source; Inform IEC and ER; Repeat measurements to confirm findings; Increase monitoring frequency to daily; Discuss with IEC and Contractor on remedial actions required; If exceedance continues, arrange meeting with IEC and ER; If exceedance stops, cease additional monitoring. 	 Check monitoring data submitted by ET; Check Contractor's working method; Discuss with ET and Contractor on possible remedial measures; Advise the ER on the effectiveness of the proposed remedial measures; Supervise Implementation of remedial measures. 	Confirm receipt of notification of failure in writing; Notify Contractor; Ensure remedial measures properly implemented.	Submit proposals for remedial actions to IEC within 3 working days of notification; Implement the agreed proposals; Amend proposal if appropriate.		

Event / Action Plan for Air Quality


Event	Action					
Action Level	ET Leader	IEC	ER	Contractor		
Limit Level						
Exceedance for one sample	 Identify source; Inform IEC, ER, Contractor and EPD; Repeat measurement to confirm finding; Increase monitoring frequency to daily; Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results. 	 Check monitoring data submitted by ET; Check Contractor's working method; Discuss with ET and Contractor on possible remedial measures; Advise ER on the effectiveness of the proposed remedial measures; Supervise implementation of remedial measures. 	 Confirm receipt of notification of exceedance in writing; Notify Contractor; Ensure remedial measures properly implemented. 	 Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC within 3 working days of notification; Implement the agreed proposals; Amend proposal if appropriate. 		
Exceedance for two or more consecutive samples	 Notify IEC, ER, Contractor and EPD; Identify source; Repeat measurement to confirm findings; Increase frequency to daily; Analyse Contractor's working procedures to determine possible mitigation to be; Arrange meeting with IEC and ER to discuss the remedial actions to be taken; Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; If exceedance stops, cease additional monitoring. 	 Discuss amongst ER, ET, and Contractor on the potential remedial actions; Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise ER accordingly; Supervise the implementation of remedial measures. 	 Confirm receipt of notification of exceedance in writing; Notify Contractor; In consultation with the IEC, agree with the Contractor on the remedial measures to be implemented; Ensure remedial measures properly implemented; If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated. 	 Take immediate action to avoid further exceedance; Submit proposals for remedial actions to IEC within 3 working days of notification; Implement the agreed proposals; Resubmit proposals if problem still not under control; Stop the relevant portion of works as determined by ER until the exceedance is abated. 		

Event / Action Plan for Noise Impact

Event	ent Action					
Limit Level	ET Leader	IEC	ER	Contractor		
Action Level	 Notify IEC and the Contractor. Carry out investigation. Report the results of investigation to IEC and the Contractor. Discuss with the Contractor and formulate remedial measures. Increase monitoring frequency to check mitigation effectiveness. 	Review with analysed results submitted by ET. Review the proposed remedial measures by the Contractor and advise ER accordingly. Supervise the implement of remedial measures.	 Confirm receipt of notification of failure in writing. Notify the Contractor. Require the Contractor to propose remedial measures for the analysed noise problem. Ensure remedial measures are properly implemented. 	Submit noise mitigation proposals to IEC. Implement noise mitigation proposals.		
Limit Level	 Notify, IEC, ER, EPD and the Contractor. Identify the source. Repeat measurement to confirm findings. Increase monitoring frequency. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented. Inform IEC, ER, and EPD the causes & actions taken for the exceedances. Assess effectiveness of the Contractor's remedial actions and keep IEC, EPD and ER informed of the results. If exceedance stops, cease additional monitoring. 		 Confirm receipt of notification of failure in writing. Notify the Contractor. Require the Contractor to propose remedial measures for the analysed noise problem. Ensure remedial measures are properly implemented. If exceedance continues, consider what activity of the work is responsible and instruct the Contractor to stop that activity of work until the exceedance is abated. 	 Take immediate action to avoid further exceedance. Submit proposals for remedial actions to IEC within 3 working days of notification. Implement the agreed proposals. Resubmit proposals if problem still not under control. Stop the relevant activity of works as determined by the ER until the exceedance is abated. 		

APPENDIX K SITE INSPECTION SUMMARIES

EM&A Environmental Inspection Record





Site Inspection Summary Inspection Information

special illomation			
Contract No.	HY/2012/06		
Date:	07 January 2020		
Time:	14:00		
Inspection No.:	320		

Non-co	pliance	
١		

Observations

Follow-up Observation(s)

1. The improper stored construction waste at SA324 was removed. (closed)

New Observation(s)

Nil

Reminder(s)


2. The Contractor was reminded to cover the stockpile at SA340 entirely.

Remarks

Nil

	Name	Signature	Date
Prepared by	Alex Chan	Alee	07 January 2020
Checked by	Y W Fung	1	07 January 2020

EM&A Environmental Inspection Record





WIDENING OF TOLO HIGHWAY (STAGE 2) BETWEEN TAI HANG AND WO HOP SHEK INTERCHANGE

Site Inspection Summary

Inspection Information

Contract No.	HY/2012/06
Date:	16 January 2020
Time:	14:00
Inspection No.:	321

٨	lon-compliance			
	Nil			

Observations

Follow-up Observation(s)

The stockpile at SA340 was entirely covered. (closed)

New Observation(s)

Chemical waste stored without drip tray was observed at SA324. The Contractor was advised to 2. provide the drip tray to chemical waste on site for preventing potential leakage.


Reminder(s)

Nil.

Remarks

Nil

	Name	Signature	Date
Prepared by	Alex Chan	Alee	16 January 2020
Checked by	Y W Fung	/	16 January 2020





EM&A Environmental Inspection Record WIDENING OF TOLO HIGHWAY (STAGE 2) BETWEEN TAI HANG AND WO HOP SHEK INTERCHANGE

Site Inspection Summary

Inspection Information

Contract No.	HY/2012/06
Date:	21 January 2020
Time:	14:00
Inspection No.:	322

Λ	Non-compliance		
	Nil		

Observations

Follow-up Observation(s)

The chemical waste at SA324 was removed. (closed)

New Observation(s)

Nil

Reminder(s)

2. The Contractor was reminded to cover the stockpile at SA310 with imperious sheeting.

Remarks

Nil

	Name	Signature	Date
Prepared by	Alex Chan	Alee	21 January 2020
Checked by	Y W Fung	/	21 January 2020

APPENDIX L
STATISTICS ON COMPLAINTS,
NOTIFICATION OF SUMMONS AND
SUCCESSFUL PROSECUTIONS

Appendix L Statistics on Complaints, Notifications of Summons and Successful Prosecutions

Contract No. HY/2012/06 – Widening of Fanling Highway – Tai Hang to Wo Hop Shek Interchange

	Date Received	Subject	Status	Total no. followed up by the ET this month	Total no. followed up by the ET since project commencement
Environmental complaints	19 December 2013	EPD referred a complaint from Lot no. 116 of Fui Sha Wai at Tai Hang of Tai Po which is concerned about the construction noise and diesel-like smell generated from construction activities nearby which caused nuisance and health problems on 19 December 2013 morning.	Closed		
	24 February 2014	EPD referred an air-and-odour complaint on 24 February 2014. The complainant complained about the construction site located near the bus stop in Fui Sha Wai, Tai Hang, Tai Wo Service Road West. When construction works were carried out, odour, white smoke and dust were generated. The complainant asked for follow-up actions.	Closed	0	10
	23 October 2014	EPD referred an air complaint on 24 October 2014. A resident complained against the excavation works of Tai Wo Service Road West between Nam Wah Po & Tai Hang Tsuen, which have piled up high stockpiles, causing serious dust nuisance to his house.	Closed		

Date Received	Subject The resident also complained that the stockpiles have not been covered and watered properly. He now requires the EPD to follow up. The location of complaint is near Lamppost Location EB5717.	Status	Total no. followed up by the ET this month	Total no. followed up by the ET since project commencement
31 December 2014	EPD referred a water complaint on 31 December 2014. The complainant complained about the muddy river outside Tai Hang Village Office on 29 December 2014. It was suspected that the muddy water was discharged from the construction works of the Project. He required the EPD to follow up.	Closed		
25 March 2015	EPD referred a water complaint on 25 March 2015. The complainant complained about the generation of the smell of gasoline from the Widening of Fanling Highway construction site on Tai Wo Service Road West, causing serious nuisance to nearby houses. The situation has continued for a few weeks and she asked the EPD to follow up as soon as possible.	Closed		

Date Received	Subject	Status	Total no. followed up by the ET this month	Total no. followed up by the ET since project commencement
5 January 2017 (Referred by the Contractor on 13 January 2017)	A complaint was received by the 1823 enquiry and complaint hotline on 5 January 2017. The complaint was referred to the Environmental Team by the Contractor on 13 January 2017. The complainant complained against the dust emission generated by the Widening of Fanling Highway construction site on Tai Wo Service Road West near Tai Hang Village. The complainant also complained that Highway Department did not conduct road surface cleansing, which affects residents' health. He/she now requires the Highway Department to follow up.	Closed		
22 May 2017 (Referred by the Contractor on 23 May 2017)	A complaint was received by the 1823 enquiry and complaint hotline on 22 May 2017. The complaint was referred to the Environmental Team by the Contractor on 23 May 2017. A complainant complained that construction noise was caused by the erection of noise barrier on Tai Wo Service Road West near Tai Hang Village on Sunday(s). The complainant concerned about if any Construction Noise Permit is issued by the Environmental Protection Department.	Closed		

Dat Recei	Subject	Status	Total no. followed up by the ET this month	Total no. followed up by the ET since project commencement
25 Feb 201 (Referre the Contra on 1 M 201	February 2018. The complaint was referred to the Environmental Team by the Contractor on 1 March 2018. A complainant complained that noise nuisance was caused continuously by road construction works at Fanling Highway near Tai Hang Village during 01:30 to 04:00 on 25 February 2018.	Closed		
Septer 201 (Referre the EP 28 Oct 201	October 2019. The complainant was regarded to the use of powered mechanical equipment not in accordance with the conditions stipulated in the Construction Noise Permit (CNP) - GW-RN0602-19 in Pak Wolber Road near Fanling Highway on 24 September 2019.	Closed		

	Date Received	Subject	Status	Total no. followed up by the ET this month	Total no. followed up by the ET since project commencement
	28 October 2019 (Referred by the EPD on 14 November 2019)	The Buildings Department received a complaint on 28 October 2019 through email. The complaint was referred to Environmental Team of HY/2012/06 on 14 November 2019. The complainant complained about dust and noise nuisance caused continuously by road construction works at Tai Wo Service Road West.	Closed		
Notification of summons	-	-	-	0	0
Successful Prosecutions	-	-	-	0	0

Contract No. 02/HY/2015 – Provision of Bus-Bus Interchange on Fanling Highway Kowloon Bound

	Date Received	Subject	Status	Total no. followed up by the ET this month	Total no. followed up by the ET since project commencement
Environmental complaints	-	-	-	0	0
Notification of summons	-	-	-	0	0
Successful Prosecutions	-	-	-	0	0