

Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2

Monthly EM&A Report
January 2020

Submitted to

Environmental Protection Department

Prepared By

Meinhardt Infrastructure and Environment Ltd

Meinhardt Infrastructure and Environment Limited

**Entrusted Portion of Widening of Tolo
Highway / Fanling Highway between Island
House Interchange and Fanling Stage 2**

Monthly EM&A Report

(January 2020)

Certified by: Fredrick Leong



Position: Environmental Team Leader

Date: 14 February 2020

Hyder-Arup-Black & Veatch Joint Venture
c/o Arcadis
17/F, Two Harbour Square,
180 Wai Yip Street,
Kwun Tong, Hong Kong
Attn: Mr. James Penny

Your Reference

Our Reference
AFK/EC/ST/cy/T329380/2
2.05/L-0308

3/F International Trade
Tower
348 Kwun Tong Road
Kowloon
Hong Kong

T +852 2828 5757
F +852 2827 1823
mottmac.hk

Environmental Monitoring and Audit (EM&A) for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling Stage 2 (between Tai Hang to Wo Hop Shek Interchange) – Entrusted Works Environmental Permit No. EP-324/2008/E Condition 3.3 – Submission of Monthly EM&A Report – January 2020 for the portion of Stage 2 works entrusted to Civil Engineering and Development Department (CEDD) under Contract No. CV/2012/09

12 February 2020
By Fax (2805 5028) & Hand

We refer to the revised Monthly EM&A Report – January 2020 (Rev.0) received on 12 February 2020 submitted by the Environmental Team via email. Pursuant to Environmental Permit Condition 3.3, I hereby verify the Monthly EM&A Report – January 2020 (Rev. 0) for the portion of works under Stage 2 of the captioned Project which is entrusted to CEDD under Contract No. CV/2012/09.

Yours faithfully
for MOTT MACDONALD HONG KONG LIMITED






Steven Tang
Independent Environmental Checker

c.c.
HyD
CEDD/BCP
AECOM
Meinhardt

Mr. Chung Lok Chin
Mr. Lu Pei Yu
Mr. Gilbert Wong
Mr. Fredrick Leong

By Fax (2714 5198)
By Fax (3547 1659)
By Fax (2251 0698)
By Fax (2559 1613)

| Date | Revision | Prepared By | Checked By | Approved By |
|-------------|----------|---------------------|----------------|----------------|
| 14 Feb 2020 | 0 | WK CHIU BoBo HUI | Fredrick LEONG | Helen COCHRANE |



Contents

| | Page |
|---|-----------|
| EXECUTIVE SUMMARY | i |
| 1 INTRODUCTION | 1 |
| 1.2 Purpose of the Report | 1 |
| 1.3 Report Structure | 1 |
| 2 PROJECT INFORMATION | 2 |
| 2.1 Background | 2 |
| 2.2 Site Description | 3 |
| 2.3 Construction Programme and Activities | 3 |
| 2.4 Project Organisation | 3 |
| 3 STATUS OF ENVIRONMENTAL LICENSES, NOTIFICATION AND PERMITS | 5 |
| 4 AIR QUALITY MONITORING | 6 |
| 4.1 Monitoring Requirement | 6 |
| 4.2 Monitoring Equipment | 6 |
| 4.3 Monitoring Location | 6 |
| 4.4 Monitoring Parameters, Frequency and Duration | 7 |
| 4.5 Monitoring Methodology | 7 |
| 4.6 Monitoring Schedule for the Reporting month..... | 8 |
| 4.7 Monitoring Results..... | 8 |
| 5 NOISE MONITORING | 9 |
| 5.1 Monitoring Requirements | 9 |
| 5.2 Monitoring Equipment | 9 |
| 5.3 Monitoring Locations | 9 |
| 5.4 Monitoring Parameters, Frequency and Duration | 9 |
| 5.5 Monitoring Methodology | 10 |
| 5.6 Monitoring Schedule for the Reporting Month..... | 10 |
| 5.7 Monitoring Results..... | 10 |
| 6 WATER MONITORING | 12 |
| 7 WASTE MANAGEMENT | 13 |
| 8 ENVIRONMENTAL SITE INSPECTION AND AUDIT | 14 |
| 8.1 Site Inspection..... | 14 |
| 9 IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES | 15 |
| 10 SUMMARY OF EP SUBMISSION IN THE REPORTING MONTH | 16 |
| 11 ENVIRONMENTAL NON-CONFORMANCE | 17 |
| 11.1 Summary of Monitoring Exceedances | 17 |

| | | |
|-----------|--|-----------|
| 11.2 | Summary of Environmental Non-Compliance | 17 |
| 11.3 | Summary of Environmental Complaints..... | 17 |
| 11.4 | Summary of Environmental Summon and Successful Prosecutions..... | 17 |
| 12 | FUTURE KEY ISSUES | 18 |
| 12.1 | Construction Programme for the Next Month..... | 18 |
| 12.2 | Key Issues for the Coming Month..... | 18 |
| 12.3 | Monitoring Schedule for the Next Month..... | 18 |
| 13 | CONCLUSIONS AND RECOMMENDATIONS | 19 |
| 13.1 | Conclusions..... | 19 |
| 13.2 | Recommendations | 19 |

List of Tables

| | |
|------------|---|
| Table 2.1 | Contact Information of Key Personnel |
| Table 3.1 | Status of Environmental Licenses, Notifications and Permits |
| Table 4.1 | Air Quality Monitoring Equipment |
| Table 4.2 | Location of Air Quality Monitoring |
| Table 4.3 | Air Quality Monitoring Parameters, Frequency and Duration |
| Table 4.4 | Summary of 1-hr TSP Monitoring Results |
| Table 4.5 | Summary of 24-hr TSP Monitoring Results |
| Table 5.1 | Noise Monitoring Equipment |
| Table 5.2 | Location of Noise Monitoring |
| Table 5.3 | Noise Monitoring Parameters, Frequency and Duration |
| Table 5.4 | Summary of Noise Monitoring Results |
| Table 8.1 | Observations and Recommendations of Site Audit |
| Table 10.1 | Status of Required Submission under Environmental Permit |

List of Figures

| | |
|----------|--|
| Figure 1 | Demarcation of Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling – Stage 2 |
| Figure 2 | Air and Noise Monitoring Locations |

List of Appendices

| | |
|------------|--|
| Appendix A | Construction Programme |
| Appendix B | Project Organization Structure |
| Appendix C | Calibration Certificates of Monitoring Equipment |
| Appendix D | EM&A Monitoring Schedules |
| Appendix E | Meteorological Data Extracted from Hong Kong Observatory |
| Appendix F | Air Quality Monitoring Results and their Graphical Presentation |
| Appendix G | Summary of Event and Action Plan |
| Appendix H | Noise Monitoring Results and their Graphical Presentation |
| Appendix I | Not Used |
| Appendix J | Not Used |
| Appendix K | Waste Flow Table |
| Appendix L | Implementation Schedule of Environmental Mitigation Measures (EMIS) |
| Appendix M | Not Used |
| Appendix N | Statistics on Complaints, Notifications of Summons and Successful Prosecutions |

EXECUTIVE SUMMARY

The Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2 (hereafter called “the Project”) covers part of the construction of the widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling which aimed to widen Tolo Highway and Fanling Highway to dual 4-lane carriageway in order to alleviate the current traffic congestion problems and to cope with the increasing transport demands to and from the urban areas and also cross boundary traffic. The Project covers construction activities at Yuen Leng along the existing Fanling Highway.

The impact EM&A for the Project includes air quality, noise and water quality monitoring. The EM&A programme commenced on 5 November 2013.

This report documents the findings of EM&A works conducted in January 2020. As informed by the Contractor, the remaining activities in the reporting month were:

- Road pavement works;
- Remaining works of Kiu Tau Footbridge ; and

Breach of Action and Limit Levels for Air Quality

No exceedance of Action and Limit Level was recorded for 24-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.

No exceedance of Action and Limit Level was recorded for 1-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.

Breach of Action and Limit Levels for Noise

No noise complaint was received in the reporting month, so no Action Level exceedance was recorded. Also, no Limit Level exceedance of noise monitoring was recorded in the reporting month.

Breach of Action and Limit Levels for Water Quality

The box culvert works have been completed in the end of March 2017. The 4-week post construction water quality monitoring has been completed in the end of April 2017 in the same manner as the impact monitoring.

Complaint, Notification of Summons and Successful Prosecution

No complaint, notification of summons and successful prosecution was received in the reporting month.

Future Key Issues

The remaining construction works in the coming reporting month are anticipated to include:

- Road pavement works;
- Remaining works of Kiu Tau Footbridge ; and

Potential environmental impacts arising from the above construction activities are anticipated to be mainly associated with construction dust, noise, water quality and waste management.

1 INTRODUCTION

1.1.1 Chun Wo Construction & Engineering Co Ltd (Chun Wo) was commissioned by the Civil Engineering and Development Department (CEDD) as the Civil Contractor for the Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2. Meinhardt Infrastructure & Environment Ltd (MIEL) has been appointed by Chun Wo as the Environmental Team (ET) to fulfill the corresponding EM&A requirements pursuant to Environmental Permit No. EP-324/2008/E in accordance with the Updated EM&A Manual (dated October 2013) for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling Stage 2. The EM&A programme commenced on 5 November 2013.

1.2 Purpose of the Report

1.2.1 This is the monthly EM&A Report which summaries the impact monitoring results and audit findings for the Project during the reporting month of January 2020.

1.3 Report Structure

1.3.1 This monthly EM&A Report comprises the following sections:

Section 1: Introduction

Section 2: Project Information

Section 3: Status of Environmental Licenses, Notifications and Permits

Section 4: Air Quality Monitoring

Section 5: Noise Monitoring

Section 6: Water Monitoring

Section 7: Waste Management

Section 8: Environmental Site Inspection and Audit

Section 9: Implementation Status of Environmental Mitigation Measures

Section 10: Summary of EP Submission in the Reporting Month

Section 11: Environmental Non-Conformance

Section 12: Future Key Issues

Section 13: Conclusions and Recommendations

2 PROJECT INFORMATION

2.1 Background

- 2.1.1 Tolo Highway and Fanling Highway are expressways in the North East New Territories connecting Sha Tin, Tai Po and Fanling. These highways form a vital part of the strategic Route 1, which links Hong Kong Island to Shenzhen. At present, this section of Route 1 is a dual 3-lane carriageway. However, at several major interchanges along this section of Route 1, the highway is only dual-2 lane. Severe congestion is a frequent occurrence during peak periods, particularly in the Kowloon bound direction.
- 2.1.2 The objective of the Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling is to widen Tolo Highway and Fanling Highway to dual 4-lane carriageway in order to alleviate the current traffic congestion problems and to cope with the increasing transport demands to and from the urban areas and also cross boundary traffic.
- 2.1.3 The construction works for the Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling are to be delivered in 2 stages:
- Stage 1 – Construction works between Island House Interchange and Tai Hang; and
- Stage 2 – Construction works between Tai Hang and Wo Hop Shek Interchange.
- 2.1.4 The construction works of Stage 1 under the EP commenced in November 2009 and was planned to be completed in December 2013 tentatively. The works of Stage 2 was planned to commence in November 2013 and complete by end of 2016. Hyder-Arup-Black and Veatch Joint Venture (HABVJV) was appointed by the Highways Department (HyD) as the consultants for the design and construction assignment for the Project. Mott MacDonald Hong Kong Ltd is the Independent Environmental Checker (IEC) of both Stage 1 and Stage 2 works.
- 2.1.5 A portion of Stage 2 works of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling (hereafter called “the Project”) is entrusted to the contractor of Contract No. CV/2012/09 Liantang / Heung Yuen Wai Boundary Control Point Site Formation and Infrastructure Works Contract 3, i.e. Chun Wo. AECOM Asia Co Ltd was appointed by the CEDD as the consultant for the design and construction assignment for the Liantang development.
- 2.1.6 The Project is a Designated Project under the Environmental Impact Assessment Ordinance (EIAO) (Cap. 499). An Environmental Impact Assessment (EIA) Report together with an Environmental Monitoring and Audit (EM&A) Manual were approved on 14 July 2000 (Register Number: EIA-043/2000). The Project is governed by an Environmental Permit (EP) (EP-324/2008) which was granted on 23 December 2008. A variation of EP (VEP) was applied and the VEP (EP-324/2008/A) was subsequently granted on 31 January 2012. An additional VEP has been applied on 24 February 2014 and the VEP (EP-324/2008/B) was subsequently granted on 17 March 2014. Furthermore, an additional VEP has been applied on 9 March 2015 and the VEP (EP-324/2008/C) was subsequently granted on 27 March 2015. The previous VEP (EP-324/2008/D) was granted on 27 August 2015. The current VEP (EP-324/2008/E) was granted on 26 January 2017.

2.2 Site Description

2.2.1 The major construction activities under the Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2 include:

At-Grade Road Works – Temporary and permanent road formation, pipe laying, road drainage, footpath and noise barrier construction;

Demolition of existing Kiu Tau Footbridge and Footbridge Re-provision; and

Box Culvert Extension – Flow diversion of existing stream, excavation, sub-base and blinding, base, wall and top slab construction.

2.2.2 **Figure 1** shows the works areas for the Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2.

2.3 Construction Programme and Activities

2.3.1 The remaining construction activities undertaken in the reporting month are summarized below:

- Road pavement works; and
- Remaining works of Kiu Tau Footbridge.

2.3.2 The construction programme is presented in **Appendix A**.

2.4 Project Organisation

2.4.1 The project organization structure is shown in **Appendix B**. The key personnel contact names and numbers for the Project are summarised in **Table 2.1**.

Table 2.1 Contact Information of Key Personnel

| Party | Role | Position | Name | Telephone | Fax |
|----------------|---|--------------------------|--------------------|------------------|------------|
| AECOM | Engineer's Representative | Senior Resident Engineer | Mr. Alan Lee | 2171 3303 | 2171 3498 |
| Mott MacDonald | Independent Environmental Checker (IEC) | IEC | Mr. Steven Tang | 2828 5920 | 2827 1823 |
| Chun Wo | Contractor | Site Agent | Mr. Chan | 2638 6144 | 2638 7077 |
| | | Environmental Officer | Mr. Yip Yun Lam | 3166 5111 | |
| | | Environmental Supervisor | Mr. Franki Leung | 2638 7005 | |
| Meinhardt | Environmental Team (ET) | ET Leader | Mr. Fredrick Leong | 2859 1739 | 2540 1580 |

3 STATUS OF ENVIRONMENTAL LICENSES, NOTIFICATION AND PERMITS

3.1.1 The relevant environmental licenses, permits and/or notifications on environmental protection for this Project and valid in the reporting month are summarized in **Table 3.1**.

Table 3.1 Status of Environmental Licenses, Notifications and Permits

| Permit / License No. / Notification / Reference No. | Valid Period | | Status | Remarks |
|---|--------------|-------------|---------------------------|--|
| | From | To | | |
| <i>Environmental Permit</i> | | | | |
| EP-324/2008/E | 26 Jan 2017 | -- | Granted on 26 Jan 2017 | |
| <i>Construction Noise Permit</i> | | | | |
| <i>Wastewater Discharge License</i> | | | | |
| WT00032188-2018 | 20 Sep 2018 | 31 Aug 2023 | Valid | -- |
| <i>Chemical Waste Producer Registration</i> | | | | |
| 5113-634-C3817- 01 | 7 Oct 2013 | -- | Valid | -- |
| <i>Billing Account for Construction Waste Disposal</i> | | | | |
| 7017914 | 2 Aug 2013 | -- | Account Active | -- |
| <i>Notification Under Air Pollution Control (Construction Dust) Regulation</i> | | | | |
| -- | 9 Aug 2019 | -- | Notified | - Extension of notification was submitted to EPD on 9 Aug 2019 |

4 AIR QUALITY MONITORING

4.1 Monitoring Requirement

4.1.1 In accordance with the Updated EM&A Manual, 1-hr and 24-hr total suspended particulate (TSP) levels at the designated air quality monitoring station are required. Impact 24-hour TSP monitoring should be carried out for at least once every 6 days. For the 1-hr TSP impact monitoring, the sampling frequency of at least three times in every 6 days should be undertaken when the highest dust impact occurs.

4.2 Monitoring Equipment

4.2.1 The 1hr- TSP and 24-hr TSP air quality monitoring were performed using a High Volume Sampler (HVS), of which its location and operation satisfy, as far as practicable, all the requirements as specified in the Updated EM&A Manual. The brand and model of the equipment are given in **Table 4.1**.

Table 4.1 Air Quality Monitoring Equipment

| Equipment | Brand and Model | Quantity | Serial Number |
|--|--|----------|---------------|
| High Volume Sampler (1-hr TSP and 24-hr TSP) | Tisch Total Suspended Particulate Mass Flow Controlled High Volume Air Sampler (Model No. TE-5170 MFC) | 1 | 2359 |
| Handheld TSP meter | TSI AM520 | 1 | 5201735006 |

4.2.2 The HVS and its accessories were maintained in good working condition, such as replacing motor brushes routinely and checking electrical wiring to ensure a continuous power supply.

4.2.3 Calibration of the HVS (five point calibration) using Calibration Kit was carried out every two months. The HVS calibration orifice will be calibrated annually.

4.2.4 The electricity supply of HVS at AM1(SR77) was suspended from 16 May 2019 and was no longer available. In order to have a more secure electricity supply, an alternative Handheld TSP meter was proposed to use for the temporary monitoring of 24-hr & 1hr air quality from 22 May 2019. In this regard, IEC and ER have no adverse comment on it. And Calibration certificates of the Handheld TSP meter are provided in **Appendix C**.

4.3 Monitoring Location

4.3.1 Air quality monitoring was conducted at the location specified in the Updated EM&A Manual. **Table 4.2** describes the details of the air quality monitoring station with its location as shown in **Figure 2**.

Table 4.2 Location of Air Quality Monitoring

| Air Monitoring Station ID | Monitoring Location | Description |
|---------------------------|---------------------|---------------------------|
| AM1(SR77) * | Yuen Leng 2 * | Residential, Ground floor |

Remark:

* Location and Station / ASR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

4.4 Monitoring Parameters, Frequency and Duration

4.4.1 **Table 4.3** summarizes the monitoring parameters, frequency and duration of impact TSP monitoring.

Table 4.3 Air Quality Monitoring Parameters, Frequency and Duration

| Parameter | Frequency and Duration |
|-------------|--|
| 1-hour TSP | At least three times in every 6 days should be undertaken when the highest dust impact occur |
| 24-hour TSP | Once every 6 days |

4.5 Monitoring Methodology

1-hr and 24-hr TSP Monitoring

- 4.5.1 With the consideration of criteria stated in the Updated EM&A Manual, the HVS was installed in the vicinity of the air sensitive receivers.
- 4.5.2 The relevant data including temperature, pressure, weather conditions, elapsed-time meter reading for the start and stop of the sampler, identification and weight of the filter paper, and any special phenomena observed were recorded. The weather information was referenced from Hong Kong Observatory (<http://www.weather.gov.hk/wxinfo/pastwx/extractc.htm>).
- 4.5.3 A HOKLAS accredited laboratory with constant temperature and humidity control, and equipped with necessary measuring and conditioning instruments, to handle the 24-hr TSP samples, was employed for sample analysis.
- 4.5.4 Filter papers of size 8"x10" were labelled before sampling. They were inspected to be clean with no pin holes and conditioned in a humidity controlled chamber for over 24-hr and were pre-weighed before use for the sampling.
- 4.5.5 The 24-hr TSP levels were measured by following the standard high volume sampling method for TSP as set out in the Title 40 of the United States Code of Federal Regulations, Chapter 1 (Part 50), Appendix B. TSP was sampled by drawing air through a conditioned, pre-weighted filter paper inside the HVS at a controlled air flow rate. After 24-hr sampling, the filter papers loaded with dust were kept in a clean and tightly sealed plastic bag, and then returned to the laboratory for reconditioning in the humidity controlled chamber followed by accurate weighing by an electronic balance with a readout down to 0.1 mg.
- 4.5.6 All the collected samples were kept in a good condition for 6 months before disposal.
- 4.5.7 For 1-hr TSP monitoring, monitoring methodology is the same as 24-hr TSP monitoring which has been presented in **Section 4.5.1** to **Section 4.5.6**, but with sampling period changed to 1 hour.

4.6 Monitoring Schedule for the Reporting month

- 4.6.1 As informed by the contractor, all major construction activities of the Entrusted Portion Project of Section 1A and 1B were substantially completed on 28 September 2018 and 3 October 2018 respectively. In such regard, the EM&A Programme of the captioned project, including monthly EM&A reporting and the corresponding environmental monitoring and audit works, is no longer required and we proposed to cease it by the end of December 2018 and we have submitted the termination proposal to EPD on 24 December 2018. And EPD are replied the EM&A monitoring shall only be terminated when insignificant environmental impacts of the remaining outstanding construction works are expected and agreement of EPD. After that we have submitted the termination proposal to EPD on 4 April 2019 again. EPD replied we need to provide the Final EM&A Report to facilitate their consideration for the termination on 14 May 2019. Therefore, the EM&A monitoring and audit works will be ceased upon EPD's approval for the termination proposal is approved. The tentative schedule for environmental monitoring for the reporting month is provided in **Appendix D**.
- 4.6.2 Meteorological data extracted from Hong Kong Observatory for the reporting month is provided in **Appendix E**.

4.7 Monitoring Results

- 4.7.1 The monitoring results for 1-hr and 24-hr TSP are summarised in **Table 4.4** and **Table 4.5** respectively. Detailed air quality monitoring results and the graphical presentation of air quality monitoring data for the current and past three reporting months are presented in **Appendix F**.

Table 4.4 Summary of 1-hr TSP Monitoring Results

| ASR ID | Average ($\mu\text{g}/\text{m}^3$) | Range ($\mu\text{g}/\text{m}^3$) | Action Level ($\mu\text{g}/\text{m}^3$) | Limit Level ($\mu\text{g}/\text{m}^3$) |
|-------------|--------------------------------------|------------------------------------|---|--|
| AM1(SR77) * | 144.2 | 91.7 – 194.3 | 292.7 | 500 |

Remark:

* Station / ASR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

Table 4.5 Summary of 24-hr TSP Monitoring Results

| ASR ID | Average ($\mu\text{g}/\text{m}^3$) | Range ($\mu\text{g}/\text{m}^3$) | Action Level ($\mu\text{g}/\text{m}^3$) | Limit Level ($\mu\text{g}/\text{m}^3$) |
|-------------|--------------------------------------|------------------------------------|---|--|
| AM1(SR77) * | 85.3 | 55.4 – 121.2 | 170.3 | 260 |

Remark:

* Station / ASR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

- 4.7.2 No exceedance of Action and Limit Level was recorded for 24-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.
- 4.7.3 No exceedance of Action and Limit Level was recorded for 1-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.
- 4.7.4 The Event and Action Plan for the occurrence of non-compliance of the air quality criteria is annexed in **Appendix G**.

5 NOISE MONITORING

5.1 Monitoring Requirements

5.1.1 In accordance with the Updated EM&A Manual, the impact noise monitoring frequency shall depend on the scale of the construction activities. An initial guide on the regular monitoring frequency should be at least once per week when noise generating activities are underway.

5.2 Monitoring Equipment

5.2.1 Noise monitoring was performed using a sound level meter at the monitoring station. The sound level meter deployed complies with the International Electrotechnical Commission Publications 651:1979 (Type 1) and 804:1985 (Type 1) specifications. An acoustic calibrator was deployed to check the sound level meter at a known sound pressure level. The brand and model of the equipment is given in **Table 5.1**.

Table 5.1 Noise Monitoring Equipment

| Equipment | Brand and Model | Quantity | Serial Number |
|------------------------|------------------------|----------|---------------|
| Sound Level Calibrator | Rion (Model No. NC-74) | 1 | 34678506 |
| Sound Level Meter | Rion (Model No. NL-52) | 1 | 00175560 |

5.2.2 The sound level calibrator and sound level meter were verified by a certified laboratory every year. Calibration certificates of the sound level meter and acoustic calibrator are provided in **Appendix C**.

5.3 Monitoring Locations

5.3.1 Impact noise monitoring was conducted at the location specified in the Updated EM&A Manual. **Table 5.2** describes the details of the noise monitoring station with its location as shown in **Figure 2**.

Table 5.2 Location of Noise Monitoring

| NSR ID | Monitoring Location | Description |
|------------|---------------------|---------------------------|
| M1(SR77) * | Yuen Leng 2 * | Residential, Ground floor |

Remark:

* Location and Station / NSR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

5.4 Monitoring Parameters, Frequency and Duration

5.4.1 **Table 5.3** summarizes the monitoring parameters, frequency and duration of impact noise monitoring.

Table 5.3 Noise Monitoring Parameters, Frequency and Duration

| Parameter and Duration | Frequency |
|--|------------------------|
| 30-mins measurement at between 0700 and 1900 on normal weekdays. Leq, L10 and L90 would be recorded. | At least once per week |

5.5 Monitoring Methodology

5.5.1 The monitoring procedures are summarised as follows:

- The sound level meter was set on a tripod at a height of 1.2 m above the ground for free-field measurements at monitoring station SR77;
- The battery condition was checked to ensure good functioning of the meter;
- Parameters such as frequency weighting, the time weighting and the measurement time were set as follows:
 - Frequency weighting: A
 - Time weighting: Fast
 - Parameters: Leq, L10 and L90
 - Time measurement: Leq(30-minutes) during non-restricted hours i.e. 07:00 – 19:00 hrs on normal weekdays
- Prior to and after each noise measurement, the meter was calibrated using the acoustic calibrator for 94dB(A) at 1000 Hz. If the difference in the calibration level before and after measurement was more than 1dB(A), the measurement would be considered invalid and repeat of noise measurement would be required after re-calibration or repair of the equipment.
- At the end of the monitoring period, the Leq, L10 and L90 were recorded. In addition, site conditions and noise sources were recorded on a standard record sheet.
- A façade correction of +3dB (A) shall be made to the noise parameter obtained by free field measurement.

5.6 Monitoring Schedule for the Reporting Month

5.6.1 The schedule for environmental monitoring for the reporting month is provided in **Appendix D**. Meteorological data extracted from Hong Kong Observatory for the reporting month is provided in **Appendix E**.

5.7 Monitoring Results

5.7.1 The monitoring results for noise are summarized in **Table 5.4** and the monitoring results and the graphical presentation of noise level for the current and past three reporting months are presented in **Appendix H**.

Table 5.4 Summary of Noise Monitoring Results

| Noise Monitoring Station ID | Average, dB(A), Leq (30min) ⁽²⁾ | Range, dB(A), Leq (30min) ⁽²⁾ | Action Level | Limit Level, dB(A) |
|-----------------------------|--|--|---|--------------------|
| M1(SR77) ⁽¹⁾ | 63.6 | 62.5 – 64.5 | When one documented valid complaint is received | 75 |

Remark:

(1) Station / NSR ID as identified in Updated EM&A Manual / EIA Report for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling

(2) +3dB(A) façade correction included

- 5.7.2 Major noise sources during the noise monitoring included construction activities of the Project and that along Tai Wo Service Road East, and nearby traffic noise.
- 5.7.3 No noise complaint was received in the reporting month, so no Action Level exceedance was recorded. Also, no Limit Level exceedance of noise monitoring was recorded in the reporting month.
- 5.7.4 The Event and Action Plan for the occurrence of non-compliance of the noise criteria is annexed in **Appendix G**.

6 WATER MONITORING

- 6.1.1 The box culvert works had been completed in March 2017. The 4-week post-construction water quality monitoring at I5 was completed in 28 April 2017.

7 WASTE MANAGEMENT

- 7.1.1 The Contractor has registered as a chemical waste producer of the Project. The C&D materials and waste sorting were carried out on-site. Receptacles were provided for general refuse collection.
- 7.1.2 As advised by the Contractor, a total of 280m³ of excavated material has been generated. 280m³ of inert C&D materials was disposed of at public fill to TM Area 38. 0m³ of inert C&D materials were reused on site. 15m³ of general refuse was disposed of at North East New Territories (NENT) Landfill. No plastic was collected by recycling contractor in the reporting month. No paper/cardboard packaging was collected by recycling contractor in the reporting month. No metal was collected by recycling contractor in the reporting month. No chemical waste was collected by licensed contractor in the reporting period. Details of the waste management data are presented in **Appendix K**.

8 ENVIRONMENTAL SITE INSPECTION AND AUDIT

8.1 Site Inspection

8.1.1 Site inspections were carried out on a weekly basis to monitor the implementation of proper environmental pollution control and mitigation measures for the Project. A summary of the site inspection is provided in **Appendix L**.

8.1.2 In the reporting month, 3 weekly site inspections were carried out on 9, 17 and 22 January 2020. The weekly site inspection for the 31 January 2020 was cancelled due to reduce the risk of novel coronavirus. No site inspection was conducted with the EPD. No non-compliance was recorded during the site inspection. A summary of the reminders and observations recorded during the site inspections are presented in **Table 8.1**.

Table 8.1 Observations and Recommendations of Site Audit

| Parameters | Date | Observations and Recommendations | Follow-up |
|----------------------------------|------|----------------------------------|-----------|
| Air Quality | N/A | N/A | N/A |
| Noise | N/A | N/A | N/A |
| Water Quality | N/A | N/A | N/A |
| Waste/ Chemical Management | N/A | N/A | N/A |
| Landscape & Visual | N/A | N/A | N/A |
| Permits / Licenses | N/A | N/A | N/A |

9 IMPLEMENTATION STATUS OF ENVIRONMENTAL MITIGATION MEASURES

- 9.1.1 The Contractor has implemented the relevant environmental mitigation measures as specified in the EIA Reports, EPs and updated EM&A Manual. The implementation status of environmental mitigation measures during the reporting period is summarized in **Appendix L**.

10 SUMMARY OF EP SUBMISSION IN THE REPORTING MONTH

10.1.1 The status of the required submission under the EP during the reporting period is summarized in **Table 10.1**.

Table 10.1 Status of Required Submission under Environmental Permit

| EP Condition | Submission | Submission Date |
|---------------|---------------------------------------|-----------------|
| Condition 3.3 | Monthly EM&A Report for December 2019 | 13 Jan 2020 |

11 ENVIRONMENTAL NON-CONFORMANCE

11.1 Summary of Monitoring Exceedances

- 11.1.1 No exceedance of Action and Limit Level were recorded for 24-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.
- 11.1.2 No exceedance of Action and Limit Level was recorded for 1-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.
- 11.1.3 No noise complaint was received in the reporting month, so no Action Level exceedance was recorded. Also, no Limit Level exceedance of noise monitoring was recorded in the reporting month.
- 11.1.4 The 4-week post-construction water quality monitoring at I5 was completed in April 2017.

11.2 Summary of Environmental Non-Compliance

- 11.2.1 No environmental non-compliance was recorded in the reporting month. The cumulative statistics are provided in **Appendix N**.

11.3 Summary of Environmental Complaints

- 11.3.1 No environmental complaints were received in the reporting month. The cumulative statistics are provided in **Appendix N**.

11.4 Summary of Environmental Summon and Successful Prosecutions

- 11.4.1 No environmental related prosecution or notification of summons was received in the reporting month. The cumulative statistics are provided in **Appendix N**.

12 FUTURE KEY ISSUES

12.1 Construction Programme for the Next Month

12.1.1 The remaining construction works in the coming reporting month are anticipated to include:

- Road pavement works; and
- Remaining works of Kiu Tau Footbridge.

12.2 Key Issues for the Coming Month

12.2.1 Key issues to be considered in the coming month are anticipated to include:

- Properly maintain all drainage facilities and wheel washing facilities on site;
- Good housekeeping should be maintained and general refuse should be removed regularly; and
- Watering shall be enhanced over the construction site.

12.3 Monitoring Schedule for the Next Month

12.3.1 The tentative schedule for environmental monitoring for the coming month is provided in **Appendix D**.

13 CONCLUSIONS AND RECOMMENDATIONS


13.1 Conclusions

- 13.1.1 The construction phase EM&A programme of the Project commenced on 5 November 2013.
- 13.1.2 The 1-hr TSP, 24-hr TSP, noise and water quality monitoring were carried out in the reporting period.
- 13.1.3 No exceedance of Action and Limit Level was recorded for 24-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.
- 13.1.4 No exceedance of Action and Limit Level was recorded for 1-hour TSP monitoring at the monitoring location AM1(SR77) in the reporting month.
- 13.1.5 No noise complaint was received in the reporting month, so no Action Level exceedance was recorded. Also, no Limit Level exceedance of noise monitoring was recorded in the reporting month.
- 13.1.6 The 4-week post-construction water quality monitoring at I5 was completed in April 2017.
- 13.1.7 Three (3) environmental site inspections were carried out in the reporting month. Recommendations on remedial actions were given to the Contractors for the deficiencies identified during the site audit.


13.2 Recommendations

According to the environmental site inspections performed in the reporting month, no following recommendation was provided.

Figure

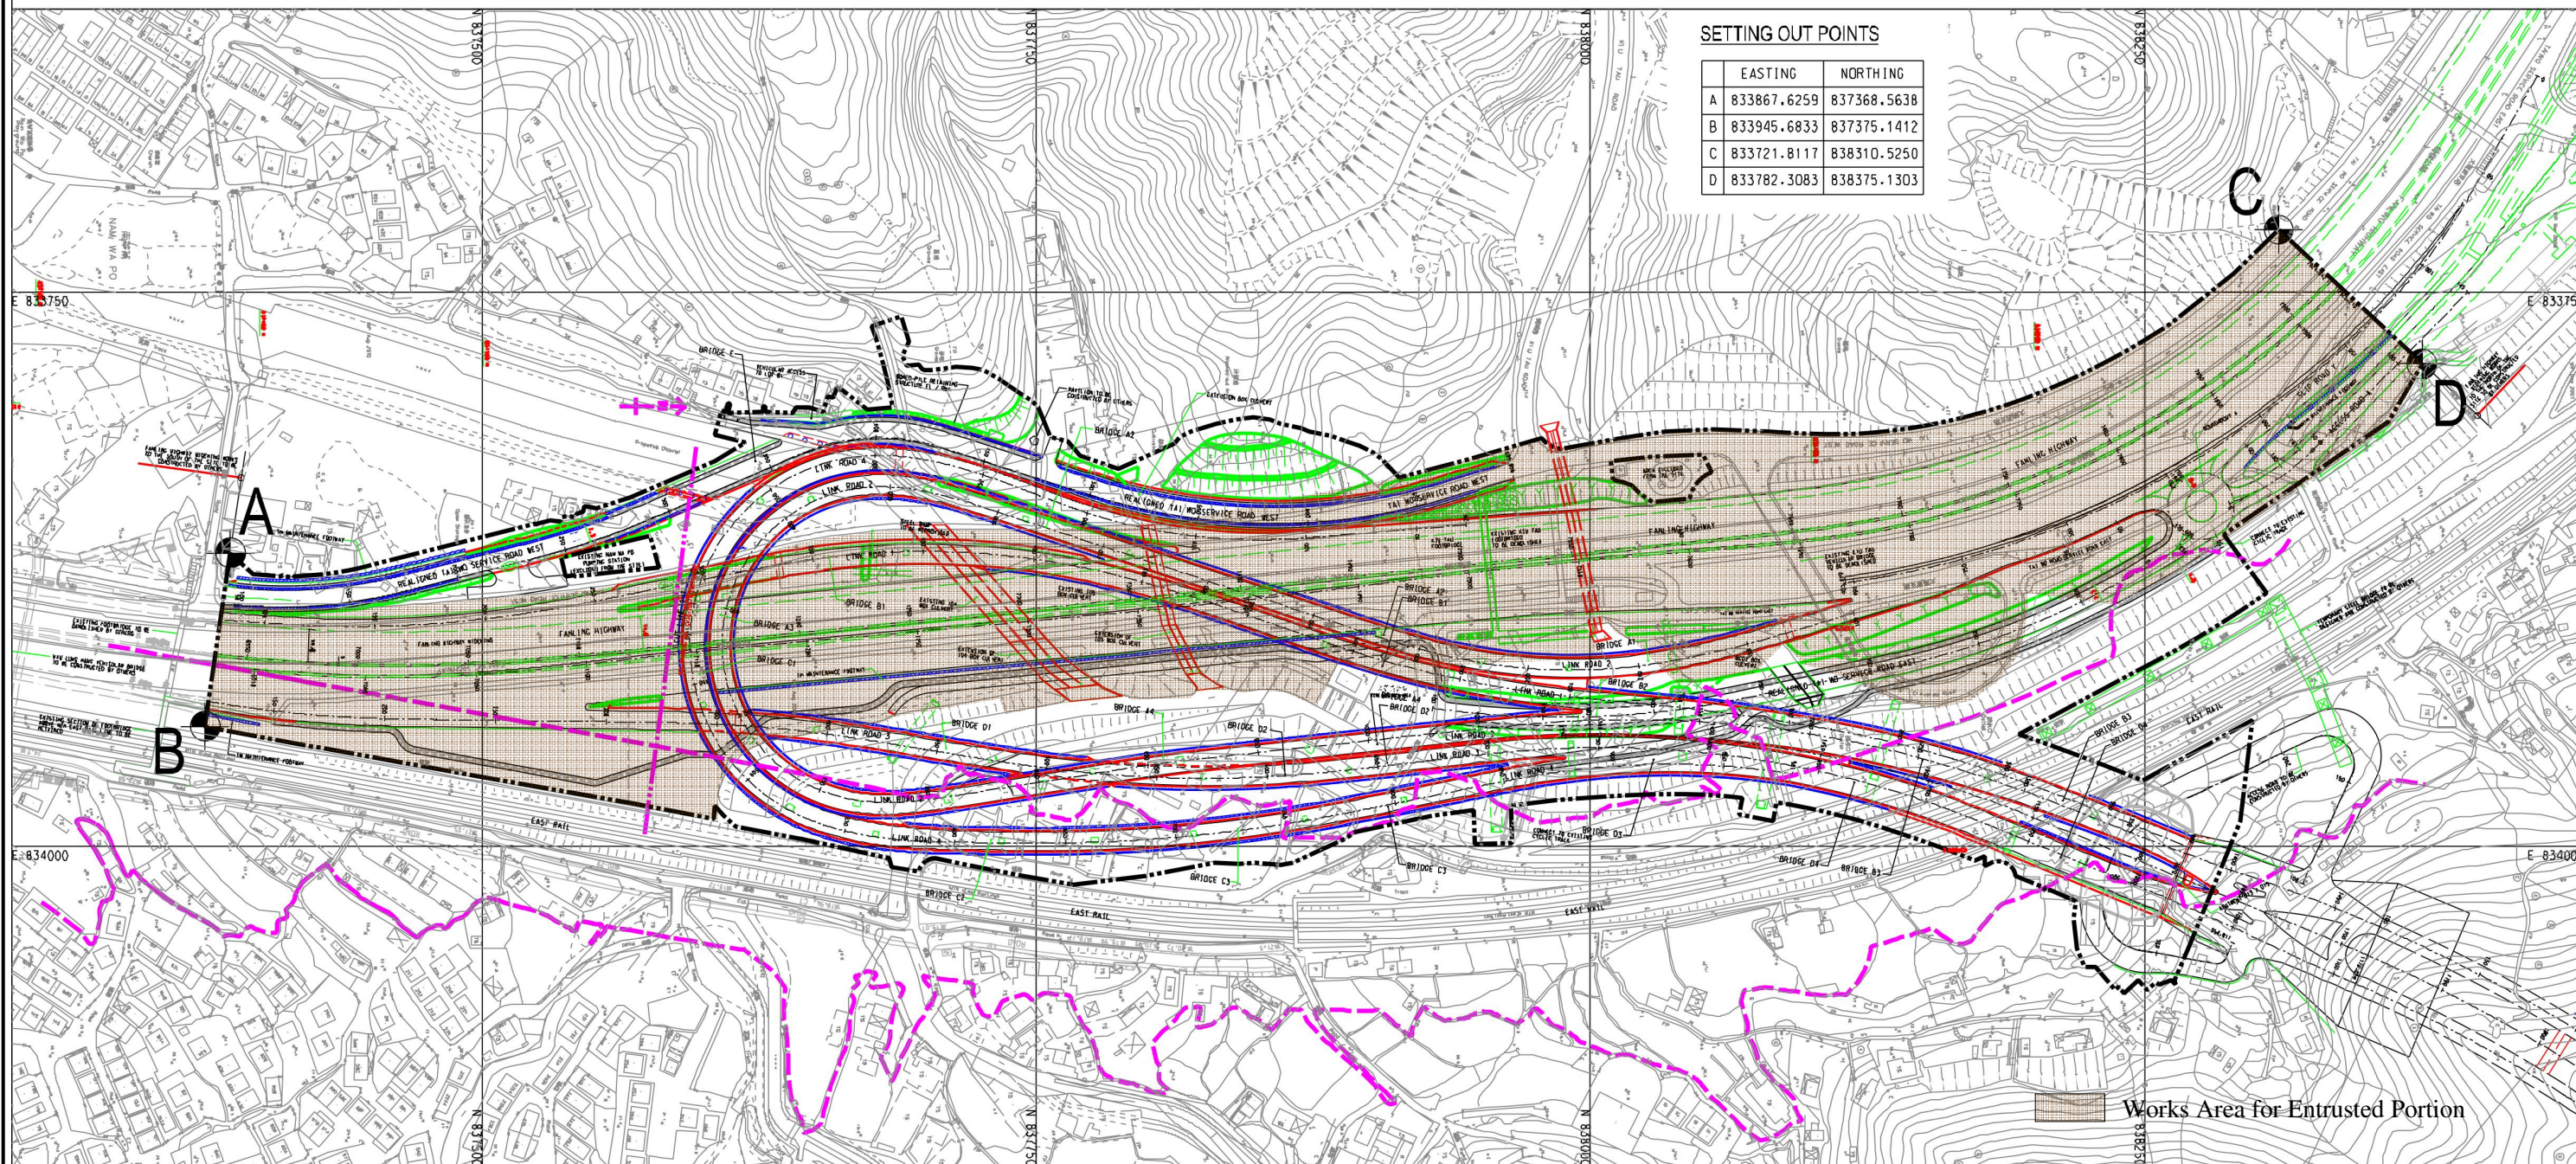

CV/201209-T-CWC-SK-001g_AD_edit.dgn 22/1/2014 17:10:34

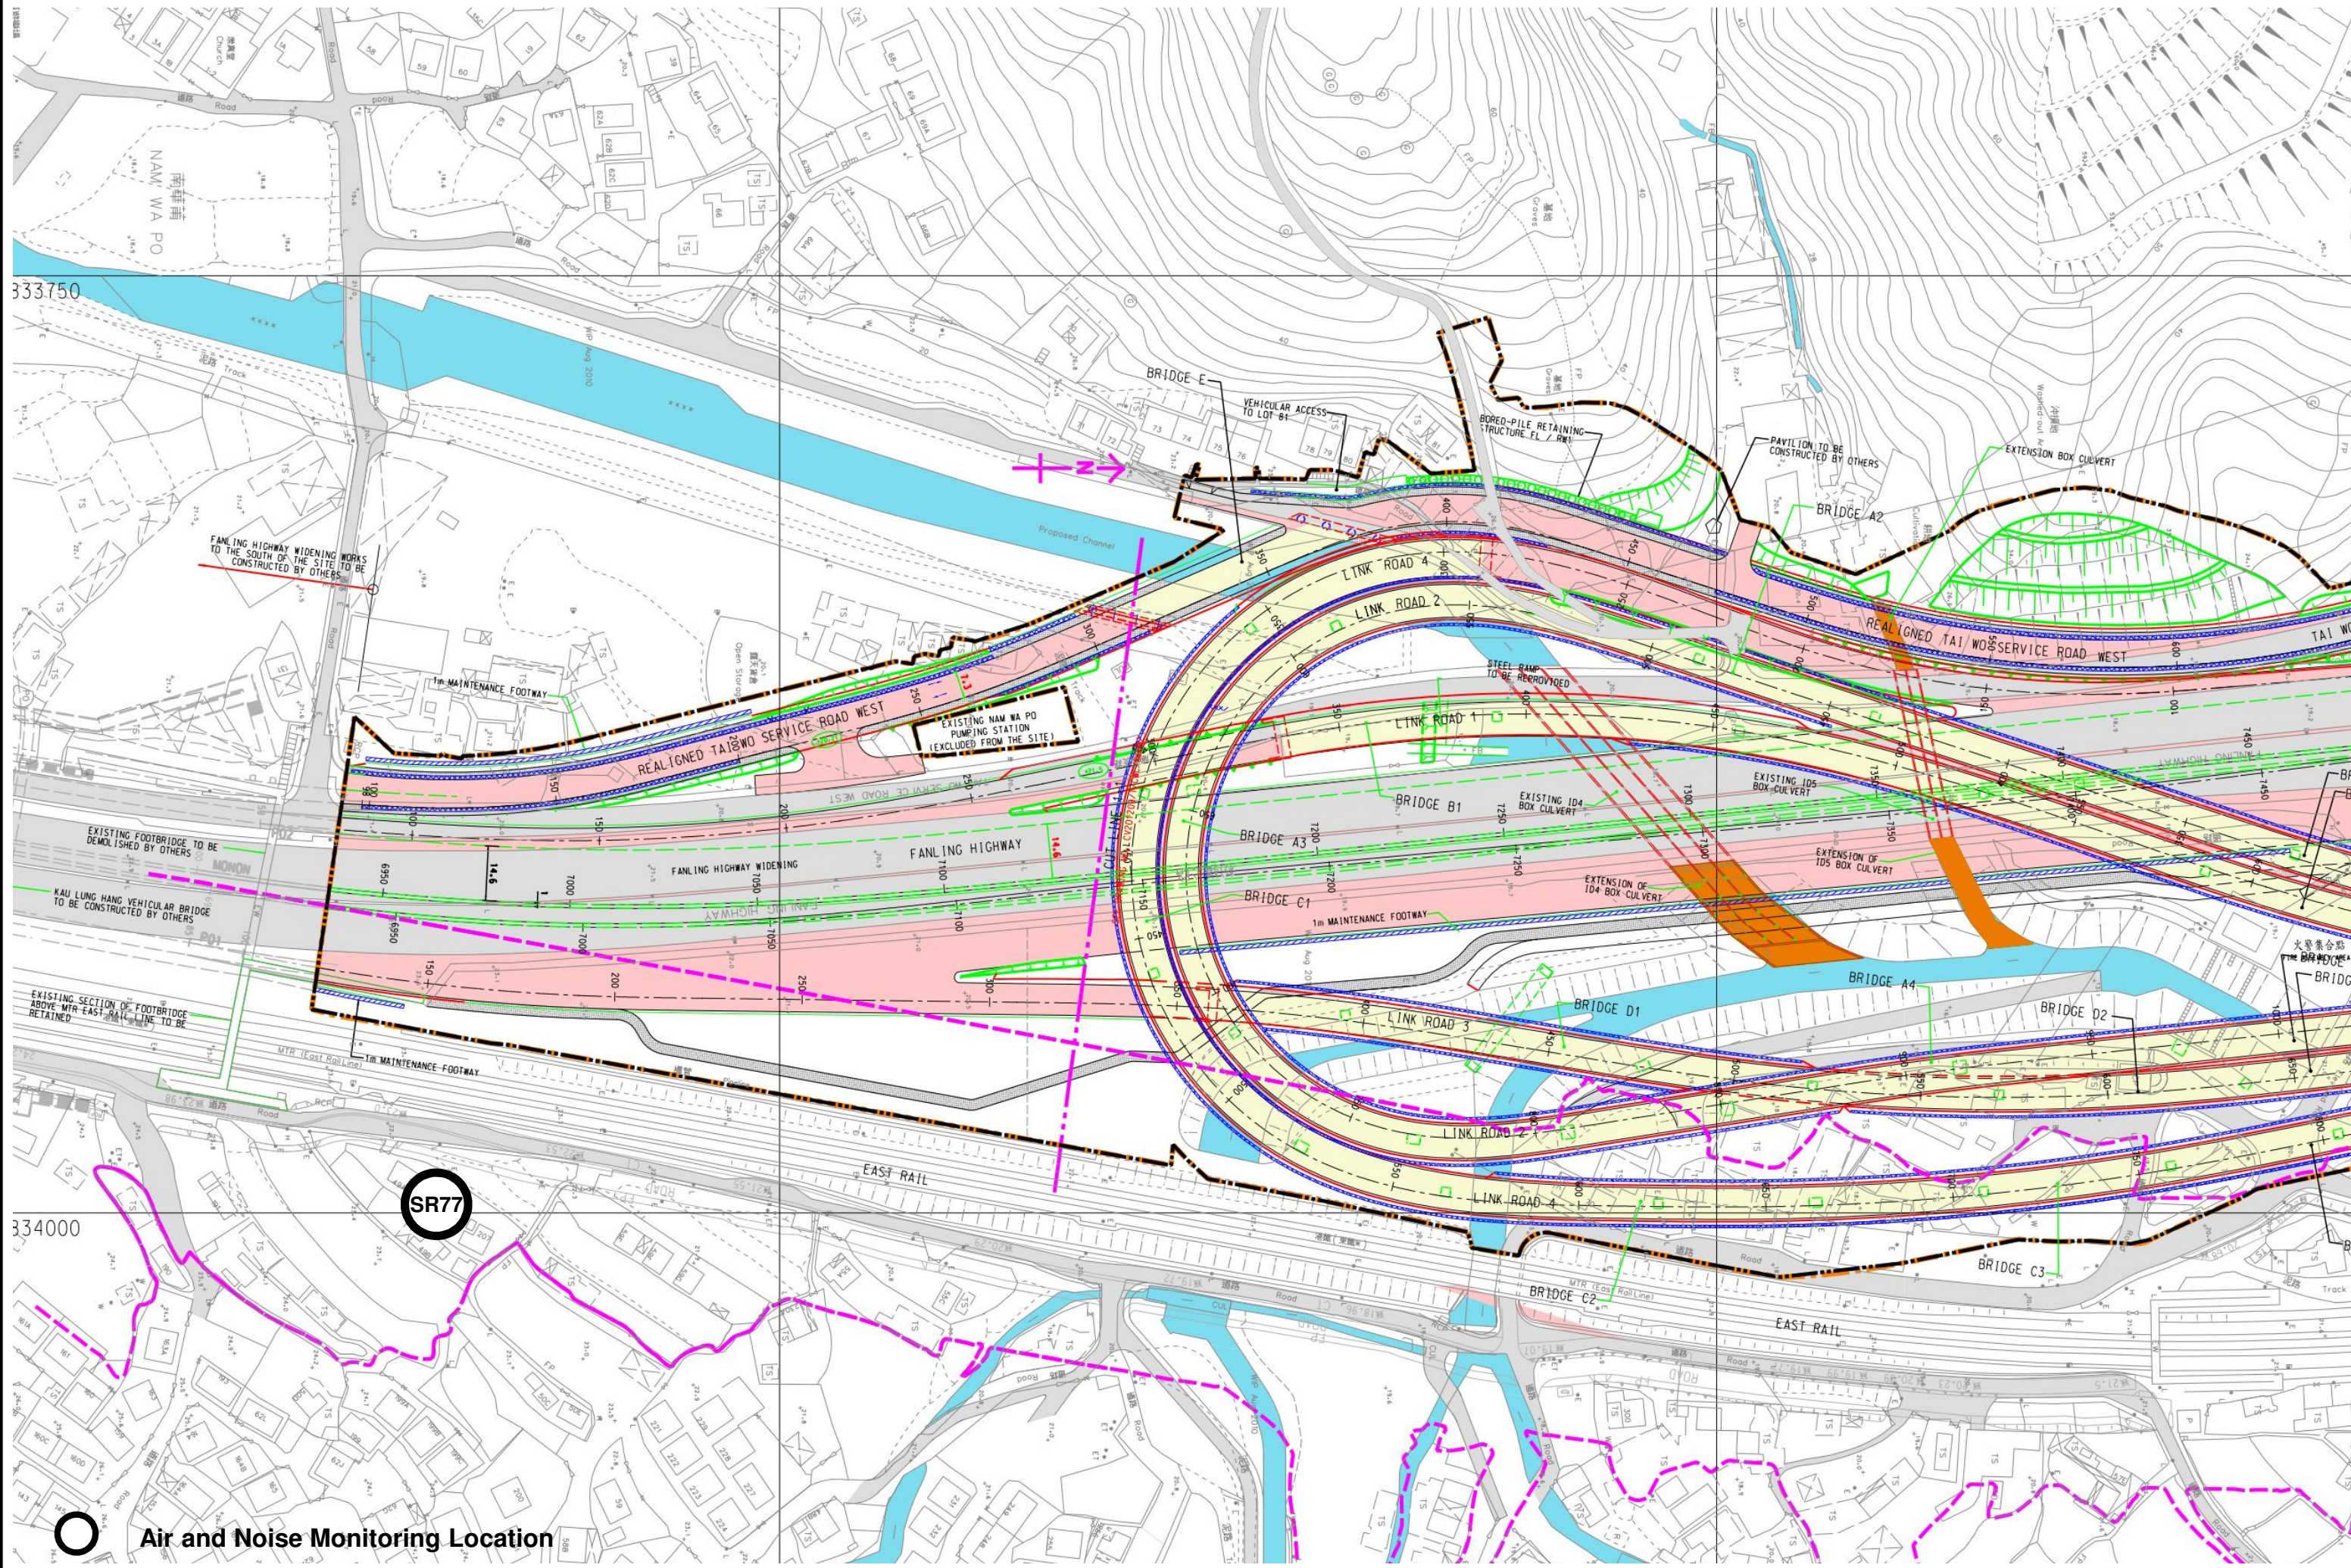

Appendix A

Construction Programme

| Activity ID | Activity Name | OD | RD | Start | Finish | TF | 2019 | | | | | |
|---|--|-----|----|-------------|-------------|------|--|-----|-----|-----|-----|--|
| | | | | | | | Mar | Apr | May | Jun | Jul | Aug |
| 3-Month Rolling Programme 2019-4-21 (Based on UMP06C) | | | | | | | | | | | | |
| Key Dates (Contractual) | | | | | | | | | | | | |
| KD-0400a | KD4: Section 3 - Remainder of Landscape Softworks not included in Section 3A (Pref. EOT by Claim 56, 58) | 0 | 0 | | 20-May-19* | 0 | | | | | | ◆ KD4: Section 3 - Remainder of Landscape Softworks not included in Section 3A (Pref. EOT by Claim 56, 58) |
| KD-0500 | KD4A: Section 3A - Landscape Softworks in NBZ1 (Potential EOT by Inclement Weather) | 0 | 0 | | 20-May-19* | -213 | | | | | | ◆ KD4A: Section 3A - Landscape Softworks in NBZ1 (Potential EOT by Inclement Weather) |
| KD-0800 | KD6: Section 5 - Preservation and Protection of Trees (Potential EOT by Inclement Weather) | 0 | 0 | | 20-May-19* | -110 | | | | | | ◆ KD6: Section 5 - Preservation and Protection of Trees (Potential EOT by Inclement Weather) |
| Key Dates (Forecast) | | | | | | | | | | | | |
| KD-0405 | KD4: Section 3 - Remainder of Landscape Softworks not included in Section 3A | 0 | 0 | | 20-May-19 | 1 | | | | | | ◆ KD4: Section 3 - Remainder of Landscape Softworks not included in Section 3A |
| KD-0505 | KD4A: Section 3A - Landscape Softworks in NBZ1 | 0 | 0 | | 20-May-19 | -213 | | | | | | ◆ KD4A: Section 3A - Landscape Softworks in NBZ1 |
| KD-0805 | KD6: Section 5 - Preservation and Protection of Trees | 0 | 0 | | 20-May-19 | -110 | | | | | | ◆ KD6: Section 5 - Preservation and Protection of Trees |
| Section IA & IB - Fanling Highway Widening (KD-1 & KD-2) | | | | | | | | | | | | |
| Fanling Highway South Portion between CH6935 and CH7470 | | | | | | | | | | | | |
| Fanling Highway Zone 1 between CH6935 and CH7130 (within SBZ2) | | | | | | | | | | | | |
| Noise Barrier | | | | | | | | | | | | |
| FHW-1110b | Noise Barrier NB6 and NB7 - Remaining Stem Wall (28m, maintain access for extension of NB 70, VO199) | 30 | 0 | 16-Aug-18 A | 30-Apr-19 A | | Noise Barrier NB6 and NB7 - Remaining Stem Wall (28m, maintain access for extension of NB 70, VO199) | | | | | |
| FHW-1140c | Noise Barrier NB70 - Footing (extended 10m under VO199) | 153 | 0 | 20-Feb-19 A | 30-Apr-19 A | | Noise Barrier NB70 - Footing (extended 10m under VO199) | | | | | |
| At-Grade Roadworks (195m) | | | | | | | | | | | | |
| FHW-1350b | Road Pavement (FLH NB 1st lane and Hard Shoulder) | 138 | 0 | 20-Mar-19 A | 20-May-19 A | | Road Pavement (FLH NB 1st lane and Hard Shoulder) | | | | | |
| Fanling Highway Zone 2 between CH7130 and CH7290 | | | | | | | | | | | | |
| Noise Barrier | | | | | | | | | | | | |
| FHW-2340b | Noise Barrier NB67-2 - Cap ID4-1A_1 and Cap ID4-1A_2 head beam (affected by Tau Pass, VO 191) | 15 | 0 | 23-Apr-19 A | 10-May-19 A | | Noise Barrier NB67-2 - Cap ID4-1A_1 and Cap ID4-1A_2 head beam (affected by Tau Pass, VO 191) | | | | | |
| FHW-2370c | Access Ramp at Tau Pass - Additional Mini-Piling (3 nos.) (under VO191) | 34 | 0 | 20-Feb-19 A | 28-Apr-19 A | | Access Ramp at Tau Pass - Additional Mini-Piling (3 nos.) (under VO191) | | | | | |
| FHW-2370d | Access Ramp at Tau Pass - Pile caps and other structures (under VO191) | 48 | 0 | 07-Mar-19 A | 03-May-19 A | | Access Ramp at Tau Pass - Pile caps and other structures (under VO191) | | | | | |
| At-Grade Roadworks (160m) | | | | | | | | | | | | |
| FHW-2240 | Permanent Street Light Installation (due to Claim No. 63) | 21 | 0 | 20-Jun-18 A | 13-Mar-19 A | | Permanent Street Light Installation (due to Claim No. 63) | | | | | |
| FHW-2250 | Road Pavement on FLH SB 4th lane after Removal of Temp. Street Light (due to Claim No. 63) | 11 | 0 | 20-Mar-19 A | 10-Apr-19 A | | Road Pavement on FLH SB 4th lane after Removal of Temp. Street Light (due to Claim No. 63) | | | | | |
| FHW-2350a | Road Drainage and Pavement (near NB67-2, MN7.9 to MN7.11) | 58 | 0 | 29-Mar-18 A | 18-May-19 A | | Road Drainage and Pavement (near NB67-2, MN7.9 to MN7.11) | | | | | |
| FHW-2350b | Installation of Drain pipe and Manholes (MN7.12 & MN7.12A) (affected by Tau Pass under VO191) | 29 | 0 | 26-Nov-18 A | 23-Apr-19 A | | Installation of Drain pipe and Manholes (MN7.12 & MN7.12A) (affected by Tau Pass under VO191) | | | | | |
| FHW-2350c | Road Drainage and Pavement (near NB67-2, MN7.12 & MN7.12A) (affected by Tau Pass, VO not yet issued) | 46 | 0 | 20-Jan-19 A | 13-May-19 A | | Road Drainage and Pavement (near NB67-2, MN7.12 & MN7.12A) (affected by Tau Pass, VO not yet issued) | | | | | |
| Fanling Highway Zone 3 between CH7290 and CH7380 | | | | | | | | | | | | |
| Noise Barrier | | | | | | | | | | | | |
| FHW-3340 | Noise Barrier NB69 - Pile cap/ Footing and Stem Wall adjacent to NB lane (108m) | 77 | 0 | 16-Oct-17 A | 30-Apr-19 A | | Noise Barrier NB69 - Pile cap/ Footing and Stem Wall adjacent to NB lane (108m) | | | | | |
| At-Grade Roadworks (130m) | | | | | | | | | | | | |
| FHW-3240 | Road Pavement on FLH SB 4th lane after Removal of Temp. Street Light (due to Claim No. 63) | 10 | 10 | 31-Aug-18 A | 30-May-19 | 296 | Road Pavement on FLH SB 4th lane after Removal of Temp. Street Light (due to Claim No. 63), Road Drainage (FLH NB hard shoulder, next to NB69) | | | | | |
| FHW-3350a | Road Drainage (FLH NB hard shoulder, next to NB69) | 61 | 0 | 26-Feb-18 A | 18-May-19 A | | Road Drainage (FLH NB hard shoulder, next to NB69) | | | | | |

- Actual Work
- Remaining Work
- Summary Bar
- Critical Remaining Work
- ◆ Milestone
- Project Baseline Bar

CEDD Contract No. CV/2012/09
Liantang / Heung Yuen Wai BCP - Site Formation & Infrastructure Works, Contract 3
3-Month Rolling Programme
3MPR070 _____ **Page 1 of 5** _____ **20-May-19**

| 3-Month Rolling Programme | | | |
|---------------------------|------------|---------|----------|
| Date | Revision | Checked | Approved |
| 20-May-19 | Revision 0 | FC | DH |
| | | | |
| | | | |
| | | | |
| | | | |

| Activity ID | Activity Name | OD | RD | Start | Finish | TF | 2019 | | | | | | |
|---|--|-----|----|-------------|-------------|-----|------|-----|-----|-----|-----|-----|--|
| | | | | | | | Mar | Apr | May | Jun | Jul | Aug | |
| FHW-3350b | Road Formation and Pavement (FLH NB 1st lane and HS next to NB69, due to Tau Pass under VO191) | 25 | 0 | 19-Mar-19 A | 16-May-19 A | | | | | | | | |
| Fanling Highway North Portion between CH7470 and CH7925 | | | | | | | | | | | | | |
| Fanling Highway Zone 4 between CH7380 and CH7470 | | | | | | | | | | | | | |
| At-Grade Roadworks (90m) | | | | | | | | | | | | | |
| FHW-4150 | Road Pavement (FLH SB 1st lane) by re-surfacing (due to Claim No. 63) | 15 | 0 | 10-Sep-18 A | 27-Apr-19 A | | | | | | | | |
| FHW-4150a | Road Drainage and Road Pavement (FLH H.S., Merging Lane)(due to Claim No. 63) | 48 | 0 | 10-Sep-18 A | 16-Apr-19 A | | | | | | | | |
| FHW-4330c | Construction of FL/RW2 (mass concrete wall, VO not yet received) | 38 | 0 | 27-Aug-18 A | 04-Apr-19 A | | | | | | | | |
| FHW-4330d | Remaining Gullies and Road Pavement after Construction of FL/RW2 (VO not yet received) | 25 | 0 | 11-Feb-19 A | 18-May-19 A | | | | | | | | |
| FHW-4330e | Road Drainage MN9.1 - MN9.3 | 24 | 0 | 23-Aug-18 A | 20-May-19 A | | | | | | | | |
| Fanling Highway Zone 5 between CH7470 and CH7600 (Provision of Kiu Tau Footbridge) | | | | | | | | | | | | | |
| Kiu Tau Footbridge Re-provision (East) | | | | | | | | | | | | | |
| FHW-5070 | Installation of Lighting Facilities (affect by design change which is under VO) | 21 | 46 | 20-Jun-18 A | 13-Jul-19 | 260 | | | | | | | |
| FHW-5090 | Erection of Pillar Box (affect by design change which is under VO) | 30 | 0 | 28-Feb-19 A | 29-Mar-19 A | | | | | | | | |
| FHW-5100 | Power Cable Laying Works (affect by design change which is under VO) | 36 | 36 | 20-May-19* | 02-Jul-19 | 233 | | | | | | | |
| FHW-5110 | Permanent Power Supply Connection (affect by design change which is under VO) | 10 | 10 | 03-Jul-19 | 13-Jul-19 | 260 | | | | | | | |
| FHW-5110a | Installation of Drainage Pipe | 32 | 22 | 10-Sep-18 A | 14-Jun-19 | 284 | | | | | | | |
| FHW-5110b | Laying of Floor Tiles (affect by design change which is under VO) | 72 | 12 | 28-Jun-18 A | 01-Jun-19 | 294 | | | | | | | |
| FHW-5110c | Installation of Suspended Ceiling (affect by design change which is under VO) | 104 | 12 | 21-May-18 A | 01-Jun-19 | 294 | | | | | | | |
| Provision of BFA Facilities (Lift) | | | | | | | | | | | | | |
| FHW-L-104f | Permanent Power Supply (affect by design change which is under VO) | 10 | 10 | 03-Jul-19* | 13-Jul-19 | 233 | | | | | | | |
| FHW-L-106f | Testing & Commissioning (affect by design change which is under VO) | 27 | 27 | 15-Jul-19* | 14-Aug-19 | 233 | | | | | | | |
| Works at existing TWSRE | | | | | | | | | | | | | |
| FHW-5490 | Road Drainage, Pavement and TCSS duct laying (Merging lane next to NB72)(due to claim) | 2 | 2 | 25-May-19* | 27-May-19 | 299 | | | | | | | |
| FHW-5500 | Road Drainage (MS10.1-10.3A), Road Pavement and TCSS duct laying (Merging lane next to NB73) | 31 | 44 | 21-Apr-18 A | 11-Jul-19 | 262 | | | | | | | |
| At-Grade Road Works (130m) | | | | | | | | | | | | | |
| FHW-5130 | Road Pavement (FLH SB 1st lane) by re-surfacing (due to claim 63) | 15 | 18 | 10-Sep-18 A | 10-Jun-19 | 288 | | | | | | | |
| FHW-5330a | Road Drainage (MN10.1-10.3A, gullies affected by Slope F18) | 60 | 15 | 16-Dec-17 A | 05-Jun-19 | 291 | | | | | | | |
| FHW-5330c | Fill Replacement Works 3SW-DF18 next to FLH NB (further modified by VO not yet received) | 73 | 24 | 01-Aug-18 A | 17-Jun-19 | 282 | | | | | | | |
| FHW-5330d | Remaining Gullies, road formation and TCSS duct laying (log on effect by Slope F18 under VO) | 25 | 0 | 23-Jan-19 A | 26-Mar-19 A | | | | | | | | |
| FHW-5330e | Road Pavement (log on effect by Slope F18 under VO) | 14 | 14 | 20-May-19* | 04-Jun-19 | 292 | | | | | | | |
| Fanling Highway Zone 6 between CH7600 and CH7660 (Existing Vehicular Bridge) | | | | | | | | | | | | | |
| At-Grade Roadworks (60m) | | | | | | | | | | | | | |
| FHW-6330a | Road Drainage and Road Formation (FLH NB hard shoulder) | 60 | 18 | 16-Dec-17 A | 10-Jun-19 | 288 | | | | | | | |
| Fanling Highway Zone 7 between CH7660 and CH7925 at NBZ (Section 1B) | | | | | | | | | | | | | |

- Actual Work
- Remaining Work
- Summary Bar
- Critical Remaining Work
- ◆ Milestone
- Project Baseline Bar

CEDD Contract No. CV/2012/09
Liantang / Heung Yuen Wai BCP - Site Formation & Infrastructure Works, Contract 3
3-Month Rolling Programme
 3MPR070 Page 2 of 5 20-May-19

| 3-Month Rolling Programme | | | |
|---------------------------|------------|---------|----------|
| Date | Revision | Checked | Approved |
| 20-May-19 | Revision 0 | FC | DH |
| | | | |
| | | | |
| | | | |
| | | | |

| Activity ID | Activity Name | OD | RD | Start | Finish | TF | 2019 | | | | | | |
|---|--|-----|-----|-------------|-------------|-----|--|-----|-----|-----|-----|-----|--|
| | | | | | | | Mar | Apr | May | Jun | Jul | Aug | |
| At-Grade Roadworks (265m) | | | | | | | | | | | | | |
| FHW-7330 | Road Pavement (FLH NB 3rd lane at NBZ joint with CSHK) by re-surfacing | 24 | 35 | 20-Aug-18 A | 29-Jun-19 | 271 | Road Pavement (FLH NB 3rd lane at NBZ joint with CSHK) | | | | | | |
| FHW-7340 | Road Pavement, Central Barrier (FLH NB 4th lane) by re-surfacing | 24 | 24 | 20-Aug-18 A | 17-Jun-19 | 282 | Road Pavement, Central Barrier (FLH NB 4th lane) by re-surfacing, Road Pa | | | | | | |
| Remaining Works for Noise Barrier along widened Fanling Highway | | | | | | | | | | | | | |
| FHW-NB-150 | Installation of Steelworks & Panel for NB72 & NB73 (248m), adjacent to FLH SB lanes at Zones 4, 5 & 6 | 16 | 16 | 20-May-19 | 06-Jun-19 | 290 | Installation of Steelworks & Panel for NB72 & NB73 (248m), adjacent to FLH SB lanes at Z | | | | | | |
| FHW-NB-320 | Installation of Steelworks & Panel for NB67-2 (85m), adjacent to FLH NB lanes at Zones 2 & 3 | 14 | 14 | 20-May-19* | 04-Jun-19 | 274 | Installation of Steelworks & Panel for NB67-2 (85m), adjacent to FLH NB lanes at Zones 2 & 3 | | | | | | |
| FHW-NB-330 | Installation of Steelworks & Panel for NB69 (109m), adjacent to FLH NB lanes near LR1 at Zone 3 | 18 | 18 | 05-Jun-19* | 26-Jun-19 | 274 | Installation of Steelworks & Panel for NB69 (109m), adjacent t | | | | | | |
| Section II - Remainder of the Works (KD-3) | | | | | | | | | | | | | |
| At Grade Link Road at Fanling Highway Interchange | | | | | | | | | | | | | |
| Link Road 1 (near Abutment AB1) | | | | | | | | | | | | | |
| FHI-LR1-1020 | Backfilling works of abutment, Gully and Profile Barrier at Abutment AB1 | 20 | 0 | 28-May-18 A | 03-Apr-19 A | | Backfilling works of abutment, Gully and Profile Barrier at Abutment AB1 | | | | | | |
| Noise Barrier | | | | | | | | | | | | | |
| FHI-LR1-1091 | Noise Barrier NB67-1 - Remaining ground beam of Bay 3 (allow access from TWSRW) | 7 | 0 | 21-Jan-19 A | 27-Apr-19 A | | Noise Barrier NB67-1 - Remaining ground beam of Bay 3 (allow access from TWSRW) | | | | | | |
| Link Road 2 (near Abutment AA1) | | | | | | | | | | | | | |
| FHI-LR2-2040 | 3SW-D/FR32 Bay 3213 (including temporary works) | 35 | 0 | 11-Mar-19 A | 20-Mar-19 A | | 3SW-D/FR32 Bay 3213 (including temporary works) | | | | | | |
| FHI-LR2-2050 | Road Pavement and Drainage next to Abutment (after completion of NB73 Bay 12&13 Stem Wall) | 20 | 0 | 23-Mar-19 A | 12-Apr-19 A | | Road Pavement and Drainage next to Abutment (after completion of NB73 Bay 12&13 Stem Wall) | | | | | | |
| FHI-LR2-2050 | Road Formation, Road Drainage and Pavement (SMH1302 - 1303 & MY2.4 - 2.5) at grade | 72 | 0 | 01-Mar-18 A | 13-May-19 A | | Road Formation, Road Drainage and Pavement (SMH1302 - 1303 & MY2.4 - 2.5) at grade | | | | | | |
| FHW-SG-103f | Fabrication and Delivery of Sign Gantry DS11 | 99 | 0 | 28-Dec-17 A | 18-May-19 A | | Fabrication and Delivery of Sign Gantry DS11 | | | | | | |
| FHW-SG-104f | Erection of Sign Gantry FADS11 and DS64 (include On-site Fabrication) | 15 | 0 | 20-Apr-19 A | 20-May-19 A | | Erection of Sign Gantry FADS11 and DS64 (include On-site Fabrication) | | | | | | |
| Link Road 3 (near Abutment AD1) | | | | | | | | | | | | | |
| FHI-LR3-3020 | Permanent Fill Slope, Construction of Gullies and Profile Barriers | 48 | 0 | 25-Apr-18 A | 18-May-19 A | | Permanent Fill Slope, Construction of Gullies and Profile Barriers | | | | | | |
| FHI-LR3-3030 | Road Pavement | 1 | 0 | 02-Mar-19 A | 04-Mar-19 A | | Road Pavement | | | | | | |
| FHI-LR3-3040 | Other Civil Works for TCSS duct laying - along Link Road 3 | 25 | 0 | 02-Apr-19 A | 30-Apr-19 A | | Other Civil Works | | | | | | |
| Link Road 4 (near Abutment AC1) | | | | | | | | | | | | | |
| FHI-LR4-4030 | Road Formation, Road Drainage, TCSS ducting and Pavement | 55 | 0 | 27-Nov-17 A | 29-Apr-19 A | | Road Formation, Road Drainage, TCSS ducting and Pavement | | | | | | |
| FHI-LR4-4040 | Remaining Section of Carriageway connect to FLH | 44 | 0 | 20-Mar-19 A | 30-Apr-19 A | | Remaining Section of Carriageway connect | | | | | | |
| Viaduct - Pavement, Street Furnitures, Lighting inside Internal Voids and Others | | | | | | | | | | | | | |
| RS-1020b | Other Street Furniture including Sign Gantry, NB, Handrail, traffic signs, etc, for Bridge A, B, C and D | 112 | 0 | 26-Feb-18 A | 20-Apr-19 A | | Other Street Furniture including Sign Gantry, NB, Handrail, traffic signs, etc, for Bridge A, B, C and D | | | | | | |
| RS-1110 | Final Pavement and Road Marking | 12 | 0 | 01-Mar-19 A | 19-Apr-19 A | | Final Pavement and Road Marking | | | | | | |
| WSD Works | | | | | | | | | | | | | |
| DN450 Fire Mains (CHA) | | | | | | | | | | | | | |
| WA-1010c | Pipe Laying - CHA 38 - 113 (DN450) near Ext. TWSRW, 20m | 11 | 102 | 16-Apr-18 A | 18-Sep-19 | 106 | Pipe Laying - CHA 38 - 113 (DN450) near Ext. TWSRW, 20m | | | | | | |
| WA-1020 | Pipe Laying - CHA 113 - 135 (DN450) near Ext. TWSRW, 20m | 102 | 102 | 20-May-19* | 18-Sep-19 | 191 | Pipe Laying - CHA 113 - 135 (DN450) near Ext. TWSRW, 20m | | | | | | |
| WA-1030 | Pipe Laying - CHA 135 - 160 (DN450) near Ext. TWSRW, 25m | 19 | 102 | 18-Apr-18 A | 18-Sep-19* | 204 | Pipe Laying - CHA 135 - 160 (DN450) near Ext. TWSRW, 25m | | | | | | |

- Actual Work
- Remaining Work
- Summary Bar
- Critical Remaining Work
- ◆ Milestone
- Project Baseline Bar

CEDD Contract No. CV/2012/09
Liantang / Heung Yuen Wai BCP - Site Formation & Infrastructure Works, Contract 3
3-Month Rolling Programme
3MPR070 _____ **Page 3 of 5** _____ **20-May-19**

| 3-Month Rolling Programme | | | |
|---------------------------|------------|---------|----------|
| Date | Revision | Checked | Approved |
| 20-May-19 | Revision 0 | FC | DH |
| | | | |
| | | | |
| | | | |
| | | | |

| Activity ID | Activity Name | OD | RD | Start | Finish | TF | 2019 | | | | | | |
|--|--|-----|-----|-------------|-----------|-----|------|-----|-----|-----|-----|--|--|
| | | | | | | | Mar | Apr | May | Jun | Jul | Aug | |
| WA-1110a | Pipe Laying - CHA 185 - 228 (DN450) near Ext. TWSRW, 43m | 24 | 24 | 20-May-19* | 17-Jun-19 | 282 | | | | | | Pipe Laying - CHA 185 - 228 (DN450) near Ext. TWSRW, 43m | |
| WA-1130b | Pipe Laying - CHA 373 - 380 (DN450) near Ext. TWSRW, 7m | 18 | 18 | 20-May-19* | 10-Jun-19 | 275 | | | | | | Pipe Laying - CHA 373 - 380 (DN450) near Ext. TWSRW, 7m | |
| WA-1130c | Pipe Laying - CHA 380 - 388 (DN450) near Ext. TWSRW, 8m | 12 | 12 | 20-May-19* | 01-Jun-19 | 281 | | | | | | Pipe Laying - CHA 380 - 388 (DN450) near Ext. TWSRW, 8m | |
| WA-3040 | Pipe Laying - CHA 810 - 835 (DN450) along Ext. TWSRW SB, 25m (NBZ) | 74 | 74 | 20-May-19* | 15-Aug-19 | 219 | | | | | | | |
| WA-3050 | Pipe Laying - CHA 835 - 880 (DN450) along Ext. TWSRW SB, 45m (NBZ) | 74 | 74 | 20-May-19* | 15-Aug-19 | 219 | | | | | | | |
| WA-3060 | Pipe Laying - CHA 880 - 925 (DN450) along Ext. TWSRW SB, 45m (NBZ) | 68 | 68 | 20-May-19* | 08-Aug-19 | 123 | | | | | | | |
| WA-3080 | Pipe Laying - CHA 925 - 972 (DN450) along Ext. TWSRW SB (Stage 2), 47m (NBZ) | 102 | 102 | 09-Aug-19* | 09-Dec-19 | 123 | | | | | | | |
| WA-4200 | Pressure Test for CHA (CHA 380 - 810) | 13 | 13 | 03-Jun-19* | 18-Jun-19 | 281 | | | | | | Pressure Test for CHA (CHA 380 - 810) | |
| DN1200 Water Mains (CHC) | | | | | | | | | | | | | |
| WC-1030 | Construction of IT inspection tee chamber(s) near the Jacking Pits | 47 | 47 | 10-May-18 A | 15-Jul-19 | 259 | | | | | | Construction of IT inspection tee chamber(s) near the Jacking Pits | |
| DN2200 Water Mains (CHF) | | | | | | | | | | | | | |
| WF-4000 | Modification of Existing DN2200 DAV Chamber at FLH NB near Kiu Tau Footbridge (covered by VO no.50) | 35 | 35 | 20-May-19* | 29-Jun-19 | 271 | | | | | | Modification of Existing DN2200 DAV Chamber at FLH NB | |
| Existing Nam Wa Po Trunk Sewage Pumping Station (PST3) | | | | | | | | | | | | | |
| PS-1010 | Construction of New Boundary Wall for Pumping Station (PST3) | 80 | 74 | 25-Nov-16 A | 15-Aug-19 | 232 | | | | | | | |
| Stage 1A - Realignment of Tai Wo Service Road West (KD-7) | | | | | | | | | | | | | |
| TWSRW Zone 5 between CH376 and CH520 | | | | | | | | | | | | | |
| Construction of Retaining Structures | | | | | | | | | | | | | |
| TWSRW-512 | Remaining works incl. railing, u-channel on top of Bored Pile Wall (wait for VO) | 22 | 22 | 25-Jun-18 A | 14-Jun-19 | 284 | | | | | | Remaining works incl. railing, u-channel on top of Bored Pile Wall (wait for VO) | |
| TWSRW-515 | Slope Works and Retaining Wall of FL-C2 (covered by VO183) | 60 | 25 | 01-Dec-17 A | 18-Jun-19 | 281 | | | | | | Slope Works and Retaining Wall of FL-C2 (covered by VO183), Slope Works | |
| At-Grade Roadworks | | | | | | | | | | | | | |
| TWSRW-511 | Retaining Wall RW9 - Bay 9002 & 9003 (covered by VO No.116) | 45 | 26 | 05-Feb-16 A | 19-Jun-19 | 280 | | | | | | Retaining Wall RW9 - Bay 9002 & 9003 (covered by VO No.116), Retain | |
| TWSRW-512 | Filling Works between Retaining Wall RW7 and RW8 | 192 | 39 | 07-Jun-16 A | 05-Jul-19 | 267 | | | | | | Filling Works between Retaining Wall RW7 and RW8 | |
| TWSRW-512 | Road Pavement and remaining works of Vehicular Access to Lot 81 | 27 | 27 | 12-Jul-18 A | 20-Jun-19 | 264 | | | | | | Road Pavement and remaining works of Vehicular Access to Lot 81, Ro | |
| TWSRW-516 | Construction of Extended Podium near RW7 incl. filling works & slope protection (covered by VO No.100) | 85 | 48 | 27-Oct-16 A | 16-Jul-19 | 258 | | | | | | Construction of Extended Podium | |
| TWSRW-517 | Construction of Pavilion (covered by VO No.137) | 49 | 49 | 10-Aug-18 A | 17-Jul-19 | 257 | | | | | | Construction of Pavilion (covered | |
| TWSRW Zone 7 between CH530 and CH640 | | | | | | | | | | | | | |
| At-Grade Roadworks | | | | | | | | | | | | | |
| TWSRW-719 | Remaining Road Drainage, Road Formation, Road Pavement and Footpath (incl. Zone 6 & Zone 7) | 44 | 44 | 20-May-19* | 11-Jul-19 | 246 | | | | | | Remaining Road Drainage, Road Formati | |
| TWSRW Zone 8 between CH640 and CH695 | | | | | | | | | | | | | |
| At-Grade Roadworks | | | | | | | | | | | | | |
| TWSRW-812 | Remaining Road Drainage, Road Formation, Road Pavement and Footpath | 60 | 60 | 20-May-19* | 30-Jul-19 | 246 | | | | | | Remaining Rd | |
| Remainder of the Works | | | | | | | | | | | | | |
| TWSRW-9020 | Filling Works to the abandoned section of TWSRW and modify existing sewerage manhole | 75 | 75 | 20-May-19* | 16-Aug-19 | 231 | | | | | | | |
| Utilities Laying Works | | | | | | | | | | | | | |

- Actual Work
- Remaining Work
- Summary Bar
- Critical Remaining Work
- ◆ Milestone
- Project Baseline Bar

CEDD Contract No. CV/2012/09
Liantang / Heung Yuen Wai BCP - Site Formation & Infrastructure Works, Contract 3
3-Month Rolling Programme
 3MPR070 _____ Page 4 of 5 _____ 20-May-19

| 3-Month Rolling Programme | | | |
|---------------------------|------------|---------|----------|
| Date | Revision | Checked | Approved |
| 20-May-19 | Revision 0 | FC | DH |
| | | | |
| | | | |
| | | | |

| Activity ID | Activity Name | OD | RD | Start | Finish | TF | 2019 | | | | |
|--|---|-----|-----|-------------|-------------|------|---|-----|-----|-----|-----|
| | | | | | | | Mar | Apr | May | Jun | Jul |
| UU-1010A | Utilities Duct Laying in Area 1, Phase2, CLP - 132kV(150mVA), approx.30m at interface section | 16 | 12 | 10-Jan-18 A | 01-Jun-19 | 171 | Utilities Duct Laying in Area 1, Phase2, CLP - 132kV(150mVA), approx.30m at interface section, U | | | | |
| UU-1010B | Utilities Duct Laying in Area 1, Phase2, Towngas - DN600, approx.20m at interface section | 58 | 58 | 22-Jul-19 | 27-Sep-19 | 171 | | | | | |
| UU-1030 | Utilities Duct Laying in Area 3, Phase1 (along existing TWSRW, Approx. 150m) (by utilities undertakers) | 7 | 7 | 20-May-19* | 26-May-19 | 246 | Utilities Duct Laying in Area 3, Phase1 (along existing TWSRW, Approx. 150m) (by utilities undertakers) | | | | |
| UU-1030A | Utilities Duct Laying in Area 3, Phase2, CLP - 132kV(150mVA), approx. 30m | 27 | 49 | 10-Jan-18 A | 17-Jul-19 | 161 | Utilities Duct Laying in Area 3, Ph | | | | |
| UU-1040A | Utilities Duct Laying in Area 4, Phase2, Towngas - DN600 & DN400, approx. 50m (by their own TTA) | 121 | 50 | 15-Sep-16 A | 18-Jul-19 | 127 | Utilities Duct Laying in Area 4, P | | | | |
| UU-1040B | Utilities Duct Laying in Area 4, Phase2, CLP - 132kV(150mVA), approx. 50m (by their own TTA) | 33 | 33 | 19-Jul-19 | 26-Aug-19 | 127 | | | | | |
| Switch-Over of Existing Utilities | | | | | | | | | | | |
| UU-SO-2520 | Switch-over Works (CLP 11kV) | 16 | 16 | 20-May-19* | 04-Jun-19 | 349 | Switch-over Works (CLP 11kV) | | | | |
| UU-SO-3500 | Switch-over Works (Towngas, DN400) | 30 | 30 | 19-Jul-19* | 17-Aug-19 | 275 | | | | | |
| Remaining Works for Noise Barrier along realigned TWSRW | | | | | | | | | | | |
| TWSRW-NB-14 | Noise Barrier Steelworks & Panel for NB2 at Zone 5 | 15 | 15 | 21-Jun-19* | 09-Jul-19 | 264 | Noise Barrier Steelworks & Panel for NB2 at | | | | |
| Stage N4A & N4B - Realignment of Tai Wo Service Road East (KD-13 & KD-14) | | | | | | | | | | | |
| TWSRE Zone 1 between CH100 and CH270 | | | | | | | | | | | |
| At-Grade Roadworks | | | | | | | | | | | |
| TWSRE-1190 | Drainage Works on Permanent Cycle Track (under VO159) | 80 | 0 | 15-Jan-18 A | 20-Mar-19 A | | Drainage Works on Permanent Cycle Track (under VO159) | | | | |
| TWSRE Zone 2 between CH270 and CH380 | | | | | | | | | | | |
| At-Grade Roadworks | | | | | | | | | | | |
| TWSRE-2120 | Road Pavement on Permanent Cycle Track | 33 | 0 | 22-Mar-19 A | 12-Apr-19 A | | R | | | | |
| TWSRE Zone 3 between CH380 and CH56 | | | | | | | | | | | |
| At-Grade Roadworks | | | | | | | | | | | |
| TWSRE-3060 | Road Pavement on Permanent Cycle Track | 40 | 0 | 21-Mar-19 A | 19-Apr-19 A | | Road Pavement on Permanent Cycle Track | | | | |
| Remaining Works for Noise Barrier along realigned TWSR East | | | | | | | | | | | |
| TWSRE-NB-12 | Installation of Steelwork & Transparent Panel - Noise Barrier NB3 (254m) | 35 | 0 | 09-Jun-17 A | 10-Apr-19 A | | Installation of Steelwork & Transparent Panel - Noise Barrier NB3 (254m); | | | | |
| Landscaping & Establishment Works (KD-4, 4A, 5, 5A, 6) | | | | | | | | | | | |
| Section 3A - Landscaping Softworks in NBZ1 | | | | | | | | | | | |
| S3A-1000 | Transplant and Landscaping Softworks in NBZ1 | 50 | 0 | 14-Feb-19 A | 29-Mar-19 A | | Transplant and Landscaping Softworks in NBZ1 | | | | |
| Section 3 - Remainder of Landscaping Softworks Not Included in Section 3A | | | | | | | | | | | |
| S3-1000 | Transplant and Landscaping Softworks on At grade Road | 131 | 0 | 26-Mar-18 A | 14-May-19 A | | Transplant and Landscaping Softworks on At grade Road | | | | |
| Section 4A: Establishment Works for Landscape Softworks under Section 3A | | | | | | | | | | | |
| S4A-1000 | Establishment Works at NBZ1 | 365 | 365 | 23-Mar-19 A | 18-May-20 | -260 | | | | | |
| Section 4: Establishment Works for Landscape Softworks under Section 3 | | | | | | | | | | | |
| S4-1000 | Establishment Works for Remaining Part of Site | 365 | 365 | 13-Mar-19 A | 18-May-20 | -258 | | | | | |
| Section 5: Preservation and Protection of Trees | | | | | | | | | | | |
| SS-1000 | Preservation and Protection of Trees | 0 | 0 | | 20-May-19 | -82 | ◆ Preservation and Protection of Trees | | | | |


- Actual Work
- Remaining Work
- Summary Bar
- Critical Remaining Work
- ◆ Milestone
- Project Baseline Bar

CEDD Contract No. CV/2012/09
Liantang / Heung Yuen Wai BCP - Site Formation & Infrastructure Works, Contract 3
3-Month Rolling Programme
 3MPR070 _____ Page 5 of 5 _____ 20-May-19

| 3-Month Rolling Programme | | | |
|---------------------------|------------|---------|----------|
| Date | Revision | Checked | Approved |
| 20-May-19 | Revision 0 | FC | DH |
| | | | |
| | | | |
| | | | |
| | | | |

Appendix B

Project Organization Structure

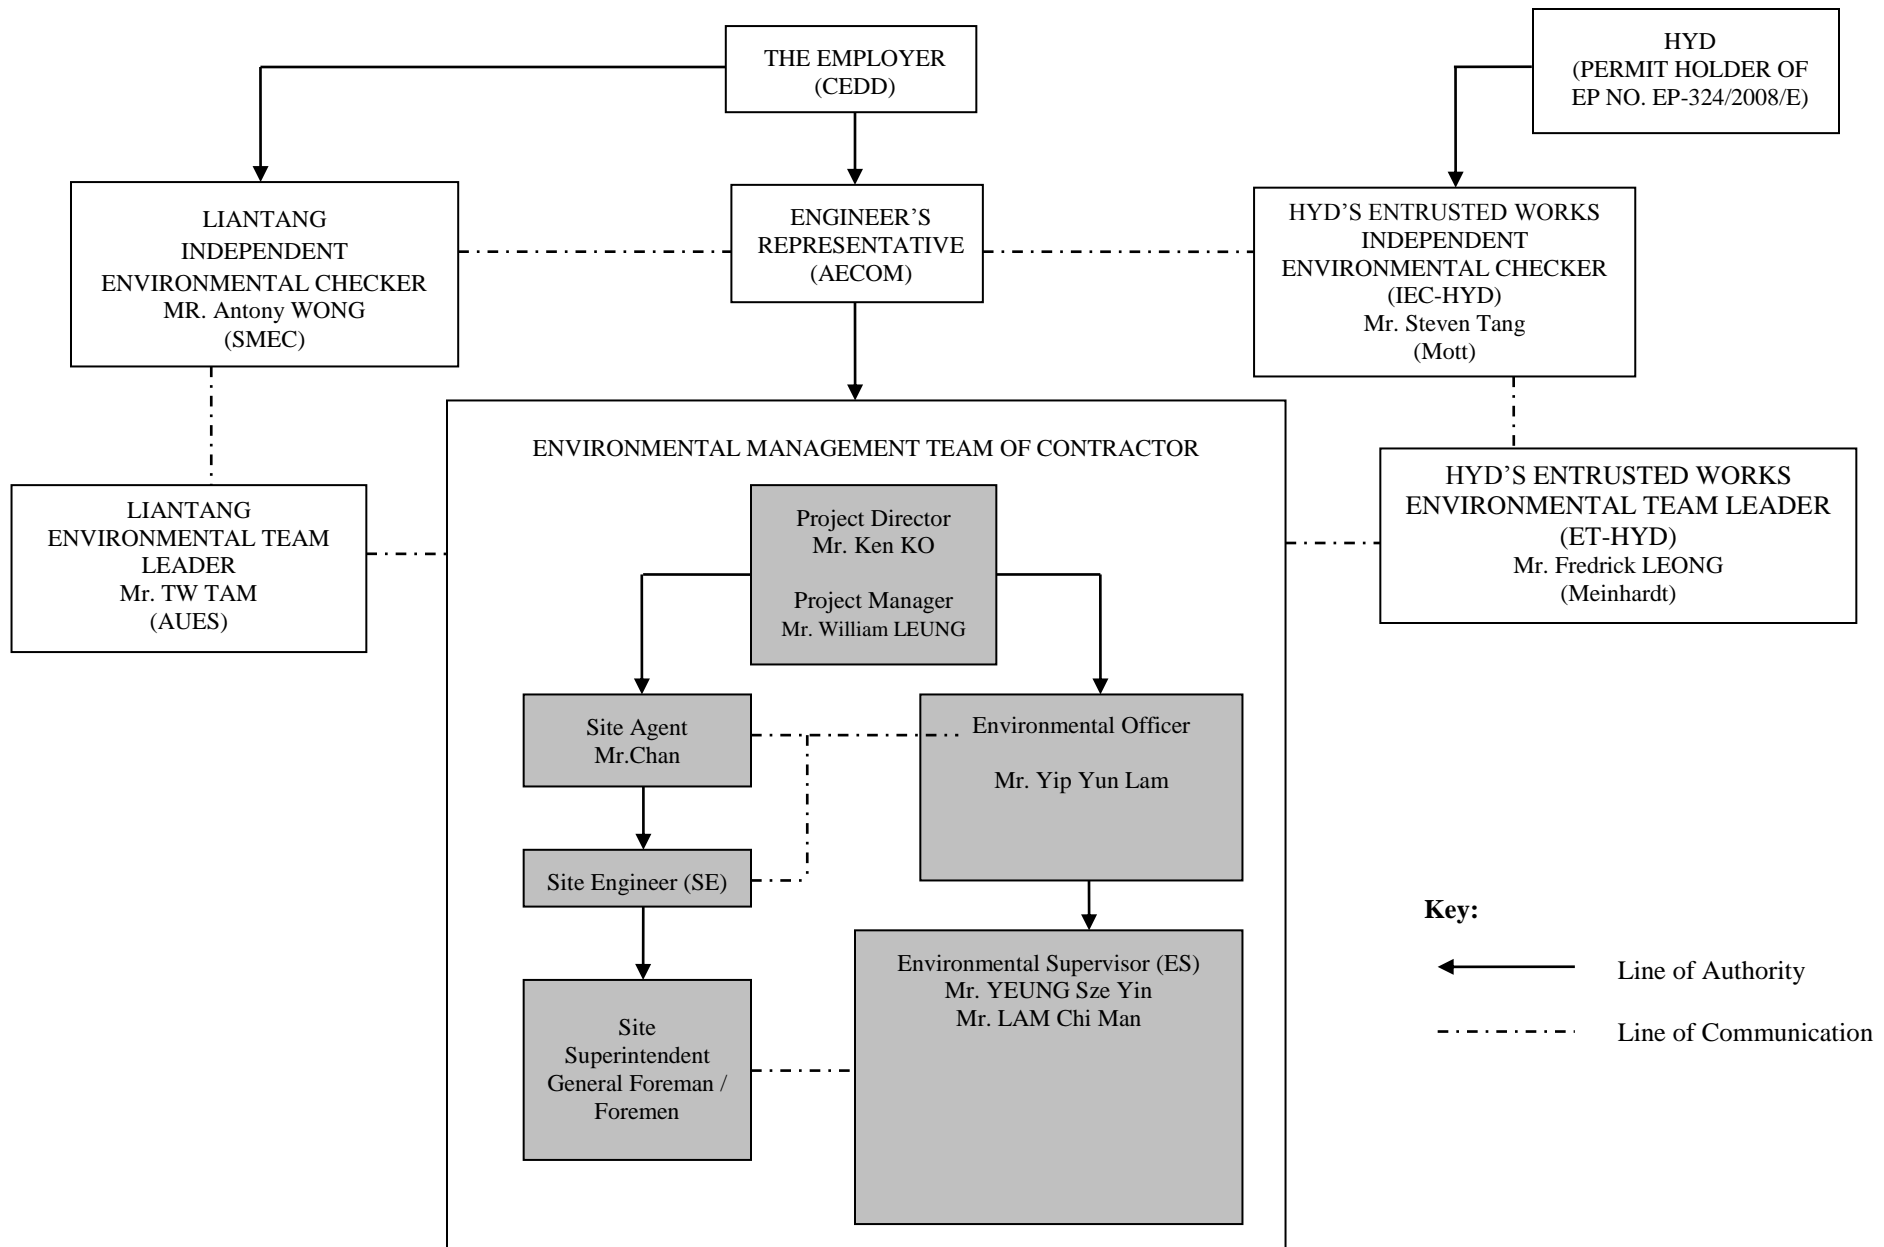

Appendix C

Calibration Certificates of Monitoring

Equipment



REPORT OF EQUIPMENT CALIBRATION

INSTRUMENT DESCRIPTION

It is certified that the item under calibration has been calibrated by corresponding calibrated High Volume Sampler and the filter paper is weighted by HOKLAS laboratory.

*Instrument: Handheld TSP meter
Brand Name: TSI
Model No.: AM520
Serial No.: 5201735006
Date of Calibration: 01 August, 2019
Date of Next Calibration : 01 August, 2020*

ISSUING ORGANISATION

Address

*Enovative Environmental Service Limited
Flat 23, 6/F, Block C, Goldfield Industrial Centre
1 Sui Wo Road
Shatin, N.T.
Hong Kong*

Phone: 852-2242 1020
Fax: 852-3691 9240
Email: info@eno.com.hk



Thomas

*Mr Wong Siu Ho, Thomas
Manager*




Enovative Environmental Service Limited

Brand Name: TSI
 Model No.: AM520
 Serial No.: 5201735006
 HVS No.: A12-TSP-102
 HVS Calibration Kit No.: Tisch 1612
 Date of Calibration: 01 August, 2019
 Date of next Calibration: 01 August, 2020

Calibration Record

| | | | | |
|-----------------|------|------|------|------|
| HVS - TSP mg/m3 | 35.9 | 43.2 | 50.1 | 49.7 |
| TSI AM520 | 35.5 | 42.8 | 49.7 | 50.4 |

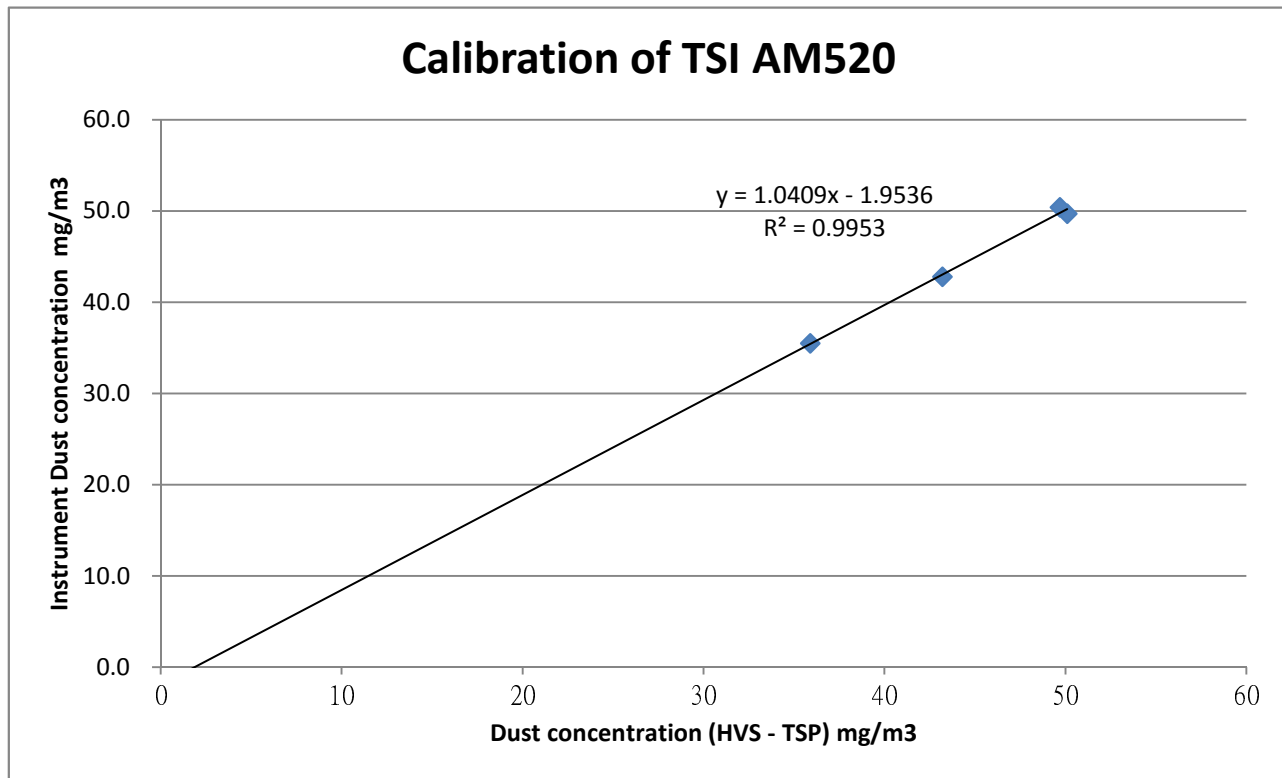

*** Filter paper being used in the calibration : 203475, 203476, 206020, 206603
 Those filter papers are weighted by HOKLAS laboratory (ALS Technichem (HK) Pty Ltd.)



Thomas

Mr Wong Siu Ho, Thomas
 Manager



Calibration Certificate

Certificate No. **903414**

Page 1 of 2 Pages

Customer : Enovative Environmental Service Limited

Address : Flat 6, 3/F, Block E, Wah Lok Industrial Centre, 31-35 Shan Mei Street, Shatin, N.T., Hong Kong.

Order No. : Q91328

Date of receipt : 4-Apr-19

Item Tested

Description : Sound Level Calibrator

Manufacturer : Rion

I.D. : 217656

Model : NC-74

Serial No. : 34678506

Test Conditions

Date of Test : 11-Apr-19

Supply Voltage : --

Ambient Temperature : (23 ± 3)°C

Relative Humidity : (50 ± 25) %

Test Specifications

Calibration check.

Ref. Document/Procedure : F21, Z02.

Test Results

All results were within the IEC 60942 Class 1 specifications.

The results are shown in the attached page(s).

Main Test equipment used:

| <u>Equipment No.</u> | <u>Description</u> | <u>Cert. No.</u> | <u>Traceable to</u> |
|----------------------|------------------------|------------------|---------------------|
| S014 | Spectrum Analyzer | 805025 | NIM-PRC & SCL-HKSAR |
| S240 | Sound Level Calibrator | 803357 | NIM-PRC & SCL-HKSAR |
| S041 | Universal Counter | 902477 | SCL-HKSAR |
| S206 | Sound Level Meter | 805027 | SCL-HKSAR |

The values given in this Calibration Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Hong Kong Calibration Ltd. shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to International System of Units (SI), or by reference to a natural constant.

The test results apply to the above Unit-Under-Test only

Calibrated by : 
Elva Chong

Approved by : 
Kin Wong

Date: 11-Apr-19



Calibration Certificate

Certificate No. 903414

Page 2 of 2 Pages

Results :

1. Generated Sound Pressure Level

| UUT Nominal Value (dB) | Measured Value (dB) | IEC 60942 Class 1 Spec. |
|------------------------|---------------------|-------------------------|
| 94.0 | 94.1 | ± 0.4 dB |

Uncertainty : ± 0.2 dB

2. Short-term Level Fluctuation : 0.0 dB

IEC 60942 Class 1 Spec. : ± 0.1 dB

Uncertainty : ± 0.01 dB

3. Frequency

| UUT Nominal Value (kHz) | Measured Value (kHz) | IEC 60942 Class 1 Spec. |
|-------------------------|----------------------|-------------------------|
| 1 | 1.001 | ± 1 % |

Uncertainty : ± 3.6 x 10⁻⁶

4. Total Distortion : < 1.1 %

IEC 60942 Class 1 Spec. : < 4 %

Uncertainty : ± 2.3 % of reading

Remark : 1. UUT : Unit-Under-Test

2. The uncertainty claimed is for a confidence probability of not less than 95%.

3. Atmospheric Pressure : 996 hPa.

----- END -----



Calibration Certificate

Certificate No. **903412**

Page 1 of 3 Pages

Customer : Enovative Environmental Service Limited

Address : Flat 6, 3/F, Block E, Wah Lok Industrial Centre, 31-35 Shan Mei Street, Shatin, N.T., Hong Kong.

Order No. : Q91328

Date of receipt : 4-Apr-19

Item Tested

Description : Sound Level Meter

Manufacturer : Rion

I.D. : 217524

Model : NL-52

Serial No. : 00175560

Test Conditions

Date of Test : 11-Apr-19

Supply Voltage : --

Ambient Temperature : (23 ± 3)°C

Relative Humidity : (50 ± 25) %

Test Specifications

Calibration check.

Ref. Document/Procedure: Z01, IEC 61672.

Test Results

All results were within the IEC 61672 Type 1 or manufacturer's specification.

The results are shown in the attached page(s).

Main Test equipment used:

| <u>Equipment No.</u> | <u>Description</u> | <u>Cert. No.</u> | <u>Traceable to</u> |
|----------------------|--------------------------|------------------|---------------------|
| S017 | Multi-Function Generator | C190926 | SCL-HKSAR |
| S240 | Sound Level Calibrator | 803357 | NIM-PRC & SCL-HKSAR |

The values given in this Calibration Certificate only relate to the values measured at the time of the test and any uncertainties quoted will not include allowance for the equipment long term drift, variations with environmental changes, vibration and shock during transportation, overloading, mis-handling, or the capability of any other laboratory to repeat the measurement. Hong Kong Calibration Ltd. shall not be liable for any loss or damage resulting from the use of the equipment.

The test equipment used for calibration are traceable to International System of Units (SI), or by reference to a natural constant. The test results apply to the above Unit-Under-Test only

Calibrated by : 
Elva Chong

Approved by : 
Kin Wong

Date: 11-Apr-19



Calibration Certificate

Certificate No. 903412

Page 2 of 3 Pages

Results :

Acoustical signal test

1. Self-generated noise: 16.2 dBA (Mfr's Spec \leq 17 dBA)

2. Reference Sound Pressure Level

| UUT Setting | | | | Applied Value (dB) | UUT Reading (dB) | |
|-------------|---------------------|----------------|---------------|--------------------|------------------|-------|
| Range (dB) | Frequency Weighting | Time Weighting | Octave Filter | | | |
| 20 ~ 130 | A | F | OFF | 94.0 | 94.1 | |
| | | S | OFF | | 94.1 | |
| | C | F | OFF | | 94.1 | |
| | Z | F | OFF | | 94.2 | |
| | A | F | OFF | 114.0 | 114.1 | |
| | | | OFF | | 114.1 | |
| | | C | F | | OFF | 114.1 |
| | | Z | F | | OFF | 114.2 |

IEC 61672 Type 1 Spec. : \pm 1.1 dB

Uncertainty : \pm 0.1 dB

Electrical signal tests

3. Electrical signal tests of frequency weightings (A weighting)

| Frequency | Attenuation (dB) | IEC 61672 Type 1 Spec. |
|-----------|------------------|--------------------------------|
| 31.5 Hz | -39.6 | - 39.4 dB, \pm 2 dB |
| 63 Hz | -26.1 | - 26.2 dB, \pm 1.5 dB |
| 125 Hz | -16.1 | - 16.1 dB, \pm 1.5 dB |
| 250 Hz | -8.6 | - 8.6 dB, \pm 1 dB |
| 500 Hz | -3.2 | - 3.2 dB, \pm 1.4 dB |
| 1 kHz | 0.0 (Ref) | 0 dB, \pm 1.1 dB |
| 2 kHz | +1.1 | + 1.2 dB, \pm 1.6 dB |
| 4 kHz | +0.7 | + 1.0 dB, \pm 1.6 dB |
| 8 kHz | -1.1 | - 1.1 dB, + 2.1 dB ~ -3.1 dB |
| 16 kHz | -8.5 | - 6.6 dB, + 3.5 dB ~ - 17.0 dB |

Uncertainty : \pm 0.1 dB



Calibration Certificate

Certificate No. 903412

Page 3 of 3 Pages

4. Frequency & Time weightings at 1 kHz

4.1 Frequency Weighting (Fast)

| UUT Setting | Applied Value (dB) | UUT Reading (dB) | Difference (dB) | IEC 61672 Type 1 Spec. |
|-------------|--------------------|------------------|-----------------|------------------------|
| A | 94.0 | 94.0 (Ref.) | -- | ± 0.4 dB |
| C | 94.0 | 94.0 | 0.0 | |
| Z | 94.0 | 94.0 | 0.0 | |

4.2 Time Weighting (A-weighted)

| UUT Setting | Applied Value (dB) | UUT Reading (dB) | Difference (dB) | IEC 61672 Type 1 Spec. |
|----------------|--------------------|------------------|-----------------|------------------------|
| Fast | 94.0 | 94.0 (Ref.) | -- | ± 0.3 dB |
| Slow | 94.0 | 94.0 | 0.0 | |
| Time-averaging | 94.0 | 94.0 | 0.0 | |

Uncertainty : ± 0.1 dB

- Remarks :
1. UUT : Unit-Under-Test
 2. The uncertainty claimed is for a confidence probability of not less than 95%.
 3. Atmospheric Pressure : 996 hPa.
 4. Preamplifier model : NH-25 , S/N : 65662
 5. Firmware Version: 1.8
 6. Power Supply Check: OK
 7. The UUT was adjusted with the supplied sound calibrator at the reference sound pressure level before the calibration.

----- END -----

Appendix D

EM&A Monitoring Schedules

**Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2
Impact Monitoring & Site Auditing Schedule for January 2020**

| January 2020 | | | | | | |
|---|--|---|---|---|--|-----------------------------------|
| Sunday | Monday | Tuesday | Wednesday | Thursday | Friday | Saturday |
| | | | 1 The First Day of January | 2 | 3 24-hour TSP + 3 x 1-hour TSP | 4 |
| 5 | 6 | 7 | 8 | 9 ET Site Walk(14:00am – 18:00pm) 24-hour TSP + 3 x 1-hour TSP, Noise (SR77) | 10 | 11 |
| 12 | 13 | 14 | 15 24-hour TSP + 3 x 1-hour TSP, Noise (SR77) | 16 | 17 ET Site walk (14:00 – 18:00pm) | 18 |
| 19 | 20 | 21 24-hour TSP + 3 x 1-hour TSP, Noise (SR77) | 22 ET Site Walk + SSEMC (09:30am – 14:00pm) | 23 | 24 24-hour TSP + 3 x 1-hour TSP, Noise (SR77) | 25 Lunar New Year's Day |
| 26 The second day of Lunar New Year | 27 The third day of Lunar New Year | 28 The fourth day of Lunar New Year | 29 | 30 24-hour TSP + 3 x 1-hour TSP, Noise (SR77) | 31 ET Site Walk(09:30am – 14:00am) (Remark: Cancel due to reduce the risk of Novel Coronavirus) | |

**Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2
Impact Monitoring & Site Auditing Schedule for February 2020**

| February 2020 | | | | | | |
|---------------|---|---|---|---|-----|-----|
| Sun | Mon | Tue | Wed | Thu | Fri | Sat |
| | | | | | | 1 |
| 2 | 3 | 4 | 5 24-hour TSP + 3 x 1-hour TSP,Noise (SR77) | 6 ET Site Walk(14:00pm – 18:00pm) | 7 | 8 |
| 9 | 10 | 11 24-hour TSP + 3 x 1-hour TSP, Noise (SR77) | 12 | 13 ET Site Walk(14:00pm – 18:00pm) | 14 | 15 |
| 16 | 17 24-hour TSP + 3 x 1-hour TSP, Noise (SR77) | 18 | 19 | 20 24-hour TSP + 3 x 1-hour TSP | 21 | 22 |
| 23 | 24 | 25 | 26 ET Site Walk + SSEMC (09:30am – 14:30pm) | 27 24-hour TSP + 3 x 1-hour TSP, Noise (SR77) | 28 | 29 |

Appendix E

Meteorological Data Extracted from Hong Kong Observatory

Daily Extract of Meteorological Observations, January 2020

**EXTRACT OF METEOROLOGICAL OBSERVATIONS FOR HONG KONG,
JANUARY 2020 (Table 2)**

| Date January | Number of hours of Reduced Visibility [#] (hours) | Total Bright Sunshine (hours) | Daily Global Solar Radiation (MJ/m ²) | Total Evaporation (mm) | Prevailing Wind Direction (degrees) | Mean Wind Speed (km/h) |
|-----------------|---|--|--|------------------------------|--|---------------------------------|
| 1 | 0 | 0.2 | 4.92 | 1.6 | 080 | 33.5 |
| 2 | 1 | 3.6 | 8.36 | 1.5 | 050 | 24.7 |
| 3 | 2 | 8.9 | 15.70 | 2.3 | 040 | 21.6 |
| 4 | 1 | 8.6 | 15.20 | 2.2 | 060 | 18.4 |
| 5 | 0 | 6.6 | 14.66 | 2.5 | 060 | 34.8 |
| 6 | 0 | 6.7 | 14.99 | 2.5 | 060 | 24.5 |
| 7 | 0 | 8.0 | 13.10 | 2.3 | 020 | 11.8 |
| 8 | 0 | 8.1 | 16.17 | 4.2 | 010 | 20.3 |
| 9 | 0 | 5.0 | 12.61 | 2.4 | 070 | 35.6 |
| 10 | 0 | 6.1 | 12.75 | 2.2 | 060 | 26.3 |
| 11 | 4 | 7.0 | 13.60 | 3.9 | 040 | 16.1 |
| 12 | 0 | 7.9 | 14.40 | 2.8 | 360 | 24.4 |
| 13 | 0 | 2.5 | 10.42 | 1.5 | 050 | 29.8 |
| 14 | 0 | 9.4 | 16.17 | 2.8 | 060 | 27.3 |
| 15 | 2 | 5.8 | 13.99 | 2.9 | 070 | 37.8 |
| 16 | 7 | 7.2 | 15.21 | 3.1 | 060 | 28.0 |
| 17 | 0 | 0.1 | 6.34 | 2.6 | 010 | 20.4 |
| 18 | 0 | 6.5 | 13.83 | 2.5 | 040 | 25.7 |
| 19 | 2 | 1.1 | 9.52 | 2.7 | 050 | 24.8 |
| 20 | 0 | 2.9 | 11.06 | 2.0 | 020 | 21.2 |
| 21 | 0 | 4.9 | 12.30 | 2.3 | 060 | 33.5 |
| 22 | 3 | 4.3 | 11.39 | 1.5 | 030 | 18.5 |
| 23 | 0 | 7.6 | 14.44 | 2.0 | 020 | 16.8 |
| 24 | 0 | 4.6 | 13.16 | 2.7 | 040 | 26.1 |
| 25 | 1 | 0.9 | 8.21 | 1.5 | 060 | 37.5 |
| 26 | 0 | 1.5 | 7.59 | 3.5 | 360 | 25.8 |
| 27 | 0 | 2.7 | 9.19 | 2.3 | 350 | 28.7 |
| 28 | 0 | 4.4 | 10.35 | 2.4 | 360 | 29.3 |
| 29 | 0 | 7.2 | 14.87 | 4.4 | 360 | 34.8 |
| 30 | 0 | 10.2 | 20.55 | 4.0 | 360 | 31.3 |
| 31 | 0 | 10.2 | 19.51 | 2.4 | 070 | 25.2 |
| Mean/Total | 23 | 170.7 | 12.73 | 79.5 | 060 | 26.3 |
| Normal* | 221.9 [§] | 143.0 | 10.17 | 71.3 | 060 | 25.3 |
| Station | Hong Kong International Airport | King's Park | | Waglan Island [^] | | |

Appendix F

Air Quality Monitoring Results and their Graphical Presentation


Appendix F
Air Quality Monitoring Results and their Graphical Presentation

24-Hour TSP Monitoring Result at Station: SR77


| Sampling Date | Weather Condition | Starting Time | Paper No. | Wt. of paper (g) | | | Elapse Time | | | Flow Rate (CFM) | | | Flow Rate (m ³ /min) | | | Total Volume (m ³) | TSP Concentration (µg/m ³) | Action Level (µg/m ³) | Limit Level (µg/m ³) | Wind speed m/s | Wind direction | NOE | IR | |
|---------------|-------------------|---------------|-----------|------------------|-----------|-------------|-------------|-------|---------------|-----------------|-------|---------------|---------------------------------|-------|---------------|--------------------------------|--|-----------------------------------|----------------------------------|----------------|----------------|-----|----|--|
| | | | | Initial Wt. | Final Wt. | Wt. of Dust | Initial | Final | Sampling Hour | Initial | Final | Avg Flow Rate | Initial | Final | Avg Flow Rate | | | | | | | | | |
| 3-Jan-20 | Sunny | 13:00 | - | - | - | - | - | - | - | - | - | - | - | - | - | 83.2 | 170.3 | 260.0 | <5 | N | | | | |
| 9-Jan-20 | Fine | 13:15 | - | - | - | - | - | - | - | - | - | - | - | - | - | 55.4 | 170.3 | 260.0 | <5 | N | | | | |
| 15-Jan-20 | Fine | 14:00 | - | - | - | - | - | - | - | - | - | - | - | - | - | 101.4 | 170.3 | 260.0 | <5 | N | | | | |
| 21-Jan-20 | Fine | 13:30 | - | - | - | - | - | - | - | - | - | - | - | - | - | 89.7 | 170.3 | 260.0 | <5 | N | | | | |
| 24-Jan-20 | Fine | 13:30 | - | - | - | - | - | - | - | - | - | - | - | - | - | 61.1 | 170.3 | 260.0 | <5 | N | | | | |
| 30-Jan-20 | Fine | 13:00 | - | - | - | - | - | - | - | - | - | - | - | - | - | 121.2 | 170.3 | 260.0 | <6 | N | | | | |
| | | | | | | | | | | | | | | | | Average | 85.3 | | | | | | | |
| | | | | | | | | | | | | | | | | Min | 55.4 | | | | | | | |
| | | | | | | | | | | | | | | | | Max | 121.2 | | | | | | | |

Note: No major dust source observed during the monitoring period
 Data in **Bold** denotes exceedance of respective Action Level
 Data in **Bold Underline** denotes exceedance of respective Limit Level
 The electricity supply of HVS at AM1(SR77) was suspended from 16 May 2019 and was no longer available. In order to have a more secure electricity supply, an alternative Handheld TSP meter was proposed to use for the temporary monitoring of 24-hr & 1hr air quality from 22 May 2019.

24-Hour TSP Monitoring Result at Station: SR77

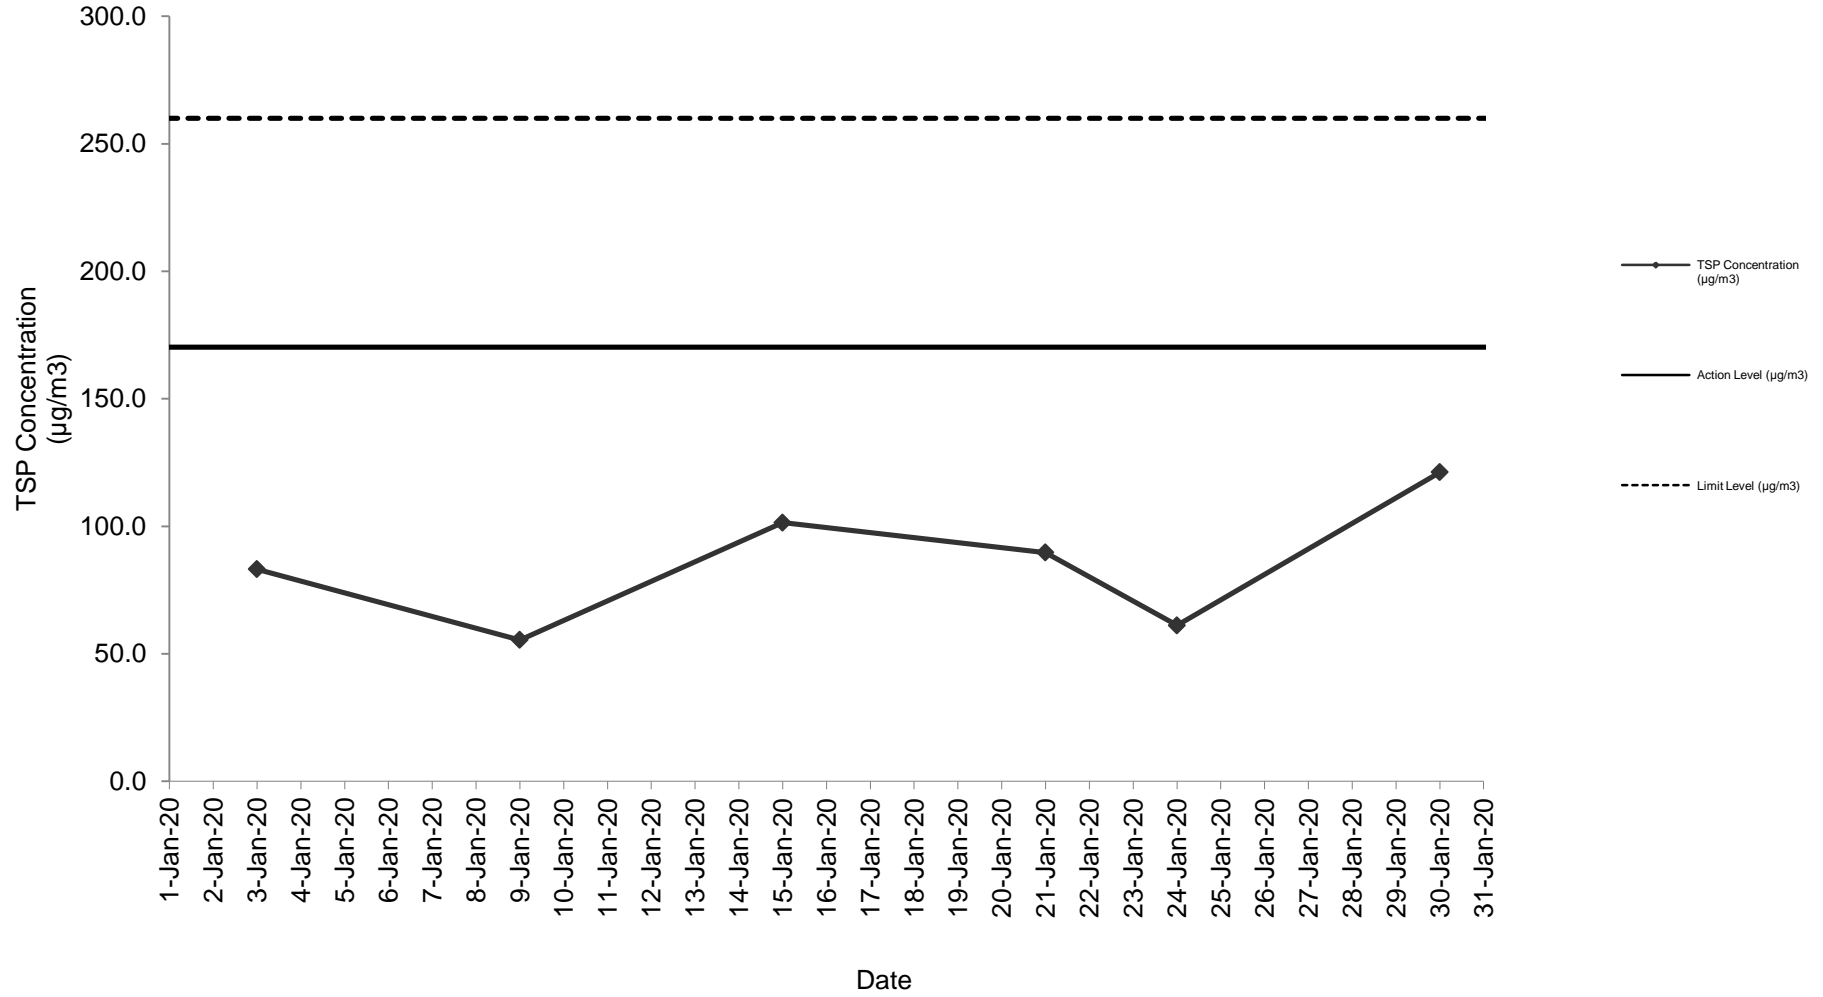

24-Hour TSP Monitoring Result at Station: SR77 (October 2019 - January 2020)

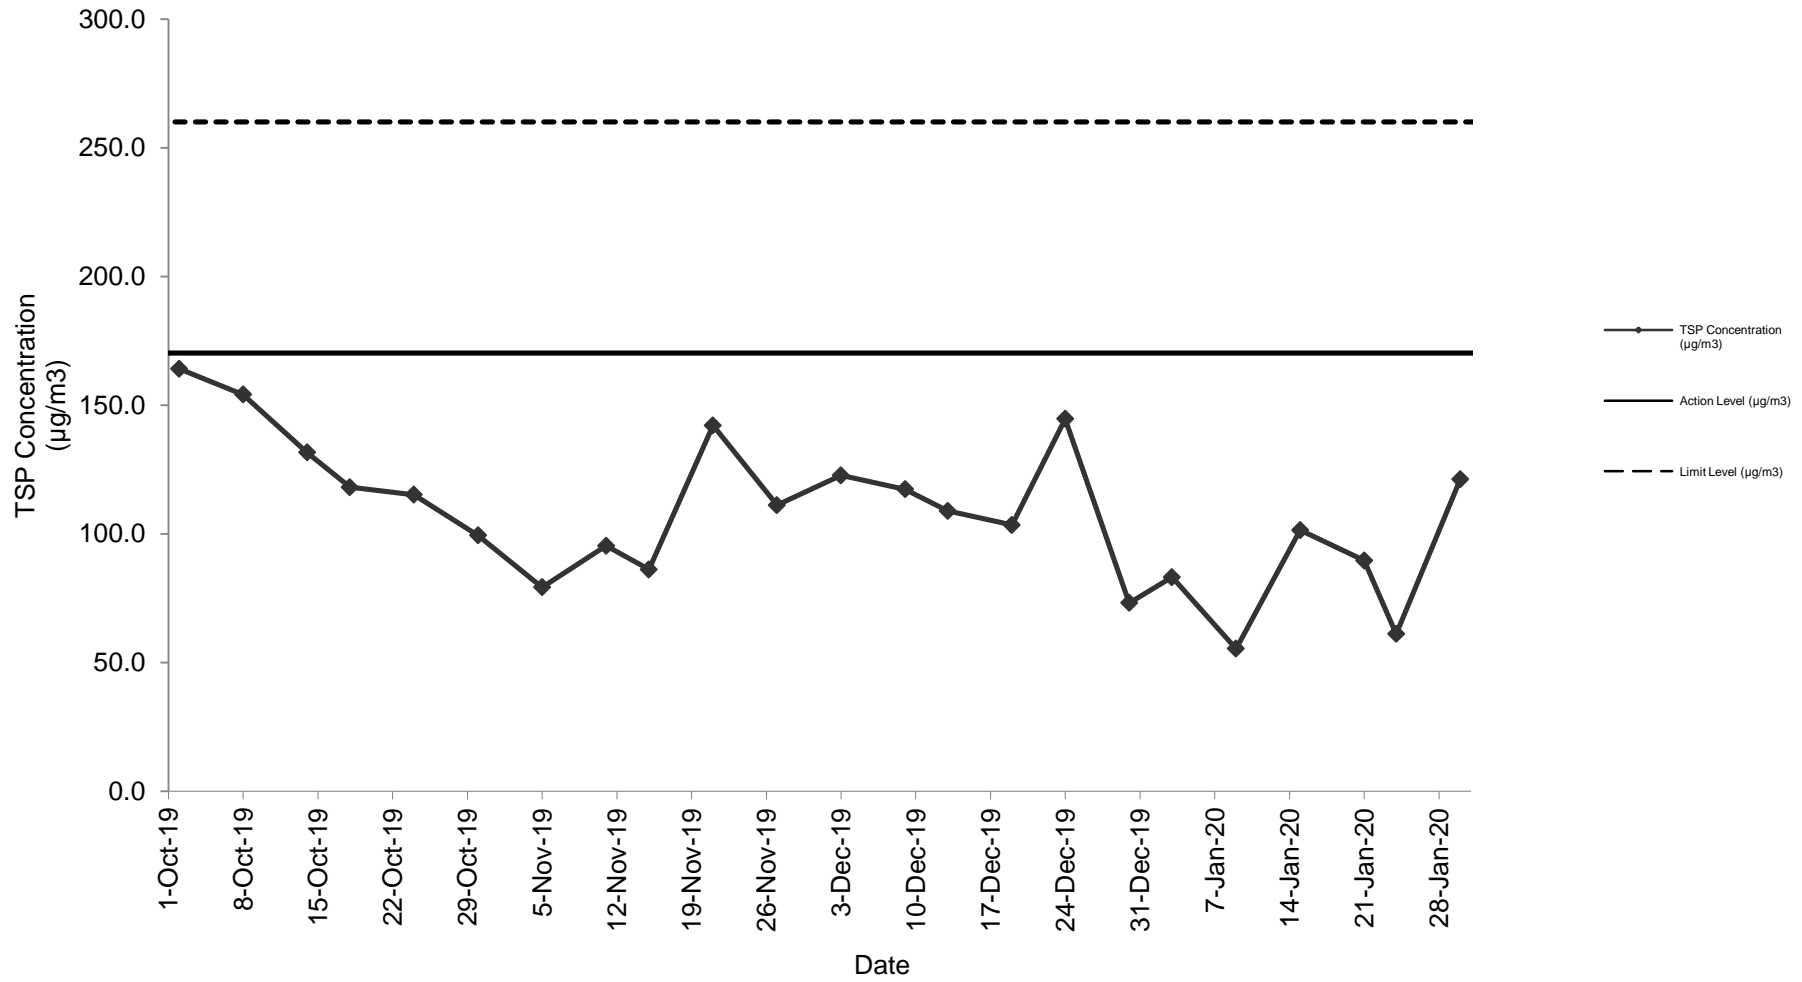


Appendix E
Air Quality Monitoring Results and their Graphical Presentation

1-Hour TSP Monitoring Result at Station: SR77


| Date | Weather Condition | Time | Conc.(µg/m ³) | | | Action Level (µg/m ³) | Limit Level (µg/m ³) |
|-----------|-------------------|---------------|---------------------------|----------------------|----------------------|-----------------------------------|----------------------------------|
| | | | 1 st Hour | 2 nd Hour | 3 rd Hour | | |
| 3-Jan-20 | Sunny | 10:00 - 13:00 | 144.3 | 141.3 | 122.7 | 292.7 | 500.0 |
| 9-Jan-20 | Fine | 10:15 - 13:15 | 106.2 | 111.3 | 104.2 | 292.7 | 500.0 |
| 15-Jan-20 | Fine | 11:00 - 14:00 | 181.6 | 177.1 | 194.3 | 292.7 | 500.0 |
| 21-Jan-20 | Fine | 10:30 - 13:30 | 155.2 | 161.4 | 143.2 | 292.7 | 500.0 |
| 24-Jan-20 | Fine | 10:30 - 13:30 | 104.2 | 91.7 | 102.2 | 292.7 | 500.0 |
| 30-Jan-20 | Fine | 10:00 - 13:00 | 180.6 | 184.3 | 190.5 | 292.7 | 500.0 |
| | | | | | Average | 144.2 | |
| | | | | | Min | 91.7 | |
| | | | | | Max | 194.3 | |

Note: No major dust source observed during the monitoring period
 Data in **Bold** denotes exceedance of respective Action Level
 Data in **Bold Underline** denotes exceedance of respective Limit Level

1-Hour TSP Monitoring Result at station: SR77

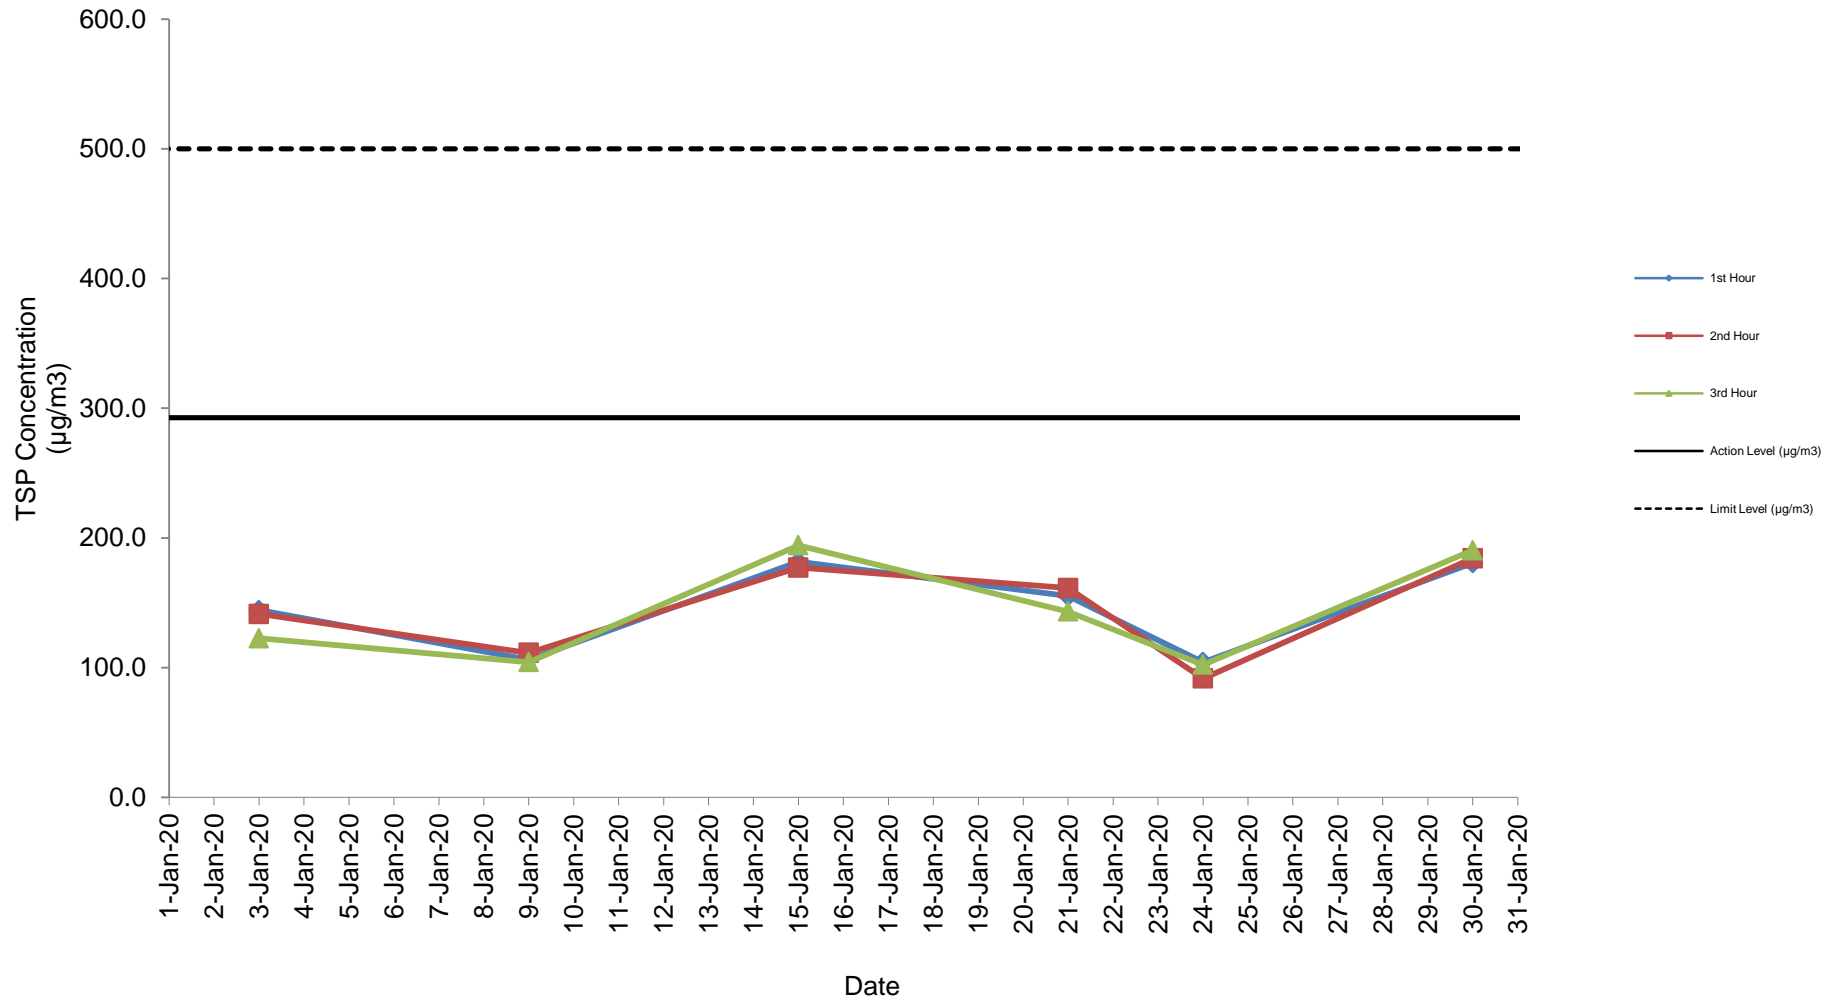

1-Hour TSP Monitoring Result at station: SR77 (October 2020 - January 2020)

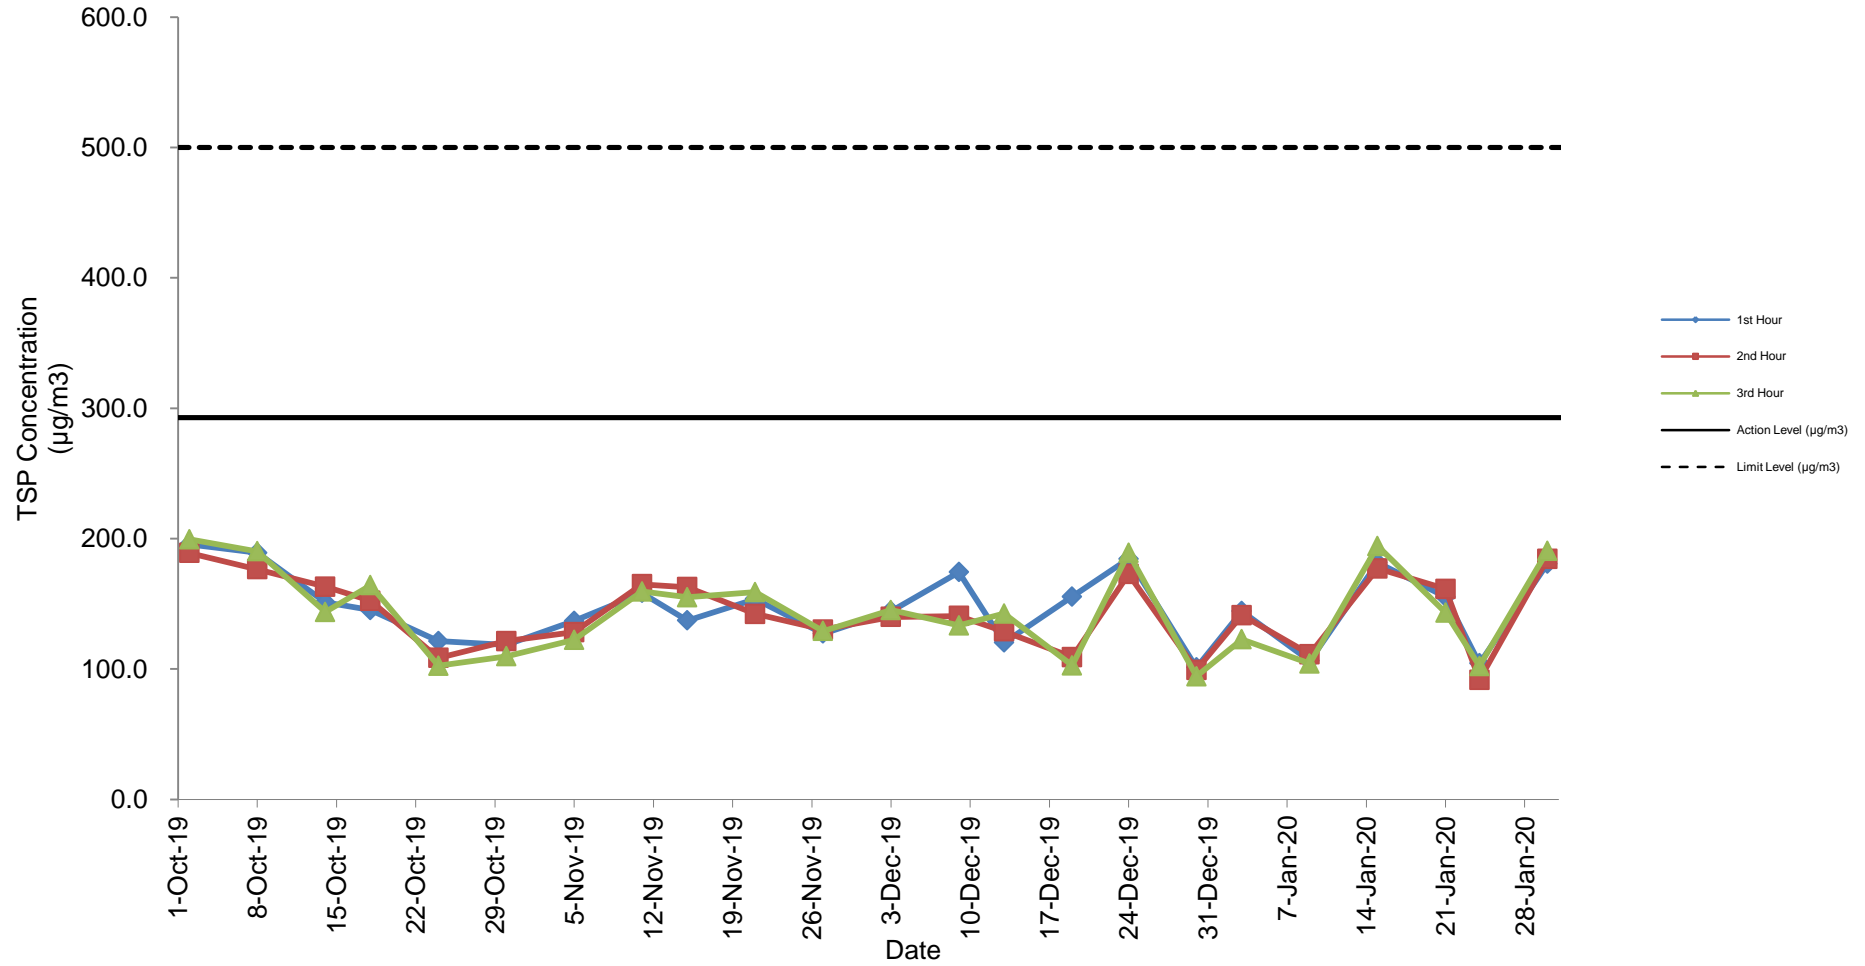

Appendix H

Noise Monitoring Results and their Graphical Presentation

Event and Action Plan for Air Quality

| Event | Action | | | |
|--|---|---|---|---|
| | ET Leader | IEC | ER | Contractor |
| Action level being exceeded by one sampling day | <ol style="list-style-type: none"> 1. Identify source; 2. Inform IEC and ER; 3. Repeat measurement to confirm finding; 4. Increase monitoring frequency to daily. | <ol style="list-style-type: none"> 1. Check monitoring data submitted by ET; 2. Check Contractor's working method. | <ol style="list-style-type: none"> 1. Notify Contractor. | <ol style="list-style-type: none"> 1. Rectify any unacceptable practice; 2. Amend working methods if appropriate. |
| Action level being exceeded by two or more consecutive sampling days | <ol style="list-style-type: none"> 1. Identify source; 2. Inform IEC and ER; 3. Repeat measurements to confirm findings; 4. Increase monitoring frequency to daily; 5. Discuss with IEC and Contractor on remedial actions required; 6. If exceedance continues, arrange meeting with IEC and ER; 7. If exceedance stops, cease additional monitoring. | <ol style="list-style-type: none"> 1. Check monitoring data submitted by ET; 2. Check Contractor's working method; 3. Discuss with ET and Contractor on possible remedial measures; 4. Advise the ER on the effectiveness of the proposed remedial measures; 5. Supervise Implementation of remedial measures. | <ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing; 2. Notify Contractor; 3. Ensure remedial measures properly implemented. | <ol style="list-style-type: none"> 1. Submit proposals for remedial actions to IEC within 3 working days of notification; 2. Implement the agreed proposals; 3. Amend proposal if appropriate. |

| Event | Action | | | |
|---|--|---|---|---|
| | ET Leader | IEC | ER | Contractor |
| Limit level being exceeded by one sampling day | <ol style="list-style-type: none"> 1. Identify source; 2. Inform IEC, ER, Contractor and EPD; 3. Repeat measurement to confirm finding; 4. Increase monitoring frequency to daily; 5. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results. | <ol style="list-style-type: none"> 1. Check monitoring data submitted by ET; 2. Check Contractor's working method; 3. Discuss with ET and Contractor on possible remedial measures; 4. Advise ER on the effectiveness of the proposed remedial measures; 5. Supervise implementation of remedial measures. | <ol style="list-style-type: none"> 1. Confirm receipt of notification of exceedance in writing; 2. Notify Contractor; 3. Ensure remedial measures properly implemented. | <ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to IEC within 3 working days of notification; 3. Implement the agreed proposals; 4. Amend proposal if appropriate. |
| Limit level being exceeded by two or more consecutive sampling days | <ol style="list-style-type: none"> 1. Notify IEC, ER, Contractor, and EPD; 2. Identify source; 3. Repeat measurement to confirm findings; 4. Increase frequency to daily; 5. Analyse Contractor's working procedures to determine possible mitigation to be; 6. Arrange meeting with IEC and ER to discuss the remedial actions to be taken; 7. Assess effectiveness of Contractor's remedial actions and keep IEC, EPD and ER informed of the results; 8. If exceedance stops, cease additional monitoring. | <ol style="list-style-type: none"> 1. Discuss amongst ER, ET, and Contractor on the potential remedial actions; 2. Review Contractor's remedial actions whenever necessary to assure their effectiveness and advise ER accordingly; 3. Supervise the implementation of remedial measures. | <ol style="list-style-type: none"> 1. Confirm receipt of notification of exceedance in writing; 2. Notify Contractor; 3. In consultation with the IEC, agree with the Contractor on the remedial measures to be implemented; 4. Ensure remedial measures properly implemented; 5. If exceedance continues, consider what portion of the work is responsible and instruct the Contractor to stop that portion of work until the exceedance is abated. | <ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance; 2. Submit proposals for remedial actions to IEC within 3 working days of notification; 3. Implement the agreed proposals; 4. Resubmit proposals if problem still not under control; 5. Stop the relevant portion of works as determined by ER until the exceedance is abated. |

Event and Action Plan for Noise

| Event | Action | | | |
|--------------|--|--|--|--|
| | ET Leader | IEC | ER | Contractor |
| Action Level | <ol style="list-style-type: none"> 1. Notify IEC and the Contractor. 2. Carry out investigation. 3. Report the results of investigation to IEC and the Contractor. 4. Discuss with the Contractor and formulate remedial measures. 5. Increase monitoring frequency to check mitigation effectiveness. | <ol style="list-style-type: none"> 1. Review with analysed results submitted by ET. 2. Review the proposed remedial measures by the Contractor and advise ER accordingly. 3. Supervise the implement of remedial measures. | <ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing. 2. Notify the Contractor. 3. Require the Contractor to propose remedial measures for the analysed noise problem. 4. Ensure remedial measures are properly implemented. | <ol style="list-style-type: none"> 1. Submit noise mitigation proposals to IEC. 2. Implement noise mitigation proposals. |
| Limit Level | <ol style="list-style-type: none"> 1. Notify IEC, ER, EPD and the Contractor. 2. Identify the source. 3. Repeat measurement to confirm findings. 4. Increase monitoring frequency. 5. Carry out analysis of Contractor's working procedures to determine possible mitigation to be implemented. 6. Inform IEC, ER, and EPD the causes & actions taken for the exceedances. 7. Assess effectiveness of the Contractor's remedial actions and keep IEC, EPD and ER informed of the results. 8. If exceedance stops, cease additional monitoring. | <ol style="list-style-type: none"> 1. Discuss amongst ER, ET Leader and the Contractor on the potential remedial actions. 2. Review the Contractor's remedial actions whenever necessary to assure their effectiveness and advise ER accordingly. 3. Supervise the implementation of remedial measures. | <ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing. 2. Notify the Contractor. 3. Require the Contractor to propose remedial measures for the analysed noise problem. 4. Ensure remedial measures are properly implemented. 5. If exceedance continues, consider what activity of the work is responsible and instruct the Contractor to stop that activity of work until the exceedance is abated. | <ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance. 2. Submit proposals for remedial actions to IEC within 3 working days of notification. 3. Implement the agreed proposals. 4. Resubmit proposals if problem still not under control. 5. Stop the relevant activity of works as determined by the ER until the exceedance is abated. |

Event and Action Plan for Water Quality

| Event | Action | | | |
|--|---|---|--|---|
| | ET Leader | IEC | ER | Contractor |
| Action level being exceeded by one sampling day | <ol style="list-style-type: none"> 1. Repeat in-situ measurement on next day of exceedance to confirm findings; 2. Identify source(s) of impact; 3. Inform IEC, Contractor & ER; 4. Check monitoring data, all plant, equipment & contractor's working methods; | <ol style="list-style-type: none"> 1. Check monitoring data submitted by ET & Contractor's working methods; | <ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing; Notify, Contractor | <ol style="list-style-type: none"> 1. Inform the ER & confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Amend working methods if appropriate. |
| Action level being exceeded by two or more consecutive sampling days | <ol style="list-style-type: none"> 1. Repeat measurement on next day of exceedance to confirm findings; 2. Identify source(s) of impact; 3. Inform IEC, Contractor, ER & EPD; 4. Check monitoring data, all plant, equipment & Contractor's working methods; 5. Discuss mitigation measures with IEC, ER & Contractor; 6. Ensure mitigation measures are implemented; 7. Increase monitoring to daily until no exceedance of Action level. | <ol style="list-style-type: none"> 1. Checking monitoring data submitted by ET & Contractor's working method; 2. Discuss with ET & Contractor on possible remedial actions; 3. Review the proposed mitigation measures submitted by Contractor & advise the ER accordingly; 4. Supervise the implementation of mitigation measures. | <ol style="list-style-type: none"> 1. Discuss with IEC on the proposed mitigation measures; 2. Ensure mitigation measures properly implemented; 3. Assess the effectiveness of the implemented mitigation measures. | <ol style="list-style-type: none"> 1. Inform the Engineer & confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Check all plant & equipment & consider changes of working methods; 4. Submit proposal of mitigation measures to ER within 3 working days of notification & discuss with ET, IEC & ER; 5. Implement the agreed mitigation measures. |

| Event | Action | | | |
|---|---|---|---|---|
| | ET Leader | IEC | ER | Contractor |
| Limit level being exceeded by one sampling day | <ol style="list-style-type: none"> 1. Repeat measurement on next day of exceedance to confirm findings; 2. Identify source(s) of impact; 3. Inform IEC, contractor, ER & EPD; 4. Check monitoring data, all plant, equipment & contractor's working methods; 5. Discuss mitigation measures with IEC, Contractor & ER. | <ol style="list-style-type: none"> 1. Checking monitoring data submitted by ET & Contractor's working method; 2. Discuss with ET & Contractor on the possible mitigation measures; 3. Review the proposed mitigation measures submitted by Contractor & advise the ER accordingly. | <ol style="list-style-type: none"> 1. Confirm receipt of notification of failure in writing; 2. Discuss with IEC, ET & Contractor on the proposed mitigation measures; 3. Request Contractor to review the working methods. | <ol style="list-style-type: none"> 1. Inform the ER & confirm notification of the non-compliance in writing; 2. Rectify unacceptable practice; 3. Check all plant & equipment & consider changes of working methods; 4. Submit proposal of mitigation measures to ER within 3 working days of notification & discuss with ET, IEC & ER. |
| Limit level being exceeded by two or more consecutive sampling days | <ol style="list-style-type: none"> 1. Repeat measurement on the next day of exceedance to confirm findings; 2. Identify source(s) of impact; 3. Inform IEC, Contractor, ER & EPD; 4. Check monitoring data, all plant, equipment & Contractor's working methods; 5. Discuss mitigation measures within IEC, Contractor & ER; 6. Ensure mitigation measures are implemented; 7. Increase the monitoring frequency to daily until no exceedance of Limit level for two consecutive days. | <ol style="list-style-type: none"> 1. Checking monitoring data submitted by ET & Contractor's working method; 2. Discuss with ET & Contractor on potential remedial actions; 3. Review Contractor's mitigation measures whenever necessary to assure their effectiveness & advise the ER accordingly; 4. Supervise the implementation of mitigation measures. | <ol style="list-style-type: none"> 1. Discuss with IEC, ET & Contractor on the proposed mitigation measures; 2. Request Contractor to critically review the working methods; 3. Make agreement on the mitigation measures to be implemented; 4. Ensure mitigation measures are properly implemented; 5. Consider & instruct, if necessary, the Contractor to slow down or to stop all or part of the construction activities until no exceedance of Limit level. | <ol style="list-style-type: none"> 1. Take immediate action to avoid further exceedance; 2. Submit proposal of mitigation measures to ER within 3 working days of notification & discuss with ET, IEC & ER; 3. Implement the agreed mitigation measures; 4. Resubmit proposals of mitigation measures if problem still not under control; 5. As directed by the Engineer, to slow down or to stop all or part of the construction activities until no exceedance of Limit level. |

Appendix H Noise Monitoring Results and their Graphical Presentation

Appendix H
Noise Monitoring Results and their Graphical Presentation

Noise Monitoring Result at SR77

| Date | Weather Condition | Start Time | End Time | Measured Noise Level (dB(A))* | | | Baseline Corrected Level, dB(A)** | Baseline Noise Level (dB(A)), Leq(30min) | Limit Level dB(A) |
|------------|-------------------|------------|----------|-------------------------------|------------|----------------|-----------------------------------|--|-------------------|
| | | | | L10(30min) | L90(30min) | Leq(30min) | | | |
| 2020-01-09 | Cloudy | 11:00 | 11:30 | 81.0 | 57.0 | 64.5 | - | 67.8 | 75.0 |
| 2020-01-15 | Fine | 11:15 | 11:45 | 79.5 | 54.5 | 63.0 | - | 67.8 | 75.0 |
| 2020-01-21 | Fine | 11:30 | 12:00 | 78.5 | 54.0 | 64.0 | - | 67.8 | 75.0 |
| 2020-01-24 | Fine | 11:15 | 11:45 | 97.5 | 55.5 | 64.0 | - | 67.8 | 75.0 |
| 2020-01-30 | Fine | 11:15 | 11:45 | 101.0 | 56.0 | 62.5 | - | 67.8 | 75.0 |
| | | | | | | Average | 63.6 | | |
| | | | | | | Minimum | 62.5 | | |
| | | | | | | Maximum | 64.5 | | |


Remarks

* +3dB(A) Façade effect correction included


** Baseline corrected level is only calculated when measured noise level (Leq) > limit level.

*** Data in **101.0** denotes exceedance of respective Limit Level

Noise monitoring result: SR77

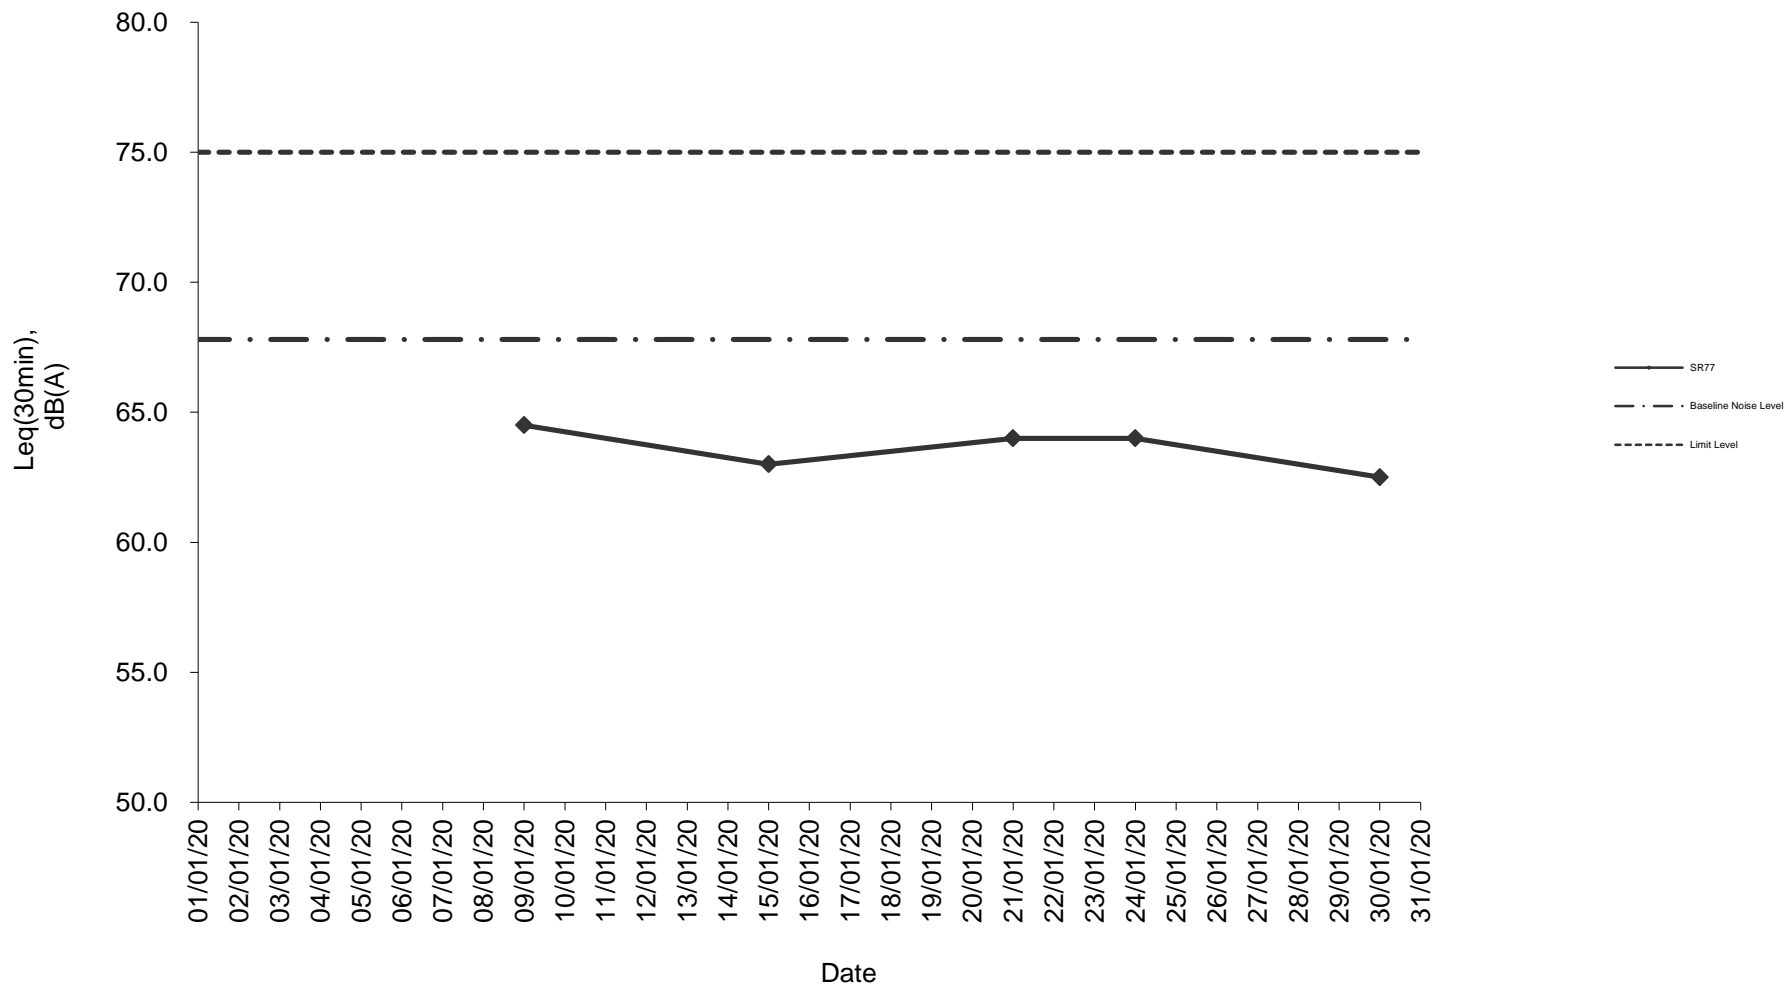

**Noise monitoring result: SR77
(October 2019 - January 2020)**

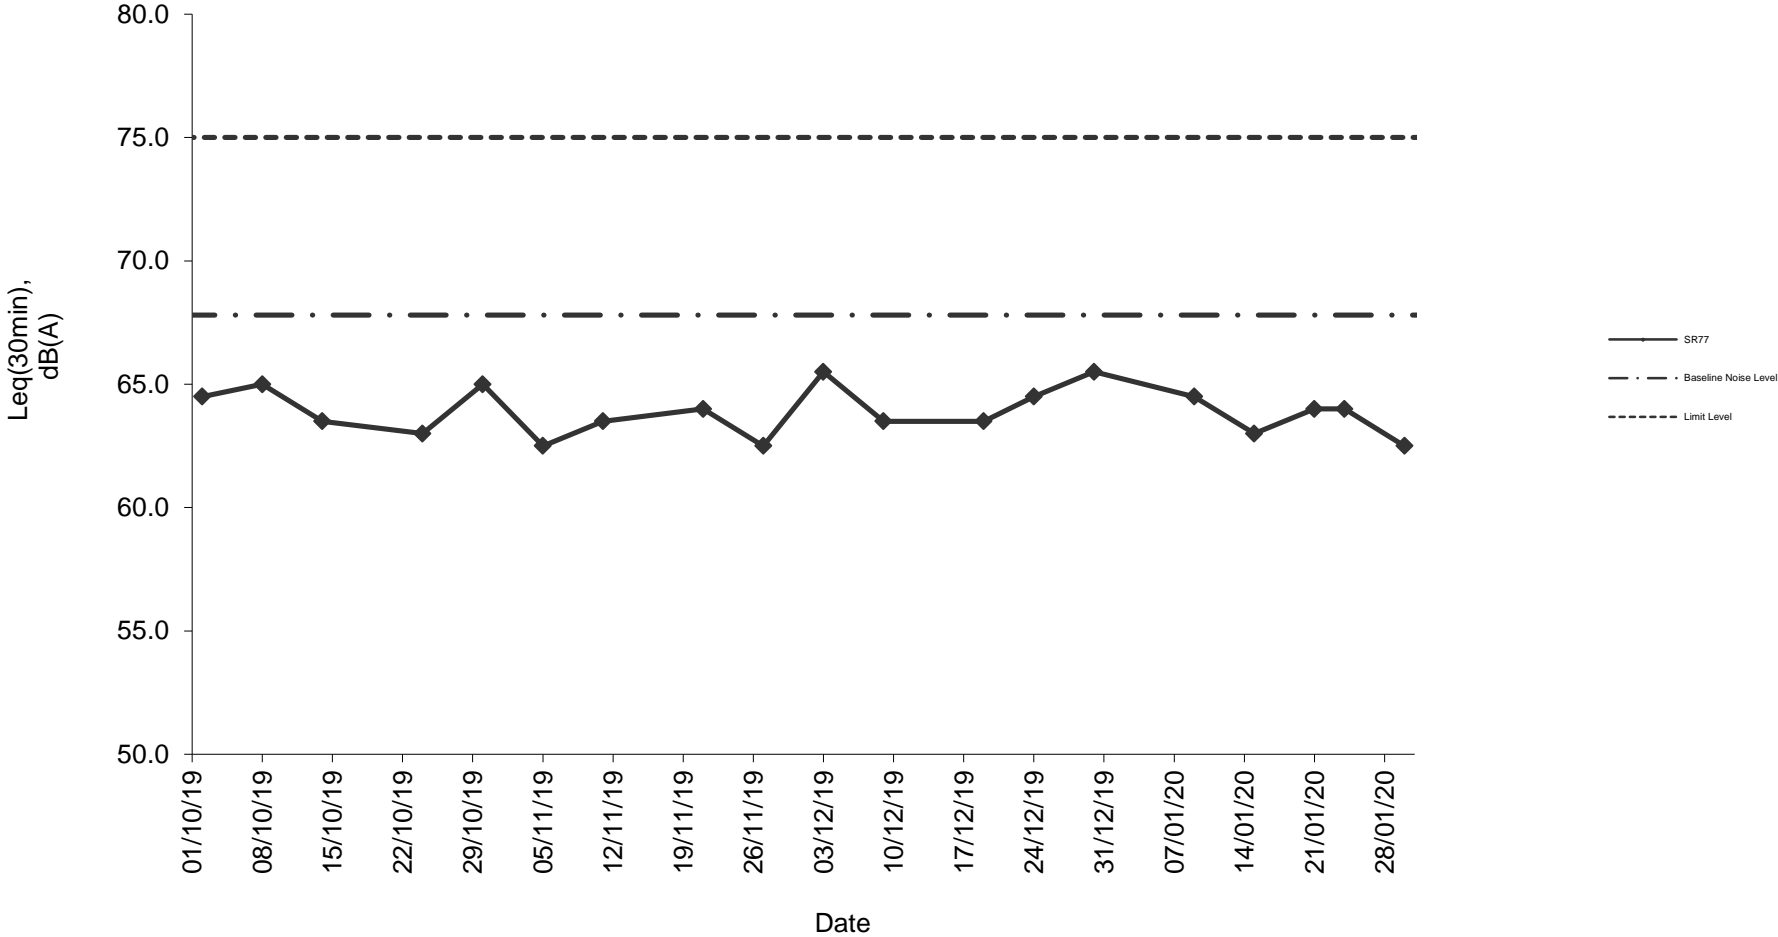

Appendix K Waste Flow Table

Monthly Summary Waste Flow Table for Year 2020

| Month | Actual Quantities of Inert C&D Materials Generated Monthly | | | | | | | Actual Quantities of C&D Wastes Generated Monthly | | | | |
|-----------|--|-------------------------------------|--------------------------|-----------------------------|-------------------------------|------------------------------|--------------------------|---|-------------------------------------|--------------------------|----------------------|--------------------------|
| | Total Quantity Generated | Hard Rock and Large Broken Concrete | Soil | Soil Reused in the Contract | Soil Reused in other Projects | Soil Disposed as Public Fill | Imported Fill | Metals | Paper/ cardboard packaging (Note 3) | Plastics | Chemical Waste | General Refuse (Note 2) |
| Unit | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in '000m ³) | (in m ³) | (in '000m ³) |
| Jan-19 | 0.280 | - | 0.280 | - | - | 0.280 | - | - | - | - | - | 0.015 |
| Feb-19 | | | | | | | | | | | | |
| Mar-19 | | | | | | | | | | | | |
| Apr-19 | | | | | | | | | | | | |
| May-19 | | | | | | | | | | | | |
| Jun-19 | | | | | | | | | | | | |
| Sub-Total | 0.280 | - | 0.280 | - | - | 0.280 | - | - | - | - | - | 0.015 |
| Jul-19 | | | | | | | | | | | | |
| Aug-19 | | | | | | | | | | | | |
| Sep-19 | | | | | | | | | | | | |
| Oct-19 | | | | | | | | | | | | |
| Nov-19 | | | | | | | | | | | | |
| Dec-19 | | | | | | | | | | | | |
| Total | - | - | - | - | - | - | - | - | - | - | - | - |

- Note:
1. Assume the density of soil fill is 2 ton/m³.
 2. Assume the density of rock and broken concrete is 2.5 ton/m³.
 3. Assume each truck of C&D wastes is 5m³.
 4. The inert C&D materials except slurry and bentonite are disposed at Tuen Mun 38.
 5. The slurry and bentonite are disposed at Tseung Kwun O 137.
 6. The non-inert C&D wastes are disposed at NENT.
 7. Assume the density of metal is 7,850 kg/m³.
 8. Assume the density of plastic is 941 kg/m³.
 9. Assume the density of paper is 800 kg/m³.

Appendix L Implementation Schedule of Environmental Mitigation Measures (EMIS)

| Impact | Environmental Protection Measures | Timing | Responsibility | Implementation Status # |
|-----------------------------------|--|---------------------|----------------|---|
| Air Quality | | | | |
| Air Quality during Construction | <ul style="list-style-type: none"> Restricting heights from which materials are dropped, as far as practicable to minimize the fugitive dust arising from unloading/loading. All stockpiles of excavated materials or spoil of more than 50m³ shall be enclosed, covered or dampened during dry or windy conditions. Effective water sprays shall be used to control potential dust emission sources such as unpaved haul roads and active construction areas. All spraying of materials and surfaces shall avoid excessive water usage. Vehicles that have the potential to create dust while transporting materials shall be covered, with the cover properly secured and extended over the edges of the side and tail boards. Materials shall be dampened, if necessary, before transportation. Travelling speeds shall be controlled to reduce traffic induced dust dispersion and re-suspension within the site from the operating haul trucks. Vehicle washing facilities shall be provided to minimise the quantity of material deposited on public roads. | During Construction | Contractor | <ul style="list-style-type: none"> ✓ ✓ ✓ ✓ ✓ ✓ ✓ |
| Air Quality during Operation | Not required | N/A | N/A | N/A |
| Noise | | | | |
| Noise during Construction | <ul style="list-style-type: none"> Use of silenced plant or plant equipped with mufflers or dampers in substitute of ordinary plant. Reduce the number of equipment and their percentage on-time. | During Construction | Contractor | <ul style="list-style-type: none"> ✓ ✓ |
| Noise during Operation | Not required | N/A | N/A | N/A |
| Water Quality | | | | |
| Water Quality during Construction | <p><u>Road Widening Works, Earthworks and Culvert Extension Works</u></p> <ul style="list-style-type: none"> Wastewater generated from any concrete batching washdown of equipment or similar activities should be discharged into foul sewers, after the removal of settleable solids, and pH adjustment as necessary. All sewage discharges from the study area should meet the TM standards and approval from EPD through the licensing process is required. | During Construction | Contractor | <ul style="list-style-type: none"> ✓ |

| | | | | |
|--------------------------------------|--|---|-------------------------------------|--|
| | <ul style="list-style-type: none"> • Sand traps, oil interceptors and other pollution prevention installations should be provided, properly cleaned and maintained. • Runoff from exposed working areas, unfinished slopes and from unlined temporary channels should be directed to stilling basins and/or silt traps before discharging to the drainage outfalls. • Regular inspections of stilling basins and/or silt traps is required to ensure that sediment is not conveyed into the existing drainage system. • Open stockpiles should be covered with a tarpaulin cover. • During the wet season, any exposed top soils should be covered with a tarpaulin, shotcreted or hydroseeded. • Sand and silt from wash-water from vehicle washing should be settled out before discharging into storm drains. • Fuels should be stored in bunded areas such that spillage can be easily collected. | | | <p>✓</p> <p>✓</p> <p>✓</p> <p>✓</p> <p>✓</p> <p>✓</p> <p>✓</p> |
| Water Quality during Operation | Not required | N/A | N/A | N/A |
| Waste Management | | | | |
| Waste Management during Construction | <p><u>General Waste</u></p> <ul style="list-style-type: none"> • Transport of wastes off site as soon as possible. • Maintenance of accurate waste records. • Minimisation of waste generation for disposal (via reduction/recycling/re-use). • No on-site burning will be permitted. • Use of re-useable metal hoardings/signboards. <p><u>Vegetation from site clearance</u></p> <ul style="list-style-type: none"> • Segregation of materials to facilitate disposal. • Mulching to reduce bulk and where possible review opportunities for the possible beneficial use within landscaping areas. | <p>During Construction</p> <p>During Construction</p> | <p>Contractor</p> <p>Contractor</p> | <p>✓</p> <p>✓</p> <p>✓</p> <p>✓</p> <p>✓</p> <p>✓</p> <p>✓</p> |
| | <p><u>Demolition Wastes</u></p> <ul style="list-style-type: none"> • Segregation of materials to facilitate disposal. | During Construction | Contractor | ✓ |

Notes (#): ✓ – Compliance; Rem – Reminder; Obs – Observation; N/C – Non Compliance; N/A – Not Applicable

| | | | | |
|---|--|---------------------|------------|-----|
| <ul style="list-style-type: none"> • Appropriate stockpile management. <p><u>Excavated Materials</u></p> <ul style="list-style-type: none"> • Segregation of materials to facilitate disposal / reuse. • Appropriate stockpile management. • Re-use of excavated material on or off site (where possible). • Special handling and disposal procedures in the event that contaminated materials are excavated. <p><u>Construction Wastes</u></p> <ul style="list-style-type: none"> • Segregation of materials to facilitate recycling/reuse (within designated area in appropriate containers/stockpiles). • Appropriate stockpile management. • Planning to reduce over ordering and waste generation. • Recycling and re-use of materials where possible (e.g. metal, wood from formwork) • For material which cannot be re-used/recycled, collection should be carried out by an approved waste contractor for landfill disposal. <p><u>Bentonite Slurries</u></p> <ul style="list-style-type: none"> • Bentonite slurries should be reused as far as possible. • Disposal in accordance with Practice Note For Professional Persons ProPECC PN 1/94. <p><u>Chemical Wastes</u></p> <ul style="list-style-type: none"> • Storage within locked, covered and bunded area. • The storage area shall not be located adjacent to sensitive receivers e.g. drains. • Minimise waste production and recycle oils/solvents where possible. | | | ✓ | |
| | | During Construction | Contractor | ✓ |
| | | | | ✓ |
| | | | | ✓ |
| | | | | N/A |
| | | During Construction | Contractor | ✓ |
| | | | | ✓ |
| | | | | ✓ |
| | | | | ✓ |
| | | During Construction | Contractor | N/A |
| | | | | N/A |
| | | During Construction | Contractor | ✓ |
| | | | ✓ | |
| | | | ✓ | |
| | | | ✓ | |
| | | | ✓ | |

Notes (#): ✓ – Compliance; Rem – Reminder; Obs – Observation; N/C – Non Compliance; N/A – Not Applicable

| | | | | |
|-----------------------------------|--|---------------------|------------|---|
| | <ul style="list-style-type: none"> Educate site workers on site cleanliness/waste management procedures. If chemical wastes are to be generated, the contractor must register with EPD as a chemical waste producer. The chemical wastes shall be collected by a licensed chemical waste collector. <p><u>Municipal Wastes</u></p> <ul style="list-style-type: none"> Waste shall be stored within a temporary refuse collection facility, in appropriate containers prior to collection and disposal. Regular, daily collections are required by an approved waste collector. | During Construction | Contractor | <ul style="list-style-type: none"> ✓ ✓ ✓ ✓ ✓ |
| Waste Management during Operation | Not required. | N/A | N/A | N/A |
| Ecology | | | | |
| Ecology during Construction | <p><u>Accurate Delineation of Works Area</u></p> <ul style="list-style-type: none"> Boundaries of proposed works areas shall be clearly identified and separated from external areas by a physical barrier to prevent encroachment of adjacent habitats. Individual trees which fall within the works areas but which work plans show do not require removal are to be retained and fenced off to maximise protection. <p><u>Dust generation</u></p> <p>There are a number of measures which shall be taken as specified in the Air Pollution Control (Construction Dust) Regulation on 'Dust Control Requirements, including the following key measures to be applied during construction:</p> <ul style="list-style-type: none"> vehicle washing facilities to be provided at every discernible or designated vehicle exit point; all temporary site access roads shall be sprayed with water to suppress dust as necessary; all dusty materials should be sprayed with water immediately prior to any handling; and all debris should be covered entirely by impervious sheeting or stored in a sheltered debris collection area. | During Construction | Contractor | <ul style="list-style-type: none"> ✓ ✓ |
| | | During Construction | Contractor | <ul style="list-style-type: none"> ✓ |
| | | | | <ul style="list-style-type: none"> ✓ ✓ ✓ |

Notes (#): ✓ – Compliance; Rem – Reminder; Obs – Observation; N/C – Non Compliance; N/A – Not Applicable

| | | | | |
|--|---|-----------------------------------|--|------------------|
| | <p><u>Surface Run-off</u></p> <p>In general, mitigation measures shall be in accordance with ProPECC PN1/94 on 'Construction Site Drainage'. Key measures include:</p> <ul style="list-style-type: none"> • Bund and cover stockpiles to avoid run-off; • Channel any run-off through a system of oil, grease and sediment / silt traps and reuse water on site where ever practical; • All vehicle maintenance to be undertaken within a bunded area; and • Maximise vegetation retention on-site to maximise absorption (minimise transport). | During Construction | Contractor | ✓ ✓ ✓ ✓ |
| Ecology during Operation | <ul style="list-style-type: none"> • To conduct compensatory ecological planting as specified in the latest landscape plans approved by EPD (Clause 2.6 of the Environmental Permit refers). | During Construction and operation | Contractor (during construction) / LCSD* (during operation) (Note: * The division of vegetation planting and maintenance responsibilities shall follow the guidelines stipulated in ETWB TCW No. 2/2004.) | N/A |
| Landscape and Visual | | | | |
| Landscape and Visual during Construction | <p><u>Preservation of Existing Vegetation</u></p> <ul style="list-style-type: none"> • Trees identified for retention within the project limit would be protected during the works • The tree transplanting and planting works shall be implemented by approved Landscape Contractors | During Construction | Contractor | ✓ ✓ |
| | <p><u>Temporary Works Areas</u></p> <p>Where feasible the works areas would be screened using hoarding and existing vegetation would be retained where possible to reduce the landscape and visual impacts arising from the construction activity. The landscape of these works areas would be restored following the completion of the construction phase.</p> <p><u>Hoarding</u></p> <p>A hoarding would be erected where practicable in the most visually sensitive locations to screen the temporary construction works from the local VSRs.</p> | During Construction | Contractor | ✓ |
| | | During Construction | Contractor | ✓ |

Notes (#): ✓ – Compliance; Rem – Reminder; Obs – Observation; N/C – Non Compliance; N/A – Not Applicable

| | | | | |
|---------------------------------------|---|---------------------|------------|-----|
| | <p><u>Top Soils</u> The works will result in disturbance to extensive areas of topsoil. Topsoil worthy of retention should be stockpiled for use following completion of the civil engineering works. It should either be temporarily vegetated with hydroseeded grass or turned over on a regular basis.</p> <p><u>Protection of Important Landscape Features</u> Important features such as temples, Island House and kilns within the study area, although remote from the proposed works retained and adequately protected.</p> | During Construction | Contractor | N/A |
| Landscape and Visual during Operation | Not required. | N/A | N/A | N/A |

Appendix N

Cumulative Statistics on Complaints, Notifications of Summons and Successful Prosecutions

Cumulative Complaint Log

| Complaint Log No. | Date of Complaint | Received From and Received By | Location of Complainant | Nature of Complaint | Outcome | Status |
|-------------------|--------------------|-------------------------------|---|--|---|-----------|
| C131126 | 26, November, 2013 | Mr. Tony Hung from WWF | Mat Wat River (works sites for box culvert extension) | Suspected unauthorised discharge of water from a construction site to Ma Wat River, Tai Wo Service Road East, Tai Po | <p>It was found that the water leaving the end of the steel pipes was the diverted water from the upstream of the existing box culverts, instead of being discharged from the construction works sites.</p> <p>An EM&A Programme is being undertaken to monitoring the environmental performance of the construction works, and the Contractor has also implemented appropriate mitigation measures to avoid silt-laden runoff discharging from the works sites into the river.</p> <p>The complaint is considered an invalid complaint under this Project.</p> | Completed |

| Complaint Log No. | Date of Complaint | Received From and Received By | Location of Complainant | Nature of Complaint | Outcome | Status |
|-------------------|-------------------|-------------------------------|---|---|---|-----------|
| C141120 | 20 November, 2014 | EPD | Ng Tung River and Ma Wat River nearby the site of the Liantang/ Heung Yuen Wai BCP Project (Contract Number CV/2012/09) | At Bridge NF426 in Fanling, the whole Ng Tung River showed milky and suspected illegal discharge by nearby factory has undertaken. (粉嶺近天橋編號 NF426 梧桐河整條河河水呈奶白色懷疑附近有工廠非法排放污水) | <p>Water Supplies Department (WSD) conducted a washout procedure on 20 November 2014 at about 9:30am to flush the newly installed water pipe of diameter of 1400mm which has recently finished disinfection. It is understood that the procedure has lasted for about 1 hour and large amount of freshwater has been discharged into the Ma Wat River through a washout port.</p> <p>Although water was observed seeping from the gantry switch and flew into the works sites, the area is a sump pit and the water was unlikely to run off and entered the river directly. As such, it is anticipated that only freshwater has been discharged into Ma Wat River through the washout port.</p> <p>Both site inspections conducted by the ET before the complaint (19 November 2014), and after the complaint (24 November 2014) did not identify any deficiencies on environmental mitigation measures. Also, there were no rains during the period and the risk of construction site run-off is considered minimal.</p> | Completed |

| Complaint Log No. | Date of Complaint | Received From and Received By | Location of Complainant | Nature of Complaint | Outcome | Status |
|-------------------|-------------------|-------------------------------|---------------------------------|---|---|--------|
| | | | | | <p>The water from the Ma Wat Channel adjoins the Ng Tung River before passing through the complaint location, so other pollution sources may also occur at upstream of Ng Tung River</p> <p>The complaint is considered unlikely due to the construction works of this project.</p> | |
| C171228 | 28 December, 2017 | 1823 | Kau Lung Hang and Hong Lok Yuen | <p>Air quality issue nearby Kau Lung Hang and Hong Lok Yuen area. Stockpiling within the Project area was observed to be uncovered, causing dust dispersion within the area. (大埔九龍坑附近的空氣污染問題嚴重。吐露港公路蓮塘口岸隧道工程經常見到沙泥沒有覆蓋，導致沙土飛揚散佈九龍坑，康樂園一帶，造成極大困擾與明顯健康風險。要求立即改善，懲罰相</p> | <p>The Environmental Team (ET) was informed of the complaint through Chun Wo and CEDD via 1823 online-enquiry/ complaint form received on 28 December 2017 at 9:04am. Investigation was triggered in accordance with the procedures as specified in Section 7.3 of the EM&A Manual. A joint investigation by the ET and the IEC was conducted on 28 December 2017.</p> <p>As advised by the Contractor, no construction works were carried out during the public holiday.</p> <p>No exceedance of TSP level at the air monitoring station under this Contract was recorded in the past six months except 8 December 2017.</p> | |

| Complaint Log No. | Date of Complaint | Received From and Received By | Location of Complainant | Nature of Complaint | Outcome | Status |
|-------------------|-------------------|-------------------------------|-------------------------|-------------------------------------|---|--------|
| | | | | <p>關建築商。附圖是該區狀況。昨日洗車，一日已經沙塵滿佈。)</p> | <p>Exceedance on 8 December 2017 was considered not project related as no major excavation works located close to the monitoring location at SR77.</p> <p>Based on the routine environmental site inspection and information provided by the Contractor, it is considered that dust suppression measures have been implemented to minimize dust nuisance arising from the works areas. Nonetheless, the ET and IEC will continue the auditing and reviewing of the Contractor's implementation of mitigation measures during the construction period.</p> | |



**Meinhardt Infrastructure and
Environment Ltd**
邁進基建環保工程顧問有限公司

10/F Genesis
33-35 Wong Chuk Hang Road
Hong Kong
香港黃竹坑道33-35號
創協坊10樓

Tel 電話: +852 2858 0738
Fax 傳真: +852 2540 1580

mail@meinhardt.com.hk
www.meinhardt-china.com
www.meinhardtgroup.com