

Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2

Quarterly EM&A Report

1 Aug 2021 to 28 Sept 2021

Submitted to

Prepared By

Environmental Protection Department

Meinhardt Infrastructure and Environment Ltd

Meinhardt Infrastructure and Environment Limited

Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2

Quarterly EM&A Report

(Aug 2021 to Sept 2021)

Certified by:	W. K. CHIU	$(\ \)$
e er an e gr		

Position: <u>Environmental Team Leader</u>

Date: 27 Oct 2021

M MOTT MACDONALD

Hyder-Arup-Black & Veatch Joint Venture c/o Arcadis 17/F, Two Harbour Square, 180 Wai Yip Street, Kwun Tong, Hong Kong Attn: Mr. Arthur Ng

Your Reference

Our Reference AFK/EC/ST/cy/T329380/2 2.05/L-0409

3/F International Trade Tower 348 Kwun Tong Road Kowloon Hong Kong

T +852 2828 5757 F +852 2827 1823 mottmac.hk Environmental Monitoring and Audit (EM&A) for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling Stage 2 (between Tai Hang to Wo Hop Shek Interchange) – Entrusted Works Environmental Permit No. EP-324/2008/E

Quarterly EM&A Summary Report for August 2021 to September 2021 for the portion of Stage 2 works entrusted to CEDD under Contract No. CV/2012/09

28 October 2021 By Fax (2805 5028) & Hand

We refer to the Quarterly EM&A Report for August 2021 to September 2021 for the Project received on 27 October 2021 submitted by ET via email. We confirm we have no comment.

Yours faithfully for MOTT MACDONALD HONG KONG LIMITED

Steven Tang Independent Environmental Checker

c.c. HyD CEDD/BCP AECOM Meinhardt

Mr. Ricky Yeung Mr. Lu Pei Yu Mr. Eddie Luk Mr. W. K. Chiu By Fax (3525 1450) By Fax (3547 1659) By Fax (2251 0698) By Fax (2540 1580)

Mott MacDonald Hong Kong Limited registered in Hong Kong no. 236497

Revision	Prepared By	Checked By	Approved By
0	Bobo HUI	W _r .K. CHIU	Claudine LEE
	1.		
	Revision 0	0 Bobo HUI	0 Bobo HUI W.K. CHIU



Contents

			Page
EXE		E SUMMARY	i
1	INTR	ODUCTION AND PROJECT INFORMATION	1
	1.1	Background	1
	1.2	Construction Programme and Activities	1
	1.3	Project Organisation	1
	1.4	Purpose of the Report	2
2	SUM	MARY OF EM&A REQUIREMENTS	2
	2.1	Monitoring Requirements	2
	2.2	Environmental Mitigation Measures	2
3	SUM	MARY OF EM&A Monitoring Data	3
	3.1	Monitoring Data	3
	3.2	Summary of Monitoring Exceedances	3
4	WAS	TE MANAGEMENT	3
5	ENVI	RONMENTAL NON-CONFORMANCE	4
6	CON	CLUSION, COMMENTS AND RECOMMENDATIONS	4

List of Tables

- Table 1.1
 Contact Information of Key Personnel
- Table 2.1 Monitoring Parameter
- Table 3.1
 Summary of Monitoring Data in the Reporting Quarter
- Table 3.2 Summary of Exceedance Events in the Reporting Quarter

List of Figures

- Figure 1Demarcation of Entrusted Portion of Widening of Tolo Highway/Fanling Highway
between Island House Interchange and Fanling Stage 2
- Figure 2 Environmental Monitoring Locations

List of Appendices

- Appendix A Construction Programme
- Appendix B Project Organization Structure
- Appendix C Implementation Schedule of Environmental Mitigation Measures (EMIS)
- Appendix D Meteorological Data Extracted from Hong Kong Observatory(NIL)
- Appendix E Environmental Monitoring Data for Air Quality and Noise(NIL)
- Appendix F Waste Flow Table
- Appendix G Statistics on Complaints, Notifications of Summons and Successful Prosecutions



EXECUTIVE SUMMARY

This report documents the findings of EM&A works conducted in the quarter between 1 Aug 2021 and 28 Sep 2021.

The impact stage EM&A programme for the Project includes air quality and noise monitoring.

The EM&A programme was carried out by the ET in accordance with the EM&A Manual requirement. It is concluded from the environmental monitoring and audit works that adequate environmental mitigation measures have been implemented by the civil works contractors where appropriate in the reporting quarter.

In the reporting quarter, no exceedance event was recorded. No necessary remedial actions have been taken.

No environmental non-compliance was recorded in the reporting quarter. No environmental complaint was received in the reporting quarter. No environmental related prosecution or notification of summons was received in the reporting quarter.

The box culvert works have been partially completed by the end of March 2014 except the last construction activity, installation of a base slab at Box Culvert ID4. The installation of the base slab at Box Culvert ID4 was commenced in December 2016 and has been completed in March 2017.

The 4-week post construction water quality monitoring has been commenced and completed in April 2017.

As informed by the contractor, all major construction activities under Contract No. CV/2012/09 of the EP/324/2008 were completed. ETL have submitted the termination proposal for the construction phase EM&A Programme to EPD on 31 Aug 2021. Referring to EPD replied letter dated on 28 Sep 2021, the termination of construction phase EM&A for this Project is approved.



1 INTRODUCTION AND PROJECT INFORMATION

1.1 Background

- 1.1.1 The Project is a Designated Project under the Environmental Impact Assessment Ordinance (EIAO) (Cap. 499). An Environmental Impact Assessment (EIA) Report together with an Environmental Monitoring and Audit (EM&A) Manual were approved on 14 July 2000 (Register Number: EIA-043/2000). The Project is governed by an Environmental Permit (EP) (EP-324/2008) which was granted on 23 December 2008. A variation of EP (VEP) was applied and the VEP (EP-324/2008/A) was subsequently granted on 31 January 2012. An additional VEP has been applied on 24 February 2014 and the VEP (EP-324/2008/B) was subsequently granted on 17 March 2014. Furthermore, an additional VEP has been applied on 9 March 2015 and the VEP (EP-324/2008/C) was subsequently granted on 27 March 2015. The previous VEP (EP-324/2008/D) was granted on 27 August 2015. The current VEP (EP-324/2008/E) was granted on 26 January 2017.
- 1.1.2 Chun Wo Construction & Engineering Co Ltd (Chun Wo) was commissioned by the Civil Engineering and Development Department (CEDD) as the Civil Contractor for the Entrusted Portion of Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling Stage 2. Meinhardt Infrastructure & Environment Ltd (MIEL) has been appointed by Chun Wo as the Environmental Team (ET) to fulfill the corresponding EM&A requirements pursuant to Environmental Permit No. EP-324/2008/D in accordance with the Updated EM&A Manual (dated March 2015) for Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling Stage 2. The EM&A programme commenced in 5 November 2013.
- 1.1.3 **Figure 1** shows the works areas for the Entrusted Portion of Widening of Tolo Highway/Fanling Highway between Island House Interchange and Fanling Stage 2.

1.2 Construction Programme and Activities

1.2.1 No construction activities undertaken in the reporting month. No construction programme will be presented in **Appendix A**

2 **Project Organisation**

2.1.1 The project organization structure is shown in **Appendix B**. The key personnel contact names and numbers for the Project, together with the general enquiry hotline, are summarised in **Table 2.1**.

Party	Role	Position	Name	Telephone	Fax
AECOM	Engineer's Representative	Senior Resident Engineer	Mr. Julian Ling/ Mr. Eddie Luk	2171 3303	2171 3498
Mott MacDonald	Independent Environmental Checker (IEC)	IEC	Mr. Steven Tang	2828 5920	2827 1823
		Site Agent	Mr. Chan	2638 6144	
Chun Wo	Contractor	Environmental Officer	Mr. Yip Yun Lam	3166 5111	2638 7077
Meinhardt	Environmental Team (ET)	ET Leader	Mr. WK. Chiu	2859 5881	2540 1580

 Table 2.1
 Contact Information of Key Personnel



Party	Role	Position	Name	Telephone	Fax
Enquiry Hotline	General Enquiry		Ms Helena Mak	6355 1731	

2.2 Purpose of the Report

- 2.2.1 As informed by the contractor, all major construction activities under Contract No. CV/2012/09 of the EP/324/2008 were completed. ETL have submitted the termination proposal for the construction phase EM&A Programme to EPD on 31 Aug 2021. Referring to EPD replied letter dated on 28 Sep 2021, the termination of construction phase EM&A for this Project is approved.
- 2.2.2 Since the termination of construction phase EM&A for this Project is approved on 28 Sep 2021, the Quarterly EM&A Report which summaries the impact monitoring results and audit findings for the Project during the reporting period between 1 Aug 2021 to 28 Sept 2021.

3 SUMMARY OF EM&A REQUIREMENTS

3.1 Monitoring Requirements

3.1.1 In accordance with the Updated EM&A Manual, environmental parameters including Air Quality and Noise have been monitored. The specific parameters, monitoring frequency and the respective Action and Limit Levels are given in **Table 3.1** and the location of the monitoring station is shown in the **Figure 2**.

Parameter	Unit	Action Level	Limit Level	Frequency		
Air Quality						
1-hour TSP	μg/m³	292.7	500	Three times every 6 days		
24-hour TSP	μg/m³	170.3	260	Once every 6 days		
		Construction	n Noise			
Leq 30min dB(A)		When one documented valid complaint is received	75	Once every Week		

Table 3.1 Monitoring Parameter

Temporary Suspension of Box Culvert Works and Water Quality Monitoring

3.1.2 The box culvert works have been completed in the end of March 2017. The 4-week post construction water quality monitoring has been completed in the end of April 2017 in the same manner as the impact monitoring.

3.2 Environmental Mitigation Measures

3.2.1 Environmental mitigation measures have been recommended in the EM&A Manual and are given in **Appendix C**. The implementation status for the reporting quarter is also given in the Appendix.



4 SUMMARY OF EM&A MONITORING DATA

4.1 Monitoring Data

4.1.1 As no remaining construction activities will be undertaken, the air quality and noise monitoring has been suspended since 31 October 2020. Thus, no air quality, noise monitoring results and the graphical presentation of air quality, noise monitoring data will be presented.

Table 4.1 Summary of Monitoring Data in the Reporting Quarter

Monitoring Location	Minimum	Maximum	Average		
Air Quality					
	1 hour Total Sus	pended Particulate			
SR77	-	-	-		
	24 hour Total Sus	spended Particulate			
SR77	-	-	-		
Construction Noise					
SR77	-	-	-		

4.2 Summary of Monitoring Exceedances

4.2.1 The number of exceedances event recorded in the reporting quarter is summarized in **Table 4.2**.

Parameter	Criteria	Number of Exceedances Events	Number of Project Related Exceedance Events
	Air C	Quality	
1-hour Total Suspended	Action Level	0	0
Particulates	Limit Level	0	0
24-hour Total Suspended	Action Level	0	0
Particulates	Limit Level	0	0
	Construc	ction Noise	
	Action Level	0	0
Leq 30min	Limit Level	0	0
	Limit Level	0	0

- 4.2.2 No exceedance of Action Level and Limit level for 1-hour TSP and 24-hour TSP monitoring were recorded at SR77 in the reporting quarter.
- 4.2.3 No exceedance of noise monitoring was recorded at SR77 in the reporting quarter.

5 WASTE MANAGEMENT

- 5.1.1 The Contractor has registered as a chemical waste producer of the Project. The C&D materials and waste sorting were carried out on-site. Receptacles were provided for general refuse collection.
- 5.1.2 During the reporting quarter, a total of 0m³ of excavated material has been generated. 0m³ of inert C&D materials was disposed of at public fill to Tuen Mun Area 38, while 0m³ of inert C&D materials was reused on site. 0m³ of general refuse was disposed of



at North East New Territories (NENT) Landfill. No plastics and no paper/cardboard packaging were collected by recycling contractor in the reporting quarter. No metals were collected by recycling contractor in the reporting quarter. No chemical waste was collected by licensed contractor in the reporting quarter. Details of the waste management data are presented in **Appendix F**.

6 ENVIRONMENTAL NON-CONFORMANCE


6.1.1 No environmental non-compliance was recorded in the reporting quarter. No environmental complaint was received. No environmental related prosecution or notification of summons was received in the reporting quarter. The summary for the non-compliance, complaints and prosecutions is provided in **Appendix G**.

7 CONCLUSION, COMMENTS AND RECOMMENDATIONS

- 7.1.1 The EM&A programme was carried out by the ET in accordance with the EM&A Manual requirement. It is concluded from the environmental monitoring and audit works that adequate environmental mitigation measures have been implemented by the civil works contractors where appropriate in the reporting quarter.
- 7.1.2 In the reporting quarter, no exceedance event was recorded.
- 7.1.3 No environmental non-compliance was recorded in the reporting quarter. No environmental complaints were received in the reporting quarter. No environmental related prosecution or notification of summons was received in the reporting quarter.
- 7.1.4 The box culvert works have been completed in the end of March 2017. The 4-week post construction water quality monitoring has been completed in the end of April 2017 in the same manner as the impact monitoring.



Figure

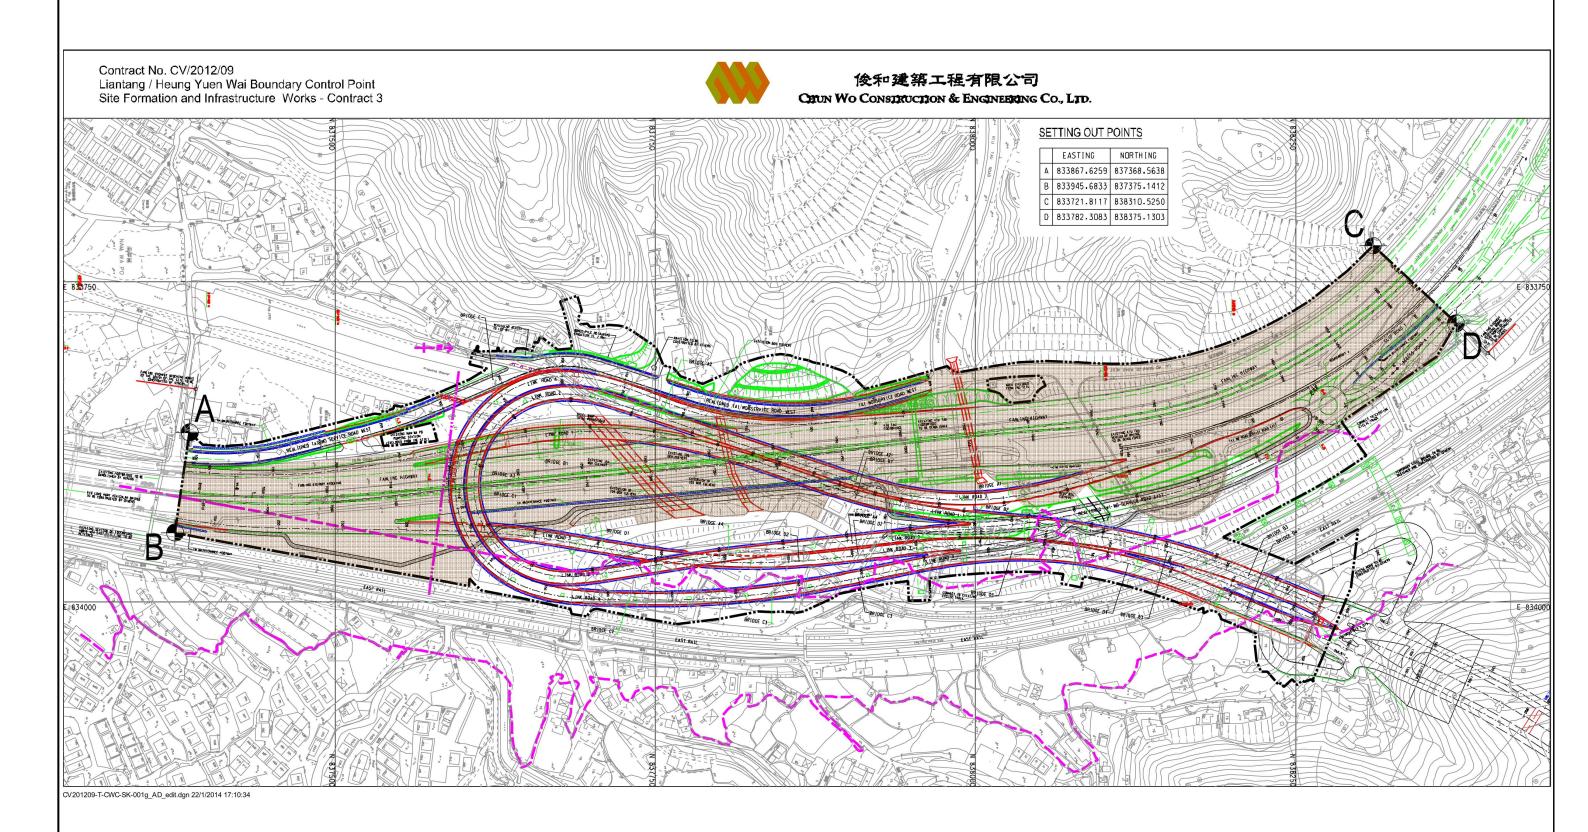


Legend:

Works Area for Entrusted Portion

MEIN-ARDT

Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling Stage 2

Figure 1: Demarcation of Entrusted Portion of Widening of Tolo Highway / Fanling Highway between Island House Interchange and Fanling – Stage 2

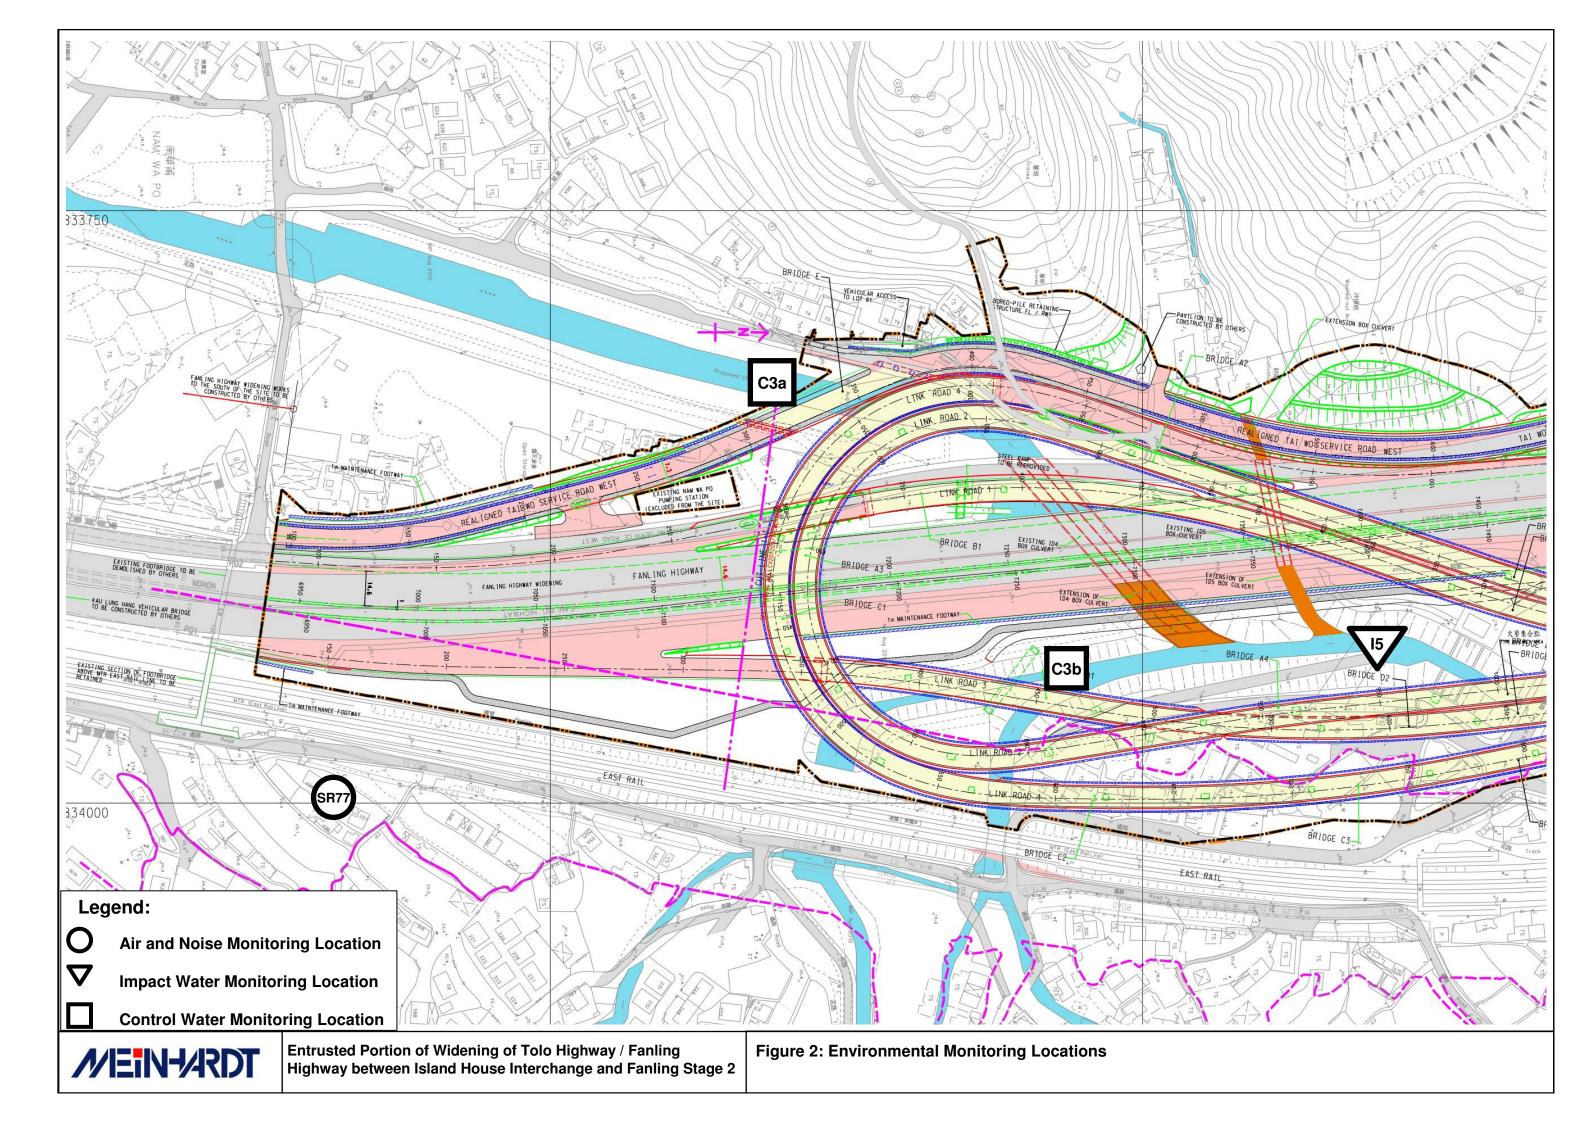




Appendix A Construction Programme (Not Used)



Appendix B Project Organization Structure

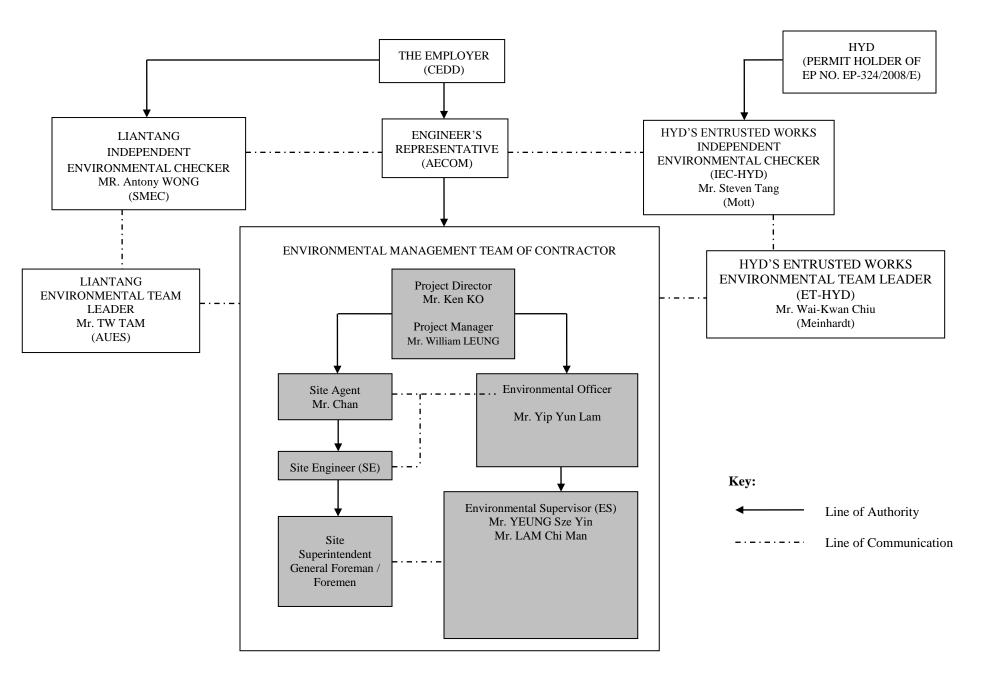



Appendix C Implementation Schedule of Environmental Mitigation Measures (EMIS)



Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status #
Air Quality		•		1
Air Quality during Construction	• Restricting heights from which materials are dropped, as far as practicable to minimize the fugitive dust arising from unloading/loading.	During Construction	Contractor	✓
	• All stockpiles of excavated materials or spoil of more than 50m ³ shall be enclosed, covered or dampened during dry or windy conditions.			\checkmark
	• Effective water sprays shall be used to control potential dust emission sources such as unpaved haul roads and active construction areas.			V
	All spraying of materials and surfaces shall avoid excessive water usage.			~
	• Vehicles that have the potential to create dust while transporting materials shall be covered, with the cover properly secured and extended over the edges of the side and tail boards.			~
	Materials shall be dampened, if necessary, before transportation.			✓
	• Travelling speeds shall be controlled to reduce traffic induced dust dispersion and re-suspension within the site from the operating haul trucks.			\checkmark
	• Vehicle washing facilities shall be provided to minimise the quantity of material deposited on public roads.			✓
Air Quality during Operation	Not required	N/A	N/A	N/A
Noise				
Noise during Construction	• Use of silenced plant or plant equipped with mufflers or dampers in substitute of ordinary plant.	During Construction	Contractor	✓
	• Reduce the number of equipment and their percentage on-time.			\checkmark
Noise during Operation	Not required	N/A	N/A	N/A
Water Quality				•
Water Quality during	Road Widening Works, Earthworks and Culvert Extension Works	During Construction	Contractor	
Construction	• Wastewater generated from any concrete batching washdown of equipment or similar activities should be discharged into foul sewers, after the removal of settable solids, and pH adjustment as necessary. All sewage discharges from the study area should meet the TM standards and approval from EPD through the licensing process is required.			Rem.
	• Sand traps, oil interceptors and other pollution prevention installations should be provided, properly cleaned and maintained.			✓

Notes ([#]): ✓ – Compliance; Rem – Reminder; Obs – Observation; N/C – Non Compliance; N/A – Not Applicable



Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status #
	• Runoff from exposed working areas, unfinished slopes and from unlined temporary channels should be directed to stilling basins and/or silt traps before discharging to the drainage outfalls.			√
	• Regular inspections of stilling basins and/or silt traps is required to ensure that sediment is not conveyed into the existing drainage system.			✓
	 Open stockpiles should be covered with a tarpaulin cover. 			\checkmark
	• During the wet season, any exposed top soils should be covered with a tarpaulin, shotcreted or hydroseeded.			\checkmark
	• Sand and silt from wash-water from vehicle washing should be settled out before discharging into storm drains.			✓
	• Fuels should be stored in bunded areas such that spillage can be easily collected.			✓
Water Quality during Operation	Not required	N/A	N/A	N/A
Waste Management	ConstalWests	During Construction	Contractor	ſ
Waste Management during Construction	 <u>General Waste</u> Transport of wastes off site as soon as possible. 	During Construction	Contractor	\checkmark
	Maintenance of accurate waste records.			\checkmark
	• Minimisation of waste generation for disposal (via reduction/recycling/re-use).			\checkmark
	No on-site burning will be permitted.			\checkmark
	Use of re-useable metal hoardings/signboards.			\checkmark
	Vegetation from site clearance	During Construction	Contractor	
	 Segregation of materials to facilitate disposal. 			\checkmark
	• Mulching to reduce bulk and where possible review opportunities for the possible beneficial use within landscaping areas.			\checkmark
	Demolition Wastes	During Construction	Contractor	
	 Segregation of materials to facilitate disposal. 			\checkmark
	Appropriate stockpile management.			\checkmark



Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status #
	Excavated Materials	During Construction	Contractor	
	Segregation of materials to facilitate disposal / reuse.			\checkmark
	Appropriate stockpile management.			\checkmark
	• Re-use of excavated material on or off site (where possible).			\checkmark
	• Special handling and disposal procedures in the event that contaminated materials are excavated.			N/A
	Construction Wastes	During Construction	Contractor	
	• Segregation of materials to facilitate recycling/reuse (within designated area in appropriate containers/stockpiles).			\checkmark
	Appropriate stockpile management.			\checkmark
	 Planning to reduce over ordering and waste generation. 			\checkmark
	• Recycling and re-use of materials where possible (e.g. metal, wood from formwork)			~
	• For material which cannot be re-used/recycled, collection should be carried out by an approved waste contractor for landfill disposal.			~
	Bentonite Slurries	During Construction	Contractor	
	 Bentonite slurries should be reused as far as possible. 			N/A
	• Disposal in accordance with Practice Note For Professional Persons ProPECC PN 1/94.			N/A
	Chemical Wastes	During Construction	Contractor	
	 Storage within locked, covered and bunded area. 			\checkmark
	• The storage area shall not be located adjacent to sensitive receivers e.g. drains.			\checkmark
	Minimise waste production and recycle oils/solvents where possible.			\checkmark
	 A spill response procedure shall be in place and absorption material available for minor spillages. 			✓
	 Use appropriate and labelled containers. 			\checkmark



Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status #
	• Educate site workers on site cleanliness/waste management procedures.			\checkmark
	• If chemical wastes are to be generated, the contractor must register with EPD as a chemical waste producer.			✓
	• The chemical wastes shall be collected by a licensed chemical waste collector.			\checkmark
	Municipal Wastes	During Construction	Contractor	
	• Waste shall be stored within a temporary refuse collection facility, in appropriate containers prior to collection and disposal.			\checkmark
	 Regular, daily collections are required by an approved waste collector. 			\checkmark
Waste Management during Operation	Not required.	N/A	N/A	N/A
Ecology				
Ecology during Construction	Accurate Delineation of Works Area	During Construction	Contractor	
	• Boundaries of proposed works areas shall be clearly identified and separated from external areas by a physical barrier to prevent encroachment of adjacent habitats.			✓
	 Individual trees which fall within the works areas but which work plans show do not require removal are to be retained and fenced off to maximise protection. 			\checkmark
	Dust generation	During Construction	Contractor	
	There are a number of measures which shall be taken as specified in the Air Pollution Control (Construction Dust) Regulation on 'Dust Control Requirements, including the following key measures to be applied during construction:			
	 vehicle washing facilities to be provided at every discernible or designated vehicle exit point; 			\checkmark
	 all temporary site access roads shall be sprayed with water to suppress dust as necessary; 			✓
	 all dusty materials should be sprayed with water immediately prior to any handling; and 			✓
	• all debris should be covered entirely by impervious sheeting or stored in a sheltered debris collection area.			~



Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status #
	Surface Run-off	During Construction	Contractor	
	In general, mitigation measures shall be in accordance with ProPECC PN1/94 on 'Construction Site Drainage'. Key measures include:			
	 Bund and cover stockpiles to avoid run-off; 			\checkmark
	• Channel any run-off through a system of oil, grease and sediment / silt traps and reuse water on site where ever practical;			✓
	 All vehicle maintenance to be undertaken within a bunded area; and 			1
	• Maximise vegetation retention on-site to maximise absorption (minimise transport).			✓
Ecology during Operation	• To conduct compensatory ecological planting as specified in the latest landscape plans approved by EPD (Clause 2.6 of the Environmental Permit refers).	During Construction and operation	Contractor (during construction) / LCSD* (during operation)	N/A
			(Note: * The division of vegetation planting and maintenance responsibilities shall follow the guidelines stipulated in ETWB TCW No. 2/2004.)	
Landscape and Visual Landscape and Visual during	Preservation of Existing Vegetation	During Construction	Contractor	
Construction	Trees identified for retention within the project limit would be protected during the works		Contractor	¥
	• The tree transplanting and planting works shall be implemented by approved Landscape Contractors			¥
	Temporary Works Areas	During Construction	Contractor	
	• Where feasible the works areas would be screened using hoarding and existing vegetation would be retained where possible to reduce the landscape and visual impacts arising from the construction activity. The landscape of these works areas would be restored following the completion of the construction phase.			√



Impact	Environmental Protection Measures	Timing	Responsibility	Implementation Status [#]
	Hoarding	During Construction	Contractor	
	• A hoarding would be erected where practicable in the most visually sensitive locations to screen the temporary construction works from the local VSRs.			~
	Top Soils	During Construction	Contractor	
	• The works will result in disturbance to extensive areas of topsoil. Topsoil worthy of retention should be stockpiled for use following completion of the civil engineering works. It should either be temporarily vegetated with hydroseeded grass or turned over on a regular basis.			N/A
	 Protection of Important Landscape Features Important features such as temples, Island House and kilns within the study area, although remote from the proposed works retained and adequately protected. 	During Construction	Contractor	N/A
Landscape and Visual during Operation	Not required.	N/A	N/A	N/A



Appendix D Meteorological Data Extracted from Hong Kong Observatory (Not Used)



Appendix E Environmental Monitoring Data for Air Quality and Noise (Not Used)



Appendix F Waste Flow Table

Monthly Summary Waste Flow Table

	Actual Quantities of Inert C&D Materials Generated Monthly								Quantities of	C&D Wastes	Generated N	lonthly
		Hard Rock							Paper/			
	Total	and Large		Soil Reused	Soil Reused				cardboard			General
	Quantity	Broken		in the	in other	Soil Disposed			packaging		Chemical	Refuse
Month	Generated	Concrete	Soil	Contract	Projects	as Public Fill	Imported Fill	Metals	(Note 3)	Plastics	Waste	(Note 2)
Unit	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in '000m ³)	(in m ³)	(in '000m ³)
Aug-21	0.000	-	0.000	-	-	0.000	-	-	-	-	-	0.000
Sep-21	0.000	-	0.000	-	-	0.000	-	-	-	-	-	0.000
Total	0.000	-	0.000	-	-	0.000	-	-	-	-	-	0.000

Note: 1. Assume the density of soil fill is 2 ton/m^3 .

2. Assume the density of rock and broken concrete is 2.5 ton/m^3 .

3. Assume each truck of C&D wastes is $5m^3$.

4. The inert C&D materials except slurry and bentonite are disposed at Tuen Mun 38.

5. The slurry and bentonite are disposed at Tseung Kwun O 137.

6. The non-inert C&D wastes are disposed at NENT.

7. Assume the density of metal is $7,850 \text{ kg/m}^3$.



Appendix G Cumulative Statistics on Complaints, Notifications of Summons and Successful Prosecutions



Cumulative Complaint Log

Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
C131126	26, November, 2013	Mr. Tony Hung from WWF	Mat Wat River (works sites for box culvert extension)	Suspected unauthorised discharge of water from a construction site to Ma Wat River, Tai Wo Service Road East, Tai Po	It was found that the water leaving the end of the steel pipes was the diverted water from the upstream of the existing box culverts, instead of being discharged from the construction works sites. An EM&A Programme is being undertaken to monitoring the environmental performance of the construction works, and the Contractor has also implemented appropriate mitigation measures to avoid silt-laden runoff discharging from the works sites into the river. The complaint is considered an invalid complaint under this Project.	Completed



Complaint	Date of	Received From and	Location of	Nature of	Outcome	Status
Log No.	Complaint	Received By	Complainant	Complaint	Outcome	Status
C141120	20 November, 2014	EPD	Ng Tung River and Ma Wat River nearby the site of the Liantang/ Heung Yuen Wai BCP Project (Contract Number CV/2012/09)	At Bridge NF426 in Fanling, the whole Ng Tung River showed milky and suspected illegal discharge by nearby factory has undertaken. (粉嶺近天橋編號 NF426 梧桐河整條河 河水呈奶白色懷疑附 近有工廠非法排放污 水)	 Water Supplies Department (WSD) conducted a washout procedure on 20 November 2014 at about 9:30am to flush the newly installed water pipe of diameter of 1400mm which has recently finished disinfection. It is understood that the procedure has lasted for about 1 hour and large amount of freshwater has been discharged into the Ma Wat River through a washout port. Although water was observed seeping from the gantry switch and flew into the works sites, the area is a sump pit and the water was unlikely to run off and entered the river directly. As such, it is anticipated that only freshwater has been discharged into Ma Wat River through the washout port. Both site inspections conducted by the ET before the complaint (19 November 2014), and after the complaint (24 November 2014) did not identify any deficiencies on environmental mitigation measures. Also, there were no rains during the period and the risk of construction site run-off is considered minimal. 	Completed



Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
					The water from the Ma Wat Channel adjoins the Ng Tung River before passing through the complaint location, so other pollution sources may also occur at upstream of Ng Tung River The complaint is considered unlikely due to the construction works of this	
C171228	28 December, 2017	1823	Kau Lung Hang and Hong Lok Yuen	Air quality issue nearby Kau Lung Hang and Hong Lok Yuen area. Stockpiling within the Project area was observed to be uncovered, causing dust dispersion within the area. (大埔 九龍坑附近的空氣污 染問題嚴重。吐露港 公路蓮塘口岸隧道工 程經常見到沙泥沒有 覆蓋,導致沙土飛揚 散佈九龍坑,康樂園 一帶,造成極大困擾 與明顯健康風險。要 求立即改善,懲罰相	 project. The Environmental Team (ET) was informed of the complaint through Chun Wo and CEDD via 1823 online-enquiry/ complaint form received on 28 December 2017 at 9:04am. Investigation was triggered in accordance with the procedures as specified in Section 7.3 of the EM&A Manual. A joint investigation by the ET and the IEC was conducted on 28 December 2017. As advised by the Contractor, no construction works were carried out during the public holiday. No exceedance of TSP level at the air monitoring station under this Contract was recorded in the past six months except 8 December 2017. 	



Complaint Log No.	Date of Complaint	Received From and Received By	Location of Complainant	Nature of Complaint	Outcome	Status
				關建築商。附圖是該 區狀況。昨日洗車, 一日已經沙塵滿佈。)	Exceedance on 8 December 2017 was considered not project related as no major excavation works located close to the monitoring location at SR77. Based on the routine environmental site inspection and information provided by the Contractor, it is considered that dust suppression measures have been implemented to minimize dust nuisance arising from the works areas. Nonetheless, the ET and IEC will continue the auditing and reviewing of the Contractor's implementation of mitigation measures during the construction period.	



Meinhardt Infrastructure and Environment Ltd 邁進基建環保工程顧問有限公司

10/F Genesis 33-35 Wong Chuk Hang Road Hong Kong 香港黃竹坑道33-35號 創協坊10樓

Tel 電話: +852 2858 0738 Fax 傳真: +852 2540 1580

mail@meinhardt.com.hk www.meinhardt-china.com www.meinhardtgroup.com