


Construction Sequence

1. Install stone columns below seabed to form the foundation of seawalls.
2. Install cellular caissons and backfill with public fill within the caissons.
3. Construct sloping seawall on the cellular caissons and in front of it.
4. Filling behind the seawalls to the reclamation level.
5. Construct temporary sheetpile / diaphragm wall.
6. Carry out excavation & lateral support works to the base level of Road P2.
7. Construct Road P2 structure and backfill to the reclamation level.

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES.
2. ALL LEVELS ARE IN METRES ABVE HONG KONG PRINCIPAL DATUM.

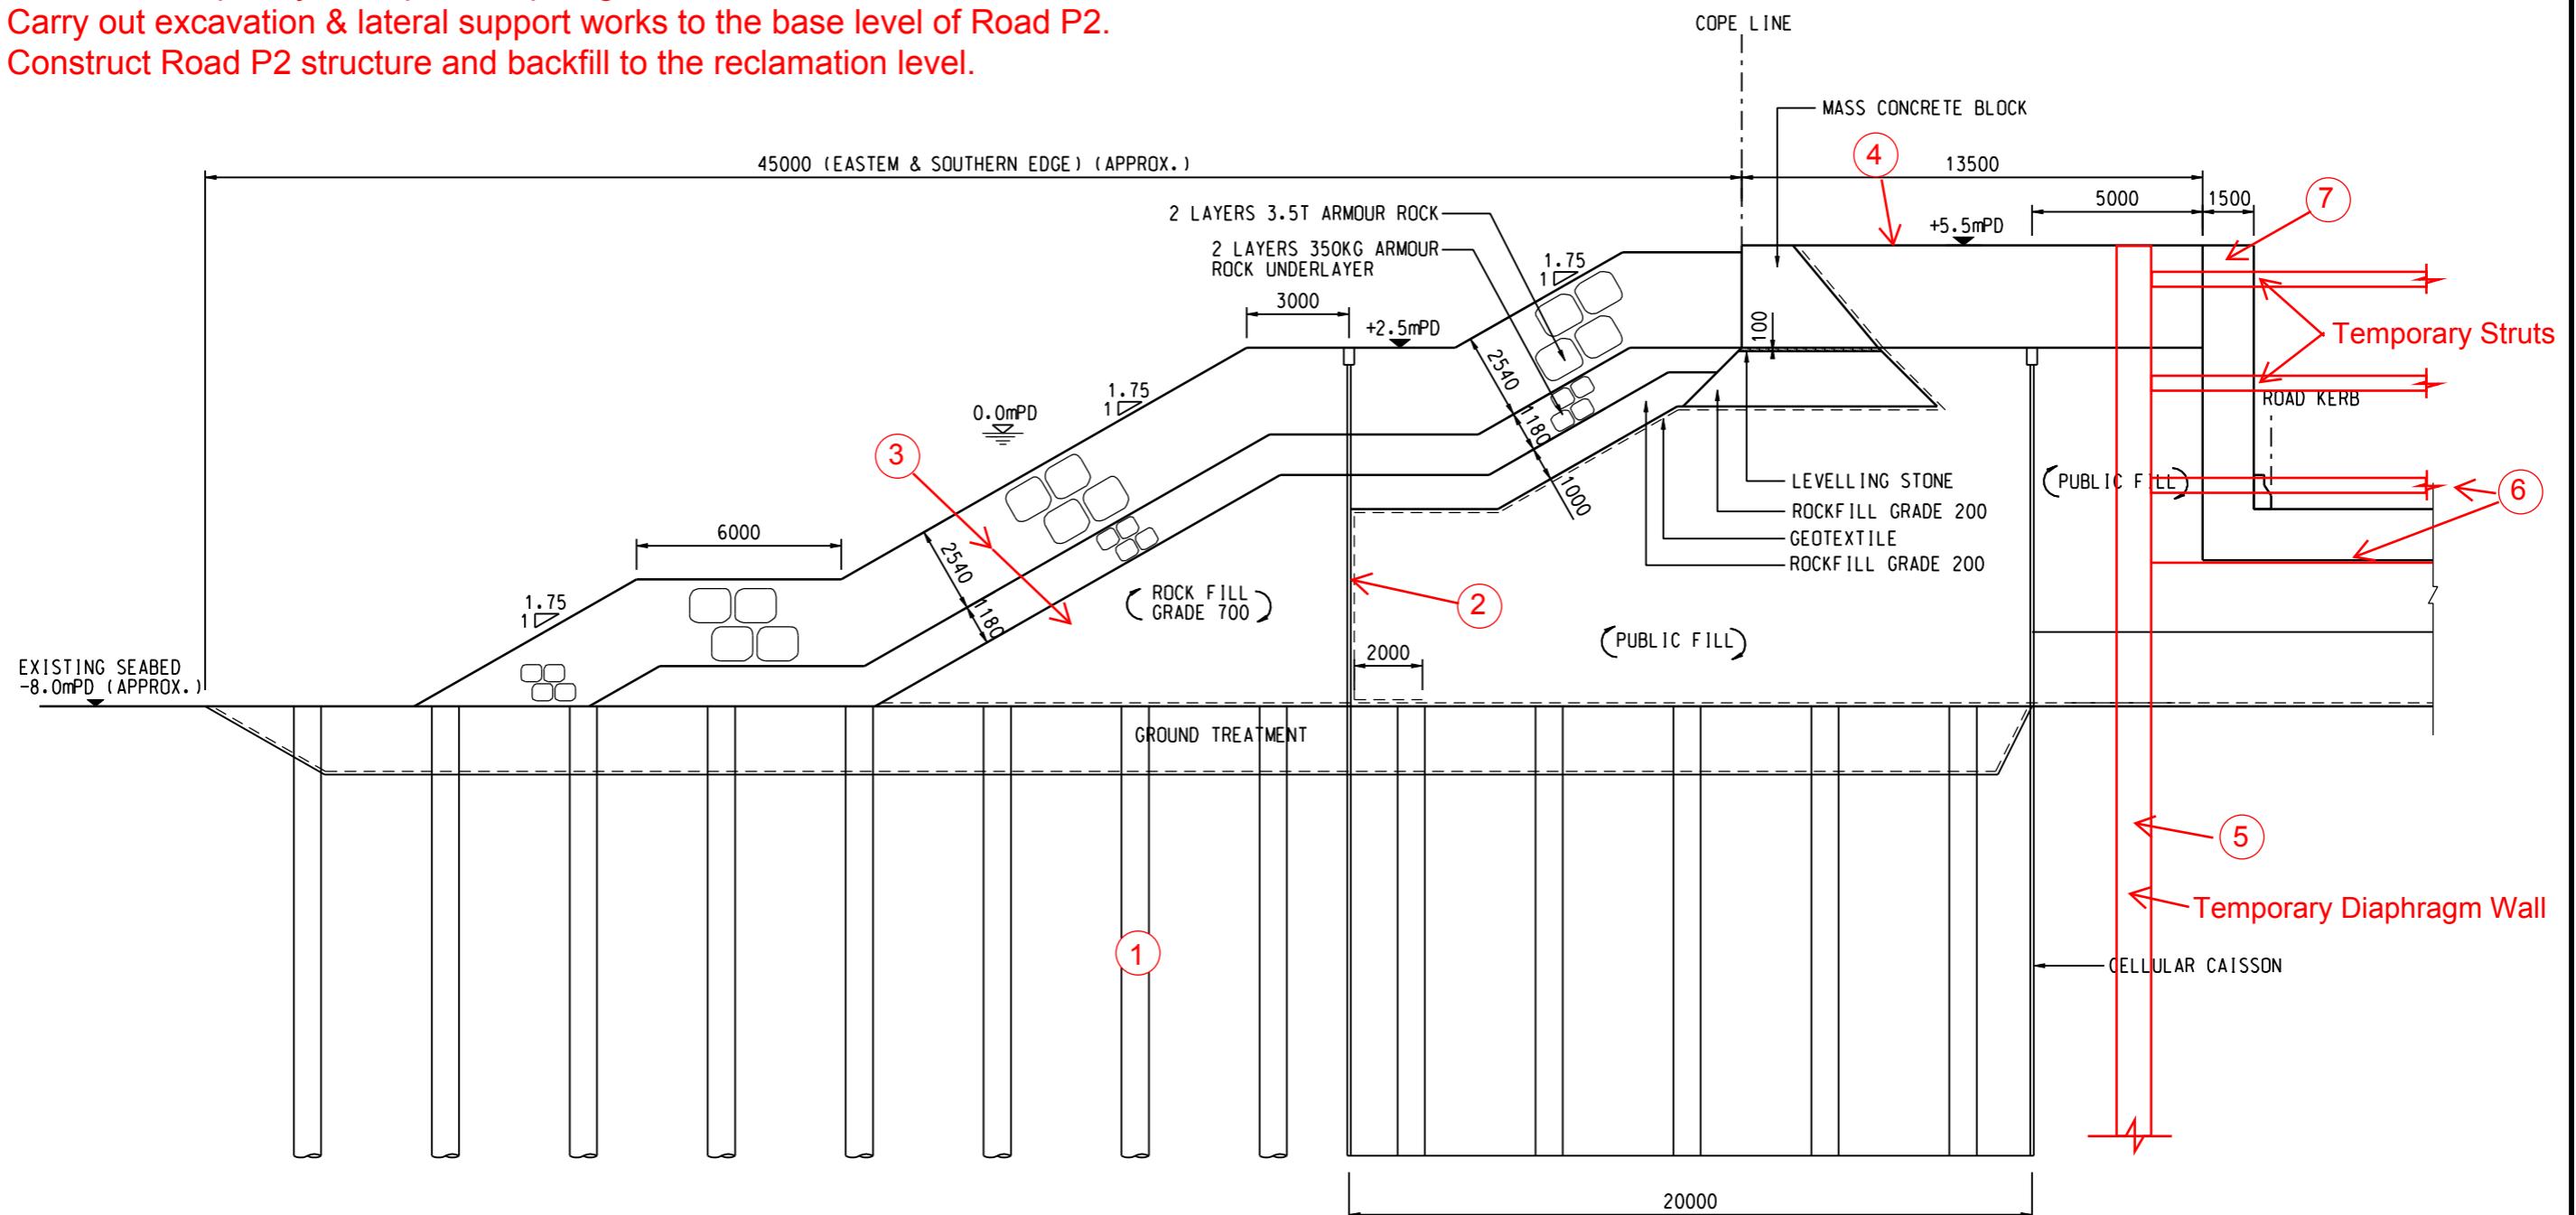

SCALE	A3 1 : 200	DATE	OCT. 2012
CHECK	--	DRAWN	LIUL
JOB NO.	60097677	DRAWING NO.	FIGURE 2.57
REV	--		--